

Network Working Group
Internet Draft
Expiration Date: September 2001
File name: [draft-ietf-ospf-abr-alt-04.txt](#)

Alex Zinin
Cisco Systems
Acee Lindem
Redback Networks
Derek Yeung
Procket Networks
February 2001

Alternative OSPF ABR Implementations
draft-ietf-ospf-abr-alt-04.txt

Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#).

Internet Drafts are working documents of the Internet Engineering Task Force (IETF), its Areas, and its Working Groups. Note that other groups may also distribute working documents as Internet Drafts.

Internet Drafts are draft documents valid for a maximum of six months. Internet Drafts may be updated, replaced, or obsoleted by other documents at any time. It is not appropriate to use Internet Drafts as reference material or to cite them other than as a "working draft" or "work in progress".

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

Abstract

OSPF [[Ref1](#)] is a link-state intra-domain routing protocol used for routing in IP networks. Though the definition of the ABR in the current OSPF specification does not require a router with multiple attached areas to have a backbone connection, it is actually necessary to provide successful routing to the inter-area and external destinations. If this requirement is not met, all traffic destined for the areas not connected to such an ABR or out of the OSPF domain, is dropped. This document describes alternative ABR behaviors implemented in Cisco and IBM routers.

Figure 1. ABR dropping transit traffic

In this example R1, R2, and R3 are ABRs. R1 and R2 have backbone connections, while R3 doesn't.

Following the section 12.4.1 of [Ref1], R3 will identify itself as an ABR by setting the bit B in its router-LSA. Being an ABR, R3 can only consider summary-LSAs from the backbone when building the routing table (according to section 16.2 of [Ref1]), so it will not have any inter-area routes in its routing table, but only intra-area routes from both Area 1 and Area 2. Consequently, according to the [section 12.4.3](#) of [Ref1], R3 will originate for Areas 1 and 2 only summary-LSAs covering destinations in the directly attached areas, i.e., in Area 2---the summary-LSAs for Area 1, and in Area 1---the summary-LSAs for Area 2.

At the same time, router R2, as an ABR connected to the backbone, will inject into Area 2 summary-LSAs describing the destinations in Area 0 (the backbone), Area 1 and other areas reachable through the backbone.


This results in a situation, where internal router R4 calculates its routes to destinations in the backbone and areas other than Area 1 via R2. The topology of Area 2 itself can be such that the best path from R4 to R2 is via the R3, so all traffic destined for the backbone and backbone-attached areas goes through R3. Router R3 in turn, having only intra-area routes for areas 1 and 2, will effectively drop all traffic not destined for the areas directly attached to it. The same problem can be seen when a backbone-connected ABR loses all of its adjacencies in the backbone---even if there are other normally functioning ABRs in the attached areas, all traffic going to the backbone (destined for it or for other areas) will be dropped.

In a standard OSPF implementation this situation can be remedied by use of the Virtual Links (see section 15 of [Ref1] for more details). In this case, router R3 will have a virtual backbone connection, will form an adjacency over it, will receive all LSAs directly from a backbone-attached router (R1 or R2, or both in our example) and will install intra- or inter-area routes.

While being an unavoidable technique for repairing a partitioned

backbone area, the use of virtual links in the described situation adds extra configuration headaches and system traffic overhead.

Another situation where standard ABR behavior does not provide acceptable results is when it is necessary to provide redundant connectivity to an ASBR via several different OSPF areas. This would allow a provider to aggregate all their customers connecting through a single access point into one area while still offering a redundant connection through another access point in a different area, as shown in Figure 2.

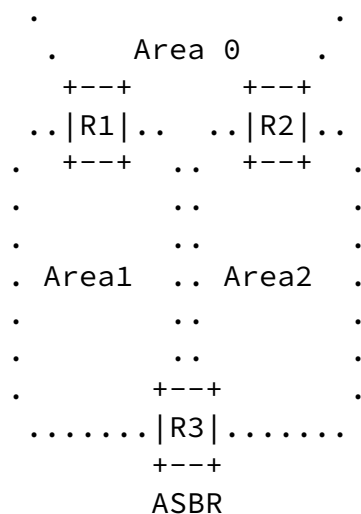

Customer Networks Advertised
as AS External or NSSA External Routes

Figure 2. Dual Homed Customer Router

This technique is already used in a number of networks including one of a major provider.

The next section describes alternative ABR behaviors, implemented in Cisco and IBM routers. The changes are in the ABR definition and inter-area route calculation. Any other parts of standard OSPF are not changed.

Described solutions are targeted to the situation when an ABR has no backbone connection. It implies that a router connected to multiple areas without a backbone connection is not an ABR and should function as a router internal to every attached area. This solution emulates a situation where separate OSPF processes are run for each area and supply routes to the routing table. It remedies the situation described in the examples above in the meaning of not dropping transit traffic. Note that a router following it does not function as a real border router---it doesn't originate summary-LSAs. Nevertheless such a behavior may be desirable in certain situations.

Note that the proposed solutions do not obviate the need of virtual link configuration in case an area has no physical backbone connection at all. The methods described here improve the behavior of a router connecting two or more backbone-attached areas.

[2](#) Changes to ABR Behavior

2.1 Definitions

The following definitions will be used in this document to describe the new ABR behaviors:

Configured area:

An area is considered configured if the router has at least one interface in any state assigned to that area.

Actively Attached area:

An area is considered actively attached if the router has at least one interface in that area in the state other than Down.

Active Backbone Connection:

A router is considered to have an active backbone connection if the backbone area is actively attached and there is at least one fully adjacent neighbor in it.

Area Border Router (ABR):

Cisco Systems Interpretation:

A router is considered to be an ABR if it has more than one area Actively Attached and one of them is the backbone area.

IBM Interpretation:

A router is considered to be an ABR if it has more than one Actively Attached area and the backbone area Configured.

2.2 Implementation Details

The following changes are made to the base OSPF, described in [\[Ref1\]](#):

1. The algorithm of Type 1 LSA (router-LSA) origination is changed to prevent a multi-area connected router from identifying itself as an ABR by the bit B (as described in section 12.4.1 of [\[Ref1\]](#)) until it considers itself as an ABR according to the definitions given in [section 2.1](#).
2. The algorithm of the routing table calculation is changed to allow the router to consider the summary-LSAs from all attached areas if it is not an ABR, but has more than one attached area, or it does not have an Active Backbone Connection. Definitions of the terms used in this paragraph are given in [section 2.1](#).

So, the paragraph 1 of section 16.2 of [\[Ref1\]](#) should be

interpreted as follows:

"The inter-area routes are calculated by examining summary-LSAs. If the router is an ABR and has an Active Backbone Connection, only backbone summary-LSAs are examined. Otherwise (either the router is not an ABR or it has no Active Backbone Connection), the router should consider summary-LSAs from all Actively Attached areas..."

3. For Cisco ABR approach, the algorithm of the summary-LSAs origination is changed to prevent loops of summary-LSAs in situations where the router considers itself an ABR but doesn't have an Active Backbone Connection (and, consequently, examines summaries from all attached areas). The algorithm is changed to allow an ABR announce only intra-area routes in such a situation.

So, the paragraph 2 of subsection 12.4.3 of [[Ref1](#)] should be interpreted as follows:

"Summary-LSAs are originated by area border routers. The precise summary routes to advertise into an area are determined by examining the routing table structure (see [Section 11](#)) in accordance with the algorithm described below. Note that only intra-area routes are advertised into the backbone, both intra-area and inter-area routes are advertised into the other areas, provided that the router has an Active Backbone Connection. Otherwise the router is allowed to advertise only intra-area routes into non-backbone areas."

For this policy to be applied we change steps 6 and 7 in the summary origination algorithm to be as follows:

Step 6:

"Else, if the destination of this route is an AS boundary router, a summary-LSA should be originated if and only if the routing table entry describes the preferred path to the AS boundary router (see Step 3 of [Section 16.4](#)). If so, a Type 4 summary-LSA is originated for the destination, with Link State ID equal to the AS boundary router's Router ID and metric equal to the routing table entry's cost. If the ABR performing this algorithm does not have an Active Backbone Connection, it can originate Type 4 summary-LSA only if the type of the route to the ASBR is intra-area. Note: Type 4 summary-LSAs should not be generated if Area A has been configured as a stub area."

Step 7:

"Else, the Destination type is network. If this is an inter-area route and the ABR performing this algorithm has an Active Backbone Connection, generate a Type 3 summary-LSA for the destination, with Link State ID equal to the network's address (if necessary, the Link State ID can also have one or more of the network's host bits set; see [Appendix E](#) for details) and metric equal to the routing table cost."

The changes in the ABR behavior described in this section allow a multi-area connected router to successfully route traffic destined for the backbone and other areas. Note that if the router does not have a backbone area Configured it does not actively attract inter-area traffic, because it does not consider itself an ABR and does not originate summary-LSAs. It still can forward traffic from one attached area to another along intra-area routes in case other routers in corresponding areas have the best inter-area paths over it, as described in [section 1.2](#).

By processing all summaries when the backbone is not active, we prevent the ABR, which has just lost its last backbone adjacency, from dropping any packets going through the ABR in question to another ABR and destined towards the backbone or other areas not connected to the ABR directly.

3 Virtual Link Treatment

Cisco ABR approach described in this document requires an ABR to have at least one active interface in the backbone area. This requirement may cause problems with virtual links in those rare situations where the backbone area is purely virtual, as shown in Figure 3, and the state of the VL is determined as in [\[Ref1\]](#).

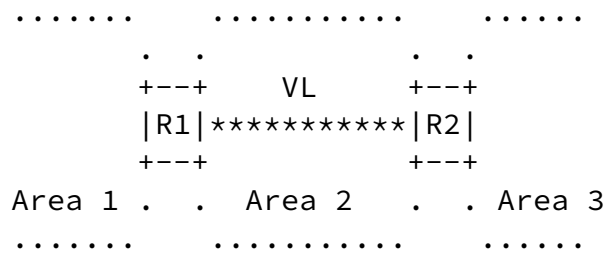


Figure 3. Purely Virtual Backbone

If R1 and R3 treat virtual links as in [\[Ref1\]](#), their virtual links

will never go up, because their router-LSAs do not contain the B-bit, which is, in turn, because the routers do not have active interfaces (virtual links) in the backbone and do not consider themselves ABRs. Note that this problem does not appear if one of the routers has a real interface in the backbone, as it usually is in real networks.

Though described situation is deemed to be rather rare, implementations supporting Cisco ABR behavior may consider changing VL-specific code so that a virtual link is reported up (an InterfaceUp event is generated) when a router with corresponding router-ID is seen via Dijkstra, no matter whether its router-LSA indicates that it is an ABR or not. This means that checking of configured virtual links should be done not in step 4 of the algorithm in 16.1 of [\[Ref1\]](#) when a router routing entry is added, but every time a vertex is added to the SPT in step 3 of the same algorithm.

[4](#) Compatibility

The changes of the OSPF ABR operations do not influence any aspects of the router-to-router cooperation and do not create routing loops, and hence are fully compatible with standard OSPF. Proof of compatibility is outside the scope of this document.

[5](#) Deployment Considerations

This section discusses the deployments details of the ABR behaviors described in this document. Note that this approach is fully compatible with standard ABR behavior, so ABRs acting as described in [\[Ref1\]](#) and in this document can coexist in an OSPF domain and will function without problems.

Deployment of ABRs using the alternative methods improves the behavior of a router connected to multiple areas without a backbone attachment, but can lead to unexpected routing asymmetry, as described below.

Consider an OSPF domain depicted in Figure 4.

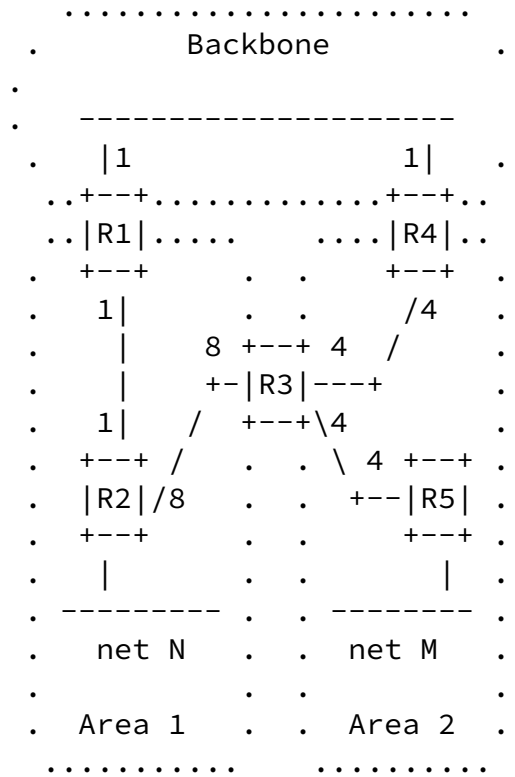


Figure 4. Inter-area routing asymmetry

Assume that R3 uses the approach described in this document. In this case R2 will have inter-area routes to network M via ABR R1 only. R5 in turn will have its inter-area route to network N via R4, but as far as R4 is only reachable via R3, all traffic destined to network N will get into R3. R3 will have an intra-area route to network N via R2 and will, of course, route it directly to it (because intra-area routes are always preferred over inter-area ones). Traffic going back from network N to network M will get into R2 and will be routed to R1, as R2 will not have any inter-area routes via R3. So, traffic from N to M will always go through the backbone while traffic from M to N will cross the areas directly via R3 and, in this example, will not use a more optimal path through the backbone.

Note that this problem is not caused by the fact that R3 uses the alternative approach. The reason for attracting the attention to it is that R3 is not really functioning as an ABR in case this new behavior is used, i.e., it does not inject summary-LSAs into the attached areas, but inter-area traffic can still go through it.

6 Security Considerations

The alternative ABR behavior specified in this document does not

raise any security issues that are not already covered in [[Ref1](#)].

[7](#) Acknowledgements

Authors would like to thank Alvaro Retana, Russ White, and Liem Nguyen for their review of the document.

[8](#) Disclaimer

This document describes OSPF ABR implementations of respective vendors "as is", only for informational purposes, and without any warranties, guarantees or support. These implementations are subject to possible future changes. For the purposes of easier deployment, information about software versions where described behavior was integrated is provided below.

Initial Cisco ABR implementation (slightly different from the one described in this memo, requiring non-backbone areas to be configured, and not necessarily actively attached in the ABR definition) was introduced in Cisco IOS (tm) version 11.1(6). Cisco ABR behavior described in this document was integrated in Cisco IOS (tm) in version 12.1(3)T.

The ABR behavior described as IBM ABR approach was implemented by IBM in IBM Nways Multiprotocol Routing Services (MRS) 3.3.

Note that the authors do not intend to keep this document in sync with actual implementations.

[10](#) References

[Ref1] J. Moy. OSPF version 2. Technical Report [RFC 2328](#), Internet Engineering Task Force, 1998. <ftp://ftp.isi.edu/in-notes/rfc2328.txt>.

[11](#) Authors' Addresses

Alex Zinin
Cisco Systems
150 West Tasman Dr.
San Jose, CA 95134

Derek M. Yeung
Procket Networks
3850 N.First Street
San Jose, CA 95134

E-mail: azinin@cisco.com

Phone: 408-954-7911

E-mail: myeung@procket.com

Acee Lindem

Redback Networks

102 Carric Bend Court

Apex, NC 27502 USA

919-387-6971

E-mail: acee@redback.com

Zinin, Lindem, Yeung

[Page 10]