

Network Working Group
Internet-Draft
Updates: [5820](#) (if approved)
Intended status: Experimental
Expires: June 21, 2014

A. Retana
S. Ratliff
Cisco Systems, Inc.
December 18, 2013

Use of the OSPF-MANET Interface in Single-Hop Broadcast Networks
draft-ietf-ospf-manet-single-hop-or-04

Abstract

This document describes the use of the OSPF-MANET interface in single-hop broadcast networks. It includes a mechanism to dynamically determine the presence of such a network and specific operational considerations due to its nature.

This document updates [RFC5820](#).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on June 21, 2014.

Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in [Section 4](#).e of

the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
1.1.	Single-Hop Broadcast Networks	3
2.	Requirements Language	3
3.	Single-Hop Network Operation	3
3.1.	Use of Router Priority	4
3.2.	Unsynchronized Adjacencies	5
4.	Single-Hop Network Detection	5
4.1.	Transition from multi-hop to single-hop mode	6
4.2.	Transition from single-hop to multi-hop mode	6
5.	IANA Considerations	7
6.	Security Considerations	7
7.	Acknowledgements	7
8.	References	7
8.1.	Normative References	7
8.2.	Informative References	7
Appendix A.	Change Log	8
A.1.	Changes between the -00 and -01 versions.	8
A.2.	Changes between the -01 and -02 versions.	8
A.3.	Changes between the -02 and -03 versions.	8
A.4.	Changes between the -03 and -04 versions	8
	Authors' Addresses	8

[1.](#) Introduction

The OSPF-MANET interface [[RFC5820](#)] uses the point-to-multipoint adjacency model over a broadcast media to allow the following:

- o all router-to-router connections are treated as if they were point-to-point links.
- o Link metric can be set on a per-neighbor basis.
- o Broadcast and multicast can be accomplished through the Layer 2 broadcast capabilities of the media.

It is clear that the characteristics of the MANET interface can also be beneficial in other types of network deployments; specifically in single-hop broadcast capable networks which may have a different cost associated with any pair of nodes.

This document updates [[RFC5820](#)] by describing the use of the MANET interface in single-hop broadcast networks, which consists of its simplified operation by not requiring the use of Overlapping Relays

as well as introducing a new heuristic for Smart Peering using the Router Priority.

1.1. Single-Hop Broadcast Networks

The OSPF extensions for MANET networks assume the ad-hoc formation of a network over bandwidth-constrained wireless links, where packets may traverse several intermediate nodes before reaching their destination (multi-hop paths on the interface). By contrast, a single-hop broadcast network (as considered in this document) is one that is structured in such a way that all the nodes in it are directly connected to each other. An Ethernet interface is a good example of the connectivity model.

Furthermore, the single-hop networks considered may have different link metrics associated to the connectivity between a specific pair of neighbors. The OSPF broadcast model [[RFC2328](#)] can't accurately describe these differences. A point-to-multipoint description is more appropriate given that each node can reach every other node directly.

In summary, the single-hop broadcast interfaces considered in this document have the following characteristics:

- o direct connectivity between all the nodes
- o different link metrics may exist per-neighbor
- o it has broadcast/multicast capabilities

2. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

3. Single-Hop Network Operation

The operation of the MANET interface doesn't change when implemented on a single-hop broadcast interface. However, the operation of some of the proposed enhancements can be simplified. Explicitly, the Overlapping Relay Discovery Process SHOULD NOT be executed and the A-bit SHOULD NOT be set by any of the nodes: the result is an empty set of Active Overlapping Relays.

This document describes the use of already defined mechanisms and requires no additional on-the-wire changes.

3.1. Use of Router Priority

Smart Peering [[RFC5820](#)] can be used to reduce the burden of requiring a full mesh of adjacencies. In short, a new adjacency is not required if reachability to the node is already available through the existing SPT. In general, the reachability is verified on a first-come-first-served basis; i.e. in a typical network, the neighbors with which a FULL adjacency is set up depend on the order of discovery.


The Smart Peering state machine allows for the definition of heuristics, beyond the SPT reachability, to decide whether or not it considers a new adjacency to be of value. This section describes one such heuristic to be used in Step (3) of the state machine, in place of the original one.

The Router Priority (as defined in OSPFv2 [[RFC2328](#)] and OSPFv3 [[RFC5340](#)]) is used in the election of the (Backup) Designated Router, and can be configured only in broadcast and NBMA interfaces. The MANET interface is a broadcast interface using the point-to-multipoint adjacency model, which means that no (Backup) Designated Router is elected. For its use with the MANET interface, the Router Priority is defined as:

Router Priority

An 8-bit unsigned integer. Used to determine the precedence of which router(s) to establish a FULL adjacency with during the Smart Peering selection process. When more than one router attached to a network is present, the one with the highest Router Priority takes precedence. If there is still a tie, the router with the highest Router ID takes precedence.

The heuristic for the smart peering state machine is described as:

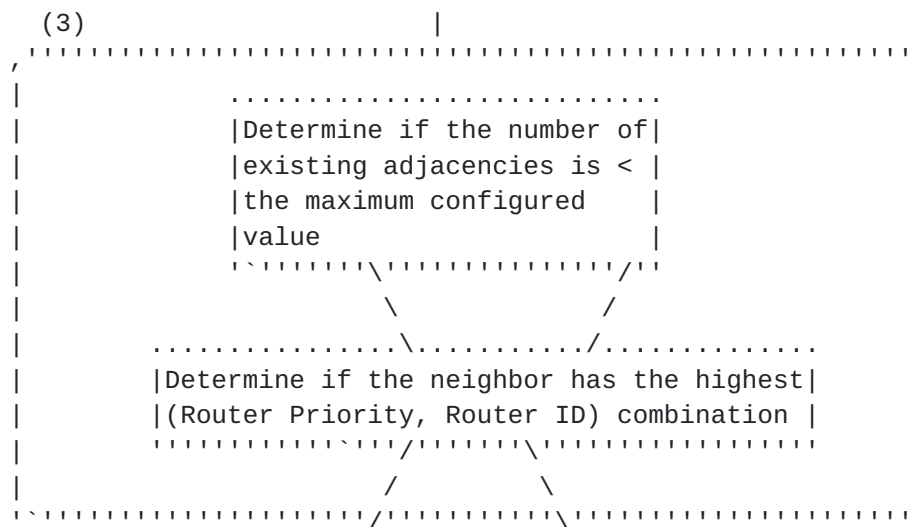

Smart Peering Algorithm

In order to avoid churn in the selection and establishment of the adjacencies, every router **SHOULD** wait until the ModeChange timer ([Section 4](#)) expires before running the Smart Peering state machine. Note that this wait should cause the selection process to consider all the nodes on the link, instead of being triggered based on receiving a Hello message from a potential neighbor. The nodes selected using this process are referred to simply as Smart Peers.

It is **RECOMMENDED** that the maximum number of adjacencies be set to 2.

[3.2.](#) Unsynchronized Adjacencies

An unsynchronized adjacency [[RFC5820](#)] is one for which the database synchronization is postponed, but that is announced as FULL because SPT reachability can be proven. A single-hop broadcast network has a connectivity model in which all the nodes are directly connected to each other. This connectivity results in a simplified reachability check through the SPT: the adjacency to a specific peer **MUST** be advertized as FULL by at least one Smart Peer.

The single-hop nature of the interface allows then the advertisement of the reachable adjacencies as FULL without additional signaling. Flooding **SHOULD** be enabled for all the unsynchronized adjacencies to take advantage of the broadcast nature of the media. As a result, all the nodes in the interface will be able to use all the LSAs received.

[4.](#) Single-Hop Network Detection

A single-hop network is one in which all the nodes are directly connected. Detection of such an interface can be easily done at every node by comparing the speaker's 1-hop neighbors with its 2-hop neighborhood. If for every 1-hop neighbor, the set of 2-hop neighbors contains the whole set of the remaining 1-hop neighbors, then the interface is a single-hop network; this condition is called the Single-Hop Condition.

A new field is introduced in the MANET interface data structure. The name of the field is SingleHop, and it is a flag indicating whether the interface is operating in single-hop mode (as described in [Section 3](#)). The SingleHop flag is set when the node meets the Single-Hop Condition on the interface. If the Single-Hop Condition is no longer met then the SingleHop flag MUST be cleared.

A new timer is introduced to guide the transition of the interface from/to multi-hop mode (which is the default mode described in [\[RFC5820\]](#)) to/from single-hop mode:

- o ModeChange: Every time a node changes the state of the SingleHop flag for the interface, the corresponding ModeChange timer MUST be set. The ModeChange timer represents the length of time in seconds that an interface SHOULD wait before changing between multi-hop and single-hop modes. It is RECOMMENDED that this timer be set to Wait Time [\[RFC2328\]](#).

The following sections describe the steps to be taken to transition between interface modes.

[4.1.](#) Transition from multi-hop to single-hop mode

Detection of the Single-Hop Condition triggers the transition into single-hop mode by setting both the SingleHop flag and the ModeChange timer.

Once the ModeChange timer expires, the heuristic defined in [Section 3.1](#) MAY be executed to optimize the set of adjacencies on the interface. Note that an adjacency MUST NOT transition from FULL to 2-Way unless the simplified reachability check ([Section 3.2](#)) can be verified.

[4.2.](#) Transition from single-hop to multi-hop mode

Not meeting the Single-Hop Condition triggers the transition into multi-hop mode by clearing the SingleHop flag and setting the ModeChange timer. The A-bit MUST be set if the Single-Hop condition is no longer met because of one of the following cases:

- o an increase in the set of 1-hop neighbors, without the corresponding increase of the 2-hop neighborhood
- o a decrease of the 2-hop neighborhood while maintaining all the previous 1-hop neighbors

Once the ModeChange timer expires, the multi-hop operation described in [[RFC5820](#)] takes over.

Note that the cases listed above may result in the interface either gaining or losing a node before the ModeChange timer expires. In both cases the heuristic defined in [Section 3.1](#) MAY be executed to optimize the set of adjacencies on the interface.

In the case that a node joins the interface, the Designated Router and Backup Designated Router fields in the Hello packet [[RFC2328](#)] MAY be used to inform the new node of the identity (Router ID) of the current Smart Peers (and avoid the optimization).

5. IANA Considerations

This document includes no request to IANA.

6. Security Considerations

No new security concerns beyond the ones expressed in [[RFC5820](#)] are introduced in this document.

7. Acknowledgements

The authors would like to thank Anton Smirnov, Jeffrey Zhang, Alia Atlas, Juan Antonio Cordero, Richard Ogier and Christer Holmberg for their comments.

8. References

[8.1.](#) Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2328] Moy, J., "OSPF Version 2", STD 54, [RFC 2328](#), April 1998.
- [RFC5820] Roy, A. and M. Chandra, "Extensions to OSPF to Support Mobile Ad Hoc Networking", [RFC 5820](#), March 2010.

[8.2.](#) Informative References

[RFC5340] Coltun, R., Ferguson, D., Moy, J., and A. Lindem, "OSPF for IPv6", [RFC 5340](#), July 2008.

[Appendix A](#). Change Log

To be removed prior to publication.

[A.1](#). Changes between the -00 and -01 versions.

- o Updated contact information.

[A.2](#). Changes between the -01 and -02 versions.

- o Indicated the nature of the [RFC5820](#) update.
- o Clarified the Single-Hop Condition and the SingleHop flag.
- o Reshuffled the references.

[A.3](#). Changes between the -02 and -03 versions.

No changes..just a refresh.

[A.4](#). Changes between the -03 and -04 versions

- o Clarified how this document updates [RFC5820](#).
- o Updated ACKs.

Authors' Addresses

Alvaro Retana
Cisco Systems, Inc.
7025 Kit Creek Rd.
Research Triangle Park, NC 27709
USA

Email: aretana@cisco.com

Stan Ratliff
Cisco Systems, Inc.
7025 Kit Creek Rd.
Research Triangle Park, NC 27709
USA

Email: sratliff@cisco.com

