

OSPF Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: June 17, 2018

J. Tantsura  
Individual  
U. Chunduri  
Huawei Technologies  
S. Aldrin  
Google, Inc  
P. Psenak  
Cisco Systems  
December 14, 2017

**Signaling MSD (Maximum SID Depth) using OSPF  
draft-ietf-ospf-segment-routing-msd-08**

**Abstract**

This document proposes a way to signal Maximum SID Depth (MSD) supported by a node at node and/or link granularity by an OSPF Router. In a Segment Routing (SR) enabled network a centralized controller that programs SR tunnels needs to know the MSD supported by the head-end at node and/or link granularity to impose the SID stack of an appropriate depth. MSD is relevant to the head-end of a SR tunnel or Binding-SID anchor node where Binding-SID expansions might result in creation of a new SID stack. Here the term OSPF means both OSPFv2 and OSPFv3.

**Status of This Memo**

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on June 17, 2018.

**Copyright Notice**

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">1.1.</a>	Conventions used in this document . . . . .	<a href="#">3</a>
<a href="#">1.1.1.</a>	Terminology . . . . .	<a href="#">3</a>
<a href="#">1.2.</a>	Requirements Language . . . . .	<a href="#">3</a>
<a href="#">2.</a>	Terminology . . . . .	<a href="#">4</a>
<a href="#">3.</a>	Node MSD TLV . . . . .	<a href="#">4</a>
<a href="#">4.</a>	Link MSD sub-TLV . . . . .	<a href="#">5</a>
<a href="#">5.</a>	Node MSD vs Link MSD conflict resolution . . . . .	<a href="#">5</a>
<a href="#">6.</a>	IANA Considerations . . . . .	<a href="#">6</a>
<a href="#">7.</a>	Security Considerations . . . . .	<a href="#">6</a>
<a href="#">8.</a>	Contributors . . . . .	<a href="#">6</a>
<a href="#">9.</a>	Acknowledgements . . . . .	<a href="#">6</a>
<a href="#">10.</a>	References . . . . .	<a href="#">6</a>
<a href="#">10.1.</a>	Normative References . . . . .	<a href="#">7</a>
<a href="#">10.2.</a>	Informative References . . . . .	<a href="#">7</a>
	Authors' Addresses . . . . .	<a href="#">8</a>

## [1.](#) Introduction

When Segment Routing tunnels are computed by a centralized controller, it is critical that the controller learns the MSD "Maximum SID Depth" of the node or link SR tunnel exits over, so the SID stack depth of a path computed doesn't exceed the number of SIDs the node is capable of imposing. This document describes how to use OSPF to signal the MSD of a node or link to a centralized controller.

PCEP SR extensions draft [[I-D.ietf-pce-segment-routing](#)] signals MSD in SR PCE Capability TLV and METRIC Object. However, if PCEP is not supported/configured on the head-end of a SR tunnel or a Binding-SID anchor node and controller does not participate in IGP routing, it has no way to learn the MSD of nodes and links which has been configured. BGP-LS [[RFC7752](#)] defines a way to expose topology and associated attributes and capabilities of the nodes in that topology to a centralized controller. MSD signaling by BGP-LS has been defined in [[I-D.ietf-idr-bgp-ls-segment-routing-msd](#)]. Typically, BGP-LS is configured on a small number of nodes, that do not



necessarily act as head-ends. In order, for BGP-LS to signal MSD for the all nodes and links in the network MSD is relevant, MSD capabilities SHOULD be distributed to every OSPF router in the network.

[I-D.ietf-ospf-mpls-eltc] defines Readable Label Depth Capability (RLDC) that is used by a head-end to insert Entropy Label (EL) at appropriate depth, so it could be read by transit nodes. MSD in contrary signals ability to impose SID's stack of a particular depth.

MSD of type 1 (IANA Registry), called Base MSD is used to signal the total number of SIDs a node is capable of imposing, to be used by a path computation element/controller. In case, there are additional SIDs (e.g. service) that are to be imposed to the stack - this would be signaled with an another MSD type (TBD), no adjustment to the Base MSD should be made. In the future, new MSD types could be defined to signal additional capabilities: entropy labels, SIDs that can be imposed thru recirculation, or another dataplane e.g. IPv6.

## **1.1. Conventions used in this document**

### **1.1.1. Terminology**

BGP-LS: Distribution of Link-State and TE Information using Border Gateway Protocol

OSPF: Open Shortest Path First

MSD: Maximum SID Depth

PCC: Path Computation Client

PCE: Path Computation Element

PCEP: Path Computation Element Protocol

SID: Segment Identifier

SR: Segment routing

## **1.2. Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].



## 2. Terminology

This memo makes use of the terms defined in [\[RFC4970\]](#).

## 3. Node MSD TLV

A new TLV within the body of the OSPF RI Opaque LSA, called Node MSD TLV is defined to carry the provisioned SID depth of the router originating the RI LSA. Node MSD is the lowest MSD supported by the node.

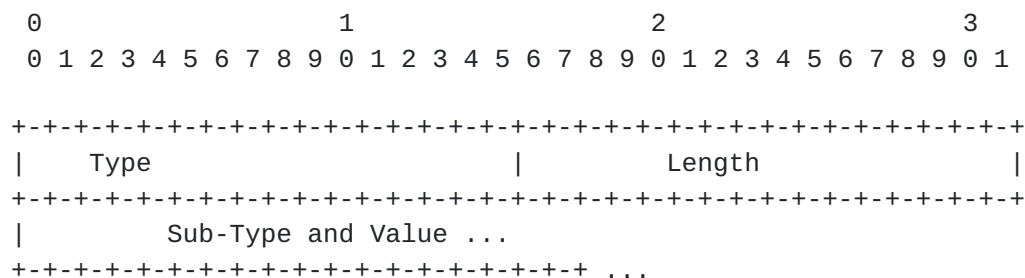


Figure 1: Node MSD TLV

The Type (2 bytes) of this TLV has value of 12.

Length is variable (minimum of 2, multiple of 2 octets) and represents the total length of value field.

Value field consists of a 1 octet sub-type (IANA Registry) and 1 octet value.

Sub-Type 1 (IANA Section), MSD and the Value field contains maximum MSD of the router originating the RI LSA. Node Maximum MSD is a number in the range of 0-254. 0 represents lack of the ability to impose MSD stack of any depth; any other value represents that of the node. This value SHOULD represent the lowest value supported by node.

Other Sub-types other than defined above are reserved for future extensions.

This TLV is applicable to OSPFv2 and to OSPFv3 [\[RFC5838\]](#) and is optional. The scope of the advertisement is specific to the deployment.



#### 4. Link MSD sub-TLV

A new sub-TLV called Link MSD sub-TLV is defined to carry the provisioned SID depth of the interface associated with the link.

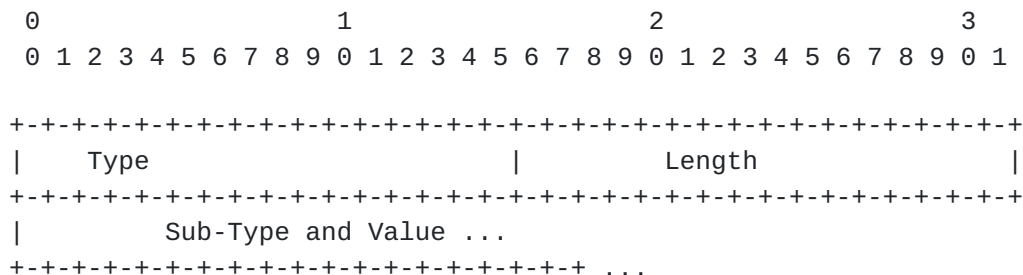


Figure 2: Link MSD Sub-TLV

The Type (2 bytes) of this TLV:

For OSPFv2, the Link level MSD value is advertised as an optional Sub-TLV of OSPFv2 Extended Link TLV as defined in [\[RFC7684\]](#), and has value of 6.

For OSPFv3, the Link level MSD value is advertised as an optional Sub-TLV of the Router-Link TLV as defined in [\[I-D.ietf-ospf-ospfv3-lsa-extend\]](#), and has value of 16 (Suggested value - to be assigned by IANA).

Length is variable and similar to what is defined in [Section 3](#).

Value field consists of a 1 octet sub-type (IANA Registry) and 1 octet value.

Sub-Type 1 (IANA Section), MSD and the Value field contains Link MSD of the router originating the corresponding LSA as specified for OSPFv2 and OSPFv3. Link MSD is a number in the range of 0-254. 0 represents lack of the ability to impose MSD stack of any depth; any other value represents that of the particular link MSD value.

Other Sub-types other than defined above are reserved for future extensions.

#### 5. Node MSD vs Link MSD conflict resolution

When both Node MSD and Link MSD are present, the value in the Link MSD MUST be used.





## **6. IANA Considerations**

This document includes a request to IANA to allocate TLV type codes for the new TLV proposed in [Section 3](#) of this document from OSPF Router Information (RI) TLVs Registry as defined by [\[RFC4970\]](#). For the link MSD, we request IANA to allocate new sub-TLV codes as proposed in [Section 4](#) from OSPFv2 Extended Link TLV Sub-TLVs registry and from Router-Link TLV defined in OSPFv3 Extend-LSA Sub-TLV registry.

This document also requests IANA to create a new Sub-type registry as proposed in [Section 3](#), [Section 4](#).

Value	Name	Reference
-----	-----	-----
0	Reserved	This document
1	Base MSD	This document
2-250	Unassigned	This document
251-254	Experimental	This document
255	Reserved	This document

Figure 3: MSD Sub-type Codepoints Registry

## **7. Security Considerations**

This document describes a mechanism to signal Segment Routing MSD supported at node and/or link granularity through OSPF LSA's and does not introduce any new security issues.

## **8. Contributors**

The following people contributed to this document:

Les Ginsberg

Email: ginsberg@cisco.com

## **9. Acknowledgements**

The authors would like to thank Stephane Litkowski and Bruno Decraene for their reviews and valuable comments.

## **10. References**



### **10.1. Normative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC4970] Lindem, A., Ed., Shen, N., Vasseur, JP., Aggarwal, R., and S. Shaffer, "Extensions to OSPF for Advertising Optional Router Capabilities", [RFC 4970](#), DOI 10.17487/RFC4970, July 2007, <<https://www.rfc-editor.org/info/rfc4970>>.

### **10.2. Informative References**

- [I-D.ietf-idr-bgp-ls-segment-routing-msd]  
Tantsura, J., Chunduri, U., Mirsky, G., and S. Sivabalan, "Signaling Maximum SID Depth using Border Gateway Protocol Link-State", [draft-ietf-idr-bgp-ls-segment-routing-msd-01](#) (work in progress), October 2017.
- [I-D.ietf-ospf-mpls-elc]  
Xu, X., Kini, S., Sivabalan, S., Filsfils, C., and S. Litkowski, "Signaling Entropy Label Capability Using OSPF", [draft-ietf-ospf-mpls-elc-04](#) (work in progress), November 2016.
- [I-D.ietf-ospf-ospfv3-lsa-extend]  
Lindem, A., Roy, A., Goethals, D., Vallem, V., and F. Baker, "OSPFv3 LSA Extendibility", [draft-ietf-ospf-ospfv3-lsa-extend-18](#) (work in progress), November 2017.
- [I-D.ietf-pce-segment-routing]  
Sivabalan, S., Filsfils, C., Tantsura, J., Henderickx, W., and J. Hardwick, "PCEP Extensions for Segment Routing", [draft-ietf-pce-segment-routing-11](#) (work in progress), November 2017.
- [RFC5838] Lindem, A., Ed., Mirtorabi, S., Roy, A., Barnes, M., and R. Aggarwal, "Support of Address Families in OSPFv3", [RFC 5838](#), DOI 10.17487/RFC5838, April 2010, <<https://www.rfc-editor.org/info/rfc5838>>.
- [RFC7684] Psenak, P., Gredler, H., Shakir, R., Henderickx, W., Tantsura, J., and A. Lindem, "OSPFv2 Prefix/Link Attribute Advertisement", [RFC 7684](#), DOI 10.17487/RFC7684, November 2015, <<https://www.rfc-editor.org/info/rfc7684>>.



[RFC7752] Gredler, H., Ed., Medved, J., Previdi, S., Farrel, A., and S. Ray, "North-Bound Distribution of Link-State and Traffic Engineering (TE) Information Using BGP", [RFC 7752](#), DOI 10.17487/RFC7752, March 2016, <<https://www.rfc-editor.org/info/rfc7752>>.

#### Authors' Addresses

Jeff Tantsura  
Individual

Email: [jefftant.ietf@gmail.com](mailto:jefftant.ietf@gmail.com)

Uma Chunduri  
Huawei Technologies

Email: [uma.chunduri@huawei.com](mailto:uma.chunduri@huawei.com)

Sam Aldrin  
Google, Inc

Email: [aldrin.ietf@gmail.com](mailto:aldrin.ietf@gmail.com)

Peter Psenak  
Cisco Systems

Email: [ppsenak@cisco.com](mailto:ppsenak@cisco.com)

