

P2PSIP Working Group
Internet-Draft
Intended status: Standards Track
Expires: January 31, 2016

H. Song
X. Jiang
R. Even
Huawei
D. Bryan
Ethernod.org
Y. Sun
ICT
July 30, 2015

P2P Overlay Diagnostics
draft-ietf-p2psip-diagnostics-17

Abstract

This document describes mechanisms for P2P overlay diagnostics. It defines extensions to the RELOAD P2PSIP base protocol to collect diagnostic information, and details the protocol specifications for these extensions. Useful diagnostic information for connection and node status monitoring is also defined. The document also describes the usage scenarios and provides examples of how these methods are used to perform diagnostics in P2PSIP overlay networks.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 31, 2016.

Copyright Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents

(<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

Table of Contents

1.	Introduction	3
2.	Terminology	4
3.	Diagnostic Scenarios	4
4.	Data Collection Mechanisms	5
4.1.	Overview of Operations	5
4.2.	"Ping-like" Behavior: Extending Ping	7
4.2.1.	RELOAD Request Extension: Ping	7
4.3.	"Traceroute-like" Behavior: The Path_Track Method	8
4.3.1.	New RELOAD Request: PathTrack	9
4.3.1.1.	PathTrack Request	10
4.3.1.2.	PathTrack Response	10
4.4.	Error Code Extensions	11
5.	Diagnostic Data Structures	11
5.1.	DiagnosticsRequest Data Structure	12
5.2.	DiagnosticsResponse Data Structure	13
5.3.	dMFlags and Diagnostic Kind ID Types	14
6.	Message Processing	17
6.1.	Message Creation and Transmission	17
6.2.	Message Processing: Intermediate Peers	18
6.3.	Message Response Creation	19
6.4.	Interpreting Results	20

7.	Authorization through Overlay Configuration	20
8.	Security Considerations	21
9.	IANA Considerations	21
9.1.	Diagnostics Flag	21
9.2.	Diagnostic Kind ID Types	22

9.3.	Message Codes	22
9.4.	Error Code	23
9.5.	Message Extension	23
9.6.	XML Name Space Registration	24
10.	Acknowledgments	24
11.	References	24
11.1.	Normative References	24
11.2.	Informative References	25
Appendix A.	Examples	26
A.1.	Example 1	26
A.2.	Example 2	26
A.3.	Example 3	26
Appendix B.	Problems with Generating Multiple Responses on Path	26
Appendix C.	Changes to the Draft	27
C.1.	Changes since -00 version	27
C.2.	Changes since -01 version	27
C.3.	Changes since -02 version	27
C.4.	Changes since -03 version	27
C.5.	Changes since -04 version	27
C.6.	Changes since -05 version	28
C.7.	Changes in version -10	28
C.8.	Changes in version -15	28
	Authors' Addresses	28

[1.](#) Introduction

In the last few years, overlay networks have rapidly evolved and emerged as a promising platform for deployment of new applications and services in the Internet. One of the reasons overlay networks are seen as an excellent platform for large scale distributed systems is their resilience in the presence of failures. This resilience has three aspects: data replication, routing recovery, and static resilience. Routing recovery algorithms are used to repopulate the routing table with live nodes when failures are detected. Static resilience measures the extent to which an overlay can route around failures even before the recovery algorithm repairs the routing

table. Both routing recovery and static resilience rely on accurate and timely detection of failures.

There are a number of situations in which some nodes in a Peer-to-Peer (P2P) overlay may malfunction or behave badly. For example, these nodes may be disabled, congested, or may be misrouting messages. The impact of these malfunctions on the overlay network may be a degradation of quality of service provided collectively by the peers in the overlay network or an interruption of the overlay services. It is desirable to identify malfunctioning or badly behaving peers through diagnostic tools, and exclude or reject them from the P2P system. Node failures may also be caused by failures of

Song, et al.

Expires January 31, 2016

[Page 3]

Internet-Draft

P2P Overlay Diagnostics

January 2015

underlying layers. For example, recovery from an incorrect overlay topology may be slow when the speed at which IP routing recovers after link failures is very slow. Moreover, if a backbone link fails and the failover is slow, the network may be partitioned, leading to partitions of overlay topologies and inconsistent routing results between different partitioned components.

Some keep-alive algorithms based on periodic probe and acknowledge mechanisms enable accurate and timely detection of failures of one node's neighbors [[Overlay-Failure-Detection](#)], but these algorithms by themselves can only detect the disabled neighbors using the periodic method. This may not be sufficient for the service provider operating the overlay network.

For Peer-to-Peer SIP (P2PSIP), a single, general P2PSIP overlay diagnostic framework supporting periodic and on-demand methods for detecting node failures and network failures is desirable. This document describes a general P2PSIP overlay diagnostic extension to the P2PSIP base protocol RELOAD [[RFC6940](#)] and is intended as a complement to keep-alive algorithms in the P2PSIP overlay itself.

[2.](#) Terminology

This document uses the concepts defined in RELOAD [[RFC6940](#)].

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

3. Diagnostic Scenarios

P2P systems are self-organizing and ideally setup and configuration of individual P2P nodes requires no network management in the traditional sense. However, users of an overlay, as well as P2P service providers may contemplate usage scenarios where some monitoring and diagnostics are required. We present a simple connectivity test and some useful diagnostic information that may be used in such diagnostics.

The common usage scenarios for P2P diagnostics can be broadly categorized in three classes:

1. Automatic diagnostics built into the P2P overlay routing protocol. Nodes perform periodic checks of known neighbors and remove those nodes from the routing tables that fail to respond to connectivity checks [[Handling Churn in a DHT](#)]. Unresponsive nodes may only be temporarily disabled, for example due to a local cryptographic processing overload, disk processing overload

Song, et al.

Expires January 31, 2016

[Page 4]

Internet-Draft

P2P Overlay Diagnostics

January 2015

or link overload. It is therefore useful to repeat the connectivity checks to see nodes have recovered and can be again placed in the routing tables. This process is known as 'failed node recovery' and can be optimized as described in the paper "Handling Churn in a DHT" [[Handling Churn in a DHT](#)].

2. Diagnostics used by a particular node to follow up on an individual user complaint or failure. For example, a technical support staff member may use a desktop sharing application (with the permission of the user) to remotely determine the health of, and possible problems with, the malfunctioning node. Part of the remote diagnostics may consist of simple connectivity tests with other nodes in the P2PSIP overlay and retrieval of statistics from nodes in the overlay. The simple connectivity tests are not dependent on the type of P2PSIP overlay. Note that other tests may be required as well, including checking the health and performance of the user's computer or mobile device and checking the bandwidth of the link connecting the user to the Internet.
3. P2P system-wide diagnostics used to check the overall health of the P2P overlay network. These include checking the consumption of network bandwidth, checking for the presence of problem links

and checking for abusive or malicious nodes. This is not a trivial problem and has been studied in detail for content and streaming P2P overlays [[Diagnostic Framework](#)], and has not been addressed in earlier P2PSIP documents [[Diagnostics and NAT traversal in P2PP](#)]. While this is a difficult problem, a great deal of information that can help in diagnosing these problems can be obtained by obtaining basic diagnostic information for peers and the network. This document provides a framework for obtaining this information.

[4.](#) Data Collection Mechanisms

[4.1.](#) Overview of Operations

The diagnostic mechanisms described in this document are primarily intended to detect and locate failures or monitor performance in P2PSIP overlay networks. It provides mechanisms to detect and locate malfunctioning or badly behaving nodes including disabled nodes, congested nodes and misrouting peers. It provides a mechanism to detect direct connectivity or connectivity to a specified node, a mechanism to detect the availability of specified resource records and a mechanism to discover P2PSIP overlay topology and the underlay topology failures.

The P2PSIP diagnostics extensions define two mechanisms to collect data. The first is an extension to the RELOAD Ping mechanism,

allowing diagnostic data to be queried from a node, as well as to diagnose the path to that node. The second is a new method and response, PathTrack, for collecting diagnostic information iteratively. Payloads for these mechanisms allowing diagnostic data to be collected and represented are presented, and additional error codes are introduced. Essentially, this document reuses RELOAD [[RFC6940](#)] specification and extends them to introduce the new diagnostics methods. The extensions strictly follow RELOAD specification on the messages routing, transport, NAT traversal etc. The diagnostic methods are however P2PSIP protocol independent.

This document primarily describes how to detect and locate failures including disabled nodes, congested nodes, misrouting behaviors and underlying network faults in P2PSIP overlay networks through a simple and efficient mechanism. This mechanism is modeled after the ping/

traceroute paradigm: ping [[RFC0792](#)] is used for connectivity checks, and traceroute is used for hop-by-hop fault localization as well as path tracing. This document specifies a "ping-like" mode (by extending the RELOAD Ping method to gather diagnostics) and a "traceroute-like" mode (by defining the new PathTrack method) for diagnosing P2PSIP overlay networks.

One way these tools can be used is to detect the connectivity to the specified node or the availability of the specified resource-record through the extended P2PSIP Ping operation. Once the overlay network receives some alarms about overlay service degradation or interruption, a Ping is sent. If the Ping fails, one can then send a PathTrack to determine where the fault lies.

The diagnostic information can only be provided to authorized nodes. Some diagnostic information can be provided to all the participants in the P2PSIP overlay, and some other diagnostic information can only be provided to the nodes authorized by the local or overlay policy. The authorization depends on the type of the diagnostic information and the administrative considerations, and is application specific.

This document considers the general administrative scenario based on diagnostic kind type, where a whole overlay can authorize a certain type of diagnostic information to a small list of particular nodes (e.g. administrative nodes). That means, if a node gets the authorization to access a diagnostic kind type, it can access that information from all nodes in the overlay network. It leaves the scenario where a particular node authorizes its diagnostic information to a particular list of nodes out of scope. This could be achieved by extension of this document if there is requirement in the near future. The default policy or access rule for a type of diagnostic information is "permit" unless specified in the diagnostics extension document. As the RELOAD protocol already

requires that each message carries the message signature of the sender, the receiver of the diagnostics requests can use the signature to identify the sender. It can then use the overlay configuration file with this signature to determine which types of diagnostic information that node is authorized for.

In the remainder of this section we define mechanisms for collecting data, as well as the specific protocol extensions (message

extensions, new methods, and error codes) required to collect this information. In [Section 5](#) we discuss the format of the data collected, and in [Section 6](#) we discuss detailed message processing.

4.2. "Ping-like" Behavior: Extending Ping

To provide "ping-like" behavior, the RELOAD Ping method is extended to collect diagnostic data along the path. The request message is forwarded by the intermediate peers along the path and then terminated by the responsible peer. After optional local diagnostics, the responsible peer returns a response message. If an error is found when routing, an Error response is sent to the initiator node by the intermediate peer. Please refer to the RELOAD [\[RFC6940\]](#) for details of the protocol.

The message flow of a Ping message (with diagnostic extensions) is as follows:

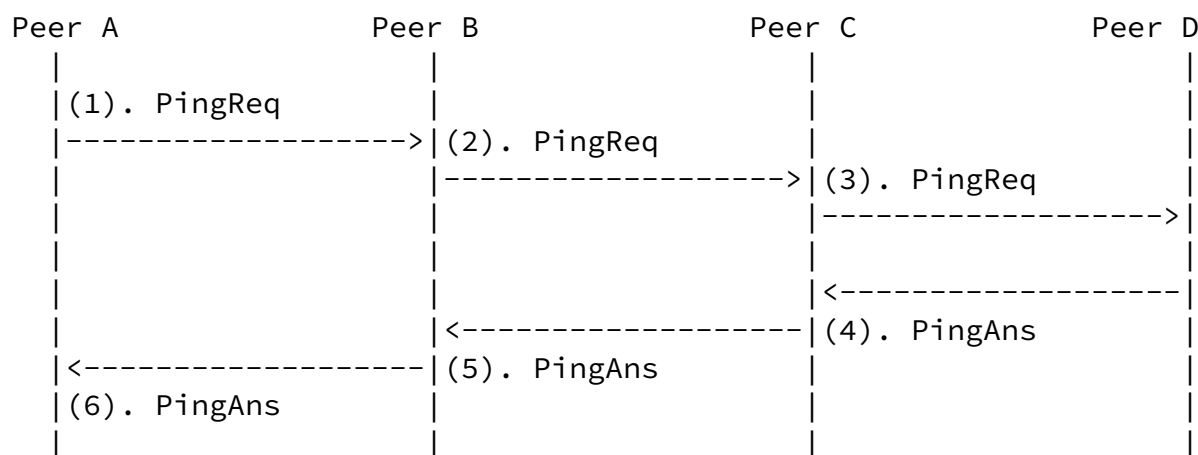


Figure 1: Ping Diagnostic Message Flow

4.2.1. RELOAD Request Extension: Ping

To extend the ping request for use in diagnostics, a new extension of RELOAD is defined. The structure for a MessageExtension in RELOAD is defined as:

```
struct {
```



```
MessageExtensionType  type;
Boolean               critical;
opaque                extension_contents<0..2^32-1>;
} MessageExtension;
```

For the Ping request extension, we define a new MessageExtensionType, extension 0x0002 named Diagnostic_Ping, as specified in Table 4 and specified in the RELOAD. The extension contents consists of a DiagnosticsRequest structure, defined later in this document in [Section 5.1](#). This extension MAY be used for new requests of the the Ping method and MUST NOT be included in requests using any other method.

This extension is not critical. If a peer does not support the extension, they will simply ignore the diagnostic portion of the message, and will treat the message as if it was a normal ping. Senders MUST accept a response that lacks diagnostic information and SHOULD NOT resend the message expecting a reply. Receivers who receive a method other than Ping including this extension MUST ignore the extension.

[4.3](#). "Traceroute-like" Behavior: The Path_Track Method

We define a simple PathTrack method for retrieving diagnostic information iteratively. The mechanism defined in this document follows the RELOAD specification, the new request and response message use the message format specified in RELOAD messages. Please refer to the RELOAD [[RFC6940](#)] for details of the protocol.

The operation of this request is shown below in Figure 2. The initiator node A asks its neighbor B which is the next hop peer to the destination ID, and B returns a message with the next hop peer C information, along with optional diagnostic information for B to the initiator node. Then the initiator node A asks the next hop peer C (directly or via symmetric routing) to return next hop peer D information and diagnostic information of C. Unless a failure prevents the message from being forwarded, this step can be iteratively repeated until the request reaches responsible peer D for the destination ID, and retrieves diagnostic information of peer D.

The message flow of a PathTrack message (with diagnostic extensions) is as follows:

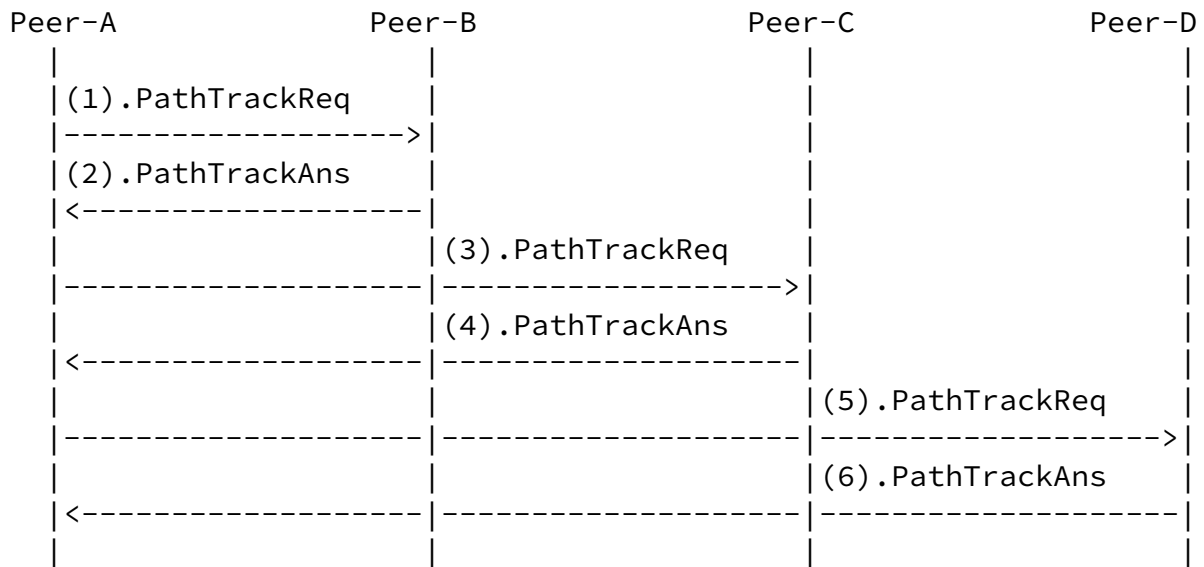


Figure 2: PathTrack Diagnostic Message Flow

There have been proposals that RouteQuery and a series of Fetch requests can be used to replace the PathTrack mechanism, but in the presence of churn such an operation would not, strictly speaking, provide identical results, as the path may change between RouteQuery and Fetch operations. (although obviously the path could change between steps of PathTrack as well).

[4.3.1.](#) New RELOAD Request: PathTrack

This document defines a new RELOAD method, PathTrack, to retrieve the diagnostic information from the intermediate peers along the routing path. At each step of the PathTrack request, the responsible peer responds to the initiator node with requested status information. Status information can include a peer's congestion state, processing power, available bandwidth, the number of entries in its neighbor table, uptime, identity, network address information, and next hop peer information.

A PathTrack request specifies which diagnostic information is requested using a DiagnosticsRequest data structure, defined and discussed in detail later in this document in [Section 5.1](#). Base information is requested by setting the appropriate flags in the data structure in the request. If all flags are clear (no bits are set), then the PathTrack request is only used for requesting the next hop information. In this case the iterative mode of PathTrack is degraded to a RouteQuery method which is only used for checking the liveness of the peers along the routing path. The PathTrack request can be routed directly or through the overlay based on the routing

mode chosen by the initiator node.

A response to a successful PathTrackReq is a PathTrackAns message. The PathTrackAns contains general diagnostic information in the payload, returned using a DiagnosticResponse data structure. This data structure is defined and discussed in detail later in this document in [Section 5.2](#). The information returned is determined based on the information requested in the flags in the corresponding request.

[4.3.1.1](#). PathTrack Request

The structure of the PathTrack request is as follows:

```
struct{
    Destination destination;
    DiagnosticsRequest request;
}PathTrackReq;
```

The fields of the PathTrackReq are as follows:

destination : The destination which the initiator node is interested in. This may be any valid destination object, including a NodeID, opaque ids, or ResourceID.

request : A DiagnosticsRequest, as discussed in [Section 5.1](#).

[4.3.1.2](#). PathTrack Response

The structure of the PathTrack Response is as follows:

```
struct{
    Destination next_hop;
    DiagnosticsResponse response;
}PathTrackAns;
```

The fields of the PathTrackAns are as follows:

next_hop : The information of the next hop node from the responding intermediate peer to the destination node. If the responding peer is the responsible peer for the destination ID,

then the next_hop node ID equals the responding node ID, and after that the initiator MUST stop the iterative process.

response : A DiagnosticsResponse, as discussed in [Section 5.2](#).

[4.4](#). Error Code Extensions

This document extends the Error response method defined in the RELOAD specification to support error cases resulting from diagnostic queries. When an error is encountered in RELOAD, the Message Code 0xFFFF is returned. The ErrorResponse structure includes an error code. and we define new error codes to report possible error conditions detected while performing diagnostics:

Code Value	Error Code Name
0x65	Underlay Destination Unreachable
0x66	Underlay Time exceeded
0x67	Message Expired
0x68	Upstream Misrouting
0x69	Loop detected
0x70	TTL hops exceeded

The final error codes will be assigned by IANA as specified in RELOAD protocol [[RFC6940](#)].

In addition, this document introduces several types of error information in the error_info field in the case of Code 0x65. These are represented as an opaque UTF-8 text string. Here are some examples for the error info.

error_info:

```
net unreachable
host unreachable
protocol unreachable
port unreachable
fragmentation needed
```

source route failed

The `error_info` field values of the Code 0x66 to 0x70 are to be application specific and defined by the particular overlay.

5. Diagnostic Data Structures

Both the extended Ping method and Path_track methods use the following common diagnostics data structures to collect data. Two common structures are defined: `DiagnosticsRequest` for requesting data, and `DiagnosticsResponse` for returning the information.

Song, et al. Expires January 31, 2016 [Page 11]

Internet-Draft P2P Overlay Diagnostics January 2015

5.1. DiagnosticsRequest Data Structure

The `DiagnosticsRequest` data structure is used to request diagnostic information and has the following form:

```
enum{ (2^16-1) } DiagnosticKindId;

struct{
    DiagnosticKindId kind;
    opaque diagnostic_extension_contents<0..2^32-1>;
}DiagnosticExtension;

struct{
    uint64 expiration;
    uint64 timestamp_initiated;
    uint64 dMFlags;
    uint32 ext_length;
    DiagnosticExtension diagnostic_extensions_list<0..2^32-1>;
}DiagnosticsRequest;
```

The fields in the `DiagnosticsRequest` are as follows:

`expiration` : The time when the request will expire represented as the number of milliseconds elapsed since midnight Jan 1, 1970 UTC not counting leap seconds. This will have the same values for

seconds as standard UNIX time or POSIX time. More information can be found at UnixTime [[UnixTime](#)]. This value MUST have a value of between 1 and 600 seconds in the future.

timestamp_initiated : The time when the P2PSIP diagnostics request was initiated represented as the number of milliseconds elapsed since midnight Jan 1, 1970 UTC not counting leap seconds. This will have the same values for seconds as standard UNIX time or POSIX time.

dMFlags : A mandatory field which is an unsigned 64-bit integer indicating which base diagnostic information the request initiator node is interested in. The initiator sets different bits to retrieve different kinds of diagnostic information. If dMFlags is set to zero, then no base diagnostic information is conveyed in the PathTrack response. If dMFlag is set to all '1's, then all base diagnostic information values are requested. A request may set any number of the flags to request the corresponding diagnostic information.

ext_length : the length of the extended diagnostic request information in bytes. If the value is greater than or equal to 1, then some extended diagnostic information is requested. A value

of zero indicates no extended diagnostic information is included. The value of ext_length MUST NOT be negative. Note that is NOT the length of the entire DiagnosticsRequest data structure.

Note this memo specifies the initial set of flags, the flags can be extended. The dMflags indicate general diagnostic information. The mapping between the bits in the dMFlags and the diagnostic information kind presented is as described in [Section 9.1](#).

diagnostic_extensions_list : consists of one or more DiagnosticExtension structures (see below) documenting additional diagnostic information being requested. Each DiagnosticExtension consists of the following fields:

kind : a numerical code indicating the type of extension diagnostic information (see [Section 9.2](#)). Note that kinds 0xF000 - 0xFFFFE are reserved for overlay specific diagnostics and may be used without IANA registration for local diagnostic

information. Kinds from 0x0000 to 0x003F MUST NOT be indicated in the `diagnostic_extensions_list` in the message request because they can be represented using the `dMFlags` in a much simpler way.

`diagnostic_extension_contents` : the opaque data containing the request for this particular extension. This data is extension dependent.

5.2. DiagnosticsResponse Data Structure

```
enum { (2^16-1) } DiagnosticKindId;
struct{
    DiagnosticKindId kind;
    opaque diagnostic_info_contents<0..2^16-1>;
}DiagnosticInfo;

struct{
    uint64 expiration;
    uint64 timestamp_received;
    uint8 hop_counter;
    uint32 ext_length;
    DiagnosticInfo diagnostic_info_list<0..2^32-1>;
}DiagnosticsResponse;
```

The fields in the `DiagnosticsResponse` are as follows:

`expiration` : The time when the response will expire represented as the number of milliseconds elapsed since midnight Jan 1, 1970 UTC not counting leap seconds. This will have the same values for

seconds as standard UNIX time or POSIX time. This value MUST have a value of between 1 and 600 seconds in the future.

`timestamp_received` : The time when P2PSIP Overlay diagnostic request was received represented as the number of milliseconds elapsed since midnight Jan 1, 1970 UTC not counting leap seconds. This will have the same values for seconds as standard UNIX time or POSIX time.

`hop_counter` : This field only appears in diagnostic responses. It MUST be exactly copied from the TTL field of the forwarding header

in the received request. This information is sent back to the request initiator, allowing it to compute the number of hops that the message traversed in the overlay.

`ext_length` : the length of the returned `DiagnosticInfo` information in bytes. If the value is greater than or equal to 1, then some extended diagnostic information is requested. A value of zero indicates no extended diagnostic information is included. The value of `ext_length` MUST NOT be negative. Note that is NOT the length of the entire `DiagnosticsRequest` data structure.

`diagnostic_info_list` : consists one or more `DiagnosticInfo` structures containing the requested diagnostic information. The fields in the `DiagnosticInfo` structure are as follows:

`kind` : A numeric code indicating the type of information being returned. For base data requested using the `dMFlags`, this code corresponds to the `dMFlag` set, and is described in [Section 5.1](#). For diagnostic extensions, this code will be identical to the value of the `DiagnosticKindId` set in the "kind" field of the `DiagnosticExtension` of the request. See [Section 9.2](#).

`diagnostic_information` : Data containing the value for the diagnostic information being reported. Various kinds of diagnostic information can be retrieved, Please refer to [Section 5.3](#) for details of the diagnostic kind ID for the base diagnostic information that may be reported.

[5.3](#). `dMFlags` and Diagnostic Kind ID Types

The `dMFlags` field described above is a 64 bit field that allows initiator nodes to identify up to 62 items of base information to request in a request message (the first and last flags being reserved). When the requested base information is returned in the response, the value of the diagnostic kind ID will correspond to the numeric field marked in the `dMFlags` in the request. The values for the `dMFlags` are defined in [Section 9.1](#) and the diagnostic kind IDs

are defined in [Section 9.2](#). The information contained for each value is described in this section.

`STATUS_INFO` (8 bits): A single value element containing an

unsigned byte representing whether or not the node is in congestion status. An example usage of STATUS_INFO is for congestion-aware routing. In this scenario, each peer has to update its congestion status periodically. An intermediate peer in the distributed hash table (DHT) network will choose its next hop according to both the DHT routing algorithm and the status information. This is done to avoid increasing load on congested peers. The rightmost 4 bits are used and other bits MUST be cleared to "0"s for future use. There are 16 levels of congestion status, with "0x00" represent zero load and "0x0F" represent congested. This document does not provide a specific method for congestion, leaving this decision to each node. One possible option for a node would be to take its CPU/memory/bandwidth usage percentage in the past 600 seconds and normalize the highest value to the range [0x00, 0x0F]. A future draft may define an objective measure or specific algorithm for this.

ROUTING_TABLE_SIZE (32 bits): A single value element containing an unsigned 32-bit integer representing the number of peers in the peer's routing table. The administrator of the overlay may be interested in statistics of this value for reasons such as routing efficiency. Access to this kind of diagnostic information MUST NOT be allowed unless compliant to the rules defined in [Section 7](#).

PROCESS_POWER (64 bits): A single value element containing an unsigned 64-bit integer specifying the processing power of the node in unit of MIPS. Fractional values are rounded up.

UPSTREAM_BANDWIDTH (64 bits): A single value element containing an unsigned 64-bit integer specifying the upstream network bandwidth (provisioned or maximum, not available) of the node in unit of Kbps. Fractional values are rounded up. For multihomed hosts, this should be the link used to send the response.

DOWNSTREAM_BANDWIDTH (64 bits): A single value element containing an unsigned 64-bit integer specifying the downstream network bandwidth (provisioned or maximum, not available) of the node in unit of Kbps. Fractional values are rounded up. For multihomed hosts, this should be the link the request was received from.

SOFTWARE_VERSION: A single value element containing a US-ASCII string that identifies the manufacture, model, operating system information and the version of the software. While the format is peer-defined, a suggested format is as follows:

"ApplicationProductToken (Platform; OS-or-CPU) VendorProductToken (VendorComment)". For example: "MyReloadApp/1.0 (Unix; Linux x86_64) libreload-java/0.7.0 (Stonyfish Inc.)". Access to this kind of diagnostic information MUST NOT be allowed unless compliant to the rules defined in [Section 7](#).

MACHINE_UPTIME (64 bits): A single value element containing an unsigned 64-bit integer specifying the time the node's underlying system has been up in seconds.

APP_UPTIME (64 bits): A single value element containing an unsigned 64-bit integer specifying the time the P2P application has been up in seconds.

MEMORY_FOOTPRINT (64 bits): A single value element containing an unsigned 64-bit integer representing the memory footprint of the peer program in kilobytes (1024 bytes). Fractional values are rounded up. Access to this kind of diagnostic information MUST NOT be allowed unless compliant to the rules defined in [Section 7](#).

DATASIZE_STORED (64 bits): An unsigned 64-bit integer representing the number of bytes of data being stored by this node. Access to this kind of diagnostic information MUST NOT be allowed unless compliant to the rules defined in [Section 7](#).

INSTANCES_STORED: An array element containing the number of instances of each kind stored. The array is indexed by Kind-ID. Each entry is an unsigned 64-bit integer. Access to this kind of diagnostic information MUST NOT be allowed unless compliant to the rules defined in [Section 7](#).

MESSAGES_SENT_RCVD: An array element containing the number of messages sent and received. The array is indexed by method code. Each entry in the array is a pair of unsigned 64-bit integers (packed end to end) representing sent and received. Access to this kind of diagnostic information MUST NOT be allowed unless compliant to the rules defined in [Section 7](#).

EWMA_BYTES_SENT (32 bits): A single value element containing an unsigned 32-bit integer representing an exponential weighted average of bytes sent per second by this peer. $sent = \alpha \times sent_present + (1 - \alpha) \times sent$ where $sent_present$ represents the bytes sent per second since the last calculation and $sent$ represents the last calculation of bytes sent per second. A suitable value for α is 0.8. This value is calculated every five seconds. Access to this kind of diagnostic information MUST NOT be allowed unless compliant to the rules defined in [Section 7](#).

EWMA_BYTES_RCVD (32 bits): A single value element containing an unsigned 32-bit integer representing an exponential weighted average of bytes received per second by this peer. $rcvd = \alpha \times rcvd_present + (1 - \alpha) \times rcvd$ where `rcvd_present` represents the bytes received per second since the last calculation and `rcvd` represents the last calculation of bytes received per second. A suitable value for `alpha` is 0.8. This value is calculated every five seconds. Access to this kind of diagnostic information **MUST NOT** be allowed unless compliant to the rules defined in [Section 7](#).

UNDERLAY_HOP (8 bits): Indicates the IP layer hops from the intermediate peer which receives the diagnostics message to the next hop peer for this message. (Note: RELOAD does not require the intermediate peers to look into the message body. So here we use PathTrack to gather underlay hops for diagnostics purpose).

BATTERY_STATUS (8 bits): The left-most bit is used to indicate whether this peer is using a battery or not. If this bit is clear (set to '0'), then the peer is using a battery for power. The other 7 bits are to be determined by specific applications.

[6.](#) Message Processing

[6.1.](#) Message Creation and Transmission

When constructing either a Ping message with diagnostic extensions or a PathTrack message, the sender first creates and populates a `DiagnosticsRequest` data structure. The `timestamp_initiated` field is set to the current time, and the `expiration` field is constructed based on this time. The sender includes the `dMFlags` field in the structure, setting any number (including all) of the flags to request particular diagnostic information. The sender **MAY** leave all the bits unset, requesting no particular diagnostic information.

The sender **MAY** also include diagnostic extensions in the `DiagnosticsRequest` data structure to request additional information. If the sender includes any extensions, it **MUST** calculate the length of these extensions and set the `ext_length` field to this value. If no extensions are included, the sender **MUST** set `ext_length` to zero.

The format of the DiagnosticRequest data structure and its fields MUST follow the restrictions defined in [Section 5.1](#).

When constructing a Ping message with diagnostic extensions, the sender MUST create an MessageExtension structure as defined in RELOAD [[RFC6940](#)], setting the value of type to 0x0002, and the value of critical to FALSE. The value of extension_contents MUST be a DiagnosticsRequest structure as defined above. The message MAY be

directed to a particular NodeId or ResourceID, but SHOULD NOT be sent to the broadcast NodeID.

When constructing a PathTrack message, the sender MUST set the message_code for the RELOAD MessageContents structure to path_track_req (0x65). The request field of the PathTrackReq MUST be set to the DiagnosticsRequest data structure defined above. The destination field MUST be set to the desired destination, which `MAY be either a NodeId or ResourceID but SHOULD NOT be the broadcast NodeID.

[6.2](#). Message Processing: Intermediate Peers

When a request arrives at a peer, if the peer's responsible ID space does not cover the destination ID of the request, then the peer MUST continue processing this request according to the overlay specified routing mode from RELOAD protocol.

In P2PSIP overlay, error responses to a message can be generated by either an intermediate peer or the responsible peer. When a request is received at a peer, the peer may find connectivity failures or malfunctioning peers through the pre-defined rules of the overlay network, e.g. by analyzing via list or underlay error messages. In this case, the intermediate peer SHOULD return an error response to the initiator node, reporting any malfunction node information available in the error message payload. All error responses generated MUST contain the appropriate error code.

Each intermediate peer receiving a Ping message with extensions (and which understands the extension) or receiving a PathTrack request/response SHOULD check the expiration value (Unix time format) to determine if the message is expired. If the message expired, the intermediate peer SHOULD generate a response with Error Code 0x67

"Message Expired", return the response the initiator node, and discard the message.

The intermediate peer SHOULD return an error response with the Error Code 0x65 "Underlay Destination Unreachable" when it receives an ICMP message with "Destination Unreachable" information after forwarding the received request to the destination peer.

The intermediate peer SHOULD return an error response with the Error Code 0x66 "Underlay Time Exceeded" when it receives an ICMP message with "Time Exceeded" information after forwarding the received request.

The peer SHOULD return an Error response with Error Code 0x68 "Upstream Misrouting" when it finds its upstream peer disobeys the

routing rules defined in the overlay. The immediate upstream peer information SHOULD also be conveyed to the initiator node.

The peer SHOULD return an Error response with Error Code 0x69 "Loop detected" when it finds a loop through the analysis of via list.

The peer SHOULD return an Error response with Error Code 0x70 "TTL hops exceeded" when it finds that the TTL field value is no more than 0 when forwarding.

[6.3.](#) Message Response Creation

When a diagnostic request message arrives at a peer, it is responsible for the destination ID specified in the forwarding header, and assuming it understands the extension (in the case of Ping) or the new request type PathTrack, it MUST follow the specifications defined in RELOAD [[RFC6940](#)] to form the response header, and perform the following operations:

When constructing a PathTrack response, the sender MUST set the message_code for the RELOAD MessageContents structure to path_track_ans (0x66).

The receiver MUST check the expiration value (Unix time format) in the DiagnosticsRequest to determine if the message is expired. If the message is expired, the peer MUST generate a response with the

Error Code 0x67 "Message Expired", return the response to the initiator node, and discard the message.

If the message is not expired, the receiver MUST construct a `DiagnosticsResponse` structure, as follows: The TTL value from the forwarding header is copied to the `hop_counter` field of the `DiagnosticsResponse` structure. Note that the default value for TTL at the beginning represents 100-hops unless overlay configuration has overridden the value. The receiver generates an Unix time format timestamp for the current time of day and places it in the `timestamp_received` field, and constructs a new expiration time and places it in the `expiration` field of the `DiagnosticsResponse`.

The destination peer MUST check if the initiator node has the authority to request specific types of diagnostic information, and if appropriate, append the diagnostic information requested in the `dMFlags` and `diagnostic_extensions` (if any) using the `diagnostic_info_list` field to the `DiagnosticsResponse` structure. If any information returned, the receiver MUST calculate the length of the response and set `ext_length` appropriately. If no diagnostic information is returned, `ext_length` MUST be set to zero.

The format of the `DiagnosticResponse` data structure and its fields MUST follow the restrictions defined in [Section 5.2](#).

In the event of an error, an error response containing the error code followed by the description (if they exist) MUST be created and sent to the sender. If the initiator node asks for diagnostic information that they are not authorized to query, the receiving peer MUST return an Error response with the Error Code 2 "Error_Forbidden".

[6.4](#). Interpreting Results

The initiator node, as well as the responding peer, MAY compute the overlay One-Way-Delay time through the value in `timestamp_received` and the `timestamp_initiated` field. However, for a single hop measurement, the traditional measurement methods MUST be used instead of the overlay layer diagnostics methods.

The P2P overlay network using the diagnostics methods specified in this document MUST enforce time synchronization with a central time

server. Network Time Protocol [[RFC5905](#)] can usually maintain time to within tens of milliseconds over the public Internet, and can achieve better than one millisecond accuracy in local area networks under ideal conditions. However, this document does not specify the choice for time synchronization, leaving it to the implementation.

The initiator node receiving the Ping response MAY check the hop_counter field and compute the overlay hops to the destination peer for the statistics of connectivity quality from the perspective of overlay hops.

7. Authorization through Overlay Configuration

The overlay configuration file MUST contain the following XML elements for authorizing a node to access the relative diagnostic kinds.

diagnostic-kind: This has the attribute "kind" with the hexadecimal number indicating the diagnostic Kind Type, this attribute has the same value with [Section 9.2](#), and at least one sub element "access-node".

access-node: This element contains one hexadecimal number indicating a NodeID, and the node with this NodeID is allowed to access the diagnostic "kind" under the same diagnostic-kind element.

8. Security Considerations

The authorization for diagnostic information must be designed with care to prevent it becoming a method to retrieve information for bot attacks. It should also be noted that attackers can use diagnostics to analyze overlay information to attack certain key peers. As this document is a RELOAD extension, it follows RELOAD message header and routing specifications, the common security considerations described in the base document [[RFC6940](#)] are also applicable to this document. Overlays may define their own requirements on who can collect/share diagnostic information.

9. IANA Considerations

9.1. Diagnostics Flag

IANA SHALL create a "RELOAD Diagnostics Flag" Registry. Entries in this registry are 1-bit flags contained in a 64-bits long integer dMFlags denoting diagnostic information to be retrieved as described in [Section 4.3.1](#). New entries SHALL be defined via [[RFC5226](#)] Standards Action. The initial contents of this registry are:

diagnostic information	diagnostic flag in dMFlags	RFC
Reserved	0x 0000 0000 0000 0000	RFC-XXXX
STATUS_INFO	0x 0000 0000 0000 0001	RFC-XXXX
ROUTING_TABLE_SIZE	0x 0000 0000 0000 0002	RFC-XXXX
PROCESS_POWER	0x 0000 0000 0000 0004	RFC-XXXX
UPSTREAM_BANDWIDTH	0x 0000 0000 0000 0008	RFC-XXXX
DOWNSTREAM_BANDWIDTH	0x 0000 0000 0000 0010	RFC-XXXX
SOFTWARE_VERSION	0x 0000 0000 0000 0020	RFC-XXXX
MACHINE_UPTIME	0x 0000 0000 0000 0040	RFC-XXXX
APP_UPTIME	0x 0000 0000 0000 0080	RFC-XXXX
MEMORY_FOOTPRINT	0x 0000 0000 0000 0100	RFC-XXXX
DATASIZE_STORED	0x 0000 0000 0000 0200	RFC-XXXX
INSTANCES_STORED	0x 0000 0000 0000 0400	RFC-XXXX
MESSAGES_SENT_RCVD	0x 0000 0000 0000 0800	RFC-XXXX
EWMA_BYTES_SENT	0x 0000 0000 0000 1000	RFC-XXXX
EWMA_BYTES_RCVD	0x 0000 0000 0000 2000	RFC-XXXX
UNDERLAY_HOP	0x 0000 0000 0000 4000	RFC-XXXX
BATTERY_STATUS	0x 0000 0000 0000 8000	RFC-XXXX
Reserved	0x FFFF FFFF FFFF FFFF	RFC-XXXX

[To RFC editor: Please replace all RFC-XXXX in this document with the RFC number of this document.]

9.2. Diagnostic Kind ID Types

IANA SHALL create a "RELOAD Diagnostic Kind ID Types" Registry. Entries in this registry are 16-bit integers denoting diagnostics extension data kind types carried in the diagnostic request and

response message, as described in [Section 5.2](#). Code points from 0x0000 to 0x003F SHALL be assigned together with flags within "RELOAD Diagnostics Flag" registry via [RFC 5226](#) [[RFC5226](#)] standards action. Code points in the range 0x0040 to 0xEFFF SHALL be registered via [RFC 5226](#) standards action.

Diagnostic Kind Type	Code	Specification
reserved	0x0000	RFC-XXXX
STATUS_INFO	0x0001	RFC-XXXX
ROUTING_TABLE_SIZE	0x0002	RFC-XXXX
PROCESS_POWER	0x0003	RFC-XXXX
UPSTREAM_BANDWIDTH	0x0004	RFC-XXXX
DOWNSTREAM_BANDWIDTH	0x0005	RFC-XXXX
SOFTWARE_VERSION	0x0006	RFC-XXXX
MACHINE_UPTIME	0x0007	RFC-XXXX
APP_UPTIME	0x0008	RFC-XXXX
MEMORY_FOOTPRINT	0x0009	RFC-XXXX
DATASIZE_STORED	0x000A	RFC-XXXX
INSTANCES_STORED	0x000B	RFC-XXXX
MESSAGES_SENT_RCVD	0x000C	RFC-XXXX
EWMA_BYTES_SENT	0x000D	RFC-XXXX
EWMA_BYTES_RCVD	0x000E	RFC-XXXX
UNDERLAY_HOP	0x000F	RFC-XXXX
BATTERY_STATUS	0x0010	RFC-XXXX
reserved for future flags	0x0011-40	RFC-XXXX
local use (reserved)	0xF000-0xFFFE	RFC-XXXX
reserved	0xFFFF	RFC-XXXX

Table 1: Diagnostic Kind Types

9.3. Message Codes

This document introduces two new types of messages and their responses, requiring the following additions to the "RELOAD Message Code" Registry defined in RELOAD [[RFC6940](#)]. These additions are:

Message Code Name	Code Value	RFC
path_track_req	0x65	RFC-AAAA
path_track_ans	0x66	RFC-AAAA

Table 2: Extensions to RELOAD Message Codes

[To RFC editor: Values starting at 0x65 were used to prevent collisions with RELOAD base values and other extensions. Please replace with the next highest available values. The final message codes will be assigned by IANA. And all RFC-AAAA should be replaced with the RFC number of RELOAD when publication.]

9.4. Error Code

This document introduces the following new error codes, extending the "RELOAD Message Code" registry as described below:

Message Code Name	Code Value	RFC
Error_Underlay_Destination_Unreachable	0x65	RFC-AAAA
Error_Underlay_Time_Exceeded	0x66	RFC-AAAA
Error_Message_Expired	0x67	RFC-AAAA
Error_Upstream_Misrouting	0x68	RFC-AAAA
Error_Loop_Detected	0x69	RFC-AAAA
Error_TTL_Hops_Exceeded	0x70	RFC-AAAA

Table 3: Extensions to RELOAD Error Codes

[To RFC editor: Values starting at 0x65 were used to prevent collisions with RELOAD base values and other extensions. Please replace with the next highest available values. The final message codes will be assigned by IANA. And all RFC-AAAA should be replaced with the RFC number of RELOAD when publication.]

9.5. Message Extension

This document introduces the following new RELOAD extension code:

Internet-Draft

P2P Overlay Diagnostics

January 2015

Extension Name	Code Value	RFC
Diagnostic_Ping	0x0002	RFC-AAAA

Table 4: New RELOAD Extension Code

[To RFC editor: The value 0x0002 was used to prevent collisions with other extensions. Please replace with the next highest available value. The final codes will be assigned by IANA. And all RFC-AAAA should be replaced with the RFC number of RELOAD when publication.]

9.6. XML Name Space Registration

This document registers a URI for the config-diagnostics XML namespaces in the IETF XML registry defined in [[RFC3688](#)]. All the elements defined in this document belong to this namespace.

URI: urn:ietf:params:xml:ns:p2p:config-diagnostics

Registrant Contact: The IESG.

XML: N/A, the requested URIs are XML namespaces

And the overlay configuration file MUST contain the following xml language declaring P2PSIP diagnostics as a mandatory extension to RELOAD.

```
<mandatory-extension>
    urn:ietf:params:xml:ns:p2p:config-diagnostics
</mandatory-extension>
```

10. Acknowledgments

We would like to thank Zheng Hewen for the contribution of the initial version of this document. We would also like to thank Bruce Lowekamp, Salman Baset, Henning Schulzrinne, Jiang Haifeng and Marc Petit-Huguenin for the email discussion and their valued comments, and special thanks to Henry Sinnreich for contributing to the usage scenarios text. We would like to thank the authors of the RELOAD protocol for transferring text about diagnostics to this document.

11. References

11.1. Normative References

- [RFC0792] Postel, J., "Internet Control Message Protocol", STD 5, [RFC 792](#), September 1981.

Song, et al.

Expires January 31, 2016

[Page 24]

Internet-Draft

P2P Overlay Diagnostics

January 2015

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), January 2004.
- [RFC5905] Mills, D., Martin, J., Burbank, J., and W. Kasch, "Network Time Protocol Version 4: Protocol and Algorithms Specification", [RFC 5905](#), June 2010.
- [RFC6940] Jennings, C., Lowekamp, B., Rescorla, E., Baset, S., and H. Schulzrinne, "REsource LOcation And Discovery (RELOAD) Base Protocol", [RFC 6940](#), January 2014.

11.2. Informative References

[UnixTime]

"UnixTime", <Wikipedia, "Unix Time",
<http://wikipedia.org/wiki/Unix_time>.>.

[Overlay-Failure-Detection]

Zhuang, S., "On failure detection algorithms in overlay networks", Proc. IEEE Infocomm, Mar 2005.

[Handling_Churn_in_a_DHT]

Rhea, S., "Handling Churn in a DHT", USENIX Annual Conference, June 2004.

[Diagnostic_Framework]

Jin, X., "A Diagnostic Framework for Peer-to-Peer Streaming", 2005.

[Diagnostics_and_NAT_traversal_in_P2PP]

Gupta, G., "Diagnostics and NAT Traversal in P2PP - Design and Implementation", Columbia University Report , June

2008.

[RFC5226] Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 5226](#), May 2008.

Song, et al.

Expires January 31, 2016

[Page 25]

Internet-Draft

P2P Overlay Diagnostics

January 2015

[Appendix A](#). Examples

Below, we sketch how these metrics can be used.

[A.1](#). Example 1

A peer may set EWMA_BYTES_SENT and EWMA_BYTES_RCVD flags in the PathTrackReq to its direct neighbors. A peer can use EWMA_BYTES_SENT and EWMA_BYTES_RCVD of another peer to infer whether it is acting as a media relay. It may then choose not to forward any requests for media relay to this peer. Similarly, among the various candidates for filling up routing table, a peer may prefer a peer with a large UPTIME value, small RTT, and small LAST_CONTACT value.

[A.2](#). Example 2

A peer may set the STATUS_INFO Flag in the PathTrackReq to a remote destination peer. The overlay has its own threshold definition for congestion. The peer can obtain knowledge of all the status information of the intermediate peers along the path. Then it can choose other paths to that node for the subsequent requests.

[A.3](#). Example 3

A peer may use Ping to evaluate the average overlay hops to other peers by sending PingReq to a set of random resource or node IDs in the overlay. A peer may adjust its timeout value according to the change of average overlay hops.

[Appendix B.](#) Problems with Generating Multiple Responses on Path

An earlier version of this document considered an approach where a response was generated by each intermediate peer as the message traversed the overlay. This approach was discarded. One reason this approach was discarded was that it could provide a DoS mechanism, whereby an attacker could send an arbitrary message claiming to be from a spoofed "sender" the real sender wished to attack. As a result of sending this one message, many messages would be generated and sent back to the spoofed "sender" - one from each intermediate peer on the message path. While authentication mechanisms could reduce some risk of this attack, it still resulted in a fundamental break from the request-response nature of the RELOAD protocol, as multiple responses are generated to a single request. Although one request with responses from all the peers in the route will be more efficient, it was determined to be too great a security risk and deviation from the RELOAD architecture.

Song, et al.

Expires January 31, 2016

[Page 26]

Internet-Draft

P2P Overlay Diagnostics

January 2015

[Appendix C.](#) Changes to the Draft

To RFC editor: This section is to track the changes. Please remove this section before publication.

[C.1.](#) Changes since -00 version

1. Changed title from "Diagnose P2PSIP Overlay Network" to "P2PSIP Overlay Diagnostics".
2. Changed the table of contents. Add a section about message processing and a section of examples.
3. Merge diagnostics text from the p2psip base draft -01.
4. Removed ECHO method for security reasons.

[C.2.](#) Changes since -01 version

Added BATTERY_STATUS as diagnostic information.

Removed UnderlayTTL test from the Ping method, instead adding an

UNDERLAY_HOP diagnostic information for PathTrack method.

Give some examples for diagnostic information, and give some editor's notes for further work.

[C.3.](#) Changes since -02 version

Provided further explanation as to why the base draft Ping in the current form cannot be used to replace Ping, and why some combination of methods cannot replace PathTrack.

[C.4.](#) Changes since -03 version

Modified structure used to share information collected. Both mechanisms now use a common data structure to convey information.

[C.5.](#) Changes since -04 version

Updated the authors' addresses and modified the last sentence in . ([Section 4.3.1.2](#))

[C.6.](#) Changes since -05 version

Resolve Marc's comments from the mailing list. And define the details of STATUS_INO.

Song, et al.

Expires January 31, 2016

[Page 27]

Internet-Draft

P2P Overlay Diagnostics

January 2015

[C.7.](#) Changes in version -10

Resolve the authorization issue and other comments (e.g. define diagnostics as a mandatory extension) from WGLC. And check for the languages.

[C.8.](#) Changes in version -15

Changed several diagnostic kind return values to be 64 bit vs. 32 bit to provide headroom. Split bandwidth into upstream and downstream. Renamed length in diagnostic request object to ext_length, added ext_length to response object, and clarified that ext_length is length of diagnostic info/extensions being returned, not the length of the object.

Aligned many flags/values with RELOAD by using hex vs decimal values.

Significant reorganization and edit for readability.

Authors' Addresses

Haibin Song
Huawei

Email: haibin.song@huawei.com

Jiang Xingfeng
Huawei

Email: jiangxignfeng@huawei.com

Roni Even
Huawei
14 David Hamelech
Tel Aviv 64953
Israel

Email: roni.even@mail101.huawei.com

David A. Bryan
Ethernod.org
Cedar Park, Texas
United States of America

Email: dbryan@ethernod.org

Song, et al.

Expires January 31, 2016

[Page 28]

Internet-Draft

P2P Overlay Diagnostics

January 2015

Yi Sun
ICT

Email: sunyi@ict.ac.cn

