

PCE Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: January 1, 2018

H. Chen, Ed.  
Y. Zhuang, Ed.  
Q. Wu  
D. Dhody  
Huawei  
D. Ceccarelli  
Ericsson  
June 30, 2017

**PCEP Extensions for LSP scheduling with stateful PCE  
draft-ietf-pce-stateful-pce-lsp-scheduling-00**

**Abstract**

This document proposes a set of extensions needed to the stateful Path Computation Element (PCE) communication Protocol (PCEP), so as to enable Labeled Switched Path (LSP) scheduling for path computation and LSP setup/deletion based on the actual network resource usage duration of a traffic service in a centralized network environment as stated in [I.D.ietf-teas-scheduled-resources].

**Status of This Memo**

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 1, 2018.

**Copyright Notice**

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Conventions used in this document</a>	<a href="#">4</a>
<a href="#">2.1.</a>	<a href="#">Terminology</a>	<a href="#">4</a>
<a href="#">3.</a>	<a href="#">Motivation and Objectives</a>	<a href="#">5</a>
<a href="#">4.</a>	<a href="#">Architecture Overview</a>	<a href="#">5</a>
<a href="#">4.1.</a>	<a href="#">LSP scheduling Overview</a>	<a href="#">5</a>
<a href="#">4.2.</a>	<a href="#">Support of LSP Scheduling</a>	<a href="#">6</a>
<a href="#">4.2.1.</a>	<a href="#">LSP Scheduling</a>	<a href="#">7</a>
<a href="#">4.2.2.</a>	<a href="#">Periodical LSP Scheduling</a>	<a href="#">7</a>
<a href="#">4.2.3.</a>	<a href="#">Stateful PCE Capability TLV</a>	<a href="#">8</a>
<a href="#">4.3.</a>	<a href="#">Scheduled LSP creation</a>	<a href="#">9</a>
<a href="#">4.3.1.</a>	<a href="#">The PCReq message and PCRpt Message</a>	<a href="#">10</a>
<a href="#">4.3.2.</a>	<a href="#">The PCRep Message</a>	<a href="#">11</a>
<a href="#">4.3.3.</a>	<a href="#">The PCUpd Message</a>	<a href="#">11</a>
<a href="#">4.3.4.</a>	<a href="#">LSP Object</a>	<a href="#">12</a>
<a href="#">4.4.</a>	<a href="#">Scheduled LSP Updates</a>	<a href="#">15</a>
<a href="#">4.5.</a>	<a href="#">Scheduled LSP activation and deletion</a>	<a href="#">15</a>
<a href="#">5.</a>	<a href="#">Security Considerations</a>	<a href="#">16</a>
<a href="#">6.</a>	<a href="#">Manageability Consideration</a>	<a href="#">16</a>
<a href="#">6.1.</a>	<a href="#">Control of Function and Policy</a>	<a href="#">16</a>
<a href="#">6.2.</a>	<a href="#">Information and Data Models</a>	<a href="#">16</a>
<a href="#">6.3.</a>	<a href="#">Liveness Detection and Monitoring</a>	<a href="#">16</a>
<a href="#">6.4.</a>	<a href="#">Verify Correct Operations</a>	<a href="#">16</a>
<a href="#">6.5.</a>	<a href="#">Requirements On Other Protocols</a>	<a href="#">16</a>
<a href="#">6.6.</a>	<a href="#">Impact On Network Operations</a>	<a href="#">16</a>
<a href="#">7.</a>	<a href="#">IANA Considerations</a>	<a href="#">16</a>
<a href="#">7.1.</a>	<a href="#">PCEP TLV Type Indicators</a>	<a href="#">17</a>
<a href="#">7.2.</a>	<a href="#">LSP-SCHEDULING-CAPABILITY</a>	<a href="#">17</a>
<a href="#">8.</a>	<a href="#">Acknowledgments</a>	<a href="#">17</a>
<a href="#">9.</a>	<a href="#">References</a>	<a href="#">17</a>
<a href="#">9.1.</a>	<a href="#">Normative References</a>	<a href="#">17</a>
<a href="#">9.2.</a>	<a href="#">Informative References</a>	<a href="#">18</a>
<a href="#">Appendix A.</a>	<a href="#">Scheduled LSP information synchronization</a>	<a href="#">19</a>
<a href="#">Appendix B.</a>	<a href="#">Contributor Addresses</a>	<a href="#">19</a>
	<a href="#">Authors' Addresses</a>	<a href="#">20</a>



## 1. Introduction

The Path Computation Element Protocol (PCEP) defined in [\[RFC5440\]](#) is used between a Path Computation Element (PCE) and a Path Computation Client (PCC) (or other PCE) to enable computation of Multi-protocol Label Switching (MPLS) for Traffic Engineering Label Switched Path (TE LSP).

Further, in order to support use cases described in [\[I-D.ietf-pce-stateful-pce-app\]](#), [\[I-D.ietf-pce-stateful-pce\]](#) specifies a set of extensions to PCEP to enable stateful control of MPLS-TE and GMPLS LSPs via PCEP.

Traditionally, the usage and allocation of network resources, especially bandwidth, can be supported by a Network Management System operation such as path pre-establishment. However, this does not provide efficient network usage since the established paths exclude the possibility of being used by other services even when they are not used for undertaking any service. [\[I-D.ietf-teas-scheduled-resources\]](#) then provides a framework that describes and discusses the problem and propose an appropriate architecture for the scheduled reservation of TE resources.

With the scheduled reservation of TE resources, it allows network operators to reserve resources in advance according to the agreements with their customers, and allow them to transmit data with scheduling such as specified starting time and duration, for example for a scheduled bulk data replication between data centers. It enables the activation of bandwidth usage at the time the service really being used while letting other services obtain it in spare time. The requirement of scheduled LSP provision is mentioned in [\[I-D.ietf-pce-stateful-pce-app\]](#) and [\[RFC7399\]](#), so as to provide more efficient network resource usage for traffic engineering, which hasn't been solved yet. Also, for deterministic networks, the scheduled LSP can provide a better network resource usage for guaranteed links. This idea can also be applied in segment routing to schedule the network resources over the whole network in a centralized manner as well.

With this in mind, this document proposes a set of extensions needed to the stateful PCE, so as to enable LSP scheduling for path computation and LSP setup/deletion based on the actual network resource usage duration of a traffic service. A scheduled LSP is characterized by a starting time and a duration. When the end of the LSP life is reached, it is deleted to free up the resources for other LSP (scheduled or not).



## **2. Conventions used in this document**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119](#) [[RFC2119](#)].

### **2.1. Terminology**

The following terminologies are re-used from existing PCE documents.

- o Active Stateful PCE [[I-D.ietf-pce-stateful-pce](#)];
- o Delegation [[I-D.ietf-pce-pce-initiated-lsp](#)];
- o PCC [[RFC5440](#)], [[I-D.ietf-pce-stateful-pce](#)];
- o PCE [[RFC5440](#)], [[I-D.ietf-pce-stateful-pce](#)];
- o TE LSP [[RFC5440](#)], [[I-D.ietf-pce-stateful-pce](#)];
- o TED [[RFC5440](#)], [[I-D.ietf-pce-stateful-pce](#)];
- o LSP DB [[RFC5440](#)], [[I-D.ietf-pce-stateful-pce](#)];

In addition, this document defines the following terminologies.

Scheduled TE LSP: a LSP with the scheduling attributes, that carries traffic flow demand at an starting time and last for a certain duration. The PCE operates path computation per LSP availability at the required time and duration.

Scheduled LSP DB: a database of scheduled LSPs

Scheduled TED: Traffic engineering database with the awareness of scheduled resources for TE. This database is generated by the PCE from the information in TED and scheduled LSP DB and allows knowing, at any time, the amount of available resources (does not include failures in the future).

Starting time(start-time): This value indicates when the scheduled LSP is used and the corresponding LSP must be setup and active. In other time(i.e., before the starting time or after the starting time plus Duration), the LSP can be inactive to include the possibility of the resources being used by other services.

Duration: The value indicates the time duration that the LSP is undertaken by a traffic flow and the corresponding LSP must be



setup and active. At the end of which, the LSP is teardown and removed from the data base.

### **3. Motivation and Objectives**

A stateful PCE can support better efficiency by using LSP scheduling described in the use case of [\[I-D.ietf-pce-stateful-pce\]](#). This requires the PCE to maintain the scheduled LSPs and their associated resource usage, e.g. bandwidth for Packet-switched network, as well as the ability to trigger signaling for the LSP setup/tear-down at the correct time.

Note that existing configuration tools can be used for LSP scheduling, but as highlighted in [section 3.1.3](#) of [\[I-D.ietf-pce-stateful-pce\]](#) as well as discussions in [\[I-D.ietf-teas-scheduled-resources\]](#), doing this as a part of PCEP in a centralized manner, has obvious advantages.

The objective of this document is to provide a set of extensions to PCEP to enable LSP scheduling for LSPs creation/deletion under the stateful PCE control, according to traffic services from customers, so as to improve the usage of network resources.

### **4. Architecture Overview**

#### **4.1. LSP scheduling Overview**

The LSP scheduling allows PCEs and PCCs to provide scheduled LSP for customers' traffic services at its actual usage time, so as to improve the network resource efficient utilization.

For stateful PCE supporting LSP scheduling, there are two types of LSP databases used in this document. One is the LSP-DB defined in PCEP [\[I-D.ietf-pce-stateful-pce\]](#), while the other is the scheduled LSP database (SLSP- DB, see [section 6](#)). The SLSP-DB records scheduled LSPs and is used as a complementary to the TED and LSP-DB. Note that the two types of LSP databases can be implemented in one physical database or two different databases. This document does not state any preference here.

Furthermore, a scheduled TED can be generated from the scheduled LSP DB, LSP DB and TED to indicate the network links and nodes with resource availability information for now and future. The scheduled TED should be maintained by all PCEs within the network environment.

In case of implementing PCC-initiated scheduled LSPs, a PCC can request a path computation with LSP information of its scheduling parameters, including the starting time and the duration. Upon





receiving the request with the scheduled LSP delegation, a stateful PCE SHALL check the scheduled TED for the network resource availability on network nodes and computes a path for the LSP with the scheduling information.

For a multiple PCE environment, in order to coordinate the scheduling request of the LSP path over the network, the PCE needs to send a request message with the path information as well as the scheduled resource for the scheduled LSP to other PCEs within the network, so as to coordinate with their scheduled LSP DBs and scheduled TEDs. Once other PCEs receive the request message with the scheduled LSPs information, if not conflicting with their scheduled LSP DBs, they reply to the requesting PCE with a response message carrying the scheduled LSP and update their scheduled LSP DBs and scheduled TEDs. After the requesting PCE confirms with all PCEs, the PCE SHALL add the scheduled LSP into its scheduled LSP Database and update its scheduled TED.

Then the stateful PCE can response to the PCC with the path for the scheduled LSP to notify the result of the computation. However, the PCC should not signal the LSP over the path once receiving these messages since the path is not activated yet until its starting time.

Alternatively, the service can also be initiated by PCE itself. In case of implementing PCE-initiated scheduled LSP, the stateful PCE shall check the network resource availability for the traffic and computes a path for the scheduled LSP per request in the same way as in PCC- Initiated mode and then for a multiple PCE network environment, coordinate the scheduled LSP with other PCEs in the network in the same way as in the PCC-Initiated mode.

In both modes, for activation of scheduled LSPs, the stateful PCE can send a path computation LSP Initiate (PCInitiate message) with LSP information at its starting time to the PCC for signaling the LSP over the network nodes as defined in [I-D.ietf-pce-pce-initiated-lsp]. Also, in the PCC-initiated mode, with scheduling information, the PCC can activate the LSP itself by triggering over the path at its starting time as well. When the scheduling usage expires, active stateful PCE SHALL remove the LSP from the network, as well as notify other PCEs to delete the scheduled LSP from the scheduled LSP database.

#### **4.2. Support of LSP Scheduling**



#### **4.2.1. LSP Scheduling**

For a scheduled LSP, a user configures it with an arbitrary scheduling duration time  $T_a$  to time  $T_b$ , which may be represented as  $[T_a, T_b]$ .

When an LSP is configured with arbitrary scheduling duration  $[T_a, T_b]$ , a path satisfying the constraints for the LSP in the scheduling duration is computed and the LSP along the path is set up to carry traffic from time  $T_a$  to time  $T_b$ .

#### **4.2.2. Periodical LSP Scheduling**

In addition to LSP Scheduling at an arbitrary time period, there are also periodical LSP Scheduling.

A periodical LSP Scheduling represents Scheduling LSP every time interval. It has a scheduling duration such as  $[T_a, T_b]$ , a number of repeats such as 10 (repeats 10 times), and a repeat cycle/time interval such as a week (repeats every week). The scheduling interval: " $[T_a, T_b]$  repeats  $n$  times with repeat cycle  $C$ " represents  $n+1$  scheduling intervals as follows:

$[T_a, T_b]$ ,  $[T_a+C, T_b+C]$ ,  $[T_a+2C, T_b+2C]$ , ...,  $[T_a+nC, T_b+nC]$

When an LSP is configured with a scheduling interval such as " $[T_a, T_b]$  repeats 10 times with a repeat cycle a week" (representing 11 scheduling intervals), a path satisfying the constraints for the LSP in each of the scheduling intervals represented by the periodical scheduling interval is computed and the LSP along the path is set up to carry traffic in each of the scheduling intervals.

##### **4.2.2.1. Elastic Time LSP Scheduling**

In addition to the basic LSP scheduling at an arbitrary time period, another option is elastic time intervals, which is represented as within  $-P$  and  $Q$ , where  $P$  and  $Q$  is an amount of time such as 300 seconds.  $P$  is called elastic range lower bound and  $Q$  is called elastic range upper bound.

For a simple time interval such as  $[T_a, T_b]$  with an elastic range, elastic time interval: " $[T_a, T_b]$  within  $-P$  and  $Q$ " means a time period from  $(T_a+X)$  to  $(T_b+X)$ , where  $-P \leq X \leq Q$ . Note that both  $T_a$  and  $T_b$  may be shifted the same  $X$ .

When an LSP is configured with elastic time interval " $[T_a, T_b]$  within  $-P$  and  $Q$ ", a path is computed such that the path satisfies the constraints for the LSP in the time period from  $(T_a+X)$  to  $(T_b+X)$



and  $|X|$  is the minimum value from 0 to  $\max(P, Q)$ . That is that  $[Ta+X, Tb+X]$  is the time interval closest to time interval  $[Ta, Tb]$  within the elastic range. The LSP along the path is set up to carry traffic in the time period from  $(Ta+X)$  to  $(Tb+X)$ .

Similarly, for a recurrent time interval with an elastic range, elastic time interval: " $[Ta, Tb]$  repeats  $n$  times with repeat cycle  $C$  within  $-P$  and  $Q$ " represents  $n+1$  simple elastic time intervals as follows:

$[Ta+X_0, Tb+X_0], [Ta+C+X_1, Tb+C+X_1], \dots, [Ta+nC+X_n, Tb+nC+X_n]$   
 where  $-P \leq X_i \leq Q, i = 0, 1, 2, \dots, n$ .

If a user wants to keep the same repeat cycle between any two adjacent time intervals, elastic time interval: " $[Ta, Tb]$  repeats  $n$  times with repeat cycle  $C$  within  $-P$  and  $Q$  SYNC" may be used, which represents  $n+1$  simple elastic time intervals as follows:

$[Ta+X, Tb+X], [Ta+C+X, Tb+C+X], \dots, [Ta+nC+X, Tb+nC+X]$   
 where  $-P \leq X \leq Q$ .

#### **4.2.2.2. Graceful Periods**

Besides the stated time scheduling, a user may want to have some graceful periods for each or some of the time intervals for the LSP. Two graceful periods may be configured for a time interval. One is the graceful period before the time interval, called grace-before, which extends the lifetime of the LSP for grace-before (such as 30 seconds) before the time interval. The other is the one after the time interval, called grace-after, which extends the lifetime of the LSP for grace-after (such as 60 seconds) after the time interval.

When an LSP is configured with a simple time interval such as  $[Ta, Tb]$  with graceful periods such as grace-before GB and grace-after GA, a path is computed such that the path satisfies the constraints for the LSP in the time period from  $Ta$  to  $Tb$ . The LSP along the path is set up to carry traffic in the time period from  $(Ta-GB)$  to  $(Tb+GA)$ . During graceful periods from  $(Ta-GB)$  to  $Ta$  and from  $Tb$  to  $(Tb+GA)$ , the LSP is up to carry traffic (maybe in best effort).

#### **4.2.3. Stateful PCE Capability TLV**

After a TCP connection for a PCEP session has been established, a PCC and a PCE indicates its ability to support LSP scheduling during the PCEP session establishment phase. For a multiple-PCE environment, the PCEs should also establish PCEP session and indicate its ability to support LSP scheduling among PCEP peers. The Open Object in the Open message contains the STATEFUL-PCE-CAPABILITY TLV defined in [I-



D.ietf-pce-stateful-pce]. Note that the STATEFUL- PCE-CAPABILITY TLV is defined in [I-D.ietf-pce-stateful- pce] and updated in [I-D.ietf-pce-pce-initiated-lsp] and [I-D.ietf- pce-stateful-sync-optimizations]. In this document, we define a new flag bit B (SCHED-LSP-CAPABILITY) flag for the STATEFUL- PCE-CAPABILITY TLV to indicate the support of LSP scheduling and another flag bit PD (PD-LSP-CAPABILITY) to indicate the support of LSP periodical scheduling.

B (LSP-SCHEDULING-CAPABILITY - 1 bit): If set to 1 by a PCC, the B Flag indicates that the PCC allows LSP scheduling; if set to 1 by a PCE, the B Flag indicates that the PCE is capable of LSP scheduling. The B bit MUST be set by both PCEP peers in order to support LSP scheduling for path computation.

PD (PD-LSP-CAPABILITY - 1 bit): If set to 1 by a PCC, the PD Flag indicates that the PCC allows LSP scheduling periodically; if set to 1 by a PCE, the PD Flag indicates that the PCE is capable of periodical LSP scheduling. The PD bit MUST be set by both PCEP peers in order to support periodical LSP scheduling for path computation.

#### **4.3. Scheduled LSP creation**

In order to realize PCC-Initiated scheduled LSP in a centralized network environment, a PCC has to separate the setup of a LSP into two steps. The first step is to request and get a LSP but not signal it over the network. The second step is to signal the scheduled LSP over the LSRs (Labeled switched Router) at its starting time.

For PCC-Initiated scheduled LSPs, a PCC can send a path computation request (PCReq) message (see [section 4.3.1](#)) or a path computation LSP report (PCRpt) message (see [section 4.3.1](#)) including its demanded resources with the scheduling information and delegation to a stateful PCE.

Upon receiving the delegation via PCRpt message, the stateful PCE computes the path for the scheduled LSP per its starting time and duration based on the network resource availability stored in scheduled TED (see [section 4.1](#)).

If a resultant path is found, the stateful PCE will send a PCReq message with the path information as well as the scheduled resource information for the scheduled LSP to other PCEs within the network if there is any, so as to keep their scheduling information synchronized.

Once other PCEs receive the PCReq message with the scheduled LSP, if not conflicts with their scheduled LSP DBs, they will reply to the





requesting PCE with a PCRep message carrying the scheduled LSP and update their scheduled LSP DBs and scheduled TEDs. After the requesting PCE confirms with all PCEs, the PCE SHALL add the scheduled LSP into its scheduled LSP DB and update its scheduled TED. If conflicts happen or no path available is found, the requesting PCE SHALL return a PCRep message with NO PATH back to the PCC. Otherwise, the stateful PCE will send a PCRep message or PCUpd message (see [section 4.3.3](#)) with the path information back to the PCC as confirmation.

For PCE-Initiated Scheduled LSP, the stateful PCE can compute a path for the scheduled LSP per requests from network management systems automatically based on the network resource availability in the scheduled TED and coordinate with other PCEs on the scheduled LSP in the same way as in the PCC- Initiated mode.

In both modes:

- o the stateful PCE is required to update its local scheduled LSP DB and scheduled TED with the scheduled LSP. Besides, it shall send a PCReq message with the scheduled LSP to other PCEs within the network, so as to achieve the scheduling traffic engineering information synchronization.
- o Upon receiving the PCRep message or PCUpd message for scheduled LSP from PCEs with a found path, the PCC knows that it gets a scheduled path for the LSP but not trigger signaling for the LSP setup on LSRs.
- o In any case, stateful PCE can update the Scheduled LSP parameters on any network events using the PCUpd message to PCC as well as other PCEs.
- o When it is time (i.e., at the start time) for the LSP to be set up, the delegated PCE sends a PCEP Initiate request to the head end LSR providing the path to be signaled.

#### **[4.3.1](#). The PCReq message and PCRpt Message**

After scheduled LSP capability negotiation, for PCC-Initiated mode, a PCC can send a PCReq message or a PCRpt message including the SCHED-LSP- ATTRIBUTE TLV (see [section 4.3.4.1](#)) or SCHED-PD-LSP-ATTRIBUTE TLV (see [section 4.3.4.2](#)) carried in the LSP Object (see [section 4.3.4](#)) body to indicate the requested LSP scheduling parameters for a customer's traffic service with the delegation bit set to 1 in LSP Object. The value of requested bandwidth is taken via the existing 'Requested Bandwidth with BANDWIDTH Object- Type as 1' defined in [\[RFC5440\]](#).



Meanwhile, for both modes (PCC-Initiated and PCE-Initiated), the delegated PCE shall distribute the scheduling information to other PCEs in the environment by sending a PCReq message with the SCHED-LSP-ATTRIBUTE TLV or SCHED-PD-LSP-ATTRIBUTE TLV, as well as the Bandwidth Object and RRO for the found path.

The definition of the PCReq message and PCRpt message to carry LSP objects (see [I- D.ietf-pce-stateful-pce]) remains unchanged.

#### **4.3.2. The PCRep Message**

To provide scheduled LSP for TE-LSPs, the stateful PCE SHALL compute the path for the scheduled LSP carried on PCReq message based on network resource availability recorded in scheduled TED which is generated from the scheduled LSP-DB and TED and also synchronize the scheduling with other PCEs in the environment by using PCReq message with path and resource information for the scheduled LSP.

If no conflict exists, other PCEs SHALL send a PCRep message with the SCHED-LSP-ATTRIBUTE TLV or SCHED-PD-LSP-ATTRIBUTE TLV, as well as the Bandwidth Object and RRO back to the requesting PCE.

If the LSP request can be satisfied and an available path is found, the stateful PCE SHALL send a PCRep Message including the SCHED- LSP-ATTRIBUTE TLV or SCHED-PD-LSP-ATTRIBUTE TLV in the LSP Object body, as well as the Bandwidth Object and RRO for the found path back to the PCC as a successful acknowledge.

If conflicts happen or no path available is found, the requesting PCE SHALL return a PCRep message with NO PATH back to the PCC.

#### **4.3.3. The PCUpd Message**

To provide scheduled LSP for TE-LSPs, the stateful PCE SHALL compute the path for the scheduled LSP carried on PCRpt message based on network resource availability recorded in scheduled TED which is generated from the scheduled LSP-DB, LSP DB and TED.

If the request can be satisfied and an available path is found, the stateful PCE SHALL send a PCUpd Message including the SCHED- LSP-ATTRIBUTE TLV or SCHED-PD-LSP-ATTRIBUTE TLV in the LSP Object body to the PCC Note that, the stateful PCE can update the Scheduled LSP parameters later as well based on any network events using the same PCUpd message.

If conflicts happen or no path available is found, the requesting PCE SHALL return a PCUpd message with ERO empty.



#### 4.3.4. LSP Object

The LSP object is defined in [[I-D.ietf-pce-stateful-pce](#)]. This document add an optional SCHED-LSP-ATTRIBUTE TLV for normal LSP scheduling and an optional SCHED-PD-LSP-ATTRIBUTE TLV for periodical LSP scheduling.


The presence of SCHED-LSP-ATTRIBUTE TLV in the LSP object indicates that this LSP is requesting scheduled parameters while the SCHED-PD-LSP-ATTRIBUTE TLV indicates that this scheduled LSP is periodical. The scheduled LSP attribute TLV MUST be present in LSP Object for each scheduled LSP carried in the PCReq message, the PCRpt message and the PCUpd message. For periodical LSPs, the SCHED-PD-LSP-ATTRIBUTE TLV can be used in LSP Object.

##### 4.3.4.1. SCHED-LSP-ATTRIBUTE TLV

The SCHED-LSP-ATTRIBUTE TLV can be included as an optional TLV within the LSP object for LSP scheduling for the requesting traffic service.

This TLV SHOULD be included only if both PCEP peers have set the B (LSP-SCHEDULING-CAPABILITY bit) in STATEFUL-PCE-CAPABILITY TLV carried in open message.

The format of the SCHED-LSP-ATTRIBUTE TLV is shown in the following figure:

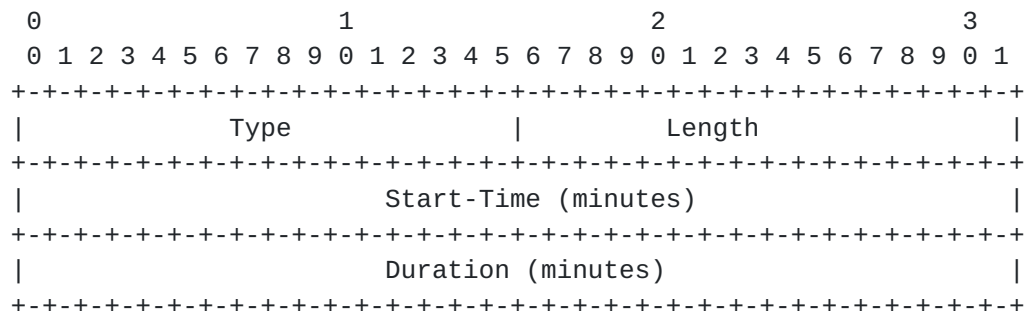

The type of the TLV is [TBD] and it has a fixed length of 8 octets.

The fields in the format are:

**Start-Time (32 bits):** This value in minutes, indicates when the scheduled LSP is used to carry traffic and the corresponding LSP must be setup and activated.

**Duration (32 bits):** The value in minutes, indicates the duration that the LSP is undertaken by a traffic flow and the corresponding



LSP must be up to carry traffic. At the expiry of this duration, the LSP is tear down and deleted.

Note, that the values of starting time and duration is from the perspective of the PCEP peer that is sending the message, also note the unit of time is minutes, and thus the time spent on transmission on wire can be easily ignored.

Editor Note 1: As described in [I-D.zhuang-teas-scheduled-resources], the encoding of the resource state information could also be expressed as a start time and end time. Multiple periods, possibly of different lengths, may be associated with one reservation request, and a reservation might repeat on a regular cycle.

Editor Notes2: The time stated in this section and in [section 4.3.4.2](#) may be a relative time or an absolute time, which need more discussions.

Editor Note3: the elastic interval and graceful interval may also be applied to the random LSP scheduling which need more discussion.

#### **[4.3.4.2](#). SCHED-PD-LSP-ATTRIBUTE TLV**


The periodical LSP is a special case of LSP scheduling. The traffic service happens in a series of repeated time intervals. The SCHED-PD-LSP-ATTRIBUTE TLV can be included as an optional TLV within the LSP object for this periodical LSP scheduling.

This TLV SHOULD be included only if both PCEP peers have set the B (LSP-SCHEDULING-CAPABILITY bit) and PD (PD-LSP-CAPABILITY bit) in STATEFUL-PCE-CAPABILITY TLV carried in open message.

The format of the SCHED-PD-LSP-ATTRIBUTE TLV is shown in the following figure:





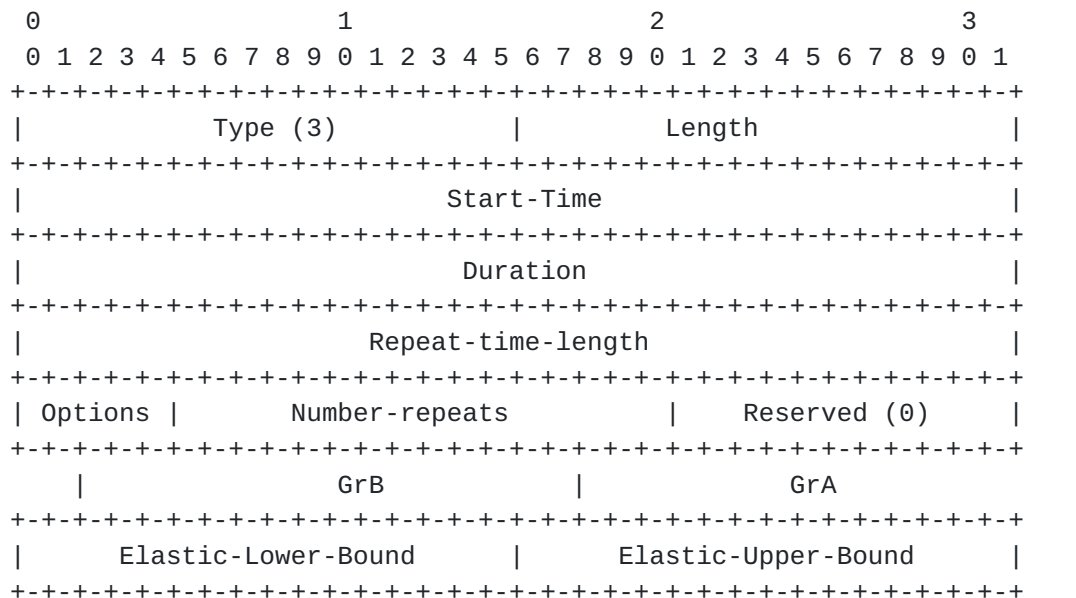

Start-Time (32 bits): This value in minutes, indicates the time when the scheduled LSP is used to carry traffic and the corresponding LSP must be setup and activated.

Duration (32 bits): The value in minutes, indicates the duration that the LSP is undertaken by a traffic flow and the corresponding LSP must be up to carry traffic.

Repeat-time-length: The time length in minutes after which LSP starts to carry traffic again for (Start Time-End Time).

Options: Indicates a way to repeat.

Options = 1: repeat every day;

Options = 2: repeat every week;

Options = 3: repeat every month;

Options = 4: repeat every year;

Options = 5: repeat every Repeat-time-length.

Number-repeats: The number of repeats. In each of repeats, LSP carries traffic.

In addition, it contains an non zero grace-before and grace-after if graceful periods are configured. It includes an non zero elastic range lower bound and upper bound if there is an elastic range configured.



- o GrB (Grace-Before): The graceful period time length in seconds before the starting time.
- o GrA (Grace-After): The graceful period time length in seconds after time interval [starting time, starting time + duration].
- o Elastic-Lower-Bound: The maximum amount of time in seconds that time interval can shift to lower/left.
- o Elastic-Upper-Bound: The maximum amount of time in seconds that time interval can shift to upper/right.

#### **4.4. Scheduled LSP Updates**

After a scheduled LSP is configured, a user may change its parameters including the requested time as well as the bandwidth.

In PCC-Initiated case, the PCC can send a PCRpt message for the scheduled LSP with updated bandwidth as well as scheduled information included in the SCHED-LSP-ATTRIBUTE TLV (see [section 4.3.4.1](#)) or SCHED-PD-LSP-ATTRIBUTE TLV carried in the LSP Object. The PCE should calculate the updated resources and synchronized with other PCEs. If the updates can be satisfied, PCE shall return a PCUpd message to PCC as described in [section 4.3.3](#). If the requested updates cannot be met, PCE shall return a PCUpd message with the original reserved attributes carried in the LSP Object.

The stateful PCE can update the Scheduled LSP parameters to other PCEs and the requested PCC at any time based on any network events using the PCUpd message including SCHED-LSP-ATTRIBUTE TLV or SCHED-PD-LSP-ATTRIBUTE TLV in the LSP Object body.

#### **4.5. Scheduled LSP activation and deletion**

In PCC-Initiated LSP scheduling, the PCC itself MAY activate the scheduled LSP at the starting time. Alternatively, the stateful PCE MAY activate the scheduled LSP at its scheduled time by send a PCInitiated message.

After the scheduled duration expires, the PCE shall send a PCUpd message with R flag set to the PCC to delete the LSP over the path, as well as to other PCEs to remove the scheduled LSP in the databases. Additionally, it shall update its scheduled LSP DB and scheduled TED.

Note that, the stateful PCE can update the Scheduled LSP parameters at any time based on any network events using the PCUpd message including SCHED-LSP-ATTRIBUTE TLV in the LSP Object body.



## **5. Security Considerations**

This document defines LSP-SCHEDULING-CAPABILITY TLV and SCHED- LSP-ATTRIBUTE TLV which does not add any new security concerns beyond those discussed in [[RFC5440](#)] and [[I-D.ietf-pce-stateful-pce](#)].

## **6. Manageability Consideration**

### **6.1. Control of Function and Policy**

The LSP-Scheduling feature MUST BE controlled per tunnel by the active stateful PCE, the values for parameters like starting time, duration SHOULD BE configurable by customer applications and based on the local policy at PCE.

### **6.2. Information and Data Models**

[RFC7420] describes the PCEP MIB, there are no new MIB Objects for this document.

### **6.3. Liveness Detection and Monitoring**

Mechanisms defined in this document do not imply any new liveness detection and monitoring requirements in addition to those already listed in [[RFC5440](#)].

### **6.4. Verify Correct Operations**

Mechanisms defined in this document do not imply any new operation verification requirements in addition to those already listed in [[RFC5440](#)].

### **6.5. Requirements On Other Protocols**

Mechanisms defined in this document do not imply any new requirements on other protocols.

### **6.6. Impact On Network Operations**

Mechanisms defined in this document do not have any impact on network operations in addition to those already listed in [[RFC5440](#)].

## **7. IANA Considerations**



### **7.1. PCEP TLV Type Indicators**

This document defines the following new PCEP TLV; IANA is requested to make the following allocations from this registry.

Value	Meaning	Reference
TBD	SCHED-LSP-ATTRIBUTE	This document
TBD	SCHED-PD-LSP-ATTRIBUTE	This document

### **7.2. LSP-SCHEDULING-CAPABILITY**

This document requests that a registry is created to manage the Flags field in the STATEFUL-PCE-CAPABILITY TLV in the OPEN object. New values are to be assigned by Standards Action [[RFC5226](#)]. Each bit should be tracked with the following qualities:

- o Bit number (counting from bit 0 as the most significant bit)
- o Capability description
- o Defining RFC

The following values are defined in this document:

Bit	Description	Reference
28	LSP-SCHEDULING-CAPABILITY (B-bit)	This document
29	PD-LSP-CAPABILITY (PD-bit)	This document

## **8. Acknowledgments**

This work has benefited from the discussions of resource scheduling on the mailing list and with Huaimo chen, author of [I-D.chen-pce-tts] since Prague meeting. We gratefully acknowledge the contributions of Huaimo Chen. The authors of this document would also like to thank Rafal Szarecki, Adrian Farrel, Cyril Margaria, Xian Zhang for the review and comments.

## **9. References**

### **9.1. Normative References**

[I-D.dhody-pce-stateful-pce-auto-bandwidth]  
Dhody, D., Palle, U., Singh, R., Gandhi, R., and L. Fang,  
"PCEP Extensions for MPLS-TE LSP Automatic Bandwidth  
Adjustment with Stateful PCE", [draft-dhody-pce-stateful-pce-auto-bandwidth-09](#) (work in progress), November 2016.





- [I-D.ietf-pce-pce-initiated-lsp]  
Crabbe, E., Minei, I., Sivabalan, S., and R. Varga, "PCEP Extensions for PCE-initiated LSP Setup in a Stateful PCE Model", [draft-ietf-pce-pce-initiated-lsp-10](#) (work in progress), June 2017.
- [I-D.ietf-pce-stateful-pce]  
Crabbe, E., Minei, I., Medved, J., and R. Varga, "PCEP Extensions for Stateful PCE", [draft-ietf-pce-stateful-pce-21](#) (work in progress), June 2017.
- [I-D.ietf-pce-stateful-sync-optimizations]  
Crabbe, E., Minei, I., Medved, J., Varga, R., Zhang, X., and D. Dhody, "Optimizations of Label Switched Path State Synchronization Procedures for a Stateful PCE", [draft-ietf-pce-stateful-sync-optimizations-10](#) (work in progress), March 2017.
- [I-D.ietf-teas-scheduled-resources]  
Zhuangyan, Z., Wu, Q., Chen, H., and A. Farrel, "Architecture for Scheduled Use of Resources", [draft-ietf-teas-scheduled-resources-03](#) (work in progress), June 2017.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC5440] Vasseur, JP., Ed. and JL. Le Roux, Ed., "Path Computation Element (PCE) Communication Protocol (PCEP)", [RFC 5440](#), DOI 10.17487/RFC5440, March 2009, <<http://www.rfc-editor.org/info/rfc5440>>.

## 9.2. Informative References

- [I-D.ietf-pce-stateful-pce-app]  
Zhang, X. and I. Minei, "Applicability of a Stateful Path Computation Element (PCE)", [draft-ietf-pce-stateful-pce-app-08](#) (work in progress), October 2016.
- [RFC5226] Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs", [RFC 5226](#), DOI 10.17487/RFC5226, May 2008, <<http://www.rfc-editor.org/info/rfc5226>>.



[RFC7420] Koushik, A., Stephan, E., Zhao, Q., King, D., and J. Hardwick, "Path Computation Element Communication Protocol (PCEP) Management Information Base (MIB) Module", [RFC 7420](#), DOI 10.17487/RFC7420, December 2014, <<http://www.rfc-editor.org/info/rfc7420>>.

#### **Appendix A. Scheduled LSP information synchronization**

As for a stateful PCE, it maintains a database of LSPs (LSP-DB) that are active in the network, so as to reveal the available network resources and place new LSPs more cleverly.

With the scheduled LSPs, they are not activated while creation, but should be considered when operating future path computation. Hence, a scheduled LSP Database (SLSP-DB) is suggested to maintain all scheduled LSP information.

The information of SLSP-DB MUST be shared and synchronized among all PCEs within the centralized network by using PCReq message, PCRep message with scheduled LSP information. In order to synchronize the scheduled LSP information in SLSP-DB among PCEs, the PCReq message and PCRep Message is used as described in [section 4.3.1](#) and [section 4.3.2](#).

To achieve the synchronization, the PCE should generate and maintain a scheduled TED based on LSP DB, scheduled LSP DB and TED, which is used to indicate the network resource availability on network nodes for LSP path computation.

#### **Appendix B. Contributor Addresses**



Xufeng Liu  
Ericsson  
USA  
Email: xliu@kuatrotech.com

Mehmet Toy  
Verizon  
USA  
Email: mehmet.toy@verizon.com

Vic Liu  
China Mobile  
No.32 Xuanwumen West Street, Xicheng District  
Beijing, 100053  
China  
Email: liu.cmri@gmail.com

Lei Liu  
Fujitsu  
USA  
Email: lliu@us.fujitsu.com

Khuzema Pithewan  
Infinera  
Email: kpithewan@infinera.com

Zitao Wang  
Huawei  
101 Software Avenue, Yuhua District  
Nanjing, Jiangsu 210012  
China

Email: wangzitao@huawei.com

Xian Zhang  
Huawei Technologies  
Research Area F3-1B,  
Huawei Industrial Base,  
Shenzhen, 518129, China

Email: zhang.xian@huawei.com

Authors' Addresses



Huaimo Chen (editor)  
Huawei  
Boston, MA  
USA

Email: [huaimo.chen@huawei.com](mailto:huaimo.chen@huawei.com)

Yan Zhuang (editor)  
Huawei  
101 Software Avenue, Yuhua District  
Nanjing, Jiangsu 210012  
China

Email: [zhuangyan.zhuang@huawei.com](mailto:zhuangyan.zhuang@huawei.com)

Qin Wu  
Huawei  
101 Software Avenue, Yuhua District  
Nanjing, Jiangsu 210012  
China

Email: [bill.wu@huawei.com](mailto:bill.wu@huawei.com)

Dhruv Dhody  
Huawei  
Divyashree Techno Park, Whitefield  
Bangalore, Karnataka 560066  
India

Email: [dhruv.ietf@gmail.com](mailto:dhruv.ietf@gmail.com)

Daniele Ceccarelli  
Ericsson  
Via A. Negrone 1/A  
Genova - Sestri Ponente  
Italy

Email: [daniele.ceccarelli@ericsson.com](mailto:daniele.ceccarelli@ericsson.com)



