

INTERNET-DRAFT  
Internet Engineering Task Force  
PINT Working Group  
Issued: 26th March 1999  
Expires: 26th September 1999

Lawrence Conroy,  
Siemens Roke Manor Research  
Scott Petrack,  
Metatel

**The PINT Profile of SIP and SDP:  
a Protocol for IP Access to Telephone Call Services**

[<draft-ietf-pint-profile-04.txt>](#)

Status of this Memo

This is an Internet-Draft and is in full conformance with all the provisions of [section 10 of RFC2026](#).

This document is an Internet-Draft. Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as ``work in progress.''

To learn the current status of any Internet-Draft, please check the ``1id-abstracts.txt' listing contained in the Internet-Drafts Shadow Directories on ftp.is.co.za (Africa), nic.nordu.net (Europe), munnari.oz.au (Pacific Rim), ftp.ietf.org (US East Coast), or ftp.isi.edu (US West Coast).

This memo provides information for the Internet community. This memo does not specify an Internet standard of any kind. Distribution of this memo is unlimited.

Copyright Notice

Copyright (c) The Internet Society (1999). All rights reserved.

Abstract

This document contains the specification of the PINT Profile 1.0, which defines a protocol for invoking certain telephone services from an IP network. These services include placing basic calls, sending and receiving faxes, and receiving content over the telephone. The protocol is specified as a set of enhancements and additions to the SIP 2.0 and SDP 2.0 protocols.

This document is intended for the PSTN-Internet Interworking (PINT) working group of the Internet Engineering Task Force. Comments are solicited and should be addressed to the working group's mailing list at [pint@lists.research.bell-labs.com](mailto:pint@lists.research.bell-labs.com) and/or the authors.

Conroy & Petrack

[Page 1]

<[draft-ietf-pint-profile-04.txt](#)> PINT Profile of SIP and SDP March, 1999

## Contents

<a href="#">1.</a>	Introduction .....	<a href="#">3</a>
<a href="#">1.1</a>	Glossary .....	<a href="#">5</a>
<a href="#">2.</a>	PINT Milestone Services .....	<a href="#">6</a>
<a href="#">2.1</a>	Request to Call .....	<a href="#">6</a>
<a href="#">2.2</a>	Request to Fax .....	<a href="#">6</a>
<a href="#">2.3</a>	Request to Hear Content .....	<a href="#">6</a>
<a href="#">2.4</a>	Relation between PINT milestone services and traditional telephone services .....	<a href="#">6</a>
<a href="#">3.</a>	PINT Functional and Protocol Architecture .....	<a href="#">7</a>
<a href="#">3.1.</a>	PINT Functional Architecture .....	<a href="#">7</a>
<a href="#">3.2.</a>	PINT Protocol Architecture .....	<a href="#">8</a>
<a href="#">3.2.1.</a>	SDP operation in PINT .....	<a href="#">9</a>
<a href="#">3.2.2.</a>	SIP Operation in PINT .....	<a href="#">9</a>
<a href="#">3.3.</a>	REQUIRED and OPTIONAL elements for PINT compliance .....	<a href="#">10</a>
<a href="#">3.4.</a>	PINT profile of SDP 2.0 .....	<a href="#">10</a>
<a href="#">3.4.1.</a>	Network Type "TN" and Address Type " <a href="#">RFC2543</a> " .....	<a href="#">11</a>
<a href="#">3.4.2.</a>	Support for Data Objects within PINT .....	<a href="#">11</a>
<a href="#">3.4.2.1.</a>	Use of fntp attributes in PINT requests .....	<a href="#">13</a>
<a href="#">3.4.2.2.</a>	Support for Remote Data Object References in PINT ..	<a href="#">13</a>
<a href="#">3.4.2.3.</a>	Support for GSTN-based Data Objects in PINT .....	<a href="#">14</a>
<a href="#">3.4.2.4.</a>	Session Description support for included Data Objects	<a href="#">15</a>
<a href="#">3.4.3.</a>	Attribute Tags to pass information into the Telephone Network .....	<a href="#">16</a>
<a href="#">3.4.3.1.</a>	The phone-context attribute .....	<a href="#">17</a>
<a href="#">3.4.3.2.</a>	Presentation Restriction attribute .....	<a href="#">19</a>
<a href="#">3.4.3.3.</a>	ITU-T CalledPartyAddress attributes parameters .....	<a href="#">19</a>
<a href="#">3.4.4.</a>	The "strict" attribute .....	<a href="#">20</a>
<a href="#">3.5.</a>	PINT profile of SIP 2.0 .....	<a href="#">21</a>
<a href="#">3.5.1.</a>	Multi-part MIME (sending data along with SIP request) ....	<a href="#">21</a>
<a href="#">3.5.2.</a>	Warning header .....	<a href="#">22</a>
<a href="#">3.5.3.</a>	Mechanism to register interest in the disposition of a PINT service, and to receive indications on that disposition ..	<a href="#">23</a>
<a href="#">3.5.3.1.</a>	Opening a monitoring session with a SUBSCRIBE request	<a href="#">23</a>
<a href="#">3.5.3.2.</a>	Sending Status Indications with a NOTIFY request ...	<a href="#">24</a>
<a href="#">3.5.3.3.</a>	Closing a monitoring session with a BYE request ....	<a href="#">25</a>
<a href="#">3.5.3.4.</a>	Timing of SUBSCRIBE requests .....	<a href="#">25</a>
<a href="#">3.5.4.</a>	The "Require:" header for PINT .....	<a href="#">26</a>
<a href="#">3.5.5.</a>	PINT URLs within PINT requests .....	<a href="#">26</a>
<a href="#">3.5.5.1.</a>	PINT URLs within Request-URIs .....	<a href="#">26</a>

<a href="#">3.5.6.</a>	Telephony Network Parameters within PINT URLs .....	<a href="#">27</a>
<a href="#">3.5.7.</a>	REGISTER requests within PINT .....	<a href="#">28</a>
<a href="#">3.5.8.</a>	BYE Requests in PINT .....	<a href="#">28</a>
<a href="#">4.</a>	Examples of PINT Requests and Responses .....	<a href="#">30</a>
4.1.	A request to a call centre from an anonymous user to receive a phone call .....	<a href="#">30</a>
4.2.	A request from a non anonymous customer (John Jones) to receive a phone call from a particular sales agent (Mary James) concerning the defective ironing board that was purchased .....	<a href="#">30</a>
4.3.	A request from the same user to get a fax back on how to assemble the Ironing Board .....	<a href="#">31</a>
Conroy & Petrack		[Page 2]
< <a href="#">draft-ietf-pint-profile-04.txt</a> >		PINT Profile of SIP and SDP    March, 1999
4.4.	A request from same user to have that same information read out over the phone .....	<a href="#">32</a>
<a href="#">4.5.</a>	A request to send an included text page to a friend's pager ....	<a href="#">32</a>
4.6.	A request to send an image as a fax to phone number +972-9-956-1867 .....	<a href="#">33</a>
4.7.	A request to read out over the phone two pieces of content in sequence .....	<a href="#">33</a>
<a href="#">4.8.</a>	Request for the prices for ISDN to be sent to my fax machine ...	<a href="#">34</a>
<a href="#">4.9.</a>	Request for a callback .....	<a href="#">34</a>
4.10.	Sending a set of information in response to an enquiry .....	<a href="#">34</a>
4.11.	Sportsline "headlines" message sent to your phone/fax/pager ....	<a href="#">35</a>
4.12.	Automatically giving someone a fax copy of your phone bill ....	<a href="#">36</a>
<a href="#">5.</a>	Security Considerations .....	<a href="#">36</a>
<a href="#">5.1.</a>	Basic Principles for PINT Use .....	<a href="#">36</a>
<a href="#">5.1.1.</a>	Responsibility for service requests .....	<a href="#">37</a>
<a href="#">5.1.2.</a>	Authority to make requests .....	<a href="#">37</a>
<a href="#">5.1.3.</a>	Privacy .....	<a href="#">38</a>
<a href="#">5.2.</a>	Security mechanisms and implications on PINT service .....	<a href="#">38</a>
<a href="#">5.3.</a>	Registration Procedures .....	<a href="#">40</a>
<a href="#">6.</a>	<b>Deployment considerations and the Relationship PINT to I.N.</b>	
(Informative)	.....	<a href="#">41</a>
<a href="#">6.1.</a>	Web Front End to PINT Infrastructure .....	<a href="#">41</a>
<a href="#">6.2.</a>	Redirects to Multiple Servers .....	<a href="#">41</a>
<a href="#">6.3.</a>	Competing PINT gateways REGISTERing to offer the same service ..	<a href="#">42</a>
4.4.	Limitations on Available Information and Request Timing for SUBSCRIBE .....	<a href="#">43</a>
4.5.	Parameters needed for invoking traditional PSTN Services within PINT .....	<a href="#">44</a>
<a href="#">6.5.1.</a>	Service Identifier .....	<a href="#">44</a>
<a href="#">6.5.2.</a>	A and B parties .....	<a href="#">44</a>
<a href="#">6.5.3.</a>	Other Service Parameters .....	<a href="#">45</a>
<a href="#">6.5.4.</a>	Service Parameter Summary .....	<a href="#">45</a>
<a href="#">6.6.</a>	Parameter Mapping to PINT Profile .....	<a href="#">46</a>

<a href="#">7. Open Issues and Draft State .....</a>	<a href="#">47</a>
<a href="#">7.1. Open Issues .....</a>	<a href="#">47</a>
<a href="#">7.2. Draft State .....</a>	<a href="#">47</a>
<a href="#">8. References .....</a>	<a href="#">50</a>
<a href="#">9. Acknowledgements .....</a>	<a href="#">51</a>
<a href="#">Appendix A: Collected ABNF .....</a>	<a href="#">52</a>
<a href="#">Appendix B: Authors' Addresses .....</a>	<a href="#">54</a>

Conroy & Petrack [Page 3]  
[<draft-ietf-pint-profile-04.txt>](#) PINT Profile of SIP and SDP March, 1999

## **[1. Introduction](#)**

The desire to invoke certain telephone call services from the Internet has been identified by many different groups (users, public and private network operators, call center service providers, equipment vendors, etc.). The generic scenario is as follows (when the invocation is successful):

1. an IP host sends a request to a server on an IP network;
2. the server relays the request into a telephone network;
3. the telephone network performs the requested call service.

As examples, consider a user who wishes to have a call placed to his/her telephone. It may be that a customer wishes to get a call from the support department of some business, or a user wishes to hear some remote automatic weather service via recorded or synthesised speech. Within a local environment such a request might result in the placement of a call between employees over the internal PBX.

We use the term "PSTN/Internet Interworking (PINT) Service" to denote such a complete transaction, starting with the sending of a request from an IP client and including the telephone call itself. PINT services are distinguished by the fact that they always involve two separate networks: an IP network to request the placement of a call, and a telephone network to execute the actual call. It is understood that Intelligent Network systems, private PBXs, cellular phone networks, and the ISDN can all be used to deliver PINT services. Also, the request for service might come from within a private IP network that is disconnected from the whole Internet.

\*\_\*\_

The requirements for the PINT protocol were deliberately restricted to

providing the ability to invoke a small number of fixed telephone call services. These "Milestone PINT services" are specified in [section 2](#). Great care has been taken, however, to develop a protocol that is aligned with other Internet protocols where possible, so that future extensions to PINT could develop along with Internet conferencing.

Within the Internet conference architecture, establishing media calls is done via a combination of protocols. SIP [2] is used to establish the association between the participants within the call (this association between participants within the call is called a "session"), and SDP [3] is used to describe the media to be exchanged within the session. The PINT protocol uses these two protocols together, providing some extensions and enhancements to enable SIP clients and servers to become PINT clients and servers.

A PINT user who wishes to invoke a service within the telephone network uses SIP to invite a remote PINT server into a session. The invitation contains an SDP description of the media session that the user would like to take place. This might be a "sending a fax session" or a "telephone call session", for example. In a PINT service execution session the media is transported over the phone system, while in a SIP session the media is normally transported over an internet.

Conroy & Petrack

[Page 4]

<[draft-ietf-pint-profile-04.txt](#)> PINT Profile of SIP and SDP March, 1999

When used to invoke a PINT service, SIP establishes an association between a requesting PINT client and the PINT server which is responsible for invoking the service within the telephone network. These two entities are not the same entities as the telephone network entities involved in the telephone network service. The SIP messages carry within their SDP payloads a description of the telephone network media session.

Note that the fact that a PINT server accepts an invitation and a session is established is no guarantee that the media will be successfully transported.

The particular requirements of PINT users lead to some new messages. When a PINT server agrees to send a fax to telephone B, it may be that the fax transmission fails after part of the fax is sent. Therefore, the PINT client may wish to receive information about the status of the actual telephone call session that was invoked as a result of the established PINT session. Two new requests, SUBSCRIBE and NOTIFY, are added here to vanilla SIP to allow this.

The enhancements and additions specified here are not intended to alter the behaviour of baseline SIP or SDP in any way. The purpose of the PINT profile is to extend the usual SIP/SDP services to the telephone world. Apart from integrating well into existing protocols and architectures, and the advantages of reuse, this means that the protocol specified here can handle

a rather wider class of call services than just the Milestone services.

The rest of this document is organised as follows: [Section 2](#) describes the original PINT Milestone services; [section 3](#) specifies the PINT functional and protocol architecture; [section 4](#) gives examples of the PINT 1.0 profile of SIP and SDP; [section 5](#) contains some security considerations for PINT. The final section contains descriptions of how the PINT profile may be used to provide service over the GSTN.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#). In addition, the construct "MUST .... OR ...." implies that it is an absolute requirement of this specification to implement one of the two possibilities stated (represented by dots in the above phrase). An implementation MUST be able to interoperate with another implementation which chooses either of the two possibilities.

## **[1.1](#) Glossary**

Requestor - An Internet host from which a request for service originates

PINT Service - A services invoked within a phone system in response to a request received from an PINT client.

PINT Client - An Internet host that sends requests for invocation of a PINT Service, in accordance with this profile.

PINT Gateway - An Internet host that accepts requests for PINT Service and dispatches them onwards towards a telephone network.

Conroy & Petrack [Page 5]  
<[draft-ietf-pint-profile-04.txt](#)> PINT Profile of SIP and SDP March, 1999

Executive System - A system which interfaces to a telephone network that executes a PINT service, and to a PINT Server. It is not directly associated with the Internet, and is represented by the PINT Server.

Requesting User - The initiator of a request for service. This role may be distinct from that of the "party" to any telephone network call that results from the request.

(Service Call) Party - A person who is involved in a telephone network call that results from the execution of a PINT service request, or a telephone network-based resource that is involved (such as an automatic Fax Sender or a Text-to-Speech Unit).

## **[2](#). PINT Milestone Services**

The original motivation for defining this protocol was the desire to invoke the following three telephone network services from within an IP network:

## **2.1 Request to Call**

A request is sent from an IP host which causes a phone call to be made, connecting party A to some remote party B.

## **2.2 Request to Fax**

A request is sent from an IP host that causes a fax to be sent to fax machine B. The request **MUST EITHER** contain a pointer to the fax data (which could reside in the IP network or in the Telephone Network), **OR** the request itself contain fax data. The content of the fax **MAY** be text **OR** some other more general image data. The details of the fax transmission are not accessible to the IP network, but remain entirely within the telephone network.

The PINT Request to Fax service does not involve "Fax over IP": the IP network is only used to send the request that a certain fax be sent. Of course, it is possible that the resulting telephone network fax call happens to use a real-time IP fax solution, but this is completely transparent to the PINT transaction.

## **2.3 Request to Hear Content**

A request is sent from an IP host which causes a phone call to be made to user A, and for some sort of content to be spoken out. The request **MUST EITHER** contain a URL pointing to the content, **OR** include the content itself. The content **MAY** be text **OR** some other more general application data. The details of the content transmission are not accessible to the IP network, but remain entirely within the telephone network.

## **2.4 Relation between PINT milestone services and traditional telephone services**

There are many different versions and variations of each telephone call service invoked by a PINT request. Consider as an example what happens when a user requests to call 1-800-2255-287 via the PINT Request-to-Call service.

Conroy & Petrack [Page 6]  
<[draft-ietf-pint-profile-04.txt](#)> PINT Profile of SIP and SDP March, 1999

There may be thousands of agents in the call centre, and there may be any number of sophisticated algorithms and equipment which is used to decide exactly which agent will return the call. And once this choice is made, there may be many different ways to set up the call: the agent's phone might ring first, and only then the original user will be called; or perhaps the user might be called first, and hear some horrible music or pre-recorded message while the agent is located.

Similarly, when a PINT request causes a fax to be sent, there are hundreds of fax protocol details to be negotiated, as well as transmission details within the telephone networks used.

PINT requests do not specify too precisely the exact telephone-side service. Operational details of individual events within the telephone network that executes the request are outside the scope of PINT. This does not preclude certain high-level details of the telephone network session from being expressed within a PINT request. For example, it is possible to express a language preference for the Request-to-Hear-Content Service. If a particular PINT system wishes to allow requests to contain details of the telephone-network-side service, it uses the SDP attribute mechanism (see [section 3.4.2](#)).

### 3. PINT Functional and Protocol Architecture

#### 3.1. PINT Functional Architecture

Familiarity is assumed with SIP 2.0 [2] and with SDP 2.0 [3].

PINT clients and servers are SIP clients and servers. SIP is used to route the request over the IP network to the correct PINT server in a secure and reliable manner, and SDP is used to describe the telephone network session which is to be invoked or whose status is to be returned.

A PINT system uses SIP proxy servers and redirect servers for their usual purpose, but at some point there must be a PINT server with the means to relay received requests into a telephone system and to receive acknowledgement of these relayed requests. A PINT server with this capability is called a "PINT gateway". A PINT gateway appears to a SIP system as a User Agent Server. Notice that a PINT gateway appears to the PINT infrastructure as if it represents a "user", while in fact it really represents an entire telephone network infrastructure which can provide a set of telephone network services.

So the PINT system might appear to an individual PINT client as follows:

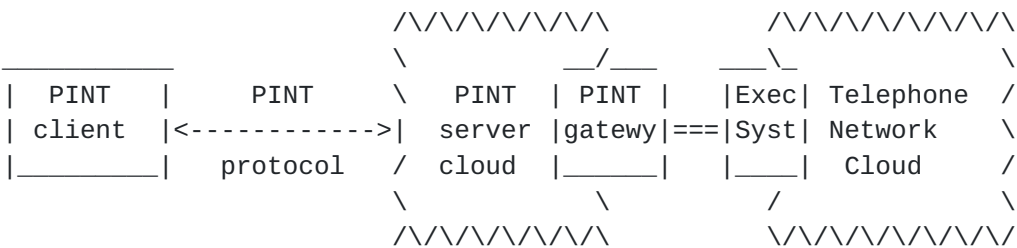


Figure 1: PINT Functional Architecture

The system of PINT servers is represented as a cloud to emphasise that a single PINT request might pass through a series of location servers, proxy servers, and redirect servers, before finally reaching the correct PINT gateway which can actually process the request by passing it to the Telephone Network Cloud.



The PINT gateway might have a true telephone network interface, or it might be connected via some other protocol or API to an "Executive System" which is capable of invoking services within the telephone cloud.

As an example, within an I.N. (Intelligent Network) system, the PINT gateway might appear to realise the Service Gateway Control Function. In an office environment, it might be a server adjunct to the office PBX, connected to both the office LAN and the office PBX.

The Executive System which lies beyond the PINT gateway is outside the scope of PINT.

### **3.2. PINT Protocol Architecture**

This section explains how SIP and SDP work in combination to convey the information necessary to invoke telephone network sessions.

\*\_\*\_

The following list summarises the extension features used in PINT 1.0. Following on from this the features are considered separately for SDP and then for SIP:

- 1) Telephony URLs in SDP Contact Fields
- 2) Refinement of SIP/SDP Telephony URLs
  - \* Inclusion of private dialling plans
- 3) Specification of TSP and/or phone-context URL-parameters
- 4) Data Objects as session media
- 4a) Protocol Transport formats to indicate the treatment of the media within the PSTN
- 5) Implicit (Indirect) media streams and opaque arguments
- 6) In-line data objects using multipart/mime
- 7) Refinement/Clarification of Opaque arguments passed onwards to Executive Systems
  - \* Framework for Presentation Restriction Indication
  - \* Framework for Q.763 arguments
- 8) An extension mechanism for SIP and SDP to specify strictures and force failure when a recipient does NOT support the specified extensions, using "Strict" and "Require" headers.
- 9) Mandatory support for "Warning" headers to give more detailed information on request disposition.
- 10) Mechanism to register interest in the disposition of a requested service, and to receive indications on that disposition.

\_\*\_\*

Both PINT and SIP rely on features of MIME[5]. The use of SIP 2.0 is implied by PINT 1.0, and this also implies compliance with version 1.0 of MIME.

\*\_\*\_

### **3.2.1. SDP operation in PINT**

The SDP payload contains a description of the particular telephone network session which the requestor wishes to occur in the PSTN. This information includes such things as the telephone network address (i.e. the "telephone number") of the terminal(s) involved in the call, an indication of the media type to be transported (e.g. audio, text, image or application data), and an indication if the information is to be transported over the telephone network via voice, fax, or pager transport. An indication of the content to be sent to the remote telephone terminal (if there is any) is also included.

SDP is flexible enough to convey these parameters independently. For example, a request to send some text via voice transport will be fulfilled by invoking some text-to-speech-over-the-phone service, and a request to send text via fax will be fulfilled by invoking some text-to-fax service.

The following is a list of PINT 1.0 enhancements and additions to SDP.

- a. A new network type "TN" and address types "[RFC2543](#)" and "X-..." ([section 3.4.1](#))
- b. New media types "text", "image", and "application", new protocol transport keywords "voice", "fax" and "pager" and the associated format types and attribute tags ([section 3.4.2](#))
- c. New format specific attributes for included content data ([section 3.4.2.4](#))
- d. New attribute tags, used to pass information to the telephone network ([section 3.4.3](#))
- e. A new attribute tag "strict", used by a client to indicate that some attribute is required to be supported in the server ([section 3.4.4](#))

\*\_\*\_

### **3.2.2. SIP Operation in PINT**

SIP is used to route the request for telephone service from the PINT client to the PINT gateway, and may include a telephone number if needed for the particular service. The following is a complete list of PINT enhancements and additions to SIP:

- f. The multipart MIME payloads ([section 3.5.1](#))
- g. Mandatory support for "Warning:" headers ([section 3.5.2](#))
- h. The SUBSCRIBE and NOTIFY request ([section 3.5.3](#))
- i. Require: headers ([section 3.5.4](#))
- j. A format for PINT URLs within a PINT request ([section 3.5.5](#))
- k. Telephone Network Parameters within PINT URLs ([section 3.5.6](#))

\*\_\*\_

[Section 3.5.8](#) contains remarks about how BYE requests are used within PINT.

This does not add anything to baseline SIP; it is included here for clarification of the semantics when used with telephone network sessions.

Conroy & Petrack

[Page 9]

<[draft-ietf-pint-profile-04.txt](#)> PINT Profile of SIP and SDP March, 1999

### **3.3. REQUIRED and OPTIONAL elements for PINT compliance**

\*\_\*\_

Of these, only the TN network type (with its associated [RFC2543](#) address type) and Strictures MUST be supported by PINT 1.0 clients and servers. In practice, most PINT service requests will use other changes, of which references to Data Objects in requests are most likely to appear in PINT requests.

Each of other new PINT constructs enables a different function, and a client or server which wishes to enable that particular function MUST do so by the construct specified in this document. For example, building a PINT client and server that provide only the Request-to-Call telephone call service, without support for the other Milestone services, is allowed.

The "Require:" headers and the "strict" attribute provide a mechanism which can be used by clients and servers to signal their need and/or ability to support specific "new" PINT protocol elements.

It should be noted that many optional features of SIP and SDP make sense as specified in the PINT context. One example is the SDP a=lang: attribute, which can be used to describe the preferred language of the callee. Another example is the use of the "t=" parameter to indicate that the time at which the PINT service is to be invoked. This is the normal use of the "t=" field. A third example are the quality attributes. Any SIP or SDP option or facility is available to PINT clients and servers without change.

\*\_\*\_

Conversely, support for Data Objects within Internet Conference sessions may be useful, even if the aim is not to provide a PSTN service request. In this case, the extensions covering these items may be incorporated into an otherwise "plain" SIP/SDP invitation. Likewise, support for Strictures may be useful, as a framework for addition of features to a "traditional" SIP/SDP infrastructure. Again, these may be convenient to incorporate into SIP/SDP implementations that would not be used for PINT service requests. Such additions are beyond the scope of this document, however.

### **3.4. PINT profile of SDP 2.0**

PINT 1.0 adds to SDP the possibility to describe audio, fax, and pager telephone sessions. It is deliberately designed to hide the underlying technical details and complexity of the telephone network. The only network type defined for PINT is the generic "TN" (Telephone Network). More precise tags such as "ISDN", "GSM", are not defined. Similarly, the transport

protocols are designated simply as "fax", "voice", and "pager"; there are no more specific identifiers for the various telephone network voice, fax, or pager protocols. Similarly, the data to be transported is identified only as a MIME type, such as "text" data, "image" data, or some more general "application" data, etc. An important example of transporting "application" data is the milestone service "Voice Access to Web Content". In this case the data to be transported is pointed to by a URI, the data type is application/URI, and the transport protocol would be "voice". Some sort of speech-synthesis facility, speaking out to a Phone, will have to be invoked to perform this service.

This section gives details of the new SDP keywords.

#### **3.4.1. Network Type "TN" and Address Type "[RFC2543](#)"**

The TN ("Telephone Network") network type is used to indicate that the terminal is connected to a telephone network.

The address types allowed for network type TN are "[RFC2543](#)" (the "2543" will be filled in by the SIP [[2](#)] RFC number) and private address types, which MUST begin with an "X-".

Address type [RFC2543](#) is a string conforming to the "telephone-subscriber" BNF specified in [RFC2543](#), (this is specified in figure 4 of the SIP [[2](#)] RFC). Note that this BNF is NOT identical to the BNF which defines the "phone-number" within the "p=" field of SDP.

Examples:

```
c= TN RFC2543 +1-201-406-4090
```

```
c= TN RFC2543 12014064090
```

\*\_\*\_

A telephone-subscriber string is of one of two types: global-phone-number or local-phone-number. These are distinguished by preceeding a global-phone-number with a "plus" sign ("+" ). A global-phone-number is by default to be interpreted as an internationally significant E.164 Number Plan Address, as defined by [7], whilst a local-phone-number is a number specified in the default dialling plan within the context of the recipient PINT Gateway.

An implementation MAY use private addressing types, which can be useful within a local domain. These address types MUST begin with an "X-", and SHOULD contain a domain name after the X-, e.g. "X-mytype.mydomain.com". An example of such a connection line is as follows:

```
c= TN X-mytype.mydomain.com A*8-HELEN
```

where "X-mytype.mydomain.com" identifies this private address type, and "A\*8-HELEN" is the number in this format.

Note that most dialable telephone numbers are expressable as local-phone-numbers within address [RFC2543](#); new address types should only be used for formats which cannot be so written.

\*\_\*\_

#### **3.4.2. Support for Data Objects within PINT**

One significant change over traditional SIP/SDP Internet Conference sessions with PINT is that a PINT service request may refer to a Data Object to be used as source information in that request. For example, a PINT service

request may specify a document to be processed as part of a GSTN service by which a Fax is sent. Similarly, a GSTN service may be take a Web page and result in a vocoder processing that page and speaking the contents over a telephone.

The "core" SIP and SDP specifications focus on media Streams, and do not have explicit support for reference to or carriage of Data Objects within requests, so these additions are needed here.

There are two changes to the session description format that is used. These are the inclusion of a new variant on the Media field, together with additional description of the "fmt" parameter when used with the Media Field values (within the context of the Contact Field Network type "TN").

An addition is also made to the SIP message format to allow the inclusion of data objects as sub-parts within the request message itself.

The original SDP syntax (from [3]) for media-field is given as:

```
media-field =          "m=" media space port ["/" integer]
                   space proto 1*(space fmt) CRLF
```

When used within PINT requests, the definitions of the sub-fields is expanded slightly.

The Media sub-field definition is relaxed to accept all of the discrete "top-level" media types defined in [5]. In the milestone services the discrete type "video" is not used, and the extra types "data" and "control" are likewise not needed. The use of these types is not precluded, but the behaviour of a PINT Gateway receiving a request including such a type is not defined here.

The Port sub-field has no meaning in PINT requests as the destination terminals are specified using "TN" addressing, so the value of the port sub-field in PINT requests is set to "0". Likewise, the optional integer field is not used in PINT.

As mentioned in [3], the Transport Protocol sub-field is specific to the associated Address Type. In the case that the Address Type in the preceeding Contact field is one of those defined for use with the Network Type "TN", the following values are defined for the Transport Protocol sub-field; "voice", "fax", and "pager".

The interpretation of this sub-field within PINT requests is the treatment or disposition of the resulting GSTN service. Thus, for transport protocol "voice", the intent is that the service will result in a GSTN voice call, whilst for protocol "fax" the result will be a GSTN fax transmission, and protocol "pager" will result in a pager message being sent.

Note that this sub-field does not necessarily dictate the media type and subtype of any source data; for example, one of the milestone services calls for a textual source to be vocoded and spoken in a resulting telephone service call. The transport protocol value in this case would be "voice", whilst the source data would be textual.

The Fmt sub-field is described in [3] as being transport protocol-specific. When used within PINT requests having one of the above protocol values, this

sub-field consists of a list of zero or more values, each of which is a defined MIME sub-type of the associated Media sub-field value. It retains (from [3]) its meaning that the list will contain a set of alternative sub-types, with the first being the preferred value.



For experimental purposes and by mutual consent of the sender and recipient, a sub-type value may be specified as an <X-token>, i.e. a character string starting with "X-". The use of such values is discouraged, and if such a value is expected to find common use then it SHOULD be registered with IANA using the standard content type registration process.

Note that PINT uses a modification of the SDP Media field definition in that, for PINT, having an empty Fmt sub-field is valid. This condition is interpreted as meaning that a unspecified or default sub-type should be used for this service. Thus, the media field value "m=audio 0 voice<CRLF>" is taken to mean that a voice call is requested, using whatever audio sub type is deemed appropriate by the Executive System. PINT service is a special case, in that the request comes from the IP network but the service call is provided within the GSTN. Thus the service request will not normally be able to define the particular codec used for the resulting GSTN service call. If such an intent IS required, then the quality attribute may be used (see "Suggested Attributes" section of [3]).

#### **3.4.2.1. Use of fntp attributes in PINT requests**

For each element of the Fmt sub-field, there MUST be a following fntp attribute. When used within PINT requests, the fntp attribute has a general structure as defined here:

"a=fnTP:" <media subtype> 1\*<resolution>

where:

<resolution> := (<urref> | <opaque-ref> | <sub-part-ref>)

A fntp attribute describes the sources used with a given Fmt entry in the Media field. The entries in a Fmt sub-field are alternatives (with the preferred one first in the list). Each entry will have a matching fntp attribute. The list of resolutions in a fntp attribute describes the set of sources that resolve the matching Fmt choice; all elements of this set will be used.

It should be noted that, for use in PINT services, the elements in such a set will be sent as a sequence; it is unlikely that trying to send them in parallel would be successful.

A fntp attribute can contain a mixture of different kinds of element. Thus an attribute might contain a sub-part-ref to included data held in a sub-part of the current message, followed by an opaque-ref to some content on the GSTN, followed by a urref pointing to some data held externally on the IP network.

To indicate which form each resolution element takes, each of them starts with its own literal tag. The detailed syntax of each form is described in the following sub-sections.

#### **3.4.2.2. Support for Remote Data Object References in PINT**

Where data objects stored elsewhere on the IP Network are to be used as sources for processing within a PINT service, they may be referred to using the uri-ref form. This is simply a Uniform Resource Identifier (URI), as described in [10].

Note that the reference SHOULD be an absolute URI, as there may not be enough contextual information for the recipient server to resolve a relative reference; any use of relative references requires some private agreement between the sender and recipient of the message, and should be avoided unless the sender can be sure that the recipient is the one intended and the reference is unambiguous in context.

This also holds for partial URIs (such as: "uri:http://aMachine/index.html") as these will need to be resolved in the context of the eventual recipient of the message.

The general syntax of a reference to an Internet-based external data object in a fmlp line within a PINT session description is:

```
<uri-ref> := ("uri:" URI-reference)
```

where URI-reference is as defined in [appendix A](#) of [10]

For example:

```
c= TN RFC2543 +1-201-406-4090
m= text 0 fax plain
a=fmlp:plain uri:ftp://ftp.isi.edu/in-notes/rfc2468.txt
```

or:

```
c= TN RFC2543 +1-201-406-4090
m= text 0 fax plain
a=fmlp:plain uri:http://www.ietf.org/meetings/glance_minneapolis.txt
```

means get this data object from the Internet and use it as a source for the requested GSTN Fax service.

#### **[3.4.2.3](#). Support for GSTN-based Data Objects in PINT**

PINT services may refer to data that is held not on the IP Network but instead within the GSTN. The way in which these items are indicated need have no meaning within the context of the Requestor or the PINT Gateway; it is merely some data that may be used by the Executive System to indicate the content intended as part of the request. This data forms an opaque reference, in that it is sent "untouched" through the PINT infrastructure.

A reference to some data object held on the GSTN has the general definition:

```
<opaque-ref> := ("opr:" *uric)
```

where uric is as defined in [appendix A](#) of [10].

For example:

```
c= TN RFC2543 +1-201-406-4090
m= text 0 fax plain
a=fmlp:plain opr:APPL.123.456
```

means send me the data that is indexed ON THE GSTN by the reference value

"APPL.123.456"; the Executive System may also take the Telephone URL held in the To: field of the enclosing SIP message into account when deciding the context to be used for the data object dereference.

Of course, an opaque reference may also be used for other purposes; it could, for example, be needed to authorise access to a document held on the GSTN rather than being required merely to disambiguate the data object. The purpose to which an opaque reference is put, however, is out of scope for this document. It is merely an indicator carried within a PINT Request.

An opaque reference may have no value in the case where the value to be used is implicit in the rest of the request. For example, the "Faxback variant of the Request to Fax" milestone service will include two party identifiers; one for the destination Fax machine that will receive the "faxed back" data, with the other indicating the Faxback service number for some company. If dialling that Faxback number would be expected to return a particular piece of information, then there is no need for an opaque reference value.

If there are several resolutions for a PINT Service Request, and one of these is an opaque reference with no value, then that opaque reference MUST be included in the attribute line, but with an empty value field.

For example:

```
c= TN RFC2543 +1-201-406-4090
m= text 0 fax plain
a=fmtp:plain spr:<Content-ID> opr:
```

might be used to precede some unambiguous "faxed back" data with a covering note (see next sub-section for details of the sub-part reference).

In the special case where an opaque reference is the sole resolution of a PINT Service Request, AND that reference needs no value, there is no need for a Fmt list at all; the intent of the service is unambiguous without any further resolution.

For example:

```
c= TN RFC2543 +1-201-406-4090
m= text 0 fax
```

means that there is an implied content stored on the GSTN, and that this is uniquely identified by the combination of SIP To-URI and the Contact field of the session description.

\*\_\*\_

#### **[3.4.2.4](#). Session Description support for included Data Objects**

As an alternative to pointing to the data via a URI or an opaque reference to a data item held on the GSTN, it is possible to include the content data within the SIP request itself. This is done by using multipart MIME for the SIP payload. The first MIME part contains the SDP description of the telephone network session to be executed. The other MIME parts contain the content data to be transported.

Format specific attribute lines within the session description are used to

indicate which other MIME part within the request contains the content data. Instead of a URI or opaque reference, the format-specific attribute indicates the Content-ID of the MIME part of the request that contains the actual data, and is defined as:

`<sub-part-ref> := ("spr:" Content-ID)`

where Content-ID is as defined in [Appendix A](#) of [4] and in [11]).

For example:

```
c= TN RFC2543 +1-201-406-4090
m= text 0 fax plain
a=fmtp:plain spr:<Content-ID>
```

\*\_\*\_

The <Content-ID> parameter is the Content-ID of one of the MIME parts inside the message, and this fragment means that the requesting user would like the data object held in the sub-part of this message labelled <Content-ID> to be faxed to the machine at phone number +1-201-406-4090.

\*\_\*\_

See also [section 3.5.1](#) for a discussion on the support needed in the enclosing SIP request for included data objects.

### **[3.4.3](#). Attribute Tags to pass information into the Telephone Network**

\*\_\*\_

It may be desired to include within the PINT request service parameters which can be understood only by some entity in the "Telephone Network Cloud". SDP attribute parameters are used for this purpose. They MAY appear within a particular media description or outside of a media description.

These attributes may also appear as parameters within PINT URLs (see [section 3.5.6](#)) as part of a SIP request.

This is necessary so that telephone terminals that require the attributes to be defined can appear within the To: line of a PINT request as well as within PINT session descriptions.

The purpose of these attributes is to allow the client to specify extra context within which a particular telephone number is to be interpreted. There are many reasons why extra context might be necessary to interpret a given telephone number:

- a. The telephone number might be reachable in many different ways (such as via competing telephone service providers), and the PINT client wishes to indicate its selection of service provider.
- b. The telephone number might be reachable only from a limited number of networks (such as an '800' freephone number).
- c. The telephone number might be reachable only within a single telephone network (such as the '152' customer service number of BT). Similarly, the number might be an internal corporate extension reachable only within the PBX.

However, as noted above, it is not usually necessary to use SDP attributes to specify the phone context. URLs such as 152@pint.bt.co.il within the To: and From: headers and/or Request-URI, normally offer sufficient context to resolve telephone numbers.

If the client wishes the request to fail if the attributes are not supported, these attributes should be used in conjunction with the "strict" attribute ([section 3.4.4](#)) and the "Require:org.ietf.pint.strict" header ([section 3.5.4](#)).



It is not possible to standardise every possible internal telephone network parameter. PINT 1.0 attributes have been chosen for specification because they are common enough that many different PINT systems will want to use them, and therefore interoperability will be increased by having a single specification.

\*\_\*\_

Proprietary attribute "a=" lines, which by definition are not interoperable, may be nonetheless useful when it is necessary to transport some proprietary internal telephone network variables over the IP network, for example to identify the order in which service call legs should be made. These private attributes SHOULD BE, however, subject to the same IANA registration procedures mentioned in the SDP specification[3].

#### **3.4.3.1. The phone-context attribute**

An attribute is specified to enable "remote local dialling". This is the service that allows a PINT client to reach a number from far outside the area or network which can usually reach the number. It is useful when the sending or receiving address is only dialable within some local context, which may be remote to the origin of the PINT client.

For example, if Alice wanted to report a problem with her telephone, she might then dial a "network wide" customer care number; within the British Telecom network in the U.K., this is "152". Note that in this case she doesn't dial any trunk prefix - this is the whole dialable number. If dialled from another operator's network, it will not connect to British Telecom's Engineering Enquiries service; and dialling "+44 152" will not normally succeed. Such numbers are called Network-Specific Service Numbers.

Within the telephone network, the "local context" is provided by the physical connection between the subscriber's terminal and the central office. An analogous association between the PINT client and the PINT server which first receives the request may not exist, which is why it may be necessary to supply this missing "telephone network context".

This attribute is defined as follows:

```
a=phone-context: <phone-context-ident>
phone-context-ident      =  network-prefix | private-prefix

network-prefix           =  intl-network-prefix | local-network-prefix
intl-network-prefix      =  "+" 1*DIGIT
local-network-prefix     =  1*DIGIT
excldigandplus           =  (0x21-0x2d,0x2f,0x40-0x7d))
private-prefix           =  1*excldigandplus 0*uric
```

An intl-network-prefix and local-network-prefix MUST be a bona fide network prefix, and a network-prefix which is an intl-network-prefix MUST begin with an E.164 service code ("country code").

It is possible to register new private-prefixes with IANA so as to avoid confrontation. Prefixes which are not so registered MUST begin with an "X-" to indicate their private, non-standard nature.

Example 1:

```
c= TN RFC2543 1-800-765-4321
a=phone-context:+972
```

This describes an terminal whose address in Israel (E.164 country code 972) is 1-800-765-4321.

Example 2:

```
c= TN RFC2543 1-800-765-4321
a=phone-context:+1
```

This describes an terminal whose address in North America (E.164 country code 1) is 1-800-765-4321.

The two telephone terminals described by examples 1 and 2 are different; in fact they are located in different countries.

Example 3:

```
c=TN RFC2543 *123
a=phone-context:+97252
```

This describes a terminal whose address when dialled from within the network identified by +97252 is the string "\*123". It so happens that +97252 defines one of the Israeli cell phone providers, and \*123 reaches customer service when dialled within that network.

It may well be useful or necessary to use the SDP "strict" parameter in conjunction with the phone-context attribute.

Example 4:

```
c= TN RFC2543 321
a=phone-context:X-acme.com 23
```

This might describe the telephone terminal which is at extension 321 of PBX number 23 within the acme.com private PBX network. It is expected that such a description would be understandable by the acme.com PINT server which receives the request.

Note that if the PINT server receiving the request is inside the acme.com network, the same terminal might be addressable as follows:

```
c= TN RFC2543 7-23-321
```

(assuming that "7" is dialled in order to reach the private PBX network from within acme.com)

\*\_\*\_

Conroy & Petrack

[Page 18]

\*\_\*\_

### **3.4.3.2. Presentation Restriction attribute**

Although it has no affect on the transport of the service request through the IP Network, there may be a requirement to allow originators of a PINT service request to indicate whether or not they wish the "other party" in the resulting service call to be presented with their calling telephone number. It is a legal requirement in some jurisdictions that a caller be able to select whether or not their correspondent can find out the calling telephone number (using Automatic Number Indication or Caller Display or Calling Line Identity Presentation equipment). Thus an attribute may be needed to indicate the originator's preference.

Whether or not the default behaviour of the Executive System is to present or not present a party's telephone number to the correspondent GSTN terminal is not specified, and it is not mandatory in all territories for a PINT Gateway or Executive System to act on this attribute. It is, however, defined here for use where there are regulatory restrictions on GSTN operation, and in that case the Executive System can use it to honour the originator's request.

The attribute is specified as follows:

a=clir:<"true" | "false">

This boolean value is needed within the attribute as it may be that the GSTN address is, by default, set to NOT present its identity to correspondents, and the originator wants to do so for this particular call. It is in keeping with the aim of this attribute to allow the originator to specify what treatment they want for the requested service call.

The expected interpretation of this attribute is that, if it is present and the value is "false" then the Calling Line Identity CAN be presented to the correspondent terminal, whilst if it is "true" then it if possible the Executive System is requested to NOT present the Calling Line Identity.

\*\_\*\_

### **3.4.3.3. ITU-T CalledPartyAddress attributes parameters**

These attributes correspond to fields that appear within the ITU-T Q.763 "CalledPartyAddress" field (see [9] ,[section 3.9](#)). PINT clients use these attributes in order to specify further parameters relating to Terminal Addresses, in the case when the address indicates a "local-phone-number." In the case that the PINT request contains a reference to PSTN terminal, the parameters may be required to correctly identify the remote terminal.

\*\_\*\_

The general form of this attribute is "a=Q763-<token>((":" <value>) |"""). Three of the possible elements and their use in SDP attributes are described

here. Where other Q763 elements are to be used, then these should be the subject of further specification to define the syntax of the attribute mapping. It is recommended that any such specification maintains the value sets shown in Q.763.

The defined attributes are:

a=Q763-nature: - indicates the "nature of address indicator".  
The value MAY be any number between 0 and 127.  
The following values are specified:

- "1" a subscriber number
- "2" unknown
- "3" a nationally significant number
- "4" an internationally significant number

The values have been chosen to coincide with the values in Q.763. Note that other values are possible, according to national rules or future expansion of Q.763.

a=Q763-plan: - indicates the numbering plan to which the address belongs. The value MAY be any number between 0 and 7. The following values are specified:

- "1" Telephone numbering plan (ITU-T E.164)
- "3" Data numbering plan (ITU-T X.121)
- "4" Telex numbering plan (ITU-T F.69)

The values have been chosen to coincide with the values in Q.763. Other values are allowed, according to national rules or future expansion of Q.763.

a=Q763-INN - indicates if routing to the Internal Network Number is allowed. The value MUST be ONE of:

- "0" routing to internal network number allowed
- "1" routing to internal network number not allowed

The values have been chosen to coincide with the values in Q.763.

Note that it is possible to use a local-phone-number and indicate via attributes that the number is in fact an internationally significant [E.164](#) number. **Normally this SHOULD NOT be done; an internationally significant E.164 number is indicated by using a "global-phone-number" for the address string.**

#### [3.4.4.](#) The "strict" attribute

According to the SIP specification, a PINT server is allowed simply to ignore attribute parameters that it does not understand. In order to force a server to fail a request if it does not understand one of the PINT attributes, a client should use the "strict" attribute, specified as follows:

a=strict:<attribute-list>

where the attribute-list is a comma-separated list of attributes that appear elsewhere in the session description.



In order to process the request successfully the PINT server must BOTH understand the attribute AND ALSO fulfil the request implied by the presence of the attribute, for each attribute appearing within the attribute-list of the strict attribute.

If the server does not recognise the attribute listed, or cannot fulfil the request implied by the attribute, the PINT server MUST fail the request with (606 Not Acceptable), along with suitable Warning: lines explaining the problem.

The "strict" attribute may appear anywhere in the session description, and any number of times, but it MUST appear before the use of the attribute marked as strict.

Since the "strict" attribute is itself an attribute, the SIP specification allows a server which does not understand the strict attribute to ignore it. In order to ensure that the PINT server will comply with the "strict" attribute, a PINT client should include a Require: header with the tag "ietf.org.pint.strict" ([section 3.5.4](#))

\*\_\*\_

Note that the majority of the PINT extensions are "tagged" and these tags can be included in Strict/Require strictures. The exception is the use of phone numbers in SDP parts. However, these are defined as a new network and address type, so that a receiving SIP/SDP server should be able to detect whether or not it supports these forms. The default behaviour for any SDP recipient is that it will fail a PINT request if it does not recognise or support the TN and [RFC2543](#) or X-token network and address types, as without the contents being recognised no media session could be created. Thus a separate stricture is not required in this case.

### **[3.5](#). PINT profile of SIP 2.0**

PINT requests are SIP requests; Many of the specifications within this profile merely explain how to use existing SIP facilities for the purposes of PINT.

\*\_\*\_

#### **[3.5.1](#). Multi-part MIME (sending data along with SIP request)**

A PINT request can contain a payload which is multipart MIME. In this case the first part MUST contain an SDP session description, which includes at least one of the format specific attribute tags for "included content data" specified above in [section 3.4.3](#). All subsequent parts contain content data which is to be transferred to the requested Telephone Call Service. As discussed earlier, within a single PINT request, some of the data MAY be pointed to by a URI within the request, and some of the data MAY be included within the request.

\*\_\*\_

Where included data is carried within a PINT service request, the Content Type entity header of the enclosing SIP message MUST indicate this. To do so, the media type value within this entity header MUST be set to a value of "multipart/mixed".

The enclosed body parts SHOULD include the part-specific Content Type headers as appropriate ("application/sdp" for the first body part holding the session description, with an appropriate content type for each of the subsequent, "included data object" parts). This matches the standard syntax of MIME multipart messages as defined in [5].

For example, in a multipart message where the string "-----next-----" is the boundary, the first two parts might be as follows:

```
-----next-----
Content-Type: application/sdp
....
c= TN RFC2543 +1-201-406-4090
m= text 0 pager plain
a=fmtp:plain spr:17@mymessage.acme.com

-----next-----
Content-Type: text/plain
Content-ID: 17@mymessage.acme.com
```

This is the text that is to be paged to +1-201-406-4090

```
-----next-----
```

The ability to indicate different alternatives for the content to be transported is useful, even when the alternatives are included within the request. For example, a request to send a short message to a pager might include the message in Unicode [6] and an alternative version of the same content in text/plain, should the PINT server or telephone network not be able to process the unicode.

PINT clients should be extremely careful when sending included data within a PINT request. Such requests SHOULD be sent via TCP, to avoid fragmentation and to transmit the data reliably. It is possible that the PINT server is a proxy server that will replicate and fan out the request, which could be disastrous if the request contains a large amount of application data. PINT proxy servers should be careful not to create many copies of a request with large amounts of data in it. If the client does not know the actual location of the PINT gateway, and is using the SIP location services to find it, and the included data makes the PINT request likely to be transported in several IP datagrams, it is RECOMMENDED that the initial PINT request not include the data but instead hold a reference to it.

### **[3.5.2. Warning header](#)**

A PINT server MUST support the SIP "Warning:" header so that it can signal lack of support for individual PINT features. As an example, suppose the PINT request is to send a jpeg picture to a fax machine, but the server cannot retrieve and/or translate jpeg pictures from the Internet into fax transmissions. In such a case the server fails the request and includes a

Warning such as the following:

Warning: 4xx pint.acme.com Incompatible Format: jpeg

SIP servers which do not understand the PINT extensions at all are strongly encouraged to implement Warning: headers to indicate that PINT extensions are not understood.

Also, Warning: headers may be included within NOTIFY requests if it is necessary to notify the client about some condition concerning the invocation of the PINT service (see next).

\*\_\*\_

### **3.5.3. Mechanism to register interest in the disposition of a PINT service, and to receive indications on that disposition**

It can be very useful to find out whether or not a requested service has completed, and if so whether or not it was successful. This is especially true for PINT service, where the person requesting the service is not (necessarily) a party to it, and so may not have an easy way of finding out the disposition of that service. Equally, it may be useful to indicate when the service has changed state, for example when the service call has started.

Arranging a flexible system to provide extensive monitoring and control during a service is non-trivial (see [section 6.4](#) for some issues); PINT 1.0 uses a simple scheme that should nevertheless provide useful information. It is possible to expand the scheme in a "backwards compatible" manner, so if required it can be enhanced at a later date. Such enhancement would be expected to be the subject of a separate document.

The PINT 1.0 status registration and indication scheme uses two new methods; SUBSCRIBE and NOTIFY. These are used to allow a PINT Requesting entity to register and interest in (or subscribe to) the status of a service request, and for the gateway to return service indications. Both of these messages follow the same procedure as used for all the SIP requests other than INVITE; the recipient MUST acknowledge the request with a final response message, otherwise the request will be repeated.

#### **3.5.3.1. Opening a monitoring session with a SUBSCRIBE request**

The SUBSCRIBE request indicates that the a user wishes to receive information about the status of a session. The request identifies the session of interest by including the original session description along with the request. Since the request may come from a user other than the original requesting user, the request may constitute a new call, so the Call-ID cannot be used; instead the origin-field of the session description enclosed within the original service request is used. The request MUST NOT include whatever content was present in the original request other than the session description, and a server MUST ignore whatever content is included within a SUBSCRIBE request with the sole exception of the enclosed session description.

The request MUST contain a "Contact:" header, specifying the PINT User Agent Server to which such information should be sent. In addition, it SHOULD contain an Expires: header, which indicates for how long the PINT Requestor wishes to receive notification of the session status.

A value of 0 within the Expires: header indicates a desire to receive one single immediate response (i.e. the request expires immediately). We refer to the period of time before the expiration of the SUBSCRIBE request as the "subscription period".

A successful response to the SUBSCRIBE request includes the session description, according to the Gateway. Normally this will be identical to the last cached response that the Gateway returned to any request concerning the same SDP global session id (see [3], [section 6](#), o= field). The t= line may be altered to indicate the actual start or stop time, however. The Gateway might add an i= line to the session description to indicate such information as how many fax pages were sent. The Gateway SHOULD include an Expires: header indicating how long it is willing to maintain the monitoring session. If this is unacceptable to the PINT Requestor, then it can close the session by sending an immediate BYE (see 3.5.3.3).

In principle, a user might send a SUBSCRIBE request after the telephone network service has completed. This allows, for example, checking up "the morning after" to see if the fax was successfully transmitted. However, a PINT gateway is only required to keep state about a call for as long as it indicated previously in a Expires: header within the response to the original INVITE message that triggered the service session, within the response to the SUBSCRIBE message, or within its BYE message (but see [section 3.5.8](#), point 3).

If the Server no longer has a record of the session to which a Requestor has SUBSCRIBED, it returns "606 Not Acceptable", along with the appropriate Warning: header indicating that the SDP session ID is no longer valid. This means that a requesting Client that knows that it will want information about the status of a session after the session terminates SHOULD send a SUBSCRIBE request before the session terminates.

#### **[3.5.3.2](#). Sending Status Indications with a NOTIFY request**

During the subscription period, the Gateway may, from time to time, send a spontaneous NOTIFY request to the entity indicated in the Contact: header of the "opening" SUBSCRIBE request. Normally this will happen as a result of any change in the status of the service session for which the Requestor has subscribed.

The receiving user agent server MUST acknowledge this by returning a final response (normally a "200 OK"). In this version of the PINT profile, the Gateway is not required to support redirects (3xx codes), and so may treat them as a failure. Thus, if the response code class is above 2xx then this may be treated by the Gateway as a failure of the monitoring session, and in that situation it will immediately attempt to close the session (see next).

The NOTIFY request contains the modified session description. For example, the Gateway may be able to indicate a more accurate start or stop time. The

Gateway may include a Warning: header to describe some problem with the invocation of the service, and may indicate within an i= line some information about the telephone network session itself.



Example:

```
NOTIFY sip:petrack@pager.com SIP/2.0
To:sip:petrack@pager.com
From:sip:R2F.pint.com@service.com
Warning: xxx fax aborted, will try every 10 minutes for the next
    hour.
Content-Type:application/sdp

c=...
i=3 pages of 5 sent
t=...
```

#### **3.5.3.3. Closing a monitoring session with a BYE request**

At some point, either the Client's representative User Agent Server or the gateway may decide to terminate the monitoring session. This is achieved by sending a BYE request to the correspondent server. Such a request indicates that the sender intends to close the monitoring session immediately, and, on receipt of the final response from the receiving server, the session is deemed over.

If the Gateway initiates closure of the monitoring session by sending a BYE message, it MUST include an Expires: header showing for how much longer after this monitoring session is closed it is willing to store information on the service session. This acts as a minimum time within which the Client can send a new SUBSCRIBE message to open another monitoring session; after the time indicated in the Expires: header the Gateway is free to dispose of any record of the service session, so that subsequent SUBSCRIBE requests can be rejected with a "606" response.

If the subscription period specified by the Client has expired, then the Gateway may send an immediate BYE request to the Client's representative User Agent Server. This ensures that the monitoring session always completes with a BYE/response exchange, and that the representative User Agent Server can avoid maintaining state in certain circumstances.

#### **3.5.3.4. Timing of SUBSCRIBE requests**

As it relies on the Gateway having a copy of the INVITED session description, the SUBSCRIBE message is limited in when it can be issued. The Gateway must have received the service request to which this monitoring session is to be associated, which from the Client's perspective happens as soon as the Gateway has sent a 1xx response back to it.

However, once this has been done, there is no reason why the Client should not send a monitoring request. It does not have to wait for the final response from the Gateway, and it can certainly send the SUBSCRIBE request before sending the ACK for the Service request final response. Beyond this

point, the Client is free to send a SUBSCRIBE request when it decides, unless the Gateway's final response to the initial service request indicated a short Expires: time.

However, there are good reasons (see 6.4) why it may be appropriate to start a monitoring session immediately before the service is confirmed by the PINT Client sending an ACK. At this point the Gateway will have decided whether or not it can handle the service request, but will not have passed the request on to the Executive System. It is therefore in a good position to ask the Executive System to enable monitoring when it sends the service request onwards. In practical implementations, it is likely that more information on transient service status will be available if this is indicated as being important BEFORE or AS the service execution phase starts; once execution has begun the level of information that can be returned may be difficult to change.

Thus, whilst it is free to send a SUBSCRIBE request at any point after receiving an Interim response from the Gateway to its service request, it is recommended that the Client should send such a monitoring request immediately prior to sending an ACK message confirming the service if it is interested in transient service status messages.

#### **[3.5.4.](#) The "Require:" header for PINT**

PINT clients use the Require: header to signal to the PINT server that a certain PINT extension of SIP is required. PINT 1.0 defines two strings that can go into the Require header:

```
org.ietf.sip.subscribe -- the server can fulfill SUBSCRIBE requests
                        (section 3.5.3)

org.ietf.sdp.strict    -- the PINT server (or the SDP parser associated
                        to it) understands the "strict" attribute
                        defined in (section 3.4.4)
```

Example:

```
Require:org.ietf.sip.subscribe,org.ietf.sdp.strict
```

A client should only include a Require: header where it truly requires the server to fail the request if the option is not supported.

#### **[3.5.5.](#) PINT URLs within PINT requests**

Normally the hostnames and domain names that appear in the PINT URLs are the internal affair of each individual PINT system. A client uses the appropriate SDP payload to indicate the particular service it wishes to invoke; it is not necessary to use a particular URL to identify the service.

A PINT URL is used in two different ways within PINT requests: within the Request-URI, and within the To: and From: headers. Use within the Request-URI requires clarification in order to ensure smooth interworking with the Telephone Network serviced by the PINT infrastructure:

#### **3.5.5.1. PINT URLS within Request-URIs**

There are some occasions when it may be useful, however, to indicate service information within the URL in a standardized way:

- a. it may not be possible to use SDP information to route the request if it is encrypted;
- b. it allows implementation which make use of I.N. "service indicators";
- c. It enables multiple competing PINT gateways to REGISTER with a single "broker" server (proxy or redirect) (see [section 6.3](#))

For these reasons, the following conventions for URLs are to be used in PINT requests:

**1. The user portion of a sip URL indicates the service to be requested. At present the following services are defined:**

R2C (for Request-to-Call)  
R2F (for Request-to-Fax)  
R2HC (for Request-to-Hear-Content)

The user portions "R2C", "R2F", and "R2HC" are reserved for the PINT milestone services. Other user portions MUST be used in case the requested service is not one of the Milestone services. See [section 3.5.8](#) for some related considerations concerning registrations by competing PINT systems to a single PINT proxy server acting as a service broker.

**2. The host portion of a sip URL contains the domain name of the PINT service provider.**

**3. A new url-parameter is defined to be "tsp" (for "telephone service provider"). This can be used to indicate the actual telephone network provider to be used to fulfil the PINT request.**

Thus, for example:-

```
INVITE sip:R2C@pint.pintservice.com SIP/2.0
```

```
INVITE sip:R2F@pint.pintservice.com;tsp=telco.com SIP/2.0
```

```
INVITE sip:R2HC@pint.mycom.com;tsp=pbx23.mycom.com SIP/2.0
```

```
INVITE sip:13@pint.telco.com SIP/2.0
```

### **[3.5.6. Telephony Network Parameters within PINT URLs](#)**

Any legal SIP URL can appear as a PINT URL within the Request-URI or To: header of a PINT request. But if the address is a telephone address, we indicated in [section 3.4.3](#) that it may be necessary to include more information in order correctly to identify the remote telephone terminal or service. PINT clients MAY include these attribute tags within PINT URLs if they are necessary or a useful complement to the telephone number within the SIP URL. These attribute tags MUST be included as URL parameters as defined in [\[2\]](#) (i.e. in the semi-colon separated manner).

The following is an example of a PINT URL which contains extra attribute tags:

`sip:5228808@pint.br.com;user=phone;strict=phone-context;phone-context=+972`

As we noted in [section 3.4.3](#), these extra attribute parameters will not normally be needed within a URL, because there is a great deal of context available to help the server interpret the phone number correctly. In particular, there is the SIP URL within the To: header, and there is also the Request-URI. In most cases this provides sufficient information for the telephone network.

The SDP attributes defined in [section 3](#) above will normally only be used when they are needed to supply necessary context to identify a telephone terminal.

In this example, the terminal with this SIP URL is the same as the one whose connection is defined by the following part of an SDP description:

```
c= TN RFC2543 +97252288088
```

### **[3.5.7. REGISTER requests within PINT](#)**

\* \_ \* \_

A PINT gateway is a SIP user agent server. User agent servers use the REGISTER request to tell a proxy or redirect server that it is available to "receive calls" (i.e. to service requests). Thus a PINT gateway registers with a proxy or redirect server the service that is accessible via itself, while in SIP, a user registering his/her presence at a particular SIP Server.

There may be competing PINT servers which can offer the same PINT service trying to register at a single PINT server. The PINT server might act as a "broker" among the various PINT gateways which can fulfil a request. A format for PINT URLs was specified in [section 3.5.5](#) that enables independent PINT systems to REGISTER an offer to provide the same service. The registrar can apply its own mechanisms and policies to decide what to respond to INVITES from clients seeking service. (See [section 6.3](#) for some possible deployment options) There is no change between SIP and PINT REGISTER semantics or syntax.

Of course, the information in the PINT URLs within the REGISTER request may not be sufficient to completely define the service that a gateway can offer. The use of SIP and SDP within PINT REGISTER requests to enable a gateway to specify in more detail the services it can offer is the subject of future study.

### **[3.5.8. BYE Requests in PINT](#)**

The semantics of BYE requests within PINT requires some extra precision. One issue concerns conferences which "cannot be left", and the other concerns keeping call state after the BYE.

The BYE request [2] is normally used to indicate that the originating entity no longer wishes to be involved in the specified call. The request

terminates the call and the media session. Applying this model to PINT, if a PINT client makes a request that results in invocation of a telephone call from A to B, a BYE request from the client, if accepted, should result in a termination of the phone call.



A question arises when the telephone call might not have even started at the time when the BYE request is received. For example, if a request to fax is sent with a t= line indicating that the fax is to be sent tomorrow at 04:00AM, the requestor might wish to cancel the request before the specified time. Even if the call has started, it may not be possible to terminate the media session on the telephone system side. For example, the fax call may be in progress when the BYE arrives, and perhaps it is just not possible to cancel the fax in session. Another possibility is that the entire telephone-side service might be completed before the BYE is received. In the above Request-to-Fax example, the BYE might be sent the following morning, and the entire fax has been sent before the BYE was received. It is too late to send the BYE.

In the case where the telephone network cannot terminate the call, the server MUST return a "606 Not Acceptable" response to the BYE, along with a session description which indicates the telephone network session which is causing the problem.

Therefore, in PINT, a "Not Acceptable" response can be returned to INVITE or BYE requests. It indicates that some aspect of the session description makes the request unacceptable.

By allowing a server to return a "Not Acceptable" response to BYE requests, we are not changing its semantics, just enlarging its use.

A combination of Warning: headers and i= lines within the session description can be used to indicate the precise nature of the problem.

Example:

```
SIP/2.0 606 Not Acceptable
From: ...
To: .....
.....
Warning: 399 pint.mycom.com Fax in progress, service cannot be aborted
Content-Type: application/sdp
Content-Length: 50

v=0
i=3 of 5 pages sent OK
c=TN RFC2543 +12014064090
m=image 0 fax tif
a=fmtp:tif uri:http://tifsRus.com/yyyyyy.tif
```

Note that the server may return an updated session description within a successful response to a BYE as well. This can be used, for example, to indicate the actual start times and stop times of the telephone session, or how many pages were sent in the fax transmission.

The second issue concerns how long must a server keep call state after

receiving a BYE. A question arises because other clients might still wish to send queries about the telephone network session which was the subject of the PINT transaction. Ordinary SIP semantics have three important implications for this situation:

**1. A BYE indicates that the requesting client will clear out all call state** as soon as it receives a successful response. A client SHOULD NOT send a SUBSCRIBE request after it has sent a BYE.

**2. A server may return an Expires: header within a successful response to a** BYE request. This indicates for how long the server will retain session state about the telephone network session. At any point during this time, a client may send a SUBSCRIBE request to the server to learn about the session state.

**3. When engaged in a SUBSCRIBE/NOTIFY monitoring session, PINT servers which** send BYE to a URL listed in the Contact: header of a client request need to be especially careful not to clear session state until after the successful response to the BYE is received. For example, it may be that the requesting client host is turned off when the telephone service is executed (and is therefore not available at the location previously specified in the Contact: attribute) to receive the PINT server's BYE.

#### **4. Examples of PINT Requests and Responses**

**4.1. A request to a call centre from an anonymous user to receive a phone** call.

```
C->S: INVITE sip:R2C@pint.mailorder.com SIP/2.0
      Via: SIP/2.0/UDP 169.130.12.5
      From: sip:anon-1827631872@chinet.net
      To: sip:+1-201-456-7890@iron.org;user=phone
      Call-ID: 19971205T234505.56.78@chinet.net
      Subject: Sale on Ironing Boards
      Content-type: application/sdp
      Content-Length: ...
```

```
v=0
o=- 53655765 2353687637 IN IP4 128.3.4.5
i=Ironing Board Promotion
c= TN RFC2543 +1-201-406-4090
m=audio 0 voice
```

In this example, the context which is required to interpret the To: address as a telephone number is not given explicitly; it is implicitly known to the R2C@pint.mailorder.com server. But the telephone of the person who wishes to receive the call is explicitly identified as an internationally significant [E.164](#) number within the North American numbering plan (because of the "+1" within the c= line).

**4.2. A request from a non anonymous customer (John Jones) to receive a phone**

call from a particular sales agent (Mary James) concerning the defective ironing board that was purchased

```
C->S: INVITE sip:marketing@pint.mailorder.com SIP/2.0
Via: SIP/2.0/UDP 169.130.12.5
From: sip:john.jones.3@chinet.net
To: sip:mary.james@mailorder.com
Call-ID: 19971205T234505.56.79@chinet.net
Subject: Defective Ironing Board - want refund
Content-type: application/sdp
Content-Length: ...

v=0
o=- 53655765 2353687637 IN IP4 128.3.4.5
c= TN RFC2543 +1-201-406-4090
m=audio 0 voice
```

The To: line might include the Mary James's phone number instead of a email-like address. An implementation which cannot accept email-like URLs in the "To:" header must fail the request with a 606 Not Acceptable. Note that the sending PINT client "knows" that the PINT Gateway contacted with the "marketing@pint.mailorder.com" Request-URI is capable of processing the client request as expected. (see 3.5.5.1 for a discussion on this).

Note also that such a telephone call service could be implemented on the phone side with different details. For example, it might be that first the agent's phone rings, and then the customer's phone rings, or it might be that first the customer's phone rings and he hears silly music until the agent comes on line. If necessary, such service parameter details might be indicated in "a=" attribute lines within the session description. The specification of such attribute lines for service consistency is beyond the scope of the PINT 1.0 specifications.

#### **4.3. A request from the same user to get a fax back on how to assemble the Ironing Board**

```
C->S: INVITE sip:faxback@pint.mailorder.com SIP/2.0
Via: SIP/2.0/UDP 169.130.12.5
From: sip:john.jones.3@chinet.net
To: sip:1-800-FAXBACK@steam.edu;user=phone;phone-context=+1
Call-ID: 19971205T234505.66.79@chinet.net
Content-type: application/sdp
Content-Length: ...

v=0
o=- 53655768 2353687637 IN IP4 128.3.4.5
c= TN RFC2543 1-201-406-4091
m=application 0 fax URI
a=fmtp:URI uri:http://localstore/Products/IroningBoards/2344.html
```

In this example, the fax to be sent is stored on some local server (localstore), whose name may be only resolvable, or which may only be

reachable, from within the IP network on which the PINT server sits. The phone number to be dialled is a "local phone number" as well. There is no "phone-context" attribute, so the context (in this case, for which nation the number is "nationally significant") must be supplied by the faxback@pint.mailorder.com PINT server.

If the server which receives does not understand the number, it should fail the request with and include a "Network Address Not Understood" warning. Note that no "strict" attribute was used here, since it is very likely that the request can be serviced even by a server which does not support the "strict" attribute.

#### **4.4. A request from same user to have that same information read out over the phone**

```
C->S: INVITE sip:faxback@pint.mailorder.com SIP/2.0
Via: SIP/2.0/UDP 169.130.12.5
From: john.jones.3@chinet.net
To: sip:1-800-FAXBACK@steam.edu;user=phone;phone-context=+1
Call-ID: 19971205T234505.66.79@chinet.net
Content-type: application/sdp
Content-Length: ...

v=0
o=- 53655768 2353687637 IN IP4 128.3.4.5
c= TN RFC2543 +1-201-406-4090
m=application 0 voice URI
a=fmtp:URI uri:http://localstore/Products/IroningBoards/2344.html
```

#### **4.5. A request to send an included text page to a friend's pager.**

In this example, the text to be paged out is included in the request.

```
C->S: INVITE sip:R2F@pint.pager.com SIP/2.0
Via: SIP/2.0/UDP 169.130.12.5
From: scott.petrack@chinet.net
To: sip:R2F@pint.pager.com
Call-ID: 19974505.66.79@chinet.net
Content-Type: multipart/mixed; boundary=--next

----next
Content-Type: application/sdp
Content-Length: ...
v=0
o=- 53655768 2353687637 IN IP4 128.3.4.5
c= TN RFC2543 +972-9-956-1867
m=text 0 pager plain
a=fmtp:plain spr:2@53655768

----next
Content-Type: text/plain
Content-ID: 2@53655768
Content-Length:...
```

Hi Joe! Please call me asap at 555-1234.

----next--

Conroy & Petrack

[Page 32]



#### **4.6. A request to send an image as a fax to phone number +972-9-956-1867**

```
C->S: INVITE sip:faxserver@pint.vocaltec.com SIP/2.0
      Via: SIP/2.0/UDP 169.130.12.5
      From: scott.petrack@chinet.net
      To: sip:faxserver@pint.vocaltec.com
      Call-ID: 19971205T234505.66.79@chinet.net
      Content-type: application/sdp
      Content-Length: ...

      v=0
      o=- 53655768 2353687637 IN IP4 128.3.4.5
      c= TN RFC2543 +972-9-956-1867
      m=image 0 fax tif gif
      a=fmtp:tif uri:http://petrack/images/tif/picture1.tif
      a=fmtp:gif uri:http://petrack/images/gif/picture1.gif
```

The image is available as tif or as jpeg. The tif is the preferred format. Note that the http server where the pictures reside is local, and the PINT server is also local (because it can resolve machine name "petrack")

#### **4.7. A request to read out over the phone two pieces of content in sequence.**

First some included text is read out by text-to-speech. Then some text which is stored at some URI on the internet is read out.

```
C->S: INVITE sip:R2HC@pint.acme.com SIP/2.0
      Via: SIP/2.0/UDP 169.130.12.5
      From: scott.petrack@chinet.net
      To: sip:R2HC@pint.acme.com
      Call-ID: 19974505.66.79@chinet.net
      Content-Type: multipart/mixed; boundary=next

      --next
      Content-Type: application/sdp
      Content-Length: ...
      v=0
      o=- 53655768 2353687637 IN IP4 128.3.4.5
      c= TN RFC2543 +1-201-406-4091
      m=text 0 voice plain
      a=fmtp:plain spr:2@53655768
      m=text 0 voice plain
      a=fmtp:plain uri:http://www.mymachine.com/texts/mytext.doc

      --next
      Content-Type: text/plain
      Content-ID: 2@53655768
      Content-Length: ...
```

Hello!! I am about to read out to you some text stored on my

Web Site. Let me know how it sounds over acme.com's new speech  
synthesis server.  
--next--

\* \_ \* \_

#### **4.8. Request for the prices for ISDN to be sent to my fax machine**

```
INVITE sip:R2FB@pint.bt.co.uk SIP/2.0
Via: SIP/2.0/UDP 169.130.12.5
To:0345-12347-01;user=phone;phone-context=+44
From: sip:hank.wangford@newts.demon.co.uk
Call-ID: 19981204T201505.56.78@demon.co.uk
Subject: Price List
Content-type: application/sdp
Content-Length: 116
```

```
v=0
o=-53655765 2353687637 IN IP4 128.3.4.5
i=ISDN Price List
c=TN RFC2543 +44-1794-8331010
m=text 0 fax
```

#### **4.9. Request for a callback**

```
INVITE sip:R2C@pint.bt.co.uk SIP/2.0
Via: SIP/2.0/UDP 169.130.12.5
To:0345-123456;user=phone;phone-context=+44
From: sip:hank.wangford@newts.demon.co.uk
Call-ID: 19981204T234505.56.78@demon.co.uk
Subject: It costs HOW much?
Content-type: application/sdp
Content-Length: 123
```

```
v=0
o=- 53655765 2353687637 IN IP4 128.3.4.5
i=ISDN pre-sales query
c= TN RFC2543 +44-1794-8331013
m=audio 0 voice
```

#### **4.10. Sending a set of information in response to an enquiry**

```
INVITE sip:R2FB@pint.bt.co.uk SIP/2.0
Via: SIP/2.0/UDP 169.130.12.5
To:0345-12347-01;user=phone;phone-context=+44
From: sip:colin.masterton@sales.hh.bt.co.uk
Call-ID: 19981205T234505.56.78@sales.hh.bt.co.uk
Subject: Price Info, as requested
Content-Type: multipart/mixed; boundary=next
```

```
--next
Content-type: application/sdp
Content-Length: 211
v=0
o=-53655765 2353687637 IN IP4 128.3.4.5
```

i=Your documents  
c=TN [RFC2543](#) +44-1794-8331010  
m=application 0 fax octet-stream  
a=fmt:octet-stream uri:http://www.bt.co.uk/imgs/pipr.gif opr:  
spr:2@53655768

```
--next
Content-Type: text/plain
Content-ID: 2@53655768
Content-Length: 352
```

Dear Sir,

Thank you for your enquiry. I have checked availability in your area, and we can provide service to your cottage. I enclose a quote for the costs of installation, together with the ongoing rental costs for the line. If you want to proceed with this, please quote job reference isdn/hh/123.45.9901.

Yours Sincerely,  
Colin Masterton  
--next--

Note that the "implicit" faxback content is given by an EMPTY opaque reference in the middle of the fntp line in this example.

#### 4.11.Sportsline "headlines" message sent to your phone/pager/fax (i) phone

```
INVITE sip:R2FB@pint.wwos.skynet.com SIP/2.0
Via: SIP/2.0/UDP 169.130.12.5
To:1-900-123-456-7;user=phone;phone-context=+1
From: sip:fred.football.fan@skynet.com
Call-ID: 19971205T234505.56.78@chinet.net
Subject: Wonderful World Of Sports NFL Final Scores
Content-type: application/sdp
Content-Length: 174
```

```
v=0
o=- 53655765 2353687637 IN IP4 128.3.4.5
i=NFL Final Scores
c= TN RFC2543 +44-1794-8331013
m=audio 0 voice x-pay
a=fntp:x-pay opr:mci.com/md5:<crypto signature>
```

#### (ii) fax

```
INVITE sip:R2FB@pint.wwos.skynet.com SIP/2.0
Via: SIP/2.0/UDP 169.130.12.5
To:1-900-123-456-7;user=phone;phone-context=+1
From: sip:fred.football.fan@skynet.com
Call-ID: 19971205T234505.56.78@chinet.net
Subject: Wonderful World Of Sports NFL Final Scores
Content-type: application/sdp
Content-Length: 173
```

```
v=0
```

o=- 53655765 2353687637 IN IP4 128.3.4.5  
i=NFL Final Scores  
c= TN [RFC2543](#) +44-1794-8331010  
m=text 0 fax x-pay  
a=fmtp:x-pay opr:mci.com/md5:<crypto signature>

(iii) pager  
INVITE sip:R2FB@pint.wwos.skynet.com SIP/2.0  
Via: SIP/2.0/UDP 169.130.12.5  
To:1-900-123-456-7;user=phone;phone-context=+1  
From: sip:fred.football.fan@skynet.com  
Call-ID: 19971205T234505.56.78@chinet.net  
Subject: Wonderful World Of Sports NFL Final Scores  
Content-type: application/sdp  
Content-Length: 173  
  
v=0  
o=- 53655765 2353687637 IN IP4 128.3.4.5  
i=NFL Final Scores  
c= TN [RFC2543](#) +44-1794-8331015  
m=text 0 pager x-pay  
a=fmtp:x-pay opr:mci.com/md5:<crypto signature>

Note that these are all VERY similar.

#### 4.12. Automatically giving someone a fax copy of your phone bill

```
INVITE sip:BillsRUs@pint.sprint.com SIP/2.0
Via: SIP/2.0/UDP 169.130.12.5
To:+1-555-888-1234;user=phone
From: sip:agent.mulder@fbi.gov
Call-ID: 19991231T234505.56.78@fbi.gov
Subject: Itemised Bill for January 98
Content-type: application/sdp
Content-Length: 117

v=0
o=-53655765 2353687637 IN IP4 128.3.4.5
i=Joe Pendleton's Phone Bill
c=TN RFC2543 +1-202-833-1010
m=text 0 fax x-files-id
a=fmtp:x-files-id opr:fbi.gov/jdcn-123@45:3des;base64,<signature>
```

Note: in this case the opaque reference is data used to convince the Executive System that the requester has the right to get this information, rather than selecting the particular content (the A party in the To: field of the SIP "wrapper" does that alone).

\_ \_ \*

## 5. Security Considerations

### 5.1. Basic Principles for PINT Use

A PINT Gateway, and the Executive System(s) with which that Gateway is

associated, exist to provide service to PINT Requestors. The aim of the PINT protocol is to pass requests from those users on to a PINT Gateway so an associated Executive System can service those requests.



#### **5.1.1. Responsibility for service requests**

The facility of making a PSTN-based call to numbers specified in the PINT request, however, comes with some risks. The request can specify an incorrect telephone or fax number. It is also possible that the Requestor has purposely entered the telephone number of an innocent third party. Finally, the request may have been intercepted on its way through any intervening PINT or SIP infrastructure, and the request may have been altered.

In any of these cases, the result may be that a call is placed incorrectly. Where there is intent or negligence, this may be construed as harassment of the person incorrectly receiving the call. Whilst the regulatory framework for misuse of Internet connections differs throughout the world and is not always mature, the rules under which PSTN calls are made are much more settled. Someone may be liable for mistaken or incorrect calls.

Understandably, the PSTN Operators would prefer that this someone is not them, so they will need to ensure that any PINT Gateway and Executive System combination does not generate incorrect calls through some error in the Gateway or Executive system implementation or PSTN-internal communications fault. Equally, it is important that the Operator can show that they act only on requests that they have good reason to believe are correct. This means that the Gateway must not pass on requests unless it is sure that they have not been corrupted in transit from the Requestor.

If a request can be shown to have come from a particular Requestor and to have been acted on in good faith by the PINT service provider, then responsibility for making requests may well fall to the Requestor rather than the Operator who executed these requests.

Finally, it may be important for the PINT service provider to be able to show that they act only on requests for which they have some degree of assurance of origin. In many jurisdictions, it is a requirement on PSTN Operators that they place calls only when they can, if required, identify the parties to the call (such as when required to carry out a Malicious Call Trace). It is at least likely that the provider of PINT services will have a similar responsibility placed on them.

It follows that the PINT service provider may require that the identity of the Requestor be confirmed. If such confirmation is not available, then they may be forced (or choose) not to provide service. This identification MAY be in the form of a confirmed Internet Address for the Requestor, but is more likely to require personal authentication of the Requesting User.

#### **5.1.2. Authority to make requests**

Where PSTN resources are used to provide a PINT service, it is at least possible that someone will have to pay for it. This person may not be the Requestor, as, for example, in the case of existing PSTN split-charging services like free phone in which the recipient of a call rather than the

originator is responsible for the call cost. This is not, of course, the only possibility; for example, PINT service may be provided on a subscription basis, and there are a number of other models. However, whichever model is chosen, there may be a requirement that the authority of a Requestor to make a PINT request is confirmed.

If such confirmation is not available, then, again, the PINT Gateway and associated Executive System may choose not to provide service.

### **5.1.3. Privacy**

Even if the identity of the Requesting User and the Authority under which they make their request is known, there remains the possibility that the request is either corrupted, maliciously altered, or even replaced whilst in transit between the Requestor and the PINT Gateway.

Similarly, information on the Authority under which a request is made may well be carried within that request. This can be sensitive information, as an eavesdropper might steal this and use it within their own requests. Such authority should be treated as if it were financial information (such as a credit card number or PIN).

The data authorizing a Requesting User to make a PINT request should be known only to them and the service provider. However, this information may be in a form that does not match the schemes normally used within the Internet. For example, X.509 certificates[15] are commonly used for secured transactions on the Internet both in the IP Security Architecture[13] and in the TLS protocol[14], but the PSTN provider may only store an account code and PIN (i.e. a fixed string of numbers).

A Requesting User has a reasonable expectation that their requests for service are confidential. For some PINT services, no content data is carried over the Internet; however, the telephone or fax numbers of the parties to a resulting service calls may be considered sensitive.

As a result, it may be that the Requestor (and their PINT service provider) will require that any request that is sent across the Internet be protected against eavesdroppers; in short, the requests may need to be encrypted.

### **5.2. Security mechanisms and implications on PINT service**

PINT is a profile on SIP[2] and SDP[3], and will use the security procedures described in SIP. There are several implications of this, and these are covered here.

For several of the PINT services, the To: header field of SIP is used to identify one of the parties to the resulting service call. The PINT Request-To-Call service is an example. As mentioned in the SIP specification, this field is used to route SIP messages through an infrastructure of Redirect and Proxy server between the corresponding User Agent Servers, and so cannot be encrypted. This means that, although the majority of personal or sensitive data can be protected whilst in transit, the telephone (or fax) number of one of the parties to a PINT service call cannot, and will be "visible" to any interception.

Another aspect of this is that, even if the Requesting User does not consider the telephone or fax numbers of the parties to a PINT service to be private, those parties might. Where PINT servers have reason to believe this

might be the case they SHOULD encrypt the request, even if the Requestor has not done so. This could happen, for example, if a Requesting User within a company placed a PINT request and this was carried via the company's Intranet to their Proxy/firewall and thence over the Internet to a PINT Gateway at another location.

If a request carries data that can be reused by an eavesdropper either to "spoof" the Requestor or to obtain PINT service by inserting the Requestor's authorization token into an eavesdropper's request, then this data SHOULD be protected. This is particularly important if the authorization token consists of static text (such as an account code and/or PIN).

One approach is to encrypt the whole of the request, using the methods described in the SIP specification. As an alternative, it may be acceptable for the authorization token to be held as an opaque reference (see [section 3.4.2.3](#) and examples 4.11 and 4.12), using some proprietary scheme agreed between the Requestor and the PINT service provider, as long as this is resistant to interception and re-use. Also, it may be that the authorization token cannot be used outside of a request cryptographically signed by the Requestor; if so then this requirement can be relaxed, as in this case the token cannot be re-used by another. However, unless both the Requestor and the Gateway are assured that this is the case, any authorization token SHOULD be treated as sensitive, and so SHOULD be encrypted.

A PINT request may contain data within the SDP message body that can be used more efficiently to route that request. For example, it may be that one Gateway and Executive System combination cannot handle a request that specifies one of the parties as a pager, whilst another can. Both gateways may have registered with a PINT/SIP Registrar, and this information may be available to intervening PINT/SIP Proxies. However, if the request message body is encrypted, then the request cannot be decoded at the Proxy server, and so Gateway selection based on contained information cannot be made there.

The result is that the Proxy may deliver the request to a Gateway that cannot handle it; the implication is that a PINT/SIP Proxy SHOULD consider its choice for the appropriate Gateway subject to correction, and, on receiving a 501 or 415 rejection from the first gateway chosen, try another. In this way, the request will succeed if at all possible, even though it may be delayed (and tie up resources in the inappropriate Gateways).

This opens up an interesting avenue for Denial Of Service; sending a valid request that appears to be suitable for a number of different Gateways, and simply occupying those Gateways in decrypting a message requesting a service they cannot provide. As mentioned in [section 3.5.5.1](#), the choice of service name to be passed in the userinfo portion of the SIP Request-URI is flexible, and it is RECOMMENDED that names be chosen that allow a Proxy to select an appropriate Gateway without having to examine the SDP body part. Thus, in the example given here, the service might be called "Request-To-Page" or "R2P" rather than the more general use of "R2F", if there is a possibility of the SDP body part being protected during transit.

A variation on this attack is to provide a request that is syntactically invalid but that, due to the encryption, cannot be detected without

expending resources in decoding it. The effects of this form of attack can be minimised in the same way as for any SIP Invitation; the Proxy should detect the 400 rejection returned from the initial Gateway, and not pass the request onwards to another.

[<draft-ietf-pint-profile-04.txt>](#) PINT Profile of SIP and SDP March, 1999  
Finally, note that the Requesting User may not have a prior relationship with a PINT Gateway, whilst still having a prior relationship with the Operator of the Executive System that fulfils their request. Thus there may be two levels of authentication and authorization; one carried out using the techniques described in the SIP specification (for use between the Requestor and the Gateway), with another being used between the Requesting User or the Requestor and the Executive System.

For example, the Requesting User may have an account with the PINT service provider. That provider might require that requests include this identity before they will be convinced to provide service. In addition, to counter attacks on the request whilst it is in transit across the Internet, the Gateway may require a separate X.509-based certification of the request. These are two separate procedures, and data needed for the former would normally be expected to be held in opaque references inside the SDP body part of the request.

The detailed operation of this mechanism is, by definition, outside the scope of an Internet Protocol, and so must be considered a private matter. However, one approach to indicating to the Requestor that such "second level" authentication or authorization is required by their Service Provider would be to ask for this inside the textual description carried with a 401 response returned from the PINT Gateway.

### **5.3. Registration Procedures**

Any number of PINT Gateways may register to provide the same service; this is indicated by the Gateways specifying the same "userinfo" part in the To: header field of the REGISTER request. Whilst such ambiguity would be unlikely to occur with the scenarios covered by "core" SIP, it is very likely for PINT; there could be any number of service providers all willing to support a "Request-To-Fax" service, for example. Unless a request specifies the Gateway name explicitly, an intervening Proxy that acts on a registration database to which several Gateways have all registered is in a position to select from the registrands using whatever algorithm it chooses; in principle, any Gateway that has registered as "R2F" would be appropriate.

However, this opens up an avenue for attack, and this is one in which a "rogue" Gateway operator stands to make a significant gain. The standard SIP procedure for releasing a registration is to send a REGISTER request with a Contact field having a wildcard value and an expires parameter with a value of 0. It is important that a PINT Registrar uses authentication of the Registrand, as otherwise one PINT service provider would be able to "spoof" another and remove their registration. As this would stop the Proxy passing any requests to that provider, this would both increase requests being sent to the rogue and stop requests going to the victim.

Another variant on this attack would be to register a Gateway using a name that has been registered by another provider; thus a rogue Operator might register its Gateway as "R2C@pint.att.com", thereby hijacking requests.


The solution is the same; all registrations by PINT Gateways SHOULD be authenticated; this includes both new or apparent replacement registrations, and any cancellation of current registrations. This recommendation is also made in the SIP specification, but for the correct operation of PINT, it is very important indeed.



## **6. Deployment considerations and the Relationship PINT to I.N. (Informative)**


### **6.1. Web Front End to PINT Infrastructure**

It is possible that some other protocol may be used to communicate a Requesting User's requirements. Due to the high numbers of available Web Browsers and servers it seems likely that some PINT systems will use HTML/HTTP as a "front end". In this scenario, HTTP will be used over a connection from the Requesting User's Web Browser (WC) to an Intermediate Web Server (WS). This will be closely associated with a PINT Client (using some unspecified mechanism to transfer the data from the Web Server to the PINT Client). The PINT Client will represent the Requesting User to the PINT Server, and thus to the Executive System that carries out the required action.



### **6.2. Redirects to Multiple Servers**

It is quite possible that a given PINT Server is associated with an Executive System (or systems) that can connect to the GSTN at different places. Equally, if there is a chain of PINT Servers, then each of these intermediate or proxy servers (PP) may be able to route PINT requests to Executive Systems that connect at specific points to the GSTN. The result of this is that there may be more than one PINT Server or Executive System that can deal with a given request. The mechanisms by which the choice on where to deliver a request are outside the scope of this document.

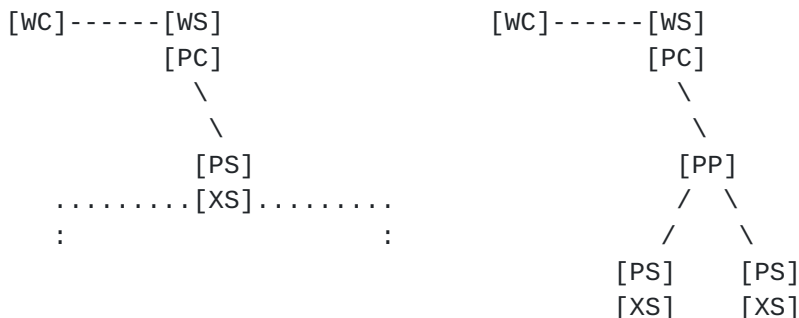

However, there do seem to be two approaches. Either a Server that acts as a proxy or redirect will select the appropriate server itself and will cause the request to be sent on accordingly, or a list of possible Locations will be returned to the Requesting User from which they can select their choice.

In SIP, the implication is that, if a proxy cannot resolve to a single unique match for a request destination, then a response containing a list of the choices should be returned to the Requesting User for selection. This is not too likely a scenario within the normal use of SIP.

However, within PINT, such ambiguity may be quite common; it implies that there are a number of possible providers of a given service.

### **6.3. Competing PINT gateways REGISTERing to offer the same service**

With PINT, the registration is not for an individual but instead for a service that can be handled by a service provider. Thus, one can envisage a registration by the PINT Server of the domain telcoA.com of its ability to support the service R2C as "R2C@telcoA.com", sent to an intermediary server that acts as registrar for the "broker.telcos.com" domain from "R2C@pint.telcoA.com" as follows:

```
REGISTER sip:registrar@broker.telcos.com SIP/2.0
To:sip:R2C@pint.telcoA.com
From:R2C@pint.telcoA.com
...
```

This is the standard SIP registration service.

However, what happens if there are a number of different Service Providers, all of whom support the "R2C" service? Suppose there is a PINT system at domain "broker.com". PINT clients requesting a Request-to-Call service from broker.com might be very willing to be redirected or proxied to any one of the various service providers which had previously registered with the registrar. PINT servers might also be interested in providing service for requests that did not specify the service provider explicitly, as well as those requests that were directed "at them".

To enable such service, PINT servers would REGISTER at the broker PINT server registrations of the form:

```
REGISTER sip:registrar@broker.com SIP/2.0
To:sip:R2C@broker.com
From:sip:R2C@pint.telcoA.com
```

When several such REGISTER messages appear at the registrar, each differing only in the URL in the From: line, the registrar has many possibilities, e.g.:

- (i) it overwrites the prior registration for "R2C@broker.telcos.com" when the next comes in;
- (ii) it rejects the subsequent registration for "R2C@broker.telcos.com";
- (iii) it maintains all such registrations.

In this last case, on receiving an Invitation for the "general" service, either:

- (iii.1) it passes on the invitation to all registered service providers, returning a collated response with all acceptances, using multiple Location: headers,

or

(iii.2) it silently selects one of the registrations (using, for example, a "round robin" approach) and routes the Invitation and response onwards without further comment.

As an alternative to all of the above approaches, it:

(iv) may choose to not allow registrations for the "general" service, rejecting all such REGISTER requests.

The algorithm by which such a choice is made will be implementation-dependent, and is outside the scope of PINT. Where a behaviour is to be defined by requesting users, then some sort of call processing language might be used to allow those clients, as a pre-service operation, to download the behaviour they expect to the server making such decisions. This, however, is a topic for other protocols, not for PINT.

\*\_\*\_

#### **6.4. Limitations on Available Information and Request Timing for SUBSCRIBE**

A reference configuration for PINT is that service requests are sent, via a PINT gateway, to an Executive System that fulfils the Service Control Function (SCF) of an Intelligent Network (see [12]). The success or failure of the resulting service call may be information available to the SCF and so may potentially be made available to the PINT gateway. In terms of historical record of whether or not a service succeeded, a large SCF may be dealing with a million call attempts per hour. Given that volume of service transactions, there are finite limits beyond which it cannot store service disposition records; expecting to find out if a Fax was sent last month from a busy SCF is unrealistic.

Other status changes, such as that on completion of a successful service call, require the SCF to arrange monitoring of the service call in a way that the service may not do normally, for performance reasons. In most implementations, it is difficult efficiently to interrupt a service to change it once it has begun execution, so it may be necessary to have two different services; one that sets GSTN resources to monitor service call termination, and one that doesn't. It is unlikely to be possible to decide that monitoring is required once the service has started.

These factors can have implications both on the information that is potentially available at the PINT Gateway, and when a request to register interest in the status of a PINT service can succeed. The alternative to using a general SCF is to provide a dedicated Service Node just for PINT services. As this node is involved in placing all service calls, it is in a position to collect the information needed. However, it may well still not be able to respond successfully to a registration of interest in call state changes once a service logic program instance is running.

Thus, although a Requesting User may register an interest in the status of a service request, the PINT Gateway may not be in a position to comply with that request. Although this does not affect the protocol used between the Requestor and the PINT Gateway, it may influence the response returned. To avoid the problem of changing service logic once running, any registration of interest in status changes should be made at or before the

time at which the service request is made.

Conversely, if a historical request is made on the disposition of a service, this should be done within a short time after the service has completed; the Executive System is unlikely to store the results of service requests for

long; these will have been processed as AMA (Automatic Message Accounting) records quickly, after which the Executive System has no reason to keep them, and so they may be discarded.

Where the PINT Gateway and the Executive System are intimately linked, the Gateway can respond to status subscription requests that occur while a service is running. It may accept these requests and simply not even try to query the Executive System until it has information that a service has completed, merely returning the final status. Thus the PINT Requestor may be in what it believes is a monitoring state, whilst the PINT Gateway has not even informed the Executive System that a request has been made. This will increase the internal complexity of the PINT Gateway in that it will have a complex set of interlocking state machines, but does mean that status registration and indication CAN be provided in conjunction with an I.N. system.

### **[6.5.](#) Parameters needed for invoking traditional PSTN Services within PINT**

This section describes how parameters needed to specify certain traditional PSTN services can be carried within PINT requests.

#### **[6.5.1.](#) Service Identifier**

When a Requesting User asks for a service to be performed, he or she will, of course, have to specify which service in some way. This can be done in the URLs within the To: header and the Request-URI (see [section 3.5.5.1](#)).

#### **[6.5.2.](#) A and B parties**

With the Request-to-Talk service, they will also need to specify the A and B parties they want to be engaged in the resulting service call. The A party could identify, for example, the Call Centre from which they want a call back, whilst the B party is their telephone number (i.e. who the Call Centre agent is to call).

The Request-to-Fax and Request-to-Hear-Content services require the B party to be specified (respectively the telephone number of the destination Fax machine or the telephone to which spoken content is to be delivered), but the A party is a Telephone Network based resource (either a Fax or speech transcoder/sender), and is implicit; the Requesting User does not (and cannot) specify it.

With the "Fax-Back" variant of the Request-to-Fax service, (i.e. where the content to be delivered resides on the GSTN) they will also have specify two parties. As before, the B party is the telephone number of the fax machine to which they want a fax to be sent. However, within this variant the A party identifies the "document context" for the PSTN-based document store from which a particular document is to be retrieved; the analogy here is to a PSTN user dialling a particular telephone number and then entering the document number to be returned using "touch tone" digits. The telephone

number they dial is that of the document store or A party, with the "touch tone" digits selecting the document within that store.



### 6.5.3. Other Service Parameters

In terms of the extra parameters to the request, the services again differ. The Request-to-Talk service needs only the A and B parties. Also it is convenient to assert that the resulting service call will carry voice, as the Executive System within the destination GSTN may be able to check that assertion against the A and B party numbers specified and may treat the call differently.

With the Request-to-Fax and Request-to-Hear-Content services, the source information to be transcoded is held on the Internet. That means either that this information is carried along with the request itself, or that a reference to the source of this information is given. In addition, it is convenient to assert that the service call will carry fax or voice, and, where possible, to specify the format for the source information.

The PSTN-based content or "Fax-Back" variant of the Request-to-Fax service needs to specify the Document Store number and the Fax machine number to which the information is to be delivered. It is convenient to assert that the call will carry Fax data, as the destination Executive System may be able to check that assertion against the document store number and that of the destination Fax machine.

In addition, the document number may also need to be sent. This parameter is an opaque reference that is carried through the Internet but has significance only within the GSTN. The document store number and document number together uniquely specify the actual content to be faxed.

### 6.5.4. Service Parameter Summary

The following table summarises the information needed in order to specify fully the intent of a PSTN service request. Note that it excludes any other parameters (such as authentication or authorisation tokens, or Expires: or CallId: headers) that may be used in a request.

Service	ServiceID	AParty	BParty	CallFmt	Source	SourceFmt
-----	-----	-----	-----	-----	-----	-----
R2C	x	x	x	voice	-	-
R2F	x	-	x	fax	URI/IL	ISF/ILSF
R2FB	x	x	x	fax	OR	-
R2HC	x	-	x	voice	URI/IL	ISF/ILSF

In this table, "x" means that the parameter is required, whilst "-" means that the parameter is not required.

The Services listed are Request to Talk (R2C), Request to Fax (R2F), the PSTN-based content or "Fax-back" Variant of Request-to-Fax (R2FB), and Request-to-Hear-Content (R2HC).

The Call Format parameter values "voice" or "fax" indicate the kind of

service call that results.

The Source Indicator "URI/IL" implies either that the data is either an Internet source reference (a Universal Resource Identifier, or URI) or is

carried "in-line" with the message. The Source indicator "OR" means that the value passed is an Opaque Reference that should be carried along with the rest of the message but is to be interpreted only within the destination (GSTN) context. As an alternative, it could be given as a "local" reference with the "file" style, or even using a partial reference with the "http" style. However, the way in which such a reference is interpreted is a matter for the receiving PINT Server and Executive System; it remains, in effect, an opaque reference.

The Source Format value "ISF/ILSF" means that the format of the source is specified either in terms of the URI or that it is carried "in-line". Note that, for some data, the format either can be detected by inspection or, if all else fails, can be assumed from the URI (for example, by assuming that the file extension part of a URL indicates the data type). For an opaque reference, the Source Format is not available on the Internet, and so is not given.

#### **6.6. Parameter Mapping to PINT Profile**

This section describes the way in which the parameters needed to specify a PSTN service request fully might be carried within a PINT profile message. There are other choices, and these are not precluded. However, in order to ensure that the Requesting User receives the service that they expect, it is necessary to have some shared understanding of the parameters passed and the behaviour expected of the PINT Server and its attendant Executive System.

The Service Identifier can be sent as the userinfo element of the Request-URI. Thus, the first line of a PINT Invitation would be of the form:

```
INVITE <serviceID>@<pint-server>.<domain> SIP/2.0
```

The A Party for the Request-to-Talk and "Fax-back" variant of Request-to-Fax service can be held in the "To:" header field. In this case the "To:" header value will be different from the Request-URI. In the services where the A party is not specified, the "To:" field is free to repeat the value held in the Request-URI. This is the case for Request-to-Fax and Request-to-Hear-Content services.

The B party is needed in all these milestone services, and can be held in the enclosed SDP sub-part, as the value of the "c=" field.

The call format parameter can be held as part of the "m=" field value. It maps to the "transport protocol" element as described in [section 3.4.2](#) of this document.

The source format specifier is held in the "m=", as a type and optional sub-type. The latter is required for all services except Request-to-Talk. As shown earlier, the source format and source are not always required when generating requests for services. However, the inclusion in all requests of a source format specifier can make parsing the request simpler and allows

for other services to be specified in the future, and so values are always given. The source format parameter is covered in [section 3.4.2](#) as the "media type" element.

The source itself is identified by an "a=fmtp:" field value, where needed. With the exception of the Request-to-Talk service, all invitations will include such a field. From the perspective of the SDP profile, it can be considered as qualifying the media sub-type, as if to say, for example, "when I say jpeg, what I mean is the following".

In summary, the parameters needed by the different services are carried in fields as shown in the following table:

Service	Svc Param	PINT/SIP or SDP field used	Example value
-----	-----	-----	-----
R2C			
	ServiceID:	<SIP Request-URI userinfo>	R2C
	BParty:	<SIP To: field>	sip:123@p.com
	AParty:	<SDP c= field>	TN <a href="#">RFC2543</a> 4567
	CallFormat:	<SDP transport protocol sub-field of m= field>	voice
	SourceFmt:	<SDP media type sub-field of m= field> (--- No media sub-type sub-field value used)	audio ---
	Source:	(--- No source specified)	---
R2F			
	ServiceID:	<SIP Request-URI userinfo>	R2F
	BParty:	(--- )	sip:R2F@pint.xxx.net
	AParty:	<SDP c= field>	TN RFCxxx +441213553
	CallFormat:	<SDP transport protocol sub-field of m= field>	fax
	SourceFmt:	<SDP media type sub-field of m= field> <SDP media sub-type sub-field of m= field>	image jpeg
	Source:	<SDP a=fmtp: field qualifying preceding m= field>	a=fmtp:jpeg <ureref>
R2FB			
	ServiceID:	<SIP Request-URI userinfo>	R2FB
	BParty:	<SIP To: field>	sip:1-730-1234@p.com
	AParty:	<SDP c= field>	TN RFCxxx +441213553
	CallFormat:	<SDP transport protocol sub-field of m= field>	fax
	SourceFmt:	<SDP media type sub-field of m= field> <SDP media sub-type sub-field	image

	of m= field>	jpeg
Source:	<SDP a=fmtp: field qualifying	
	preceding m= field>	a=fmtp:jpeg opr:1234

R2HC

ServiceID:	<SIP Request-URI userinfo>	R2HC
BParty:	(--- SIP To: field not used)	sip:R2HC@pint.ita.il
AParty:	<SDP c= field>	TN RFCxxx +441213554
CallFormat:	<SDP transport protocol sub-field of m= field>	voice
SourceFmt:	<SDP media type sub-field of m= field>	text
	<SDP media sub-type sub-field of m= field>	html
Source:	<SDP a=fmtp: field qualifying preceding m= field>	a=fmtp:html <uref>

## **[7. Open Issues and Draft State](#)**

### **[7.1. Open Issues](#)**

There are no current technical open issues.

### **[7.2. Draft State](#)**

Changes from version 00:

- \* Removed References to Q763 parameters.

It is difficult to see how these parameters could be passed to an Intelligent Network System, and in many potential configurations this information would not be accepted, as it did not come from a "trusted" source.

- \* Removed references to ITU and other standardisation efforts.

A PINT standards-track RFC cannot really refer to standards that are in progress. The set of IETF references are to documents that are on the Standards Track. Standardisation efforts in other organisations are subject to change and so these references are not appropriate.

Changes from version 01 to previous interim version:

- \* Corrected a few typos, orphaned internal references, and some of the examples.

- \* Made a few corrections and added some comments on changes to be expected in the next draft. These were highlighted by \*\*\*\* before the affected paragraphs.

- \* Removed references to the Telephony URL draft that has expired. It seems likely that the SIP draft will reach RFC status first.

Changes from interim version to version 03:

- \* removed previous change marks

- \* New changes are indicated by \*-\*- in the text above the change
- \* Corrected a few more typos, and re-visited the examples (thanks to Francois for the MIME comments!)



- \* removed refs to out of date Internet Conference Architecture draft from "Introduction"
- \* Corrected a few more typos, and re-visited the examples
- \* added initial summary list for new PINT features in "PINT Protocol Architecture"
- \* added a comment on the MIME version implied by PINT 1.0 in "PINT Protocol Architecture"
- \* added sub-section number for SDP description in "PINT Protocol Architecture"
- \* added sub-section number for SIP description in "PINT Protocol Architecture"
- \* removed reference to Security mechanisms in "SIP Operation in PINT"
- \* added strictures as MUST and split into separate paras for clarity in "REQUIRED and OPTIONAL elements for PINT compliance"
- \* added comment that PINT features may be useful for SIP/SDP in "REQUIRED and OPTIONAL elements for PINT compliance"
- \* changed E.164 number -> N.P.A., and added local dialling plan number in " Network Type "TN" and Address Type "[RFC2543](#)"
- \* added an introductory section on data object support in PINT & rewrote section in "Support for Data Objects within PINT"
- \* added section on opaque references in "Support for Data Objects within PINT"
- \* changed section number and reworked text in "Session Description support for included Data Objects"
- \* removed ref to former (non-tagged) method of checking resolution type in "Session Description support for included Data Objects"
- \* moved last part of section to the SIP description, leaving a ref. in "Session Description support for included Data Objects"
- \* highlighted that attributes may appear as PINT URL parameters in SIP in "Attribute Tags to pass information into the Telephone Network"
- \* moved para from end of "phone-context attribute" to main body of "Attribute Tags to pass information into the Telephone Network"
- \* added sub-section added (by request) on "Presentation Restriction attribute"
- \* Re-introduced sub-section on "CalledPartyAddress attributes parameters" (Q763 parameters), also by request
- \* added comment on the general form of Q763 attributes to the original content of this section
- \* added a comment that all PINT extensions can be covered by Strictures to "The "strict" attribute"
- \* moved some orphaned text from "Session Description support for included

Data Objects" into "Multi-part MIME"

- \* removed sub-section on " PINT URLS within To: headers" and comments on "1-800-FLOWERS" style telephony URLs

- \* removed references to wildcards in REGISTER messages within " REGISTER requests within PINT"
- \* replaced example 4.8 with new examples 4.8 - 4.12
- \* added section on "Limitations on Available Information and Request Timing for SUBSCRIBE"
- \* added a few references that were missing
- \* added "Collected ABNF" appendix.

Changes from version 3 to this version:

- \* New changes are indicated by a -\*- mark on the line before the change
- \* added a Security Considerations Section
- \* really added the comment on PINT/SIP implying MIME 1.0 this time!
- \* added ABNF definition for the use of PINT attributes as URL parameters
- \* added ABNF definition of tsp URL parameter
- \* added a statement that there are no current technical open issues
- \* corrected boilerplate
- \* added reference to SIP RFC number.

## **8. References**

- [2] M. Handley, E. Schooler, H. Schulzrinne, & J. Rosenberg, "SIP: Session Initiation Protocol", [RFC2543](#), Internet Engineering Task Force, March 1999.
- [3] M. Handley & V. Jacobsen, "SDP: Session Description Protocol", [RFC2327](#), Internet Engineering Task Force, April 1998.
- [4] N. Freed & N. Borenstein, "Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies", [RFC2045](#), November 1996.
- [5] N. Freed & N. Borenstein, "Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types", [RFC2046](#), November 1996.
- [6] The Unicode Consortium, "The Unicode Standard -- Version 2.0", Addison-Wesley, 1996.
- [7] ITU-T Study Group 2, "E.164 - The International Public Network Numbering Plan",

ITU-T, June 1997.

- [8] H. Lu et al,  
"Toward the PSTN/Internet Inter-Networking--Pre-PINT Implementations",  
Informational [RFC2458](#), Internet Engineering Task Force, Nov 1998.

- [9] ITU-T Study Group XI,  
"Q.763 - Formats and Codes for the ISDN User Part of SS No7"  
ITU-T, August 1994.
- [10] T. Berners-Lee, R. Fielding, & L. Masinter,  
"Uniform Resource Identifiers (URI): Generic Syntax", [RFC2396](#),  
Internet Engineering Task Force, August 1998.
- [11] D. Crocker,  
"Standard for the format of ARPA Internet text messages", [RFC822](#),  
Internet Engineering Task Force, August 1982.
- [12] ITU-T Study Group XI,  
"Q.1204 - IN Distributed Functional Plane Architecture",  
ITU-T, February 1994.
- [13] T. Dierks & C. Allen,  
"The TLS Protocol Version 1.0", [RFC2246](#),  
Internet Engineering Task Force, January 1999.
- [14] R. Thayer, N. Doraswamy & R. Glenn,  
"IP Security Document Roadmap", Informational [RFC2411](#),  
Internet Engineering Task Force, November 1998.
- [15] R. Housley, W. Ford, W. Polk & D. Solo,  
"Internet X.509 Public Key Infrastructure Certificate and CRL Profile",  
[RFC2459](#), Internet Engineering Task Force, January 1999.

## **[9. Acknowledgements](#)**

The authors wish to thank the members of the PINT working group for comments that were helpful to the preparation of this specification. Ian Elz's comments were extremely useful to our understanding of internal PSTN operations. The SUBSCRIBE and NOTIFY requests were first suggested by Henning Schulzrinne and Jonathan Rosenberg.



Appendix A: Collected ABNF

```
phone-context-attribute = "phone-context:" <phone-context-ident>

phone-context-ident      = network-prefix | private-prefix

network-prefix           = intl-network-prefix | local-network-prefix

intl-network-prefix      = "+" 1*DIGIT

local-network-prefix     = 1*DIGIT

exclldigandplus          = (0x21-0x2d,0x2f,0x40-0x7d))

private-prefix           = 1*exclldigandplus 0*uric

clir-attribute           = "clir:" ("true" | "false")

q763-nature-attribute    = "Q763-nature:" ("1" | "2" | "3" | "4")

q763plan-attribute       = "Q763-plan:" ("1"|"2" |"3" |"4" |"5" |"6" |"7")
; -- of these, 1, 3, and 4 are defined in the text

q763-INN-attribute       = "Q763-INN:" ("0" | "1")

strict-attribute         = "strict:" <attribute-list>

attribute-list           = 1*(PINT-attribute | attribute)
; -- attribute is as defined in SDP

PINT-attribute           = ( clir-attribute | q763-nature-attribute |
                             q763plan-attribute | q763-INN-attribute |
                             phone-context-attribute )

clir-parameter           = "clir" "=" ("true" | "false")

q763-nature-parameter    = "Q763-nature" "=" ("1" | "2" | "3" | "4")

q763plan-parameter       = "Q763-plan" "=" ("1"|"2" |"3" |"4" |"5" |"6" |"7")

q763-INN-parameter       = "Q763-INN" "=" ("0" | "1")

tsp-parameter            = "tsp" "=" <hostname>
; -- hostname is as defined in SIP

phone-context-parameter  = "phone-context" "=" <phone-context-ident>

SIP-param                = ( transport-param | user-param | method-param |
                             ttl-param | maddr-param | other-param )
; -- the values in this list are all as defined in SIP
```

PINT-param                   = ( clir-parameter | q763-nature-parameter |  
                                  q763plan-parameter | q763-INN-parameter |  
                                  tsp-parameter | phone-context-parameter )

Conroy & Petrack

[Page 52]



```
URL-parameter          = (SIP-param | PINT-param)
; -- redefinition of SIP's URL-parameter to include ones defined in PINT

Require-header         = "Require:" 1*(required-extensions)

required-extensions    = ("org.ietf.sip.subscribe" | "org.ietf.sdp.strict")

connection-field       = ["c=" nettype space addrtype space
                           connection-address CRLF]
; -- this is the original definiton from SDP
; -- the following are PINT interpretations and modifications

nettype                = ("IN"|"TN")

addrtype               = (INAddrType | TNAddrType)

INAddrType             = ("IP4"|"IP6")

TNAddrType             = ("RFC2543"|<OtherAddrType>)

OtherAddrType          = (X-Token)
; -- X-token is as defined in RFC2045

addr                   = (FQDN | unicast-address | TNAddr)
; -- FQDN and unicast address specified in SDP

TNAddr                 = (RFC2543Addr|OtherAddr)
; -- TNAddr defined only in context of nettype == "TN"

RFC2543Addr            = (INPAddr|LDPAddr)

INPAddr                = "+" POS-DIGIT 0*("-" DIGIT)|DIGIT)

LDPAddr                = DIGIT 0*("-" DIGIT)|DIGIT)

OtherAddr              = 1*uric
; -- uric is as defined in RFC2396

media-field            = "m=" media space port space proto 0*(space fmt)
                           CRLF

media                  = ("application"|"audio"|"image"|"text")
; -- is any MIME discrete type. Only those listed are used in PINT 1.0

port                   = "0"

proto                  = (INProto|TNProto)

INProto                = 1* (alpha-numeric)
; -- this is the "classic" SDP protocol, defined if nettype == "IN"
```

```
TNProto          = ("phone"|"fax"|"pager")  
; -- this is the PINT protocol, defined if nettype == "TN"
```

```
fmt                                = <subtype>
; -- subtype as defined in RFC2046. Must be a subtype of type held in
; -- associated media sub-field

pint-fmt                           = "a=fmt:" <media subtype> 1*<resolution>

resolution                         = (<ureref> | <opaque-ref> | <sub-part-ref>)

ureref                             = "uri:" <URI-Reference>
; -- URI-Reference defined in RFC2396

opaque-ref                         = "opr:" 0*uric

sub-part-ref                       = "spr:" Content-ID
; -- Content-ID is as defined in RFC2046 and RFC822
```

#### Appendix B: Author's Addresses

Lawrence Conroy  
Siemens Roke Manor Research  
Roke Manor  
Old Salisbury Lane  
Romsey, Hampshire  
U.K. S051 0ZN  
lwc@roke.co.uk  
+44 (1794) 833666

Scott Petrack  
MetaTel, Inc.  
284 North Ave.  
Weston, MA 02493  
scott.petrack@metatel.com  
+1 (781)-891-9000

