

Network Working Group  
Internet Draft  
Expiration Date: May 2006

Luca Martini  
Eric C. Rosen  
Cisco Systems, Inc.

Nasser El-Aawar  
Level 3 Communications, LLC.

Giles Heron  
Tellabs

November 2005

## Encapsulation Methods for Transport of Ethernet Over MPLS Networks

[draft-ietf-pwe3-ethernet-encap-11.txt](#)

### Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/1id-abstracts.html>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

### Abstract

An Ethernet Pseudowire (PW) is used to carry Ethernet/802.3 Protocol Data Units over an MPLS network. This enables service providers to offer "emulated" Ethernet services over existing MPLS networks. This document specifies the encapsulation of Ethernet/802.3 PDUs within a pseudo wire. It also specifies the procedures for using a PW to provide a "point-to-point Ethernet" service.

## Table of Contents

<a href="#">1</a>	Specification of Requirements .....	<a href="#">2</a>
<a href="#">2</a>	Introduction .....	<a href="#">3</a>
<a href="#">3</a>	Applicability Statement .....	<a href="#">6</a>
<a href="#">4</a>	Details Specific to Particular Emulated Services .....	<a href="#">7</a>
<a href="#">4.1</a>	Ethernet Tagged Mode .....	<a href="#">7</a>
<a href="#">4.2</a>	Ethernet Raw Mode .....	<a href="#">8</a>
<a href="#">4.3</a>	Ethernet Specific Interface Parameter LDP Sub-TLV .....	<a href="#">8</a>
<a href="#">4.4</a>	Generic Procedures .....	<a href="#">8</a>
<a href="#">4.4.1</a>	Raw Mode vs. Tagged Mode .....	<a href="#">9</a>
<a href="#">4.4.2</a>	MTU Management on the PE/CE Links .....	<a href="#">10</a>
<a href="#">4.4.3</a>	Frame Ordering .....	<a href="#">11</a>
<a href="#">4.4.4</a>	Frame Error Processing .....	<a href="#">11</a>
<a href="#">4.4.5</a>	IEEE 802.3x Flow Control Interworking .....	<a href="#">11</a>
<a href="#">4.5</a>	Management .....	<a href="#">11</a>
<a href="#">4.6</a>	The Control Word .....	<a href="#">12</a>
<a href="#">4.7</a>	QoS Considerations .....	<a href="#">13</a>
<a href="#">5</a>	Security Considerations .....	<a href="#">13</a>
<a href="#">6</a>	PSN MTU Requirements .....	<a href="#">14</a>
<a href="#">7</a>	IANA Considerations .....	<a href="#">14</a>
<a href="#">8</a>	Full Copyright Statement .....	<a href="#">14</a>
<a href="#">9</a>	Intellectual Property Statement .....	<a href="#">14</a>
<a href="#">10</a>	Normative References .....	<a href="#">15</a>
<a href="#">11</a>	Informative References .....	<a href="#">16</a>
<a href="#">12</a>	Editor Information .....	<a href="#">16</a>
<a href="#">13</a>	Author Information .....	<a href="#">16</a>
<a href="#">14</a>	Significant Contributors .....	<a href="#">17</a>
Ap A	Interoperability Guidelines .....	<a href="#">20</a>
Ap B	QoS Details .....	<a href="#">21</a>

## [1. Specification of Requirements](#)

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#)



## **2. Introduction**

An Ethernet Pseudowire (PW) allows Ethernet/802.3 [[802.3](#)] Protocol Data Units (PDUs) to be carried over an Multi Protocol Label Switched [[MPLS-ARCH](#)] network. In addressing the issues associated with carrying an Ethernet PDU over a Public Switched Network (PSN), this document assumes that a Pseudowire (PW) has been set up by using a control protocol such as the one as described in [[PWE3-CTRL](#)]. The design of Ethernet Pseudowire described in this document conforms to the pseudo wire architecture described in [[RFC3985](#)]. It is also assumed in the remainder of this document that the reader is familiar with [RFC3985](#).

The PWE3 Ethernet PDU consists of the Destination Address, Source Address, Length/Type, MAC Client Data and padding extracted from a MAC frame as a concatenated octet sequence in their original order [[PDU](#)].

In addition to the Ethernet PDU format used within the pseudo wire, this document discusses:

- Procedures for using a PW in order to provide a pair of Customer Edge Routers (CE) with an emulated (point-to-point) Ethernet service, including the procedures for the processing of Provider Edge-bound and CE-bound Ethernet PDUs. [[RFC3985](#)]
- Ethernet-specific QoS and security considerations
- Inter-domain transport considerations for Ethernet PW

The following two figures describe the reference models which are derived from [[RFC3985](#)] to support the Ethernet PW emulated services.



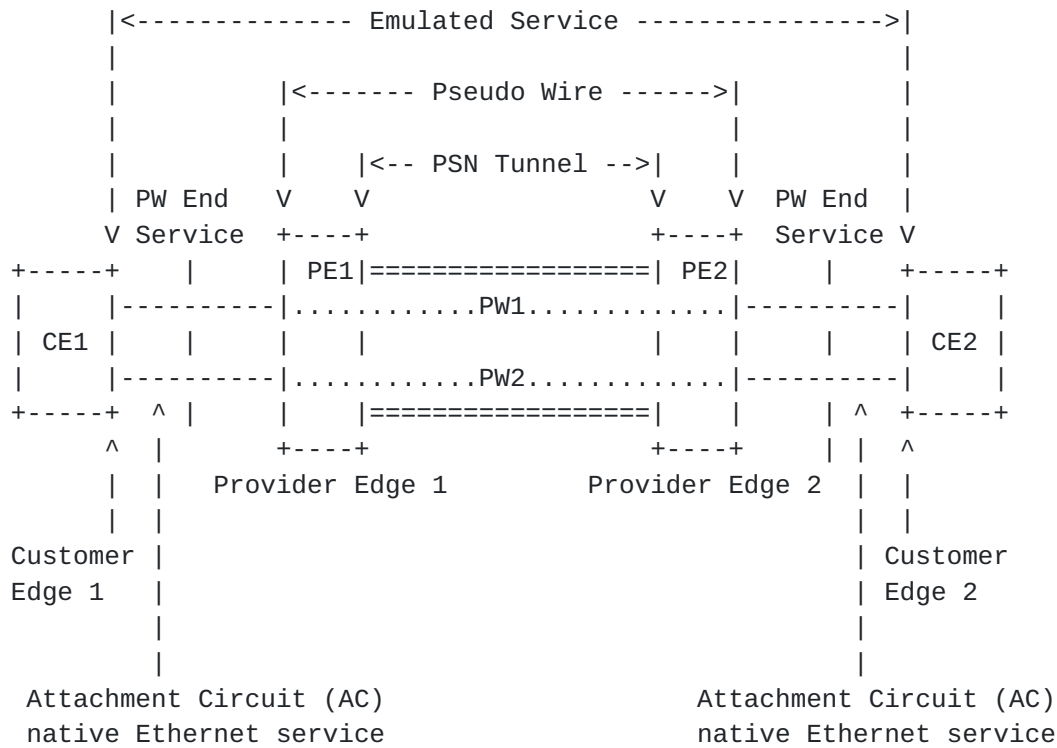


Figure 1: PWE3 Ethernet/VLAN Interface Reference Configuration

The "emulated service" shown in Figure 1 is, strictly speaking, a bridged LAN; the PEs have MAC interfaces, consume MAC control frames, etc. However, the procedures specified herein only support the case in which there are two CEs on the "emulated LAN". Hence we refer to this service as "emulated point-to-point Ethernet". Specification of the procedures for using pseudo wires to emulate LANs with more than two CEs are out of scope of the current document.

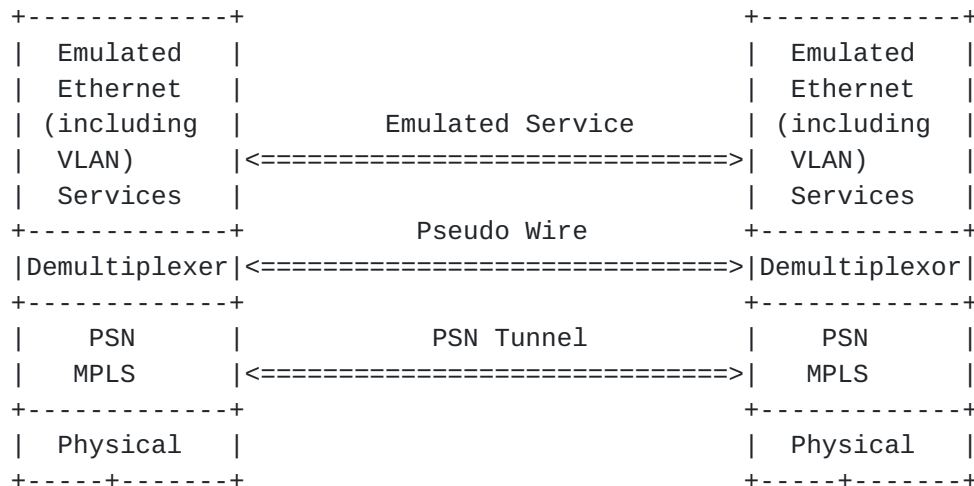




Figure 2: Ethernet PWE3 Protocol Stack Reference Model

For the purpose of this document, PE1 will be defined as the ingress router, and PE2 as the egress router. A layer 2 PDU will be received at PE1, encapsulated at PE1, transported, decapsulated at PE2, and transmitted out on the attachment circuit of PE2.

An Ethernet PW emulates a single Ethernet link between exactly two endpoints. The mechanisms described in this document are agnostic to that which is beneath the "Pseudo Wire" level in Figure 2, concerning itself only with the "Emulated Service" portion of the stack.

The following reference model describes the termination point of each end of the PW within the PE:

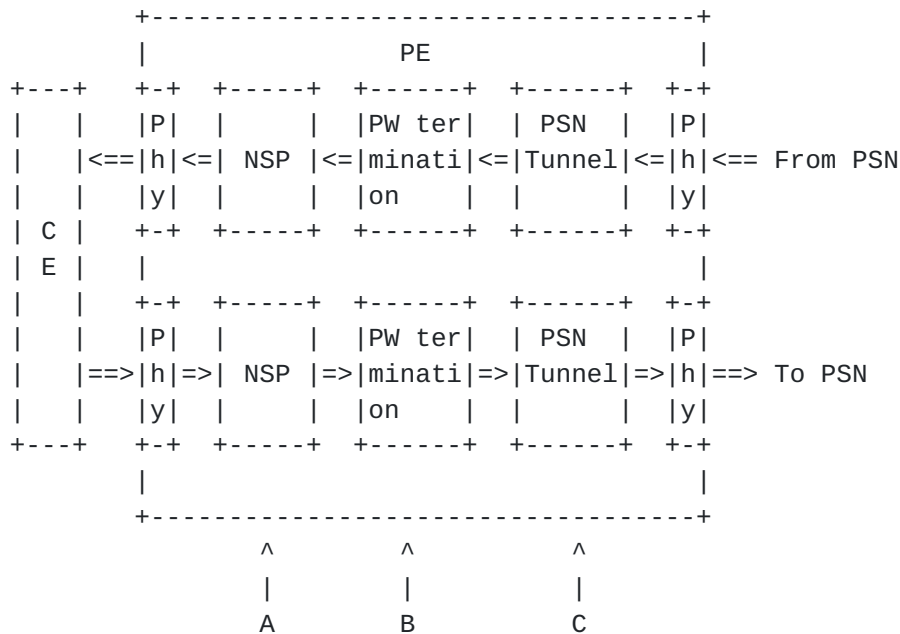


Figure 3: PW reference diagram

The PW terminates at a logical port within the PE, defined at point B in the above diagram. This port provides an Ethernet MAC service that will deliver each Ethernet frame that is received at point A, unaltered, to the point A in the corresponding PE at the other end of the PW.

The Native Service Processing (NSP) function includes frame processing that is required for the Ethernet frames that are forwarded to the PW termination point. Such functions may include stripping, overwriting or adding VLAN tags, physical port multiplexing and demultiplexing, PW-PW bridging, L2 encapsulation, shaping, policing, etc. These functions are specific to the ethernet





technology , and may not be required for the PW emulation service.

The points to the left of A, including the physical layer between the CE and PE, and any adaptation (NSP) functions between it and the PW terminations, are outside of the scope of PWE3 and are not defined here.

"PW Termination", between A and B, represents the operations for setting up and maintaining the PW, and for encapsulating and decapsulating the Ethernet frames as necessary to transmit them across the MPLS network.

An Ethernet PW operates in one of two modes: "raw mode" or "tagged mode". In tagged mode, each frame MUST contain at least one 802.1Q [802.1Q] VLAN tag, and the tag value is meaningful to the NSPs at the two PW termination points. That is, the two PW termination points must have some agreement (signaled or manually configured) on how to process the tag. On a raw mode PW, a frame MAY contain an 802.1Q VLAN tag, but if it does, the tag is not meaningful to the NSPs, and passes transparently through them.

### **3. Applicability Statement**

The Ethernet PW emulation allows a service provider to offer a "port to port" Ethernet based service across an MPLS packet switched network (PSN) while the Ethernet VLAN PW emulation allows an "Ethernet VLAN to VLAN" based service across an MPLS packet switched network (PSN).

The Ethernet or Ethernet VLAN PW has the following characteristics in relationship to the respective native service:

- Ethernet PW connects two Ethernet ACs while Ethernet VLAN PW connects two Ethernet VLAN ACs, supporting bi-directional transport of variable length Ethernet frames. The ingress Native Service Processing (NSP) function strips the preamble and FCS from the Ethernet frame and transports the frame in its entirety across the PW. This is done regardless of the presence of the 802.1Q tag in the frame. The egress NSP function receives the Ethernet frame from the PW and regenerates the preamble or FCS before forwarding the frame to the attachment circuit. Since FCS is not being transported across either Ethernet or Ethernet VLAN PWs, payload integrity transparency may be lost. The OPTIONAL methods described in [FCS] can be used to achieve payload integrity transparency on Ethernet or Ethernet VLAN PWs.



- For Ethernet VLAN PW, VLAN tag rewrite can be achieved by NSP at the egress PE which is outside the scope of this document.
- The Ethernet or Ethernet VLAN PW only supports homogeneous Ethernet frame type across the PW; both ends of the PW must be either tagged or untagged. Heterogeneous frame type support achieved with NSP functionality is outside the scope of this document.
- Ethernet port or Ethernet VLAN status notification is provided using the PW Status TLV in the LDP status notification message. Loss of connectivity between PEs can be detected by the LDP session closing, or by using [VCCV] mechanisms. The PE can convey these indications back to its attached Remote System.
- The maximum frame size that can be supported is limited by the PSN MTU minus the MPLS header size, unless fragmentation and reassembly is used [[FRAG](#)].
- The packet switched network may reorder, duplicate, or silently drop packets. Sequencing MAY be enabled in the Ethernet or Ethernet VLAN PW to detect lost, duplicate, or out-of-order packets on a per-PW basis.
- The faithfulness of an Ethernet or Ethernet VLAN PW may be increased by leveraging Quality of Service features of the PEs and the underlying PSN. (see "QoS Considerations" section)

## **[4. Details Specific to Particular Emulated Services](#)**

### **[4.1. Ethernet Tagged Mode](#)**

The Ethernet frame will be encapsulated according to the procedures defined later in this document for tagged mode. It should be noted that if the VLAN identifier is modified by the egress PE, the Ethernet spanning tree protocol might fail to work properly. If this issue is of significance, the VLAN identifier MUST be selected in such away that it matches on the Attachment Circuits at both ends of the PW.

If the PE detects a failure on the Ethernet physical port, or the port is administratively disabled, it MUST send PW status notification message for all PWs associated with the port.

This mode uses service-delimiting tags to map input Ethernet frames to respective PWs and is corresponds to PW type 0x0004 "Ethernet Tagged Mode" [[IANA](#)].



#### **4.2. Ethernet Raw Mode**

The Ethernet frame will be encapsulated according to the procedures defined later in this document for raw mode. If the PE detects a failure on the Ethernet input port, or the port is administratively disabled, the PE MUST send an appropriate PW status notification message to the corresponding remote PE.

In this mode all Ethernet frames received on the attachment circuit of PE1 will be transmitted to PE2 on a single PW. This service corresponds to PW type 0x0005 "Ethernet" [[IANA](#)].

#### **4.3. Ethernet Specific Interface Parameter LDP Sub-TLV**

This LDP sub-Type Length Value [[LDP](#)] specifies interface specific parameters. When applicable, it MUST be used to validate that the PEs, and the ingress and egress ports at the edges of the circuit, have the necessary capabilities to interoperate with each other. The Interface parameter TLV is defined in [[PWE3-CTRL](#)], the IANA registry with initial values for interface parameter sub-TLV types is defined in [[IANA](#)], but the Ethernet specific interface parameters are specified as follows:

- 0x06 Requested VLAN ID Sub-TLV

An Optional 16 bit value indicating the requested VLAN ID. This parameter MUST be used by a PE that is incapable of rewriting the 802.1Q Ethernet VLAN tag on output. If the ingress PE receives this request, it MUST rewrite the VLAN ID contained inside the VLAN Tag at the input to match the requested VLAN ID. If this is not possible, and the VLAN ID does not already match the configured ingress VLAN ID, the PW MUST not be enabled. This parameter is applicable only to PW type 0x0004.

#### **4.4. Generic Procedures**

When the NSP/Forwarder hands a frame to the PW termination function:

- The preamble (if any) and FCS are stripped off.
- The control word as defined in the "The Control Word" section is, if necessary, prepended to the resulting frame. The conditions under which the control word is or is not used are specified below.



- The proper Pseudowire demultiplexor ( PW Label ) is prepended to the resulting packet.
- The proper tunnel encapsulation is prepended to the resulting packet.
- The packet is transmitted.

The way in which the proper tunnel encapsulation and pseudo wire demultiplexor are chosen depends on the procedures that were used to set up the pseudo wire.

The tunnel encapsulation depends on how the MPLS PSN is setup. This can include no label, one label or more labels. The proper pseudo wire demultiplexor is an MPLS label whose value is determined by the PW setup and maintenance protocols.

When a packet arrives over a PW, the tunnel encapsulation and PW demultiplexor are stripped off. If the control word is present, it is processed and stripped off. The resulting frame is then handed to the Forwarder/NSP. Regeneration of the FCS is considered to be an NSP responsibility.

#### **4.4.1. Raw Mode vs. Tagged Mode**

When the PE receives an Ethernet frame, and the frame has a VLAN tag, we can distinguish two cases:

1. The tag is "service-delimiting". This means that the tag was placed on the frame by some piece of service provider-operated equipment, and the tag is used by the service provider to distinguish the traffic. For example, LANs from different customers might be attached to the same service provider switch, which applies VLAN tags to distinguish one customer's traffic from another's, and then forwards the frames to the PE.
2. The tag is not service-delimiting. This means that the tag was placed in the frame by a piece of customer equipment, and is not meaningful to the PE.

Whether the tag is service delimiting or not , is determined by local configuration on the PE.

If an Ethernet PW is operating in raw mode, service-delimiting tags are NEVER sent over the PW. If a service-delimiting tag is present when the frame is received from attachment circuit by the PE, it MUST be stripped (by the NSP) from the frame before the frame is sent to





the PW.

If an Ethernet PW is operating in tagged mode, every frame sent on the PW MUST have a service-delimiting VLAN tag. If the frame as received by the PE from the attachment circuit does not have a service-delimiting VLAN tag, the PE must prepend the frame with a dummy VLAN tag before sending the frame on the PW. This is the default operating mode. This is the only REQUIRED mode.

In both modes, non-service-delimiting tags are passed transparently across the PW as part of the payload. It should be noted that a single Ethernet packet may contain more than one tag. At most one of these tags may be service-delimiting. In any case the NSP function may only inspect the outer most tag for the purpose of adapting the Ethernet frame to the pseudo wire.

In both modes, the service-delimiting tag values have only local significance, i.e., are meaningful only at a particular PE-CE interface. When tagged mode is used, the PE that receives a frame from the PW may rewrite the tag value, or may strip the tag entirely, or may leave the tag unchanged, depending on its configuration. When raw mode is used, the PE that receives a frame may or may not need to add a service-delimiting tag before transmitting the frame on the attachment circuit; however it MUST not rewrite or remove any tags which are already present.

The following table illustrates the what operations might be performed at input from the attachment circuit:

```

+-----+
|      Tag-> | service delimiting | non service delimiting|
|-----+-----+-----|
|  Raw Mode  | 1st VLAN Tag Removed| no operation performed|
|-----+-----+-----|
| Tagged Mode | NO OP or Tag Added  |      Tag Added        |
+-----+
    
```

**4.4.2. MTU Management on the PE/CE Links**

The Ethernet PW MUST NOT be enabled unless it is known that the MTUs of the CE-PE links are the same at both ends of the PW. If an egress router receives an encapsulated layer 2 PDU whose payload length (i.e., the length of the PDU itself without any of the encapsulation headers), exceeds the MTU of the destination layer 2 interface, the PDU MUST be dropped.



### **4.4.3. Frame Ordering**

In general, applications running over Ethernet do not require strict frame ordering. However the IEEE definition of 802.3 [[802.3](#)] requires that frames from the same conversation in the context of link aggregation (clause 43) are delivered in sequence. Moreover, the PSN cannot (in the general case) be assumed to provide or to guarantee frame ordering. An Ethernet PW can, through use of the control word, provide strict frame ordering. If this option is enabled, any frames which get mis-ordered by the PSN will be dropped or reordered by the receiving PW endpoint. If strict frame ordering is a requirement for a particular PW, this option **MUST** be enabled.

### **4.4.4. Frame Error Processing**

An encapsulated Ethernet frame traversing a pseudo wire may be dropped, corrupted or delivered out-of-order. As described in [PWE3-REQ], frame-loss, corruption, and out-of-order delivery is considered to be a "generalized bit error" of the pseudo wire. PW frames that are corrupted will be detected at the PSN layer and dropped.

At the ingress of the PW the native Ethernet frame error processing mechanisms **MUST** be enabled. Therefore, if a PE device receives an Ethernet frame containing hardware level CRC errors, framing errors, or a runt condition, the frame **MUST** be discarded on input. Note that defining this processing is part of the NSP function and is outside the scope of this document.

### **4.4.5. IEEE 802.3x Flow Control Interworking**

In a standard Ethernet network, the flow control mechanism is optional and typically configured between the two nodes on a point-to-point link (e.g. between the CE and the PE). IEEE 802.3x PAUSE frames **MUST NOT** be carried across the PW. See [Appendix A](#) for notes on CE-PE flow control.

## **4.5. Management**

The Ethernet PW management model follows the general management defined in [[RFC3985](#)] and [[PWE3-MIB](#)]. Many common PW management facilities are provided here, with no additional Ethernet specifics necessary. Ethernet-specific parameters are defined in an additional MIB module, [[PW-MIB](#)].




#### 4.6. The Control Word

When carrying Ethernet over an MPLS backbone, sequentiality may need to be preserved. The OPTIONAL control word along the guidelines of [PWE3-CW] is defined here, and addresses this requirement. Implementations MUST support sending no control word, and MAY support sending a control word. If the control word is not used all the functionality defined in [PWE3-CW] is not available. In particular the PW packet may be mistakenly recognized as an IP packet by PSN devices that use the first nibble in the packet to identify it's content. This problem is only significant if the PSN contain equal cost load sharing links, and a source MAC address starting with 0x4 as it first byte is used.

A PW carried over an MPLS PSN that uses the contents of the MPLS payload to select the ECMP path SHOULD employ the PW MPLS Control Word, if strict packet ordering is required.

In all cases the egress router must be aware of whether the ingress router will send a control word over a specific virtual circuit. This may be achieved by configuration of the routers, or by signaling, as defined in [PWE3-CTRL].

The control word is defined as follows:

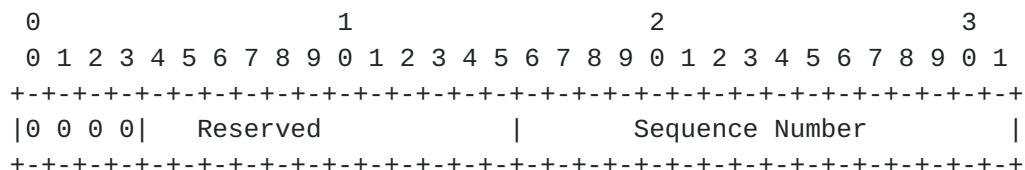

In the above diagram the first 4 bits MUST be set to 0 to indicate PW data. The rest of the first 16 bits are reserved for future use. They MUST be set to 0 when transmitting, and MUST be ignored upon receipt.

The next 16 bits provide a sequence number that can be used to guarantee ordered frame delivery. The processing of the sequence number field is OPTIONAL.

The sequence number space is a 16 bit, unsigned circular space. The sequence number value 0 is used to indicate that the sequence number check algorithm is not used. The sequence number processing algorithm is found in [PWE3-CW].



#### **4.7. QoS Considerations**

The ingress PE MAY consider the user priority (PRI) field [[802.1Q](#)] of the VLAN tag header when determining the value to be placed in a QoS field of the encapsulating protocol (e.g., the EXP fields of the MPLS label stack). In a similar way, the egress PE MAY consider the QoS field of the MPLS (e.g., the EXP fields of the MPLS label stack) protocol when queuing the frame for CE-bound.

A PE MUST support the ability to carry the Ethernet PW as a best effort service over the MPLS PSN. PRI bits are kept transparent between PE devices, regardless of the QoS support of the PSN.

If an 802.1Q VLAN field is added at the PE, a default PRI setting of zero MUST be supported, a configured default value is recommended, or the value may be mapped from the QoS field of the PSN, as referred to above.

A PE may support additional QoS support by means of one or more of the following methods:

- i. One COS per PW End Service (PWES), mapped to a single COS PW at the PSN.
- ii. Multiple COS per PWES mapped to a single PW with multiple COS at the PSN.
- iii. Multiple COS per PWES mapped to multiple PWs at the PSN.

Examples of the cases above and details of the service mapping considerations are described in [Appendix B](#).

The PW guaranteed rate at the MPLS PSN level is PW service provider policy based on agreement with the customer, and may be different from the Ethernet physical port rate.

#### **5. Security Considerations**

The Ethernet pseudo wire type is subject to all of the general security considerations discussed in [[RFC3985](#)][PWE3-CTRL].

The Ethernet pseudo wire is transported on a MPLS PSN, therefore the security of the pseudo wire itself will only be as good as the security of the MPLS PSN. The MPLS PSN can be secured by various methods, as described in [[MPLS-ARCH](#)].

Security achieved by access control of MAC addresses is out of scope of this document. Additional security requirements related to the use of PW in a switching (virtual bridging) environment are not discussed





here as they are not within the scope of this document.

## **6. PSN MTU Requirements**

The MPLS PSN MUST be configured with an MTU that is large enough to transport a maximum sized Ethernet frame which has been encapsulated with a control word, a pseudo wire demultiplexor, and a tunnel encapsulation. With MPLS used as the tunneling protocol, for example, this is likely to be 8 or more bytes greater than the largest frame size. The methodology described in [FRAG] MAY be used to fragment encapsulated frames that exceed the PSN MTU. However if [FRAG] is not used and if the ingress router determines that an encapsulated layer 2 PDU exceeds the MTU of the PSN tunnel through which it must be sent, the PDU MUST be dropped.

## **7. IANA Considerations**

This document has no IANA Actions.

## **8. Full Copyright Statement**

Copyright (C) The Internet Society (2005).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

## **9. Intellectual Property Statement**

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be



found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).

## **10. Normative References**

- [PWE3-CW] "PWE3 Control Word for use over an MPLS PSN", S. Bryant, G. Swallow, D. McPherson, [draft-ietf-pwe3-cw-01.txt](#), ( work in progress ), December 2004.
- [IANA] "IANA Allocations for pseudo Wire Edge to Edge Emulation (PWE3)" Martini, Townsley, [draft-ietf-pwe3-iana-allocation-08.txt](#) (work in progress), April 2004
- [PWE3-CTRL] "Transport of Layer 2 Frames Over MPLS", Martini L., et al [draft-ietf-pwe3-control-protocol-09.txt](#), ( work in progress ), September 2004.
- [MPLS-ARCH] [RFC3031](#), "Multiprotocol Label Switching Architecture." E. Rosen, A. Viswanathan, R. Callon. January 2001.
- [802.3] IEEE802.3-2005, ISO/IEC 8802-3: 2000 (E), "IEEE Standard for Information technology -- Telecommunications and information exchange between systems -- Local and metropolitan area networks -- Specific requirements -- Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications", 2005.
- [802.1Q] ANSI/IEEE Standard 802.1Q-2005, "IEEE Standards for Local and Metropolitan Area Networks: Virtual Bridged Local Area Networks", 2005.
- [PDU] IEEE Std 802.3, 1998 Edition, "Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications" figure 3.1, 1998



## **11. Informative References**

- [RFC3985] [RFC3985](#), "PWE3 Architecture" Bryant, et al., [RFC3985](#).
- [PWE3-REQ] "Requirements for Pseudo Wire Emulation Edge-to-Edge",  
Xiao, X., McPherson, D., Pate, P., White, C., Kompella,  
K., Gill, V., Nadeau, T., [draft-ietf-pwe3-requirements-08.txt](#),  
(work in progress), September 2003.
- [PWE3-MIB] "Pseudo Wire (PW) Management Information Base  
using SMIV2", Zelig, D., Mantin, S., Nadeau, T., Danenberg,  
D., [draft-ietf-pwe3-pw-mib-04.txt](#), (work in progress),  
February 2004.
- [LDP] "LDP Specification." L. Andersson, P. Doolan, N. Feldman, A.  
Fredette, B. Thomas. January 2001. [RFC3036](#)
- [FRAG] "PWE3 Fragmentation and Reassembly", A. Malis, W. M. Townsley,  
[draft-ietf-pwe3-fragmentation-08.txt](#) ( work in progress )  
February 2005
- [FCS] "PWE3 Frame Check Sequence Retention", A. Malis, D.Allan,  
N. Del Regno, [draft-ietf-pwe3-fcs-retention-04.txt](#) (work in  
progress) September 2005

## **12. Editor Information**

Luca Martini  
Cisco Systems, Inc.  
9155 East Nichols Avenue, Suite 400  
Englewood, CO, 80112  
e-mail: [lmartini@cisco.com](mailto:lmartini@cisco.com)

## **13. Author Information**

Nasser El-Aawar  
Level 3 Communications, LLC.  
1025 Eldorado Blvd.  
Broomfield, CO, 80021  
e-mail: [nna@level3.net](mailto:nna@level3.net)



Giles Heron  
Tellabs  
Abbey Place  
24-28 Easton Street  
High Wycombe  
Bucks  
HP11 1NT  
UK  
e-mail: giles.heron@tellabs.com

Eric C. Rosen  
Cisco Systems, Inc.  
1414 Massachusetts Avenue  
Boxborough, MA 01719  
e-mail: erosen@cisco.com

#### **14. Significant Contributors**

Andrew G. Malis  
Tellabs  
90 Rio Robles Dr.  
San Jose, CA 95134  
e-mail: Andy.Malis@tellabs.com

Dan Tappan  
Cisco Systems, Inc.  
1414 Massachusetts Avenue  
Boxborough, MA 01719  
e-mail: tappan@cisco.com

Steve Vogelsang  
ECI Telecom  
Omega Corporate Center  
1300 Omega Drive  
Pittsburgh, PA 15205  
e-mail: stephen.vogelsang@ecitele.com





Vinai Sirkay  
Reliance Infocomm  
Dhirubai Ambani Knowledge City  
Navi Mumbai 400 709  
India  
e-mail: [vinai@sirkay.com](mailto:vinai@sirkay.com)

Vasile Radoaca  
Nortel Networks  
600 Technology Park  
Billerica MA 01821  
e-mail: [vasile@nortelnetworks.com](mailto:vasile@nortelnetworks.com)

Chris Liljenstolpe  
Alcatel  
11600 Sallie Mae Dr.  
9th Floor  
Reston, VA 20193  
e-mail: [chris.liljenstolpe@alcatel.com](mailto:chris.liljenstolpe@alcatel.com)

Kireeti Kompella  
Juniper Networks  
1194 N. Mathilda Ave  
Sunnyvale, CA 94089  
e-mail: [kireeti@juniper.net](mailto:kireeti@juniper.net)

Tricci So  
Nortel Networks 3500 Carling Ave.,  
Nepean, Ontario,  
Canada, K2H 8E9.  
e-mail: [tso@nortelnetworks.com](mailto:tso@nortelnetworks.com)

XiPeng Xiao  
Riverstone Networks  
5200 Great America Parkway  
Santa Clara, CA 95054  
e-mail: [xxiao@riverstonenet.com](mailto:xxiao@riverstonenet.com)



Christopher O. Flores  
T-Systems  
10700 Parkridge Boulevard  
Reston, VA 20191  
USA  
e-mail: christopher.flores@usa.telekom.de

David Zelig  
Corrigent Systems  
126, Yigal Alon St.  
Tel Aviv, ISRAEL  
e-mail: davidz@corrigent.com

Raj Sharma  
Luminous Netwokrs, Inc.  
10460 Bubb Road  
Cupertino, CA 95014  
e-mail: raj@luminous.com

Nick Tingle  
TiMetra Networks  
274 Ferguson Drive  
Mountain View, CA 94043  
e-mail: nick@timetra.com

Sunil Khandekar  
TiMetra Networks  
274 Ferguson Drive  
Mountain View, CA 94043  
email: sunil@timetra.com

Loa Andersson  
TLA-group  
e-mail: loa@pi.se



Ap A Interoperability Guidelines

Configuration Options

The following is a list of the configuration options for a point-to-point Ethernet PW based on the reference points of Figure 3:

Service and Encap on A	Encap on C	Operation at B ingress/egress	Remarks
1) Raw	Raw - Same as A		
2) Tag1	Tag2	Optional change of VLAN value	VLAN can be 0-4095 Change allowed in both directions
3) No Tag	Tag	Add/remove Tag field	Tag can be 0-4095 (note i)
4) Tag	No Tag	Remove/add Tag field	(note ii)

Figure 4: Configuration Options

Allowed combinations:

Raw and other services are not allowed on the same NSP virtual port (A). All other combinations are allowed, except that conflicting VLANs on (A) are not allowed. Note that in most point-to-point PW application the NSP virtual port is the same entity as the physical port.

Notes:

- i. Mode #3 MAY be limited to adding VLAN NULL only, since change of VLAN or association to specific VLAN can be done at the PW CE-bound side.



- ii. Mode #4 exists in layer 2 switches, but is not recommended when operating with PW since it may not preserve the user's PRI bits. If there is a need to remove the VLAN tag (for TLS at the other end of the PW) it is recommended to use mode #2 with tag2=0 (NULL VLAN) on the PW and use mode #3 at the other end of the PW.

#### IEEE 802.3x Flow Control Considerations

If the receiving node becomes congested, it can send a special frame, called the PAUSE frame, to the source node at the opposite end of the connection. The implementation MUST provide a mechanism for terminating PAUSE frames locally (i.e. at the local PE). It MUST operate as follows: PAUSE frames received on a local Ethernet port SHOULD cause the PE device to buffer, or to discard, further Ethernet frames for that port until the PAUSE condition is cleared. Optionally, the PE MAY simply discard PAUSE frames.

If the PE device wishes to pause data received on a local Ethernet port (perhaps because its own buffers are filling up or because it has received notification of congestion within the PSN) then it MAY issue a PAUSE frame on the local Ethernet port, but MUST clear this condition when willing to receive more data.

#### Ap B QoS Details

[Section 3.7](#) describes various modes for supporting PW QoS over the PSN. Examples of the above for a point to point VLAN service are:

- The classification to the PW is based on VLAN field only, regardless of the user PRI bits. The PW is assigned a specific COS (marking, scheduling, etc.) at the tunnel level.
- The classification to the PW is based on VLAN field, but the PRI bits of the user is mapped to different COS marking (and network behavior) at the PW level. Examples are and E-LSP in an MPLS network.
- The classification to the PW is based on VLAN field and the PRI bits, and frames with different PRI bits are mapped to different PWs. An example is to map a PWES to different L-LSPs in MPLS PSN in order to support multiple COS over an L-LSP capable network, or to multiple L2TPv3 sessions [L2TPv3].

The specific value to be assigned at the PSN for various COS is out of scope for this document.





Adaptation of 802.1Q COS to PSN COS

It is not required that the PSN will have the same COS definition of COS as defined in [802.1Q], and the mapping of 802.1Q COS to PSN COS is application specific and depends on the agreement between the customer and the PW provider. However, the following principles adopted from 802.1Q table 8-2 MUST be met when applying set of PSN COS based on user's PRI bits.

	----- #of available classes of service -----							
User	1	2	3	4	5	6	7	8
Priority								
0 Best Effort (Default)	0	0	0	1	1	1	1	2
1 Background	0	0	0	0	0	0	0	0
2 Spare	0	0	0	0	0	0	0	1
3 Excellent Effort	0	0	0	1	1	2	2	3
4 Controlled Load	0	1	1	2	2	3	3	4
5 Interactive Multimedia	0	1	1	2	3	4	4	5
6 Interactive Voice	0	1	2	3	4	5	5	6
7 Network Control	0	1	2	3	4	5	6	7

Figure 5: IEEE 802.1Q COS Service Mapping



#### Drop precedence

The 802.1P standard does not support drop precedence, therefore from the PW PE-bound point of view there is no mapping required. It is however possible to mark different drop precedence for different PW frames based on the operator policy and required network behavior. This functionality is not discussed further here.

PSN QoS support and signaling of QoS is out of scope of this document.