

Network Working Group
Internet Draft
Updates: [RFC5542](#) (if approved)
Intended Status: Standards Track
Expires: November 14, 2010

Praveen Muley, Ed.
Mustapha Aissaoui, Ed.
Alcatel-Lucent

May 14, 2010

Pseudowire Preferential Forwarding Status Bit
[draft-ietf-pwe3-redundancy-bit-03.txt](#)

Abstract

This document describes a mechanism for standby status signaling of redundant pseudowires (PWs) between their termination points. A set of redundant PWs is configured between provider edge (PE) nodes in single-segment pseudowire (SS-PW) applications, or between terminating provider edge (T-PE) nodes in multi-segment pseudowire (MS-PW) applications.

In order for the PE/T-PE nodes to indicate the preferred PW to use for forwarding PW packets to one another, a new status bit is needed to indicate a preferential forwarding status of active or standby for each PW in a redundant set.

In addition, a second status bit is defined to allow peer PE nodes to coordinate a switchover operation of the PW.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on November 14, 2010.

Copyright Notice

Copyright (c) 2010 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC-2119](#) [1].

Table of Contents

1.	Introduction.....	3
2.	Motivation and Scope.....	5
3.	Terminology.....	7
4.	PE Architecture.....	8
5.	Modes of Operation.....	9
5.1.	Independent Mode:.....	9
5.2.	Master/Slave Mode:.....	10
6.	PW State Transition Signaling Procedures.....	12
6.1.	PW Standby Notification Procedures in Independent mode..	12
6.2.	PW Standby notification procedures in Master/Slave mode.	12
6.2.1.	PW State Machine.....	13
6.3.	Coordination of PW Switchover.....	14
6.3.1.	Procedures at the requesting endpoint.....	16
6.3.2.	Procedures at the receiving endpoint.....	17
7.	Operational Status Mapping.....	18
7.1.	AC Defect State Entry/Exit.....	18
7.2.	PW Defect State Entry/Exit.....	18
8.	Applicability and Backward Compatibility.....	19
9.	Security Considerations.....	19
10.	MIB Considerations.....	19
11.	IANA Considerations.....	20

11.1 . Status Code for PW Preferential Forwarding Status.....	20
11.2 . Status Code for PW Request Switchover Status.....	21
12 . Major Contributing Authors.....	21
13 . Acknowledgments.....	22
14 . References.....	22
14.1 . Normative References.....	22
14.2 . Informative References.....	22
15 . Appendix A - Applications of PW Redundancy Procedures.....	23
15.1 . One Multi-homed CE with single SS-PW redundancy.....	23
15.2 . Multiple Multi-homed CEs with single SS-PW redundancy..	25
15.3 . Multi-homed CE with MS-PW redundancy.....	26
15.4 . Single Homed CE with MS-PW redundancy.....	28
15.5 . PW redundancy between H-VPLS MTU-s and PE-rs.....	29
Author's Addresses.....	31

[1](#). Introduction

In Virtual Private Wire Services (VPWS) or Virtual Private Local Area network Services (VPLS) that use SS-PWs, protection for the PW is provided by the packet switched network (PSN) layer. This may be a Resource Reservation Protocol with Traffic Engineering (RSVP-TE) label switched path (LSP) with a fast reroute (FRR) backup or an end-to-end backup LSP. There are, however, applications where PSN protection is insufficient to fully protect the PW-based service. These include the following:

In a VPWS service where the Customer Edge (CE) node is dual homed to a pair of PE nodes, PW redundancy mechanisms are required to ensure that the correct PW is used for forwarding when attachment circuit (AC) redundancy is used. PW redundancy mechanisms are also required when multiple redundant MS-PWs are used between T-PEs, to ensure that both T-PEs use the same MS-PW to forward to one another.

In a hierarchical VPLS (H-VPLS) service, PW redundancy mechanisms are required to enable a multi-tenant unit switch (MTU-s) to be dual-homed to two PE-rs devices.

In these cases, pseudowire redundancy mechanisms are required. These scenarios are described in the PW redundancy and framework document [\[5\]](#).

Scenarios, such as those above, therefore rely on a set of two or more pseudowires to protect a given VPWS or VPLS . Only one of these pseudowires is used by the PEs to forward user traffic on at any given time. This is the active PW. The other PWs in the set are

protocol [2]. In addition, a second status bit is defined to allow peer PE nodes to coordinate a switchover operation of the PW from active to standby, or vice versa.

2. Motivation and Scope

The PWE3 control protocol [2] defines the following status codes in PW the status TLV to indicate the operational state for an AC and a PW:

0x00000000 - Pseudowire forwarding (clear all failures)

0x00000001 - Pseudowire Not Forwarding

0x00000002 - Local Attachment Circuit (ingress) Receive Fault

0x00000004 - Local Attachment Circuit (egress) Transmit Fault

0x00000008 - Local PSN-facing PW (ingress) Receive Fault

0x00000010 - Local PSN-facing PW (egress) Transmit Fault

The scenarios defined in [5] allow the provisioning of a primary PW and one or many secondary PWs in the same VPWS or VPLS service.

A PE node makes a selection of which PW to activate at any given time for the purpose of forwarding user packets. This selection takes into account the local operational state of the PW as well as the remote operational state of the PW as indicated in the status bits of the PW it received from the peer PE node.

In the absence of faults, all PWs are operationally UP both locally and remotely and a PE node needs to select a single PW to forward user packets to. This is referred to as the active PW. All other PWs will be in standby and must not be used to forward user packets.

In order for both ends of the service to select the same PW for forwarding user packets, this document defines a new status bit, the 'preferential forwarding' status bit, to allow a PE node to indicate the preferential forwarding state of a PW to its peer PE node.

In addition, a second status bit is defined to allow peer PE nodes to coordinate a switchover operation of the PW if required by the application. This is known as the 'request switchover' status bit.

Together, the mechanisms described in this document achieve the following PW protection capabilities:

- a. A MANDATORY 1:1 PW protection with a single active PW and one standby PW. An active PW can forward data traffic and control plane traffic, such as OAM packets. A standby PW does not carry data traffic.
- b. An OPTIONAL N:1 PW protection scheme with a single active PW and N standby PWs.
- c. An OPTIONAL mechanism to allow PW endpoints to coordinate the switchover to a given PW by using an explicit request/acknowledgment switchover procedure. This mechanism is complementary to the Independent mode of operation and is described in [Section 6.3](#). This mechanism can be invoked manually by the user, effectively providing a manual switchover capability. It can also be invoked automatically to resolve a situation where the PW endpoints could not match the two directions of the PW.
- d. An OPTIONAL, locally configured precedence to govern the selection of a PW when more than one PW qualify for the active state, as defined in sections [5.1](#) and [5.2](#). The PW with the lowest precedence value has the highest priority. Precedence may be configured via, for example, a local configuration parameter at the PW endpoint.
- e. OPTIONALLY, implementations can designate by configuration one PW in the 1:1 or N:1 set as a primary PW and the remaining as secondary PWs. If more than one PW qualify for the active state, as defined in sections [5.1](#) and [5.2](#), a PE node selects the primary PW in preference to a secondary PW. In other words, the primary PW has implicitly the lowest precedence value. Furthermore, a PE node reverts to the primary PW immediately after it comes back up or after the expiration of a delay. The PE node can use the PW precedence to select a secondary PW among many that qualify for active state.

These protection schemes are provided using the following operational modes:

1. An independent mode of operation in which each PW endpoint
node uses its own local rule to select which PW it intends to activate at any given time and advertises it to the remote endpoints. Only a PW which is operationally UP and which indicated Active status bit locally and remotely is in the Active state and can be used to forward data packets. This is described in [Section 5.1](#).

2. A Master/Slave mode in which one PW endpoint, the Master endpoint, selects and dictates to the other endpoint(s), the Slave endpoint(s), which PW to activate. This is described in [Section 5.2](#).

The above mechanisms and operational modes allow the following:

- a. Multi-homing of a CE device to two or more PE nodes.
- b. Multi-homing of a PE node to two or more PE nodes.

More details of how these schemes are used can be found in Informative [Appendix A](#).

Note that this document specifies the mechanisms to support PW redundancy where a set of redundant PWs terminate on either a PE (for SS-PW) or a T-PE (for MS-PW). PW redundancy scenarios where the redundant set of PW segments terminate on an S-PE are for further study.

3. Terminology

UP PW: A PW which has been configured (label mapping exchanged between PEs) and is not in any of the PW defect states specified in [\[2\]](#). Such a PW is available for forwarding traffic.

DOWN PW: A PW that has either not been fully configured, or has been configured and is in any of the PW defect states specified in [\[2\]](#), such a PW is not available for forwarding traffic.

Active PW: An UP PW used for forwarding user and OAM traffic.

Standby PW: An UP PW that is not used for forwarding user traffic, but may forward OAM traffic.

Primary PW: the PW which a PW endpoint activates in preference to any other PW when more than one PW qualify for active state. When the primary PW comes back up after a failure and qualifies for active state, the PW endpoint always reverts to it. The designation of Primary is performed by local configuration for the PW at the PE.

Secondary PW: when it qualifies for active state, a Secondary PW is only selected if no Primary PW is configured or if the configured primary PW does not qualify for active state (e.g., is DOWN). By default, a PW in a redundancy PW set is

considered secondary. There is no Revertive mechanism among secondary PWs.

PW Precedence: this is a configuration local to the PE that dictates the order in which a forwarder chooses to use a PW when multiple PWs all qualify for the active state. Note that a PW which has been configured as Primary has implicitly the lowest precedence value.

PW Endpoint: A PE where a PW terminates on a point where Native Service Processing is performed, e.g., A SS-PW PE, an MS-PW T-PE, or an H-VPLS MTU-s or PE-rs.

This document uses the term 'PE' to be synonymous with both PEs as per [RFC3985](#) and T-PEs as per [RFC5659](#).

This document uses the term 'PW' to be synonymous with both PWs as per [RFC3985](#) and SS-PWs and MS-PWs as per [RFC5659](#).

4. PE Architecture

Figure 4-1 shows the PE architecture for PW redundancy, when more than one PW in a redundant set is associated with a single AC. This is based on the architecture in Figure 4b of [RFC3985](#) [6]. The forwarder selects which of the redundant PWs to using the criteria described in this document.

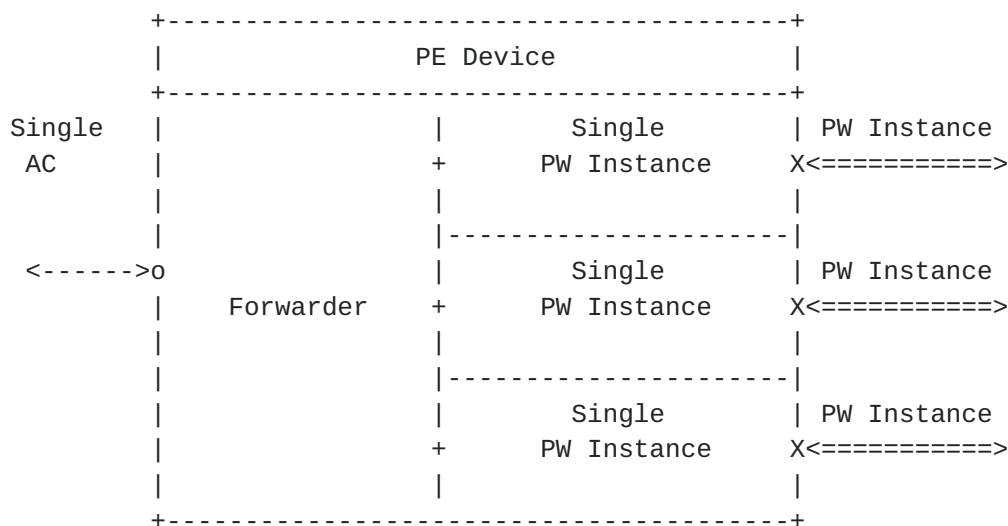


Figure 4-1 PE Architecture for PW redundancy

5. Modes of Operation

There are two modes of operation for the use of the PW preferential forwarding status bits:

- o Independent mode
- o Master/Slave mode.

5.1. Independent Mode:

PW endpoint nodes independently select which PW they intend to make active and which PWs they intend to make standby. They advertise the corresponding Active/Standby forwarding state for each PW. Each PW endpoint compares local and remote status and uses the PW that is operationally UP at both endpoints and that shows Active states at both the local and remote endpoint.

If more than one PW qualify for the Active state, each PW endpoint MUST implement a common mechanism to choose the PW for forwarding. If this mechanism uses a precedence value for the PW, it must use the PW with the lowest configured precedence value. The precedence parameter is optional.

If more than one PW qualify for the Active state, and the PW endpoint is configured with one PW as primary, it must use the primary PW in preference to all secondary PWs. If a primary PW is not available, it must use the secondary PW with the lowest precedence value. If the primary PW becomes available, a PW endpoint must revert to it immediately or after the expiration of a configurable delay. These primary/secondary procedures are optional.

In steady state with consistent configuration, a PE will always find an Active PW. However, it is possible that due to a misconfiguration, such a PW is not found. In the event that an active PW is not found, a management indication SHOULD be generated. If a management indication for failure to find an active PW was generated and an active PW is subsequently found, a management indication should be generated, so clearing the previous failure indication. Additionally, a PE may use the optional request switchover procedures described in [Section 6.3](#). to have both PE nodes switch to a common PW.

There may also be transient conditions where endpoints do not share a common view of the active/standby state of the PWs. This could be caused by propagation delay of the T-LDP status messages between

endpoints. In this case, the behavior of the receiving endpoint is outside the scope of this document.

Thus, in this mode of operation, the following definition of Active and Standby PW states apply:

o Active State

A PW is considered to be in Active state when the PW labels are exchanged between its two endpoints, and the status bits exchanged between the endpoints indicate the PW is UP and Active at both endpoints. In this state user traffic can flow over the PW in both directions.

o Standby State

A PW is considered to be in Standby state when the PW labels are exchanged between its two endpoints, but the status bits exchanged indicate the PW is in Standby state at one or both endpoints. In this state the endpoints MUST NOT forward data traffic over the PW but MAY allow PW OAM packets, e.g., VCCV, to be sent and received in order to test the liveness of standby PWs. If the PW is a spoke in H-VPLS, any MAC addresses learned via the PW SHOULD be flushed when it transitions to Standby state according to the procedures in [RFC4762](#) [3] and [9].

5.2. Master/Slave Mode:

One endpoint node of the redundant set of PWs is designated the Master and is responsible for selecting which PW both endpoints must use to forward user traffic.

The Master indicates the forwarding state in the Active/Standby status bit. The other endpoint node, the Slave, MUST follow the decision of the Master node based on the received status bits.

One endpoint of the PW, the Master, actively selects which PW to activate and uses it for forwarding user traffic. This status is indicated to the Slave node by setting the preferential forwarding status bit in the status bit TLV to Active. It does not forward user traffic to any other of the PW's in the redundancy set to the slave node and indicates this by setting the preferential forwarding status bit in the status bit TLV to Standby for those PWs. The master node MUST ignore any Active/Standby status bits received from the Slave nodes.

If more than one PW qualify for the Active state, each PW endpoint MUST implement a common mechanism to choose the PW for forwarding. If this mechanism uses a precedence value for the PW, it must use the PW with the lowest configured precedence value. The precedence parameter is optional.

If more than one PW qualify for the Active state, and the PW endpoint is configured with one PW as primary, it must use the primary PW in preference to all secondary PWs. If a primary PW is not available, it must use the secondary PW with the lowest precedence value. If the primary PW becomes available, a PW endpoint must revert to it immediately or after the expiration of a configurable delay. These primary/secondary procedures are optional.

The Slave endpoint(s) are required to act on the status bits received from the Master. When the received status bit transitions from Active to Standby, a Slave node MUST stop forwarding over the previously active PW. When the received status bit transitions from Standby to Active for a given PW, the Slave node MUST start forwarding user traffic over this PW.

There is a single PE Master PW endpoint node and one or many PE PW endpoint Slave nodes. The assignment of Master/Slave roles to the PW endpoints is performed by local configuration. Note that the above behavior assumes correct configuration of the Master and Slave endpoints. This document does not define a mechanism to detect errors in the configuration.

In this mode of operation, the following definition of Active and Standby PW states apply:

- o Active State

A PW is considered to be in Active state when the PW labels are exchanged between its two endpoints, and the status bits exchanged between the endpoints indicate the PW is UP at both endpoints, and the forwarding status sent by the Master endpoint indicates Active state. In this state user traffic can flow over the PW in both directions.

- o Standby State

A PW is considered to be in Standby state when the PW labels are exchanged between its two endpoints, but the status bits sent by the Master endpoint indicate the PW is in Standby state. In this state the endpoints MUST NOT forward data traffic over the PW but MAY allow PW OAM packets, e.g., VCCV, to be sent and received. If the PW is a

spoke in H-VPLS, any MAC addresses learned via the PW SHOULD be flushed when it transitions to Standby state according to the procedures in [RFC4762](#) [3] and [9].

6. PW State Transition Signaling Procedures

This section describes the extensions to PW status signaling and the processing rules for these extensions. It defines a new "PW preferential forwarding" bit Status Code that is to be used with the PW Status TLV specified in [RFC 4447](#) [2]. The PW preferential forwarding bit, when set, is used to signal the Standby state of the PW by one PE to the far end PE.

6.1. PW Standby Notification Procedures in Independent mode

PEs that contain PW endpoints independently select which PW they intend to use for forwarding, depending on the specific application (example applications are described in [5]). They advertise the corresponding Active/Standby forwarding state for each PW. An active forwarding state is indicated by clearing the Active/Standby status bit in the PW status TLV. A standby forwarding state is indicated by setting the Active/Standby status bit in the PW status TLV. This advertisement occurs in both the initial label mapping message and in a subsequent notification message when the forwarding state transitions as a result of a state change in the specific application.

Each PW endpoint compares the updated local and remote status and effectively activates the PW which is operationally UP at both endpoints and which shows both local Active and remote Active states.

When a PW is in active state, the PEs can forward both user packets and OAM packets over the PW.

When a PW is in standby state, the PEs MUST NOT forward user packets over the PW but MAY forward PW OAM packets.

For MS-PWs, S-PEs MUST relay the PW status notification containing both the operational and preferential forwarding status bits between ingress and egress PWs as per the procedures defined in [4].

6.2. PW Standby notification procedures in Master/Slave mode

Whenever the Master PW endpoint selects or deselects a PW for forwarding user traffic at its end, it explicitly notifies the event to the remote Slave endpoint. The slave endpoint carries out the corresponding action on receiving the PW state change notification.

If the PW preferential forwarding bit in PW Status TLV received by the slave is set, it indicates that the PW at the Master end is not used for forwarding and is thus kept in the Standby state, the PW MUST also not be used for forwarding at Slave endpoint. Clearing the PW Preferential Forwarding bit in PW Status TLV indicates that the PW at the Master endpoint is used for forwarding and is in Active state, and the receiving Slave endpoint MUST activate the PW if it was previously not used for forwarding.

When this mechanism is used, a common group-id in the PWid FEC element or Grouping TLV in Generalized PWid FEC Element defined in [2] MAY be used to signal PWs in groups in order to minimize the number of LDP status messages that must be sent. When PWs are provisioned with such grouping a termination point sends a single "wildcard" Notification message using a PW FEC TLV with only the group ID set, to denote this change in status for all affected PW connections. This status message contains either the PW FEC TLV with only the Group ID set, or else it contains the PW Generalized FEC TLV with only the PW Grouping ID TLV. As mentioned in [2], the Group ID field of the PWid FEC Element, or the PW Grouping TLV used with the Generalized ID FEC Element, can be used to send status notification for all arbitrary set of PWs. For example, Group-ID in PWid may be used to send wildcard status notification message for a group of PWs when PWid FEC element is used for PW state signaling. When Generalized PWid FEC Element defined is used in PW state signaling, PW Grouping TLV may be used for wildcard status notification for a group of PWs.

For MS-PWs, S-PEs MUST relay the PW status notification containing both the operational and preferential forwarding status bits between ingress and egress PW segments as per the procedures defined in [4].

6.2.1. PW State Machine

It is convenient to describe the PW state change behavior in terms of a state machine (Table 1). The PW state machine is explained in detail in the two defined states and the behavior is presented as a state transition table. The same state machine is applicable to PW Groups.

STATE	EVENT	NEW STATE
ACTIVE	PW put in Standby (master) Action: Transmit PW preferential forwarding bit set	STANDBY
	Receive PW preferential forwarding bit set (slave) Action: Stop forwarding over PW	STANDBY
	Receive PW preferential forwarding bit set but bit not supported Action: None	ACTIVE
	Receive PW preferential forwarding bit clear Action: None.	ACTIVE
STANDBY	PW activated (master) Action: Transmit PW preferential forwarding bit clear	ACTIVE
	Receive PW preferential forwarding bit clear (slave) Action: Activate PW	ACTIVE
	Receive PW preferential forwarding bit clear but bit not supported Action: None	STANDBY
	Receive PW preferential forwarding bit set Action: No action	STANDBY

Table 1 PW State Transition Table

6.3. Coordination of PW Switchover

There are PW redundancy applications which require that PE nodes coordinate the switchover to a PW such that both endpoints will forward over the same PW at any given time. One such application for

redundant MS-PW is identified in [5]. Multiple MS-PWs are configured between a pair of T-PE nodes. The paths of these MS-PWs are diverse and are switched at different S-PE nodes. Only one of these MS-PWs is active at any given time. The others are put in standby. The endpoints follow the Independent Mode procedures to use the PW which is both UP and for which both endpoints advertise an Active 'preferential forwarding' status bit.

The trigger for sending a request to switchover of the MS-PW by one endpoint can be an operational event, for example a failure, which causes the endpoints to be unable to find a common PW for which both endpoints advertise an Active 'preferential forwarding' status bit. The other trigger is the execution of an administrative maintenance operation by the network operator in order to move the traffic away from the nodes or links currently used by the active PW.

Unlike the case of a Master/Slave mode of operation, the endpoint requesting the switchover requires explicit acknowledgement from the peer endpoint that the request can be honored before it switches to another PW. Furthermore, any of the endpoints can make the request to switchover.

This document specifies a second status bit that is used by a PE to request that its peer PE switchover to use a different active PW. This bit is referred to as the 'request PW switchover' status bit. The 'preferential forwarding' status bit continues to be used by each endpoint to indicate its current local settings of the active/standby state of each PW in the redundancy set. In other words, as in the Independent mode, it indicates to the far-end which of the PWs is being used to forward packets and which is being put in standby. It can thus be used as a way for the far-end to acknowledge the requested switchover operation.

The request switchover bit is OPTIONAL and, if received by a PE, is ignored if not understood.

If the request switchover bit is supported by both sending and receiving PEs, the following procedures MUST be followed by both endpoints of a PW to coordinate the switchover of the PW.

S-PEs nodes MUST relay the PW status notification containing the operational status bits, as well as the 'preferential forwarding' and 'request switchover' status bits between ingress and egress PW segments as per the procedures defined in [4].

6.3.1. Procedures at the requesting endpoint

- a. The requesting endpoint sends a Status TLV in the LDP notification message with the 'request switchover' bit set on the PW it desires to switch to.
- b. The endpoint does not activate forwarding on that PW at this point in time. It MAY, however, enable receiving on that PW. Thus the 'preferential forwarding' status bit still reflects the currently-used PW.
- c. The requesting endpoint starts a timer while waiting the remote endpoint to acknowledge the request.
- d. If while waiting for the acknowledgment, the requesting endpoint receives a request from its peer to switchover to the same or a different PW, it must perform the following:
 - i. If its address is higher than that of the peer, this endpoint ignores the request and continues to wait for the acknowledgement from its peer.
 - ii. If its system IP address is lower than that of its peer, it aborts the timer and immediately starts the procedures of the receiving endpoint in [Section 6.3.2](#).
- e. If while waiting for the acknowledgment, the requesting endpoint receives a status notification message from its peer with the 'preferential forwarding' status bit cleared in the requested PW, it must treat this as an explicit acknowledgment of the request and must perform the following:
 - i. Abort the timer.
 - ii. Activate the PW.
 - iii. Send an update status notification message with the 'preferential forwarding' status bit and the 'request switchover' bit clear on the newly active PW and send an update status notification message with the 'preferential forwarding' status bit set in the previously active PW.
- f. If while waiting for the acknowledgment, the requesting endpoint detects that the requested PW went into operational Down state locally, and could use an alternate PW which is operationally UP, it must perform the following:

- i. Abort the timer.
 - ii. Issue a new request to switchover to the alternate PW.
 - iii. Re-start the timer.
- g. If, while waiting for the acknowledgment, the requesting endpoint detects that the requested PW went into an operational Down state locally, and could not use an alternate PW which is operationally UP, it must perform the following:
 - i. Abort the timer.
 - ii. Send an update status notification message with the 'preferential forwarding' status bit unchanged and the 'request switchover' bit reset for the requested PW.
- h. If, while waiting for the acknowledgment, the timer expires, the requesting endpoint MUST assume that the request was rejected and MAY issue a new request.
- i. If the requesting node receives the acknowledgment after the request expired, it will treat it as if the remote endpoint unilaterally switched between the PWs without issuing a request. In that case, it may issue a new request and follow the requesting endpoint procedures to synchronize which PW to use for the transmit and receive directions of the emulated service.

6.3.2. Procedures at the receiving endpoint

- a. Upon receiving a status notification message with the 'request switchover' bit set on a PW different from the currently active one, and the requested PW is operationally UP, the receiving endpoint must perform the following:
 - i. Activate the PW.
 - ii. Send an update status notification message with the 'preferential forwarding' status bit clear and the 'request switchover' bit reset on the newly active PW , and send an update status notification message with the 'preferential forwarding' status bit set in the previously active PW.
 - iii. Upon receiving a status notification message with the 'request switchover' bit set on a PW different from the currently active one, and the requested PW is

operationally Down, the receiving endpoint MUST ignore the request.

7. Operational Status Mapping

The generation and processing of the PW Status TLV must follow the procedures in [RFC 4447](#) [2]. The PW status TLV is sent on the active PW and standby PWs to make sure the remote AC and remote PW states are always known to the local PE node.

The generation and processing of PW Status TLV by an S-PE node in a MS-PW must follow the procedures in [4].

The procedures for mapping the operational status between a PW and an AC in a PW service must follow the rules in [7] with the following modifications.

7.1. AC Defect State Entry/Exit

A PE enters the AC receive (or transmit) defect state for a PW when one or more of the conditions specified for this PW type in [7] are met.

When a PE enters the AC receive (or transmit) defect state for a PW, it must send a forward (reverse) defect indication to the remote peers over all PWs in the redundancy set when required by the PW type in [7].

When a PE exits the AC receive (or transmit) defect state for a PW service, it must clear the forward (or reverse) defect indication to the remote peers over all PWs in the redundancy set when required by the PW type in [7].

7.2. PW Defect State Entry/Exit

A PE enters the PW receive (or transmit) defect state for a PW service when one or more of the conditions specified in [Section 8.2.1](#) ([Section 8.2.2](#)) in [7] are met for all PWs in the redundancy set.

When a PE enters the PW receive (or transmit) defect state for a PW service, it must send a reverse (or forward) defect indication over one or more of the PWs in the redundancy set if the PW failure was detected by this PE without receiving a forward defect indication from the remote PE [7].

When a PE exits the PW receive (or transmit) defect state for a PW, it must clear the reverse (or forward) defect indication over any PW in the redundancy set if applicable.

8. Applicability and Backward Compatibility

The mechanism defined in this document is applicable to applications where standby state signaling of a PW or PW group is required.

A PE implementation that uses the mechanisms described in this document MUST negotiate the use of PW status TLV between its T-LDP peers as per [RFC 4447](#) [2]. If PW Status TLV is found to be not supported by either of its endpoint after status negotiation procedures, then the mechanisms specified in this document cannot be used.

A PE implementation compliant to [RFC 4447](#) [2], and which does not support the generation or processing of the 'preferential forwarding' status bit or of the 'request switchover' status bit, will ignore these status bits if they are received from a peer PE.

9. Security Considerations

This document uses the LDP extensions that are needed for protecting pseudo-wires. It will have the same security properties as in the PWE3 control protocol [2].

10. MIB Considerations

This document makes the following update to the PwOperStatusTC textual convention in [RFC5542](#) [8]:

```
PwOperStatusTC ::= TEXTUAL-CONVENTION
    STATUS      current
    DESCRIPTION
        "Indicates the operational status of the PW.
```

- up(1): Ready to pass packets.
- down(2): PW signaling is not yet finished, or indications available at the service level indicate that the PW is not passing packets.

- testing(3): AdminStatus at the PW level is set to test.

- dormant(4): The PW is not in a condition to pass packets but is in a 'pending' state, waiting for some external event.

- notPresent(5): Some component is missing to accomplish the setup of the PW. It can be configuration error, incomplete configuration, or a missing H/W component.

- lowerLayerDown(6): One or more of the lower-layer interfaces responsible for running the underlying PSN is not in OperStatus 'up' state."

```
SYNTAX    INTEGER {  
    up(1),  
    down(2),  
    testing(3),  
    dormant(4),  
    notPresent(5),  
    lowerLayerDown(6)  
}
```

11. IANA Considerations

This document defines the following PW status codes for the PW redundancy application. IANA is requested to allocate these from the PW Status Codes registry.

11.1. Status Code for PW Preferential Forwarding Status

0x00000020 When the bit is set, it indicates "PW forwarding standby".

When the bit is cleared, it indicates "PW forwarding active".

11.2. Status Code for PW Request Switchover Status

0x00000040 When the bit is set, it represents "Request switchover to this PW".

When the bit is cleared, it represents no specific action.

12. Major Contributing Authors

The editors would like to thank Matthew Bocci, Pranjali Kumar Dutta, Giles Heron, Marc Lasserre, Luca Martini, Thomas Nadeau, Jonathan Newton, Hamid Ould-Brahim, and Olen Stokes, who made a major contribution to the development of this document.

Matthew Bocci
Alcatel-Lucent
Email: matthew.bocci@alcatel-lucent.com

Pranjali Kumar Dutta
Alcatel-Lucent
Email: pdutta@alcatel-lucent.com

Giles Heron
BT
giles.heron@gmail.com

Marc Lasserre
Alcatel-Lucent
Email: mlasserre@alcatel-lucent.com

Luca Martini
Cisco Systems, Inc.
Email: lmartini@cisco.com

Thomas Nadeau
BT
tom.nadeau@bt.com

Jonathan Newton
Cable & Wireless
Email: Jonathan.Newton@cw.com

Hamid Ould-Brahim
Nortel
Email: hbrahim@nortel.com

Olen Stokes
Extreme Networks
Email: ostokes@extremenetworks.com

13. Acknowledgments

The authors would like to thank Vach Kompella, Kendall Harvey, Tiberiu Grigoriu, John Rigby, Prashanth Ishwar, Neil Hart, Kajal Saha, Florin Balus, Philippe Niger, Dave McDysan, and Roman Krzanowski for their valuable comments and suggestions.

14. References

14.1. Normative References

- [1] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [2] Martini, L., et al., "Pseudowire Setup and Maintenance using LDP", [RFC 4447](#), April 2006.
- [3] Kompella, V., Lasserre, M., et al., "Virtual Private LAN Service (VPLS) Using LDP Signalling", [RFC 4762](#), January 2007.

14.2. Informative References

- [4] Martini, L., et al., "Segmented Pseudo Wire", [draft-ietf-pwe3-segmented-pw-13.txt](#), August 2009.
- [5] Muley, P., et al., "Pseudowire (PW) Redundancy", [draft-ietf-pwe3-redundancy-02.txt](#), October 2009.
- [6] Bryant, S., et al., "Pseudo Wire Emulation Edge-to-Edge (PWE3) Architecture", [RFC 3985](#), March 2005
- [7] Aissaoui, M., et al., "Pseudo Wire (PW) OAM Message Mapping", [draft-ietf-pwe3-oam-msg-map-11.txt](#), June 2009.
- [8] Nadeau, T., Zelig, D., Nicklass, O., "Definitions of Textual Conventions for Pseudowire (PW) Management", [RFC5542](#), May 2009

[9] Dutta, P., Lasserre, M., Stokes, O., "LDP Extensions for Optimized MAC Address Withdrawal in H-VPLS", [draft-ietf-l2vpn-vpls-ldp-mac-opt-00.txt](#), April 2009

15. Appendix A - Applications of PW Redundancy Procedures

This section shows how the mechanisms described in this document are used to achieve the desired protection behavior for the scenarios described in the PW redundancy requirements and framework document [5].

15.1. One Multi-homed CE with single SS-PW redundancy

The following figure illustrates an application of single segment pseudowire redundancy.

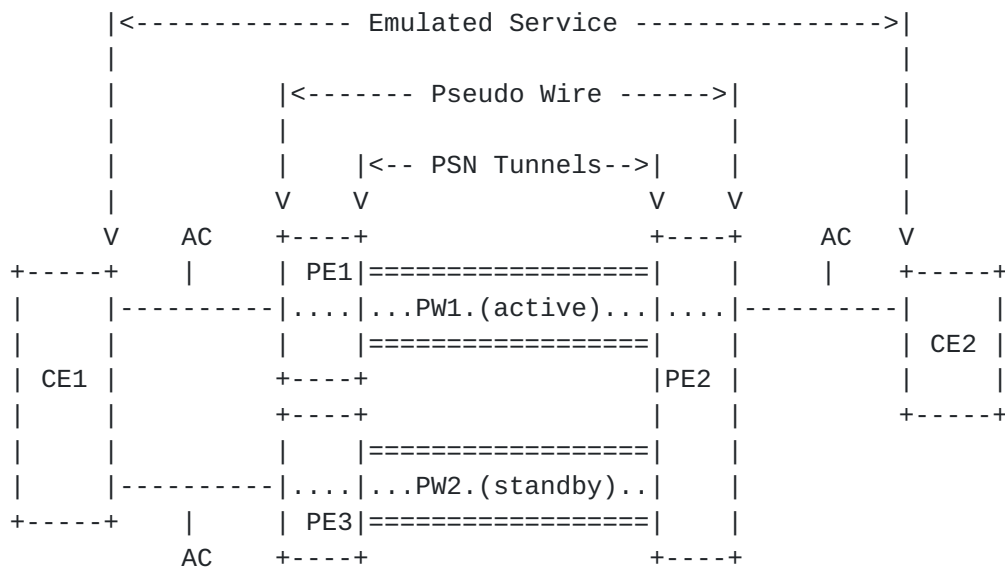


Figure 15-1 Multi-homed CE with single SS-PW redundancy

The application in Figure 15-1 makes use of the Independent mode of operation.

CE1 is dual homed to PE1 and to PE3 by attachment circuits. The method for dual-homing of CE1 to PE1 and to PE3 nodes, and the protocols used, are outside the scope of this document (see [5]).

In this example, the AC from CE1 to PE1 is active, while the AC from CE1 to PE3 is standby, as determined by the redundancy protocol running on the ACs. Thus, in normal operation, PE1 and PE3 will advertise "Active" and "Standby" 'preferential forwarding' status bit respectively to PE2, reflecting the forwarding state of the two ACs to CE1 as determined by the AC dual-homing protocol. PE2 advertises 'preferential forwarding' status bit of "Active" on both PW1 and PW2 since the AC to CE2 is single homed. As both the local and remote operational and preferential forwarding status for PW1 are UP and Active, traffic is forwarded over PW1 in both directions.

On failure of the AC between CE1 and PE1, the forwarding state of the AC on PE3 transitions to Active. PE3 then announces the newly changed 'preferential forwarding' status bit of "active" to PE2. PE1 will advertise a PW status notification message indicating that the AC between CE1 and PE1 is operationally down. PE2 matches the local and remote preferential forwarding status of "active" and operational status "Up" and select PW2 as the new active pseudowire to send traffic to.

On failure of PE1 node, PE3 will detect it and will transition the forwarding state of its AC to Active. The method by which PE3 detects that PE1 is down is outside the scope of this document. PE3 then announces the newly changed 'preferential forwarding' status bit of "active" to PE2. PE3 and PE2 match the local and remote preferential forwarding status of "active" and operational status "Up" and select PW2 as the new active pseudo-wire to send traffic to. Note that PE2 may have detected that the PW to PE1 went down via T-LDP Hello timeout or via other means. However, it will not be able to forward user traffic until it receives the updated status bit from PE3.

Note in this example, the receipt of the operational status of the AC on the CE1-PE1 link is normally sufficient for PE2 to switch to PW2. However, the operator may want to trigger the switchover of the PW for administrative reasons, e.g , maintenance, and thus the use of the 'preferential forwarding' status bit is required to notify PE2 to trigger the switchover.

Note that the primary/secondary procedures do not apply in this case as the PW Active/Standby status is driven by the AC forwarding state as determined by the AC dual-homing protocol used.

15.2. Multiple Multi-homed CEs with single SS-PW redundancy

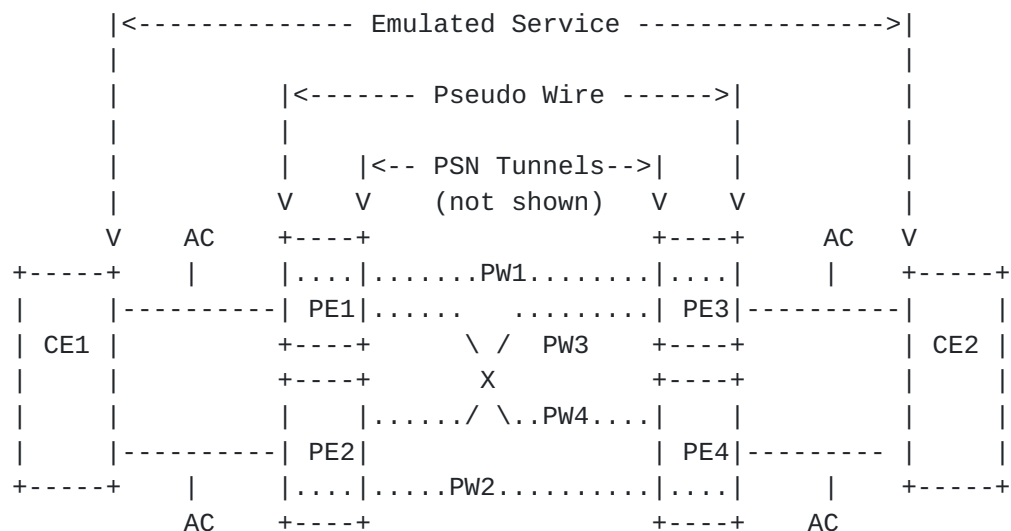


Figure 15-2 Multiple Multi-homed CEs with single SS-PW redundancy

The application in Figure 15-2 makes use of the Independent mode of operation.

CE1 is dual-homed to PE1 and PE2. CE2 is dual-homed PE3 and PE4. The method for dual-homing and the used protocols are outside the scope of this document. Note that the PSN tunnels are not shown in this figure for clarity. However, it can be assumed that each of the PWs shown is encapsulated in a separate PSN tunnel.

PE1 advertises the preferential status "active" and operational status "UP" for pseudowires PW1 and PW4 connected to PE3 and PE4. This status reflects the forwarding state of the AC attached to PE1. PE2 advertises preferential status "standby" where as operational status "UP" for pseudowires PW2 and PW3 to PE3 and PE4. PE3 advertises preferential status "standby" where as operational status "UP" for pseudo-wires PW1 and PW3 to PE1 and PE2. PE4 advertise the preferential status "active" and operational status "UP" for pseudo-wires PW2 and PW4 to PE2 and PE1 respectively. The method of deriving Active/Standby status of the AC is outside the scope of this document. Thus by matching the local and remote preferential forwarding status of "active" and operational status "Up" of pseudowire, the PE nodes determine which PW should be in the Active state. In this case it is PW4 that will be selected.

On failure of the AC between CE1 and PE1, the forwarding state of the AC on PE2 is changed to Active. PE2 then announces the newly changed 'preferential forwarding' status bit of "active" to PE3 and PE4. PE1 will advertise a PW status notification message indicating that the AC between CE1 and PE1 is operationally down. PE2 and PE4 match the local and remote preferential forwarding status of "active" and operational status "Up" and select PW2 as the new active pseudowire to send traffic to.

On failure of PE1 node, PE2 will detect it and will transition the forwarding state of its AC to Active. The method by which PE2 detects that PE1 is down is outside the scope of this document. PE2 then announces the newly changed 'preferential forwarding' status bit of "active" to PE3 and PE4. PE2 and PE4 match the local and remote preferential forwarding status of "active" and operational status "Up" and select PW2 as the new active pseudo-wire to send traffic to. Note that PE3 and PE4 may have detected that the PW to PE1 went down via T-LDP Hello timeout or via other means. However, they will not be able to forward user traffic until they received the updated status bit from PE2.

Because each dual-homing algorithm running on the two node sets, i.e., {CE1, PE1, PE2} and {CE2, PE3, PE4}, selects the active AC independently, there is a need to signal the active status of the AC such that the PE nodes can select a common active PW for end-to-end forwarding between CE1 and CE2 as per the procedures in the independent mode.

Note that any primary/secondary procedures, as defined in sections 5.1. and 5.2. , do not apply in this use case as the Active/Standby status is driven by the AC forwarding state as determined by the AC dual-homing protocol used.

15.3. Multi-homed CE with MS-PW redundancy

The following figure illustrates an application of multi-segment pseudowire redundancy.

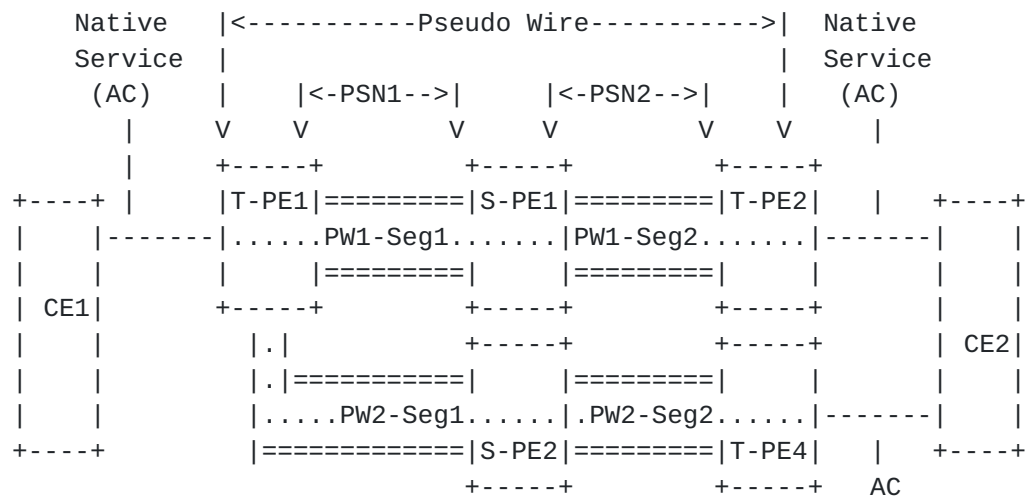


Figure 15-3 Multi-homed CE with MS-PW redundancy

The application in Figure 15-3 makes use of the Independent mode of operation.

CE2 is dual-homed to T-PE2 and T-PE4. PW1 and PW2 are used to extend the resilient connectivity all the way to T-PE1. PW1 has two segments and is active pseudowire while PW2 has two segments and is a standby pseudo-wire. This application requires support for MS-PW with segments of the same type as described in [4].

The operation in this case is the same as in the case of SS-PW as described in [Section 15.1](#). . The only difference is that the S-PE nodes need to relay the PW status notification containing both the operational and forwarding status to the T-PE nodes.

15.4. Single Homed CE with MS-PW redundancy

The following is an application of the independent mode of operation along with the optional request switchover procedures in order to provide N:1 PW protection. A revertive behavior to a primary PW is shown as an example of configuring and using the primary/secondary procedures described in sections 5.1. and 5.2. .

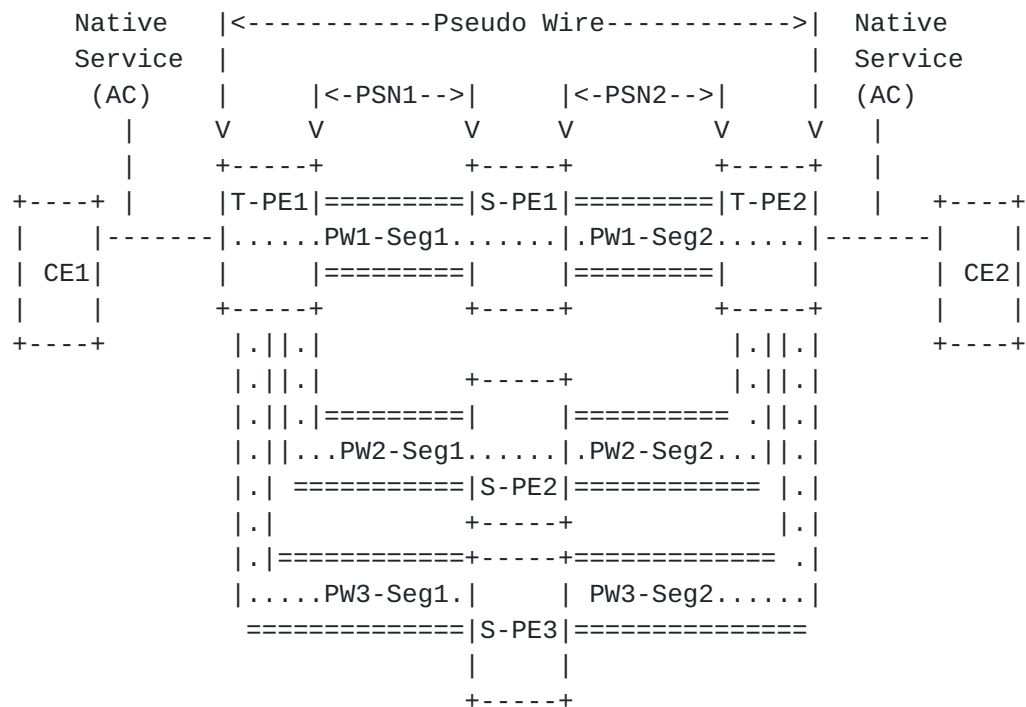


Figure 15-4 Single homed CE with multi-segment pseudo-wire redundancy

CE1 is connected to PE1 in provider Edge 1 and CE2 to PE2 in provider edge 2 respectively. There are three segmented PWs. A primary PW, PW1, is switched at S-PE1. A primary PW, PW1 has the lowest precedence value of zero. A secondary PW, PW2, which is switched at S-PE2 and has a precedence of 1. Finally, another secondary PW, PW3, is switched at S-PE3 and has a precedence of 2. The precedence is locally configured at the endpoints of the PW, i.e., T-PE1 and T-PE2. Lower the precedence value, higher the priority.

T-PE1 and T-PE2 will select the PW they intend to activate based on their local and remote operational state as well as the local precedence configuration. In this case, they will both advertise preferential forwarding' status bit of "active" on PW1 and of "standby" on PW2 and PW3 using priority derived from local precedence configuration. Assuming all PWs are operationally UP, T-PE1 and T-PE2 will use PW1 to forward user packets.

If PW1 fails, then the T-PE detecting the failure will send a status notification to the remote T-PE with a "PW Down" bit set as well as the 'preferential forwarding' status bit set on PW1. It will also clear 'preferential forwarding' status bit on PW2 as it is the next it has the next lowest precedence value. T-PE2 will also perform the same steps as soon as it is informed of the failure of PW1. Both T-PE nodes will perform a match on the 'preferential forwarding' status of "active" and operational status of "Up" and will use PW2 to forward user packets.

However this does not guarantee that the T-PEs will choose the same PW from the redundant set to forward on, for a given emulated service, at all times. This may be due to a mismatch of the configuration of the PW precedence in each T-PE. This may also be due to a failure which caused the endpoints to not be able to match the Active 'preferential forwarding' status bit and operational status bits. In this case, T-PE1 and/or T-PE2 can invoke the optional request switchover/acknowledgement procedures to synchronize the choice of PW to forward on in both directions.

The trigger for sending a request to switchover can also be the execution of an administrative maintenance operation by the network operator in order to move the traffic away from the T-PE/S-PE nodes /links to be serviced.

In case the request switchover is sent by both endpoints simultaneously, both T-PEs send status notification with the newly selected PW with 'request switchover' bit set, waiting for response from the other endpoint. In such situation, the T-PE with greater system address request is given precedence. This helps in synchronizing PWs in event of mismatch of precedence configuration as well.

On recovery of primary PW1, PW1 is selected to forward traffic and the secondary PW, PW2, is set to standby.

15.5. PW redundancy between H-VPLS MTU-s and PE-rs

Following figure illustrates the application of use of PW redundancy in H-VPLS for the purpose of dual-homing an MTU-s node to PE nodes using PW spokes. This application makes use of the Master/Slave mode of operation.

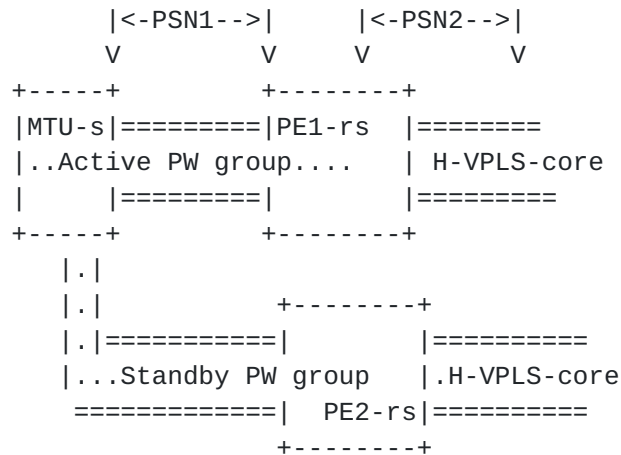


Figure 15-5 Multi-homed MTU-s in H-VPLS core

MTU-s is dual homed to PE1-rs and PE2-rs. The primary spoke PWs from MTU-s are connected to PE1-rs while the secondary PWs are connected to PE2. PE1-rs and PE2-rs are connected to H-VPLS core on the other side of network. MTU-s communicates to PE1-rs and PE2-rs the forwarding status of its member PWs for a set of VSIs having common status Active/Standby. It may be signaled using PW grouping with common group-id in Pwid FEC Element or Grouping TLV in Generalized Pwid FEC Element as defined in [2] to scale better. MTU-s derives the status of the PWs based on local policy configuration. In this example, the primary/secondary procedures, as defined in [Section 5.2](#), are used but this can be based on any other policy.

Whenever MTU-s performs a switchover, it sends a wildcard Notification Message to PE2-rs for the Standby PW group containing PW Status TLV with PW Standby bit cleared. On receiving the notification PE-2rs unblocks all member PWs identified by the PW group and state of PW group changes from Standby to Active. All procedures described in [Section 6.2](#) are applicable.

The use of the 'preferential forwarding' status bit in Master/Slave mode is similar to Topology Change Notification in RSTP controlled IEEE Ethernet Bridges but is restricted over a single hop. When these procedures are implemented, PE-rs devices are aware of switchovers at MTU-s and could generate MAC Withdraw Messages to trigger MAC flushing within the H-VPLS full mesh. By default, MTU-s devices should still trigger MAC Withdraw messages as currently defined in [6] to prevent two copies of MAC withdraws to be sent, one by MTU-s and another one by PE-rs nodes. Mechanisms to disable MAC Withdraw trigger in certain devices is out of the scope of this document

Author's Addresses

Praveen Muley
Alcatel-lucent
701 E. Middlefield Road
Mountain View, CA, USA
Email: Praveen.muley@alcatel-lucent.com

Mustapha Aissaoui
Alcatel-lucent
600 March Rd
Kanata, ON, Canada K2K 2E6
Email: mustapha.aissaoui@alcatel-lucent.com