

QUIC
Internet-Draft
Intended status: Standards Track
Expires: 13 January 2022

T. Pauly
E. Kinnear
Apple Inc.
D. Schinazi
Google LLC
12 July 2021

An Unreliable Datagram Extension to QUIC
draft-ietf-quic-datagram-03

Abstract

This document defines an extension to the QUIC transport protocol to add support for sending and receiving unreliable datagrams over a QUIC connection.

Discussion of this work is encouraged to happen on the QUIC IETF mailing list quic@ietf.org (<mailto:quic@ietf.org>) or on the GitHub repository which contains the draft: <https://github.com/quicwg/datagram> (<https://github.com/quicwg/datagram>).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 13 January 2022.

Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights

and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
1.1.	Specification of Requirements	3
2.	Motivation	3
3.	Transport Parameter	4
4.	Datagram Frame Type	5
5.	Behavior and Usage	5
5.1.	Multiplexing Datagrams	6
5.2.	Acknowledgement Handling	6
5.3.	Flow Control	7
5.4.	Congestion Control	7
6.	Security Considerations	7
7.	IANA Considerations	8
8.	Acknowledgments	8
9.	References	8
9.1.	Normative References	8
9.2.	Informative References	8
	Authors' Addresses	9

[1.](#) Introduction

The QUIC Transport Protocol [[RFC9000](#)] provides a secure, multiplexed connection for transmitting reliable streams of application data. Reliability within QUIC is performed on a per-stream basis, so some frame types are not eligible for retransmission.

Some applications, particularly those that need to transmit real-time data, prefer to transmit data unreliably. These applications can build directly upon UDP [[RFC0768](#)] as a transport, and can add security with DTLS [[RFC6347](#)]. Extending QUIC to support transmitting unreliable application data would provide another option for secure datagrams, with the added benefit of sharing a cryptographic and authentication context used for reliable streams.

This document defines two new DATAGRAM QUIC frame types, which carry application data without requiring retransmissions.

Discussion of this work is encouraged to happen on the QUIC IETF mailing list quic@ietf.org (<mailto:quic@ietf.org>) or on the GitHub repository which contains the draft: <https://github.com/quicwg/datagram> (<https://github.com/quicwg/datagram>).

[1.1.](#) Specification of Requirements

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

[2.](#) Motivation

Transmitting unreliable data over QUIC provides benefits over existing solutions:

- * Applications that open both a reliable TLS stream and an unreliable DTLS flow to the same peer can benefit by sharing a single handshake and authentication context between a reliable QUIC stream and flow of unreliable QUIC datagrams. This can reduce the latency required for handshakes.
- * QUIC uses a more nuanced loss recovery mechanism than the DTLS handshake, which has a basic packet loss retransmission timer. This can allow loss recovery to occur more quickly for QUIC data.
- * QUIC datagrams, while unreliable, can support acknowledgements, allowing applications to be aware of whether a datagram was successfully received.
- * QUIC datagrams are subject to QUIC congestion control, allowing applications to avoid implementing their own.

These reductions in connection latency, and application insight into the delivery of datagrams, can be useful for optimizing audio/video streaming applications, gaming applications, and other real-time network applications.

Unreliable QUIC datagrams can also be used to implement an IP packet

tunnel over QUIC, such as for a Virtual Private Network (VPN). Internet-layer tunneling protocols generally require a reliable and authenticated handshake, followed by unreliable secure transmission of IP packets. This can, for example, require a TLS connection for the control data, and DTLS for tunneling IP packets. A single QUIC connection could support both parts with the use of unreliable datagrams.

[3.](#) Transport Parameter

Support for receiving the DATAGRAM frame types is advertised by means of a QUIC Transport Parameter (name=max_datagram_frame_size, value=0x0020). The max_datagram_frame_size transport parameter is an integer value (represented as a variable-length integer) that represents the maximum size of a DATAGRAM frame (including the frame type, length, and payload) the endpoint is willing to receive, in bytes.

The default for this parameter is 0, which indicates that the endpoint does not support DATAGRAM frames. A value greater than 0 indicates that the endpoint supports the DATAGRAM frame types and is willing to receive such frames on this connection.

An endpoint MUST NOT send DATAGRAM frames until it has received the max_datagram_frame_size transport parameter with a non-zero value. An endpoint MUST NOT send DATAGRAM frames that are larger than the max_datagram_frame_size value it has received from its peer. An endpoint that receives a DATAGRAM frame when it has not indicated support via the transport parameter MUST terminate the connection with an error of type `PROTOCOL_VIOLATION`. Similarly, an endpoint that receives a DATAGRAM frame that is larger than the value it sent in its max_datagram_frame_size transport parameter MUST terminate the connection with an error of type `PROTOCOL_VIOLATION`.

For most uses of DATAGRAM frames, it is RECOMMENDED to send a value of 65535 in the max_datagram_frame_size transport parameter to indicate that this endpoint will accept any DATAGRAM frame that fits

inside a QUIC packet.

The `max_datagram_frame_size` transport parameter is a unidirectional limit and indication of support of DATAGRAM frames. Application protocols that use DATAGRAM frames MAY choose to only negotiate and use them in a single direction.


When clients use 0-RTT, they MAY store the value of the server's `max_datagram_frame_size` transport parameter. Doing so allows the client to send DATAGRAM frames in 0-RTT packets. When servers decide to accept 0-RTT data, they MUST send a `max_datagram_frame_size` transport parameter greater or equal to the value they sent to the client in the connection where they sent them the `NewSessionTicket` message. If a client stores the value of the `max_datagram_frame_size` transport parameter with their 0-RTT state, they MUST validate that the new value of the `max_datagram_frame_size` transport parameter sent by the server in the handshake is greater or equal to the stored value; if not, the client MUST terminate the connection with error `PROTOCOL_VIOLATION`.

Application protocols that use datagrams MUST define how they react to the `max_datagram_frame_size` transport parameter being missing. If datagram support is integral to the application, the application protocol can fail the handshake if the `max_datagram_frame_size` transport parameter is not present.

4. Datagram Frame Type

DATAGRAM frames are used to transmit application data in an unreliable manner. The DATAGRAM frame type takes the form `0b0011000X` (or the values `0x30` and `0x31`). The least significant bit of the DATAGRAM frame type is the `LEN` bit (`0x01`). It indicates that there is a `Length` field present. If this bit is set to 0, the `Length` field is absent and the `Datagram Data` field extends to the end of the packet. If this bit is set to 1, the `Length` field is present.

The DATAGRAM frame is structured as follows:

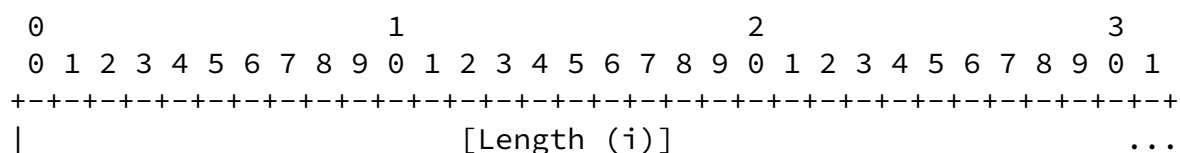




Figure 1: DATAGRAM Frame Format

DATAGRAM frames contain the following fields:

Length: A variable-length integer specifying the length of the datagram in bytes. This field is present only when the LEN bit is set. If the LEN bit is not set, the datagram data extends to the end of the QUIC packet. Note that empty (i.e., zero-length) datagrams are allowed.

Datagram Data: The bytes of the datagram to be delivered.

5. Behavior and Usage

When an application sends an unreliable datagram over a QUIC connection, QUIC will generate a new DATAGRAM frame and send it in the first available packet. This frame SHOULD be sent as soon as possible, and MAY be coalesced with other frames.

When a QUIC endpoint receives a valid DATAGRAM frame, it SHOULD deliver the data to the application immediately, as long as it is able to process the frame and can store the contents in memory.

DATAGRAM frames MUST be protected with either 0-RTT or 1-RTT keys.

Note that while the `max_datagram_frame_size` transport parameter places a limit on the maximum size of DATAGRAM frames, that limit can be further reduced by the `max_packet_size` transport parameter, and by the Maximum Transmission Unit (MTU) of the path between endpoints. DATAGRAM frames cannot be fragmented, therefore application protocols need to handle cases where the maximum datagram size is limited by other factors.

5.1. Multiplexing Datagrams

DATAGRAM frames belong to a QUIC connection as a whole, and are not strongly associated with any stream ID at the QUIC layer. However, it is expected that applications will want to differentiate between

specific DATAGRAM frames by using identifiers, such as for logical flows of datagrams or to distinguish between different kinds of datagrams.

Identifiers used to multiplex different kinds of datagrams, or flows of datagrams, are the responsibility of the application protocol running over QUIC to define. The application defines the semantics of the Datagram Data field and how it is parsed.

If the application needs to support the coexistence of multiple flows of datagrams, one recommended pattern is to use a variable-length integer at the beginning of the Datagram Data field.

QUIC implementations SHOULD present an API to applications to assign relative priorities to DATAGRAM frames with respect to each other and to QUIC streams.

[5.2.](#) Acknowledgement Handling

Although DATAGRAM frames are not retransmitted upon loss detection, they are ack-eliciting ([\[RFC9002\]](#)). Receivers SHOULD support delaying ACK frames (within the limits specified by `max_ack_delay`) in response to receiving packets that only contain DATAGRAM frames, since the timing of these acknowledgements is not used for loss recovery.

As with any ack-eliciting frame, when a sender suspects that a packet containing only DATAGRAM frames has been lost, it MAY send probe packets to elicit a faster acknowledgement as described in [Section 6.2.4 of \[RFC9002\]](#).

If a sender detects that a packet containing a specific DATAGRAM frame might have been lost, the implementation MAY notify the application that it believes the datagram was lost.

Similarly, if a packet containing a DATAGRAM frame is acknowledged, the implementation MAY notify the sender application that the datagram was successfully transmitted and received. Due to reordering, this can include a DATAGRAM frame that was thought to be lost, but which at a later point was received and acknowledged. It is important to note that acknowledgement of a DATAGRAM frame only indicates that the transport-layer handling on the receiver processed the frame, and does not guarantee that the application on the

receiver successfully processed the data. Thus, this signal SHOULD NOT replace application-layer signals that indicate successful processing.

[5.3.](#) Flow Control

DATAGRAM frames do not provide any explicit flow control signaling, and do not contribute to any per-flow or connection-wide data limit.

The risk associated with not providing flow control for DATAGRAM frames is that a receiver might not be able to commit the necessary resources to process the frames. For example, it might not be able to store the frame contents in memory. However, since DATAGRAM frames are inherently unreliable, they MAY be dropped by the receiver if the receiver cannot process them.

[5.4.](#) Congestion Control

DATAGRAM frames employ the QUIC connection's congestion controller. As a result, a connection might be unable to send a DATAGRAM frame generated by the application until the congestion controller allows it [[RFC9002](#)]. The sender implementation MUST either delay sending the frame until the controller allows it or drop the frame without sending it (at which point it MAY notify the application). Implementations that use packet pacing SHOULD support delaying the transmission of DATAGRAM frames for at least the time it takes to send the paced packets allowed by the congestion controller to avoid dropping frames excessively.

Implementations can optionally support allowing the application to specify a sending expiration time, beyond which a congestion-controlled DATAGRAM frame ought to be dropped without transmission.

[6.](#) Security Considerations

The DATAGRAM frame shares the same security properties as the rest of the data transmitted within a QUIC connection. All application data transmitted with the DATAGRAM frame, like the STREAM frame, MUST be protected either by 0-RTT or 1-RTT keys.

[7.](#) IANA Considerations

This document registers a new value in the QUIC Transport Parameter Registry:

Value: 0x0020 (if this document is approved)

Parameter Name: max_datagram_frame_size

Specification: A non-zero value indicates that the endpoint supports receiving unreliable DATAGRAM frames. An endpoint that advertises this transport parameter can receive DATAGRAM frames from the other endpoint, up to and including the length in bytes provided in the transport parameter. The default value is 0.

This document also registers a new value in the QUIC Frame Type registry:

Value: 0x30 and 0x31 (if this document is approved)

Frame Name: DATAGRAM

Specification: Unreliable application data

[8.](#) Acknowledgments

Thanks to Ian Swett, who inspired this proposal.

[9.](#) References

[9.1.](#) Normative References

[RFC9000] Iyengar, J., Ed. and M. Thomson, Ed., "QUIC: A UDP-Based Multiplexed and Secure Transport", [RFC 9000](#), DOI 10.17487/RFC9000, May 2021, <<https://www.rfc-editor.org/info/rfc9000>>.

[RFC9002] Iyengar, J., Ed. and I. Swett, Ed., "QUIC Loss Detection and Congestion Control", [RFC 9002](#), DOI 10.17487/RFC9002, May 2021, <<https://www.rfc-editor.org/info/rfc9002>>.

[9.2.](#) Informative References

[RFC0768] Postel, J., "User Datagram Protocol", STD 6, [RFC 768](#), DOI 10.17487/RFC0768, August 1980, <<https://www.rfc-editor.org/info/rfc768>>.

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC6347] Rescorla, E. and N. Modadugu, "Datagram Transport Layer Security Version 1.2", [RFC 6347](#), DOI 10.17487/RFC6347, January 2012, <<https://www.rfc-editor.org/info/rfc6347>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

Authors' Addresses

Tommy Pauly
Apple Inc.
One Apple Park Way
Cupertino, California 95014,
United States of America

Email: tpauly@apple.com

Eric Kinnear
Apple Inc.
One Apple Park Way
Cupertino, California 95014,
United States of America

Email: ekinnear@apple.com

David Schinazi
Google LLC
1600 Amphitheatre Parkway
Mountain View, California 94043,
United States of America

Email: dschinazi.ietf@gmail.com

