

Internet Draft
File: <[draft-ietf-rap-rsvp-identity-02.txt](#)>

Satyendra Yadav
Raj Yavatkar
Intel
Ramesh Pabbati
Peter Ford
Tim Moore
Microsoft
Shai Herzog
IPHighway

Identity Representation for RSVP
January 1999

Status of this Memo

This document is an Internet Draft. Internet Drafts are working documents of the Internet Engineering Task Force (IETF), its Areas, and its Working Groups. Note that other groups may also distribute working documents as Internet Drafts.

Internet Drafts are draft documents valid for a maximum of six months. Internet Drafts may be updated, replaced, or obsoleted by other documents at any time. It is not appropriate to use Internet Drafts as reference material or to cite them other than as a "working draft" or "work in progress".

To view the list Internet-Draft Shadow Directories, see
<http://www.ietf.org/shadow.html>.

A Revised Version of this draft document will be submitted to the RFC editor as a Proposed Standard for the Internet Community. Discussion and suggestions for improvement are requested. This document will expire in July 1999. Distribution of this draft is unlimited.

Copyright Notice

Copyright (C) The Internet Society (1999). All Rights Reserved.

1. Abstract

This document describes the representation of identity information in POLICY_DATA object [[POL-EXT](#)] for supporting policy based admission control in RSVP. The goal of identity representation is to allow a process on a system to securely identify the owner and the application of the communicating process (e.g. user id) and convey this information in RSVP messages (PATH or RESV) in a secure manner. We describe the encoding of identities as RSVP policy element. We describe the processing rules to generate identity policy elements for multicast merged flows. Subsequently, we describe representations of user identities for Kerberos and Public Key based user authentication mechanisms. In summary we describe the use of

this identity information in an operational setting.

2. Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC-2119](#)].

3. Introduction

RSVP [[RFC 2205](#)] is a resource reservation setup protocol designed for an integrated services Internet [[RFC 1633](#)]. RSVP is used by a host to request specific quality of service (QoS) from the network for particular application data streams or flows. RSVP is also used by routers to deliver QoS requests to all nodes along the path(s) of the flows and to establish and maintain state to provide the requested service. RSVP requests will generally result in resources being reserved in each node along the data path. RSVP allows particular users to obtain preferential access to network resources, under the control of an admission control mechanism. Permission to make a reservation is based both upon the availability of the requested resources along the path of the data and upon satisfaction of policy rules. Providing policy based admission control mechanism based on user identity or application is one of the prime requirements.

In order to solve these problems and implement user based policy control it is required to identify the user making an RSVP request. This document proposes a mechanism for sending identification information in the RSVP messages and enables authorization decisions based on policy and identity of the user requesting resources from the network.

We describe the authentication policy element (AUTH_DATA) contained in the POLICY_DATA object. User process can generate an AUTH_DATA policy element and give it to RSVP process (service) on the originating host. RSVP service inserts AUTH_DATA into the RSVP message to identify the owner (user) making the request for network resources. Network elements, such as routers, authenticate user using the credentials presented in the AUTH_DATA and admit the RSVP message based on admission policy. After a request has been authenticated, first hop router installs the RSVP state and forwards the new policy element returned by the Policy Decision Point (PDP) [[POL-FRAME](#)].

4. Policy Element for Authentication Data

4.1 Policy Data Object Format

POLICY_DATA objects contain policy information and are carried by RSVP messages. A detail description of the format of POLICY_DATA object can be found in "RSVP Extensions for Policy Control" [POL-EXT].

4.2 Authentication Data Policy Element

In this section, we describe a policy element (PE) called authentication data (AUTH_DATA). AUTH_DATA policy element contains a list of authentication attributes. Policy object containing AUTH_DATA must be protected against replay attacks using INTEGRITY object option as described in the [POL-EXT].

```
+-----+-----+-----+-----+
| Length           | P-Type = Identity Type |
+-----+-----+-----+-----+
// Authentication Attribute List //
|                                     |
+-----+-----+-----+-----+
```

Length
The length of the policy element (including the Length and P-Type) is in number of octets (must be a multiple of 4) and indicates the end of the authentication attribute list.

Identity Type
Type of identity information contained in this Policy Element supplied as the Policy element type (P-type). The Internet Assigned Numbers Authority (IANA) acts as a registry for identity types as described in the section 10, IANA Considerations. Initially, the registry contains the following identity types:

- 2 AUTH_USER authentication scheme to identify users
- 3 AUTH_APP authentication scheme to identify applications

Reserved
Must be set to 0.

Authentication Attribute List

Authentication attributes contain information specific to authentication method and type of AUTH DATA. The policy element provides the mechanism for grouping a collection of authentication attributes.

4.3 Authentication Attributes

Authentication attributes must be encoded as a multiple of 4 octets, attributes that are not a multiple of 4 octets long must be padded to a 4-octet boundary.

```
+-----+-----+-----+-----+
| Length           | A-Type |SubType |
+-----+-----+-----+-----+
| Value à
+-----+-----+-----+-----+
```

Length

The length field is two octets and indicates the actual length of the attribute (including the Length and A-Type fields) in number of octets. The length does not include any bytes padding the attribute to make it multiple of 4 octets long.

A-Type

Authentication attribute type (A-Type) field is one octet. IANA acts as a registry for A-Types as described in the [section 10](#), IANA Considerations. Initially, the registry contains the following A-Types:

1 POLICY_LOCATOR Unique string for locating the admission policy (such as X.500 DN described in [[RFC 1779](#)]).

2 CREDENTIAL User credential such as Kerberos ticket, or digital certificate.
Application credential such as application ID.

3 DIGITAL_SIGNATURE Digital signature of the authentication data policy element.

4 POLICY_ERROR_OBJECT Detailed information on policy failures.

SubType

Authentication attribute sub-type field is one octet. Value of SubType depends on A-type.

Value:

The value field contains 0-65351 octets.

4.3.1 Policy Locator

POLICY_LOCATOR is used to locate the admission policy for the user or application. Distinguished Name (DN) is unique for each User or

application hence a DN is used as policy locator.

```
+-----+-----+-----+-----+
| Length      |A-Type |SubType|
+-----+-----+-----+-----+
| OctetString à
+-----+-----+-----+-----+
```

Length
> 4

A-Type
POLICY_LOCATOR

SubType

Following sub types for POLICY_LOCATOR are defined. IANA acts as a registry for POLICY_LOCATOR sub types as described in the [section 10](#), IANA Considerations. Initially, the registry contains the following sub types for POLICY_LOCATOR:

1 ASCII DN OctetString contains the X.500 DN as described in the [RFC 1779](#) as an ASCII string.

2 UNICODE DN OctetString contains the X.500 DN described in the [RFC 1779](#) as an UNICODE string.

3 ASCII_DN_ENCRYPT OctetString contains the encrypted X.500 DN. The Kerberos session key or digital certificate private key is used for encryption. For Kerberos encryption the format is the same as returned from gss_seal [[RFC 1509](#)].

4 UNICODE_DN_ENCRYPT OctetString contains the encrypted UNICODE X.500 DN. The Kerberos session key or digital certificate private key is used for encryption. For Kerberos encryption the format is the same as returned from gss_seal [[RFC 1509](#)].

OctetString

The OctetString field contains the DN.

[4.3.2](#) Credential

CREDENTIAL indicates the credential of the user or application to be authenticated. For Kerberos authentication method the CREDENTIAL

object contains the Kerberos session ticket. For public key based authentication this field contains a digital certificate.

A summary of the CREDENTIAL attribute format is shown below. The fields are transmitted from left to right.

```
+-----+-----+-----+-----+
| Length      |A-Type |SubType|
+-----+-----+-----+-----+
| OctetString à
+-----+-----+-----+-----+
```

Length
> 4

A-Type
CREDENTIAL

SubType
IANA acts as a registry for CREDENTIAL sub types as described in the [section 10](#), IANA Considerations. Initially, the registry contains the following sub types for CREDENTIAL:

1 ASCII_ID OctetString contains user or application identification in plain ASCII text string.

2 UNICODE_ID OctetString contains user or application identification in plain UNICODE text string.

3 KERBEROS_TKT OctetString contains Kerberos ticket.

4 X509_V3_CERT OctetString contains X.509 V3 digital certificate [[X.509](#)].

5 PGP_CERT OctetString contains PGP digital certificate.

OctetString
The OctetString contains the user or application credential.

[4.3.3 Digital Signature](#)

The DIGITAL_SIGNATURE attribute must be the last attribute in the attribute list and contains the digital signature of the AUTH_DATA policy element. The digital signature signs all data in the AUTH_DATA policy element up to the DIGITAL_SIGNATURE. The algorithm used to compute the digital signature depends on the authentication method specified by the CREDENTIAL SubType field.

A summary of DIGITAL_SIGNATURE attribute format is described below.

```
+-----+-----+-----+-----+
```

Length	A-Type	SubType
OctetString		

Length
> 4

A-Type
DIGITAL_SIGNATURE

SubType
No sub types for DIGITAL_SIGNATURE are currently defined. This field must be set to 0.

OctetString
OctetString contains the digital signature of the AUTH_DATA.

4.3.4 Policy Error Object

This attribute is used to specify any errors associated with the policy element. When a RSVP policy node (local policy decision point or remote PDP) encounters a request that fails policy control due to its Authentication Policy Element, it may add a POLICY_ERROR_CODE containing additional information about the reason the failure occurred into the policy element. This will then cause an appropriate PATH_ERROR or RESV_ERROR message to be generated with the policy element and appropriate RSVP error code in the message, which is returned to the request's source.

The AUTH DATA policy element in the PATH or RSVP message does not contain the POLICY_ERROR_OBJECT attribute.

Length	A-Type	0
0 (Reserved)	Error value	
OctetString		

Length
>= 8

A-Type
POLICY_ERROR_CODE

Error Value
A 32-bit bit code containing the reason that the policy decision point failed to process the policy element. The standard values are

ERROR_NO_MORE_INFO	1	no information is available
UNKNOWN_CREDENTIAL	2	the credentials are unknown
NO_PRIVILEGES	3	the credential has no privilege
EXPIRED_CREDENTIAL	4	the credential has expired
IDENTITY_CHANGED	5	identity has changed

OctetString

The OctetString field contains information from the policy decision point that may contain additional information about the failure. For example

```
"MSFT", DEF_SUBNET FLOW_RATE, CONTROLLED LOAD, 10000, 10000,
1000, 0, 0, 1000, 1000
```

This example contains an identification string for the policy decision point, more information about why the policy decision point failed. In this case, the subnet default policy on Token bucket rate failed and the flow spec that caused the failure is also returned.

5. Authentication Data Formats

Authentication attributes are grouped in a policy element to represent the identity credentials.

5.1 Simple User Authentication

In simple user authentication method the user login ID (in plain ASCII or UNICODE text) is encoded as CREDENTIAL attribute. A summary of the simple user AUTH_DATA policy element is shown below.

```
+-----+-----+-----+-----+
| Length                | P-type = AUTH_USER          |
+-----+-----+-----+-----+
| Length                | POLICY_LOCATOR | SubType    |
+-----+-----+-----+-----+
| OctetString (User's Distinguished Name) à
+-----+-----+-----+-----+
| Length                | CREDENTIAL      | ASCII_ID      |
+-----+-----+-----+-----+
| OctetString (User's login ID) à
+-----+-----+-----+-----+
```

5.2 Kerberos User Authentication

Kerberos [[RFC 1510](#)] authentication uses a trusted third party (the Kerberos Distribution Center ù KDC) to provide for authentication of the user to a network server. It is assumed that a KDC is present

and both host and verifier of authentication information (router or PDP) implement Kerberos authentication.

A summary of the Kerberos AUTH_DATA policy element is shown below.

```
+-----+-----+-----+-----+
| Length                | P-type  (AUTH_USER)          |
+-----+-----+-----+-----+
| Length                | POLICY_LOCATOR| SubType          |
+-----+-----+-----+-----+
| OctetString (User's Distinguished Name) à
+-----+-----+-----+-----+
| Length                | CREDENTIAL  | KERBEROS_TKT |
+-----+-----+-----+-----+
| OctetString (Kerberos Session Ticket) à
+-----+-----+-----+-----+
```

5.2.1. Operational Setting using Kerberos Identities

An RSVP enabled host is configured to construct and insert AUTH_DATA policy element into RSVP messages that designate use of the Kerberos authentication method (KERBEROS_TKT). Upon RSVP session initialization, the user application contacts the KDC to obtain a Kerberos ticket for the next network node or its PDP. A router when generating a RSVP message contacts the KDC to obtain a Kerberos ticket for the next hop network node or its PDP. The identity of the PDP or next network hop can be statically configured, learned via DHCP or maintained in a directory service. The Kerberos ticket is sent to the next network node (which may be a router or host) in a RSVP message. The KDC is used to validate the ticket and authentication the user sending RSVP message.

5.3 Public Key based User Authentication

In public key based user authentication method digital certificate is encoded as user credentials. The digital signature is used for authenticating the user. A summary of the public key user AUTH_DATA policy element is shown below.

```
+-----+-----+-----+-----+
| Length                | P-type  (AUTH_USER)          |
+-----+-----+-----+-----+
| Length                | POLICY_LOCATOR| SubType          |
+-----+-----+-----+-----+
| OctetString (User's Distinguished Name) à
+-----+-----+-----+-----+
```

Length	CREDENTIAL	SubType
OctetString (User's Digital Certificate)à		
Length	DIGITAL_SIGN.	0
OctetString (Digital signature) à		

5.3.1. Operational Setting for public key based authentication

Public key based authentication assumes following:

- RSVP service requestors have a pair of keys (private key and public key).
- Private key is secured with the user.
- Public keys are stored in digital certificates and a trusted party, certificate authority (CA) issues these digital certificates.
- The verifier (PDP or router) has the ability to verify the digital certificate.

RSVP requestor uses its private key to generate DIGITAL_SIGNATURE. User Authenticators (router, PDP) use the user's public key (stored in the digital certificate) to verify the signature and authenticate the user.

5.4 Simple Application Authentication

The application authentication method encodes the application identification such as an executable filename as plain ASCII or UNICODE text.

Length	P-type = AUTH_APP	
Length	POLICY_LOCATOR	SubType
OctetString (Application Distinguished Name) à		
Length	CREDENTIAL	ASCII_ID
OctetString (Application Id û ex: vic.exe)		

6. Operation

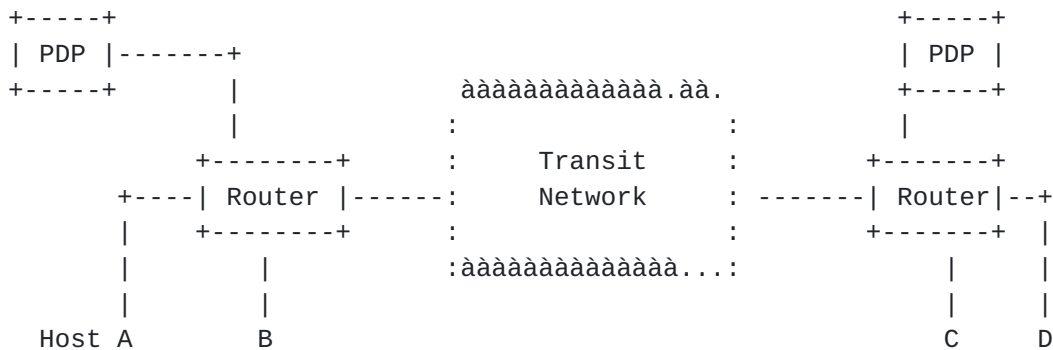


Figure 1: User and Application Authentication using AUTH_DATA PE

Network nodes (hosts/routers) generate AUTH_DATA policy elements, contents of which depends on the identity type used and the authentication method used. But generally contains authentication credentials (Kerberos ticket or digital certificate) and policy locators (which can be the X.500 Distinguished Name of the user or network node or application names). Network nodes generate AUTH_DATA policy element containing the authentication identity when making the RSVP request or forwarding an RSVP message.

Network nodes generate user AUTH_DATA policy element using the following rules

- 1. For unicast sessions the user policy locator is the copied from the previous hop. The authentication credentials are for the current network node identity.**
- 2. For multicast messages the user policy locator is for the current network node identity. The authentication credentials are for the current network node.**

Network nodes generate application AUTH_DATA policy element using the following rules:

1. For unicast sessions the application AUTH_DATA is the copied from the previous hop.
2. For multicast messages the application AUTH_DATA is either the first application AUTH_DATA in the message or chosen by the PDP.

7. Message Processing Rules

7.1 Message Generation (RSVP Host)

An RSVP message is created as specified in [RFC2205] with following modifications.

1. RSVP message may contain multiple AUTH_DATA policy elements.

2. Authentication policy element (AUTH_DATA) is created and the IdentityType field is set to indicate the identity type in the policy element.

DN is inserted as POLICY_LOCATOR attribute.

Credentials such as Kerberos ticket or digital certificate are inserted as the CREDENTIAL attribute.

3. POLICY_DATA object (containing the AUTH_DATA policy element) is inserted in the RSVP message in appropriate place. If INTEGRITY object is not computed for the RSVP message then an INTEGRITY object must be computed for this POLICY_DATA object, as described in the [POL_EXT], and must be inserted as an Policy Data option.

7.2 Message Reception (Router)

RSVP message is processed as specified in [[RFC2205](#)] with following modifications.

1. If router is not policy aware then it should send the RSVP message to the PDP and wait for response. If the router is policy unaware then it ignores the policy data objects and continues processing the RSVP message.

2. Reject the message if the response from the PDP is negative.

3. Continue processing the RSVP message.

7.3 Authentication (Router/PDP)

1. Retrieve the AUTH_DATA policy element. Check the PE type field and return an error if the identity type is not supported.

2. Verify user credential

- Simple authentication: e.g. Get user ID and validate it, or get executable name and validate it.

- Kerberos: Send the Kerberos ticket to the KDC to obtain the session key. Using the session key authenticate the user.

- Public Key: Validate the certificate that it was issued by a trusted Certificate Authority (CA) and authenticate the user or application by verifying the digital signature.

8. Error Signaling

If PDP fails to verify the AUTH_DATA policy element then it must return Policy control failure (Error Code = 02) to PEP. The error values are described in [[RFC 2205](#)] and [[POL-EXT](#)]. Also PDP must supply a policy data object containing the AUTH DATA Policy Element with more details on the Policy Control failures in the policy error object attribute. The PEP will include this Policy Data object in the outgoing RSVP Error message.

[9. IANA Considerations](#)

Following the policies outlined in [[IANA-CONSIDERATIONS](#)], authentication attribute types (A-Type) in the range 0-127 are allocated an IETF Consensus action, A-Type values between 128-255 are reserved for Private Use and are not assigned by IANA.

Following the policies outlined in [[IANA-CONSIDERATIONS](#)], POLICY_LOCATOR SubType values in the range 0-127 are allocated an IETF Consensus action, POLICY_LOCATOR SubType values between 128-255 are reserved for Private Use and are not assigned by IANA.

Following the policies outlined in [[IANA-CONSIDERATIONS](#)], CREDENTIAL SubType values in the range 0-127 are allocated an IETF Consensus action, CREDENTIAL SubType values between 128-255 are reserved for Private Use and are not assigned by IANA.

[10. Security Considerations](#)

The purpose of this draft is to describe a mechanism to authenticate RSVP requests based on user identity in a secure manner. RSVP INTEGRITY object is used to protect the policy object containing user identity information from security (replay) attacks. Combining the AUTH_DATA policy element and the INTEGRITY object results in a secure access control that enforces authentication based on both the identity of the user and the identity of the originating node.

Simple authentication does not contain credential that can be securely authenticated and is inherently less secured.

The Kerberos authentication mechanism is reasonably well secured.

User authentication using a public key certificate is known to provide the strongest security.

[11. Acknowledgments](#)

We would like to thank Andrew Smith, Bob Lindell and many others for their valuable comments on this draft.

12. References

[ASCII] Coded Character Set -- 7-Bit American Standard Code for Information Interchange, ANSI X3.4-1986.

[IANA-CONSIDERATIONS] Alvestrand, H. and T. Narten, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 2434](#), October 1998.

[POL-EXT] Herzog, S., "RSVP Extensions for Policy Control." Internet-Draft, [draft-ietf-rap-policy-ext-02.txt](#), January 1999.

[POL-FRAME] Yavatkar, R., et.al. "A Framework for Policy-based Admission Control RSVP." Internet-Draft, [draft-ietf-rap-framework-01.txt](#), November 1998.

[RFC 1510] The Kerberos Network Authentication Service (V5). Kohl J., Neuman, C. [RFC 1510](#).

[RFC 1704] On Internet Authentication. Haller, N, Atkinson, R., [RFC 1704](#).

[RFC 1779] A String Representation of Distinguished Names. S. Kille. [RFC 1779](#)

[RFC 2205] Braden, R., et. al., "Resource ReSerVation Protocol (RSVP) û Version 1 Functional Specification." [RFC 2205](#).

[RFC 2209] Braden, R., Zhang, L., "Resource ReSerVation Protocol (RSVP) - Version 1 Message Processing Rules." [RFC 2209](#).

[UNICODE] The Unicode Consortium, "The Unicode Standard, Version 2.0", Addison-Wesley, Reading, MA, 1996.

[X.509] R. Housley, et. al., "Internet X.509 Public Key Infrastructure Certificate and CRL Profile", Internet-Draft, [draft-ietf-pkix-ipki-part1-11.txt](#), September 1998.

[X.509-ITU] ITU-T (formerly CCITT) Information technology û Open Systems Interconnection û The Directory: Authentication Framework Recommendation X.509 ISO/IEC 9594-8

13. Author Information

Satyendra Yadav
Intel, JF3-206
2111 NE 25th Avenue
Hillsboro, OR 97124

Satyendra.Yadav@intel.com

Raj Yavatkar
Intel, JF3-206
2111 NE 25th Avenue
Hillsboro, OR 97124

Raj.Yavatkar@intel.com

Ramesh Pabbati
Microsoft
1 Microsoft Way
Redmond, WA 98054

rameshpa@microsoft.com

Peter Ford
Microsoft
1 Microsoft Way
Redmond, WA 98054

peterf@microsoft.com

Tim Moore
Microsoft
1 Microsoft Way
Redmond, WA 98054

timmoore@microsoft.com

Shai Herzog
IPHHighway
2055 Gateway Pl., Suite 400
San Jose, CA 95110

14. Full Copyright Statement

Copyright (C) The Internet Society (1999). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE."

Internet Draft Identity Representation for RSVP January 1999

Yadav, et al. 3

Yadav, et al. 1