

RAW
Internet-Draft
Intended status: Informational
Expires: 27 August 2022

CJ. Bernardos, Ed.
UC3M
G.Z. Papadopoulos
IMT Atlantique
P. Thubert
Cisco
F. Theoleyre
CNRS
23 February 2022

RAW use-cases
draft-ietf-raw-use-cases-05

Abstract

The wireless medium presents significant specific challenges to achieve properties similar to those of wired deterministic networks. At the same time, a number of use-cases cannot be solved with wires and justify the extra effort of going wireless. This document presents wireless use-cases (such as aeronautical communications, amusement parks, industrial applications, pro audio and video, gaming, UAV and V2V control, edge robotics and emergency vehicles) demanding reliable and available behavior.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 27 August 2022.

Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Revised BSD License.

Table of Contents

1.	Introduction	3
2.	Aeronautical Communications	5
2.1.	Problem Statement	5
2.2.	Specifics	6
2.3.	Challenges	7
2.4.	The Need for Wireless	8
2.5.	Requirements for RAW	8
2.5.1.	Non-latency critical considerations	9
3.	Amusement Parks	9
3.1.	use-case Description	9
3.2.	Specifics	9
3.3.	The Need for Wireless	10
3.4.	Requirements for RAW	10
3.4.1.	Non-latency critical considerations	11
4.	Wireless for Industrial Applications	11
4.1.	use-case Description	11
4.2.	Specifics	11
4.2.1.	Control Loops	11
4.2.2.	Unmeasured Data	12
4.3.	The Need for Wireless	12
4.4.	Requirements for RAW	13
4.4.1.	Non-latency critical considerations	14
5.	Pro Audio and Video	14
5.1.	use-case Description	14
5.2.	Specifics	14
5.2.1.	Uninterrupted Stream Playback	14
5.2.2.	Synchronized Stream Playback	14
5.3.	The Need for Wireless	15
5.4.	Requirements for RAW	15
5.4.1.	Non-latency critical considerations	15
6.	Wireless Gaming	15
6.1.	use-case Description	15

6.2.	Specifics	16
6.3.	The Need for Wireless	16
6.4.	Requirements for RAW	16
6.4.1.	Non-latency critical considerations	17

7.	Unmanned Aerial Vehicles and Vehicle-to-Vehicle platooning and control	17
7.1.	use-case Description	17
7.2.	Specifics	18
7.3.	The Need for Wireless	18
7.4.	Requirements for RAW	18
7.4.1.	Non-latency critical considerations	19
8.	Edge Robotics control	19
8.1.	use-case Description	19
8.2.	Specifics	20
8.3.	The Need for Wireless	20
8.4.	Requirements for RAW	20
8.4.1.	Non-latency critical considerations	20
9.	Emergencies: Instrumented emergency vehicle	20
9.1.	use-case Description	20
9.2.	Specifics	21
9.3.	The Need for Wireless	21
9.4.	Requirements for RAW	21
9.4.1.	Non-latency critical considerations	22
10.	Summary	22
11.	IANA Considerations	22
12.	Security Considerations	22
13.	Acknowledgments	22
14.	References	23
14.1.	Normative References	23
14.2.	Informative References	23
	Authors' Addresses	26

[1.](#) Introduction

Based on time, resource reservation, and policy enforcement by distributed shapers, Deterministic Networking provides the capability to carry specified unicast or multicast data streams for real-time applications with extremely low data loss rates and bounded latency, to support time-sensitive and mission-critical applications on a converged enterprise infrastructure.

Deterministic Networking in the IP world is an attempt to eliminate packet loss for a committed bandwidth while ensuring a worst case end-to-end latency, regardless of the network conditions and across technologies. By leveraging on lower (L2 and below) capabilities, L3 can exploit the use of a service layer, steering over multiple technologies, and using media independent signaling to provide high reliability, precise time delivery, and rate enforcement. Deterministic networking can be seen as a set of new Quality of Service (QoS) guarantees of worst-case delivery. IP networks become more deterministic when the effects of statistical multiplexing (jitter and collision loss) are mostly eliminated. This requires a

tight control of the physical resources to maintain the amount of traffic within the physical capabilities of the underlying technology, e.g., using time-shared resources (bandwidth and buffers) per circuit, and/or by shaping and/or scheduling the packets at every hop.

Key attributes of Deterministic Networking include:

- * time synchronization on all the nodes,
- * centralized computation of network-wide deterministic paths,
- * multi-technology path with co-channel interference minimization,
- * frame preemption and guard time mechanisms to ensure a worst-case delay, and
- * new traffic shapers within and at the edge to protect the network.

Wireless operates on a shared medium, and transmissions cannot be guaranteed to be fully deterministic due to uncontrolled interferences, including self-induced multipath fading. Reliable and Available Wireless (RAW) is an effort to provide Deterministic Networking Mechanisms on across a multi-hop path that includes a wireless physical layer. Making Wireless Reliable and Available is even more challenging than it is with wires, due to the numerous causes of loss in transmission that add up to the congestion losses and the delays caused by overbooked shared resources.

The wireless and wired media are fundamentally different at the physical level, and while the generic Problem Statement [[RFC8557](#)] for DetNet applies to the wired as well as the wireless medium, the methods to achieve RAW necessarily differ from those used to support Time-Sensitive Networking over wires, e.g., due to the wireless radio channel specifics.

So far, Open Standards for Deterministic Networking have prevalently been focused on wired media, with Audio/Video Bridging (AVB) and Time Sensitive Networking (TSN) at the IEEE and DetNet [[RFC8655](#)] at the IETF. But wires cannot be used in several cases, including mobile or rotating devices, rehabilitated industrial buildings, wearable or in-body sensory devices, vehicle automation and multiplayer gaming.

Purpose-built wireless technologies such as [[ISA100](#)], which incorporates IPv6, were developed and deployed to cope for the lack of open standards, but they yield a high cost in OPEX and CAPEX and are limited to very few industries, e.g., process control, concert instruments or racing.

This is now changing [[I-D.ietf-raw-technologies](#)]:

- * IMT-2020 has recognized Ultra-Reliable Low-Latency Communication (URLLC) as a key functionality for the upcoming 5G.
- * IEEE 802.11 has identified a set of real-applications [[IEEE80211-RT-TIG](#)] which may use the IEEE802.11 standards. They typically emphasize strict end-to-end delay requirements.
- * The IETF has produced an IPv6 stack for IEEE Std. 802.15.4 TimeSlotted Channel Hopping (TSCH) and an architecture [[RFC9030](#)] that enables RAW on a shared MAC.

Experiments have already been conducted with IEEE802.1 TSN over IEEE802.11be [[IEEE80211BE](#)]. This mode enables time synchronization, and time-aware scheduling (trigger based access mode) to support TSN flows.

This draft extends the "Deterministic Networking use-cases" document [[RFC8578](#)] and describes several additional use-cases which require "reliable/predictable and available" flows over wireless links and possibly complex multi-hop paths called Tracks. This is covered

mainly by the "Wireless for Industrial Applications" use-case, as the "Cellular Radio" is mostly dedicated to the (wired) transport part of a Radio Access Network (RAN). Whereas the "Wireless for Industrial Applications" use-case certainly covers an area of interest for RAW, it is limited to 6TiSCH, and thus its scope is narrower than the use-cases described next in this document.

[2.](#) Aeronautical Communications

Aircraft are currently connected to ATC (Air-Traffic Control) and AOC (Airline Operational Control) via voice and data communications systems through all phases of a flight. Within the airport terminal, connectivity is focused on high bandwidth communications while during en-route high reliability, robustness and range are the focus.

[2.1.](#) Problem Statement

Up to 2020, civil air traffic has been growing constantly at a compound rate of 5.8% per year [[ACI19](#)] and despite the severe impact of the COVID-19 pandemic, air traffic growth is expected to resume very quickly in post-pandemic times [[IAT20](#)] [[IAC20](#)]. Thus, legacy systems in air traffic management (ATM) are likely to reach their capacity limits and the need for new aeronautical communication technologies becomes apparent. Especially problematic is the saturation of VHF band in high density areas in Europe, the US, and Asia [[KEAV20](#)] [[FAA20](#)] calling for suitable new digital approaches

such as AeroMACS for airport communications, SatCOM for remote domains, and LDACS as long-range terrestrial aeronautical communications system. Making the frequency spectrum's usage more efficient a transition from analog voice to digital data communication [[PLA14](#)] is necessary to cope with the expected growth of civil aviation and its supporting infrastructure. A promising candidate for long range terrestrial communications, already in the process of being standardized in the International Civil Aviation Organization (ICAO), is the L-band Digital Aeronautical Communications System (LDACS) [[ICA018](#)] [[I-D.ietf-raw-ldacs](#)].

[2.2.](#) Specifics

During the creation process of new communications system, analog voice is replaced by digital data communication. This sets a

paradigm shift from analog to digital wireless communications and supports the related trend towards increased autonomous data processing that the Future Communications Infrastructure (FCI) in civil aviation must provide. The FCI is depicted in Figure 1:

```

#
#
#
#
#
#
#
#
#
#
#
#
#
#
#

```

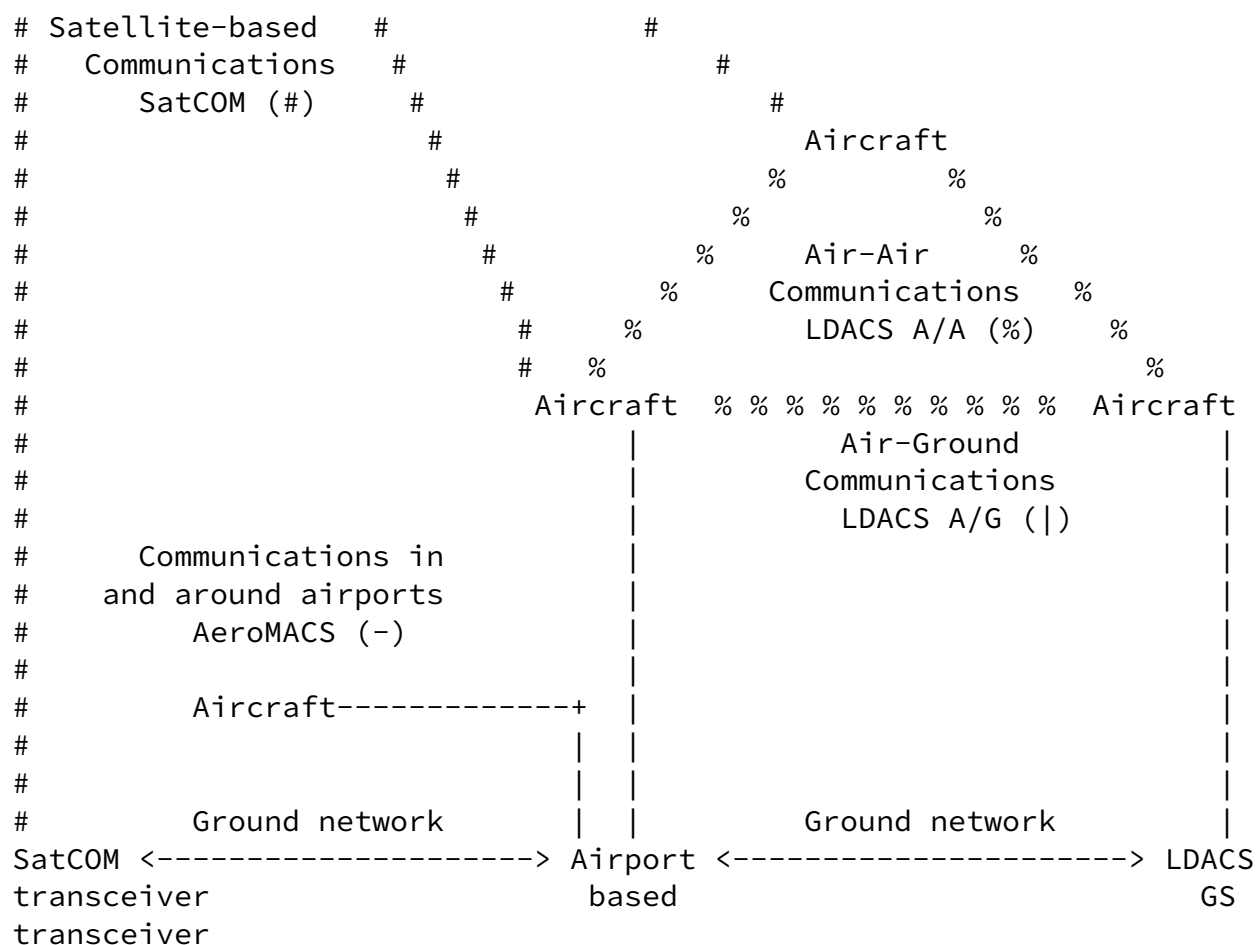


Figure 1: The Future Communication Infrastructure (FCI): AeroMACS for APT/TMA domain, LDACS A/G for TMA/ENR domain, LDACS A/G for ENR/ORP domain, SatCOM for ORP domain communications

2.3. Challenges

This paradigm change brings a lot of new challenges:

- * Efficiency: It is necessary to keep latency, time and data overhead (routing, security) of new aeronautical datalinks at a minimum.

- * Modularity: Systems in avionics usually operate up to 30 years,

thus solutions must be modular, easily adaptable and updatable.

- * Interoperability: All 192 members of the international Civil Aviation Organization (ICAO) must be able to use these solutions.
- * Dynamicity: the communication infrastructure needs to accomodate mobile devices (airplanes) that move extremely fast.

2.4. The Need for Wireless

In a high mobility environment such as aviation, the envisioned solutions to provide worldwide coverage of data connections with in-flight aircraft require a multi-system, multi-link, multi-hop approach. Thus air, ground and space-based datalink providing technologies will have to operate seamlessly together to cope with the increasing needs of data exchange between aircraft, air traffic controller, airport infrastructure, airlines, air network service providers (ANSPs) and so forth. Thus, making use of wireless technologies is a must in tackling this enormous need for a worldwide digital aeronautical datalink infrastructure.

2.5. Requirements for RAW

Different safety levels need to be supported, from extremely safety critical ones requiring low latency, such as a WAKE warning - a warning that two aircraft come dangerously close to each other - and high resiliency, to less safety critical ones requiring low-medium latency for services such as WXGRAPH - graphical weather data.

Overhead needs to be kept at a minimum since aeronautical data links provide comparatively small data rates in the order of kbit/s.

Policy needs to be supported when selecting data links. The focus of RAW here should be on the selectors, responsible for the track a packet takes to reach its end destination. This would minimize the amount of routing information that must travel inside the network because of precomputed routing tables with the selector being responsible for choosing the most appropriate option according to policy and safety.

[2.5.1.](#) Non-latency critical considerations

Achieving low latency is a requirement for aeronautics communications, though the expected latency is not extremely low and what it is important is to keep the overall latency bounded under a certain threshold. This use-case is not latency-critical from that view point. On the other hand, given the controlled environment, end-to-end mechanisms can be applied to guarantee bounded latency where needed.

[3.](#) Amusement Parks

[3.1.](#) use-case Description

The digitalization of Amusement Parks is expected to decrease significantly the cost for maintaining the attractions. Such deployment is a mix between industrial automation (i.e., Smart Factories) and multimedia entertainment applications.

Attractions may rely on a large set of sensors and actuators, which react in real time. Typical applications comprise:

- * Emergency: safety has to be preserved, and must stop the attraction when a failure is detected.
- * Video: augmented and virtual realities are integrated in the attraction. Wearable mobile devices (e.g., glasses, virtual reality headset) need to offload one part of the processing tasks.
- * Real-time interactions: visitors may interact with an attraction, like in a real-time video game. The visitors may virtually interact with their environment, triggering actions in the real world (through actuators) [[KOB12](#)].
- * Geolocation: visitors are tracked with a personal wireless tag so that their user experience is improved.
- * Predictive maintenance: statistics are collected to predict the future failures, or to compute later more complex statistics about the attraction's usage, the downtime or its popularity for example.

[3.2.](#) Specifics

Amusement parks comprise a variable number of attractions, mostly outdoor, over a large geographical area. The IT infrastructure is

typically multi-scale:

- * Local area: the sensors and actuators controlling the attractions are co-located. Control loops trigger only local traffic, with a small end-to-end delay, typically inferior to 10 ms, like classical industrial systems [[IEEE80211-RT-TIG](#)].
- * Wearable mobile devices are free to move in the park. They exchange traffic locally (identification, personalization, multimedia) or globally (billing, child tracking).
- * Computationally intensive applications offload some tasks. Edge computing seems an efficient way to implement real-time applications with offloading. Some non-time-critical tasks may rather use the cloud (predictive maintenance, marketing).

[3.3.](#) The Need for Wireless

Amusement parks cover large areas, and a global interconnection would require a huge length of cables. Wireless also increases the reconfigurability, enabling to update an attraction at a lower cost. The frequent renewal helps to increase the customer loyalty.

Some parts of the attraction are mobile, like trucks of a roller-coaster or robots. Since cables are prone to frequent failures in this situation, wireless transmissions are recommended.

Wearable devices are extensively used for a user experience personalization. They typically need to support wireless transmissions. Personal tags may help to reduce the operating costs [[DISNEY15](#)] and to increase the number of charged services provided to the audience (e.g., VIP tickets or interactivity). Some applications rely on more sophisticated wearable devices such as digital glasses or Virtual Reality (VR) headsets for an immersive experience.

[3.4.](#) Requirements for RAW

The network infrastructure must support heterogeneous traffic, with very different critical requirements. Thus, flow isolation must be provided.

The transmissions must be scheduled appropriately even in presence of mobile devices. While the [\[RFC9030\]](#) already proposes an architecture for synchronized, IEEE Std. 802.15.4 Time-Slotted Channel Hopping (TSCH) networks, the industry requires a multi-technology solution, able to guarantee end-to-end requirements across heterogeneous technologies, with strict SLA requirements.

Nowadays, long-range wireless transmissions are used mostly for best-effort traffic. On the contrary, [\[IEEE802.1TSN\]](#) is used for critical flows using Ethernet devices. However, IP enabled technology is required to interconnect large areas, independent of the PHY and MAC layers.

It is expected that several different technologies (long vs. short range) are deployed, which have to cohabit in the same area. Thus, we need to provide layer-3 mechanisms able to exploit multiple co-interfering technologies.

[3.4.1.](#) Non-latency critical considerations

While some of the applications in this use-case involve control loops (e.g., sensors and actuators) that require bounded latencies below 10 ms, that can therefore be considered latency critical, there are other applications as well that mostly demand reliability (e.g., safety related, or maintenance).

[4.](#) Wireless for Industrial Applications

[4.1.](#) use-case Description

A major use-case for networking in Industrial environments is the control networks where periodic control loops operate between a collection of sensors that measure a physical property such as the temperature of a fluid, a Programmable Logic Controller (PLC) that decides an action such as warm up the mix, and actuators that perform the required action, such as the injection of power in a resistor.

[4.2.](#) Specifics

4.2.1. Control Loops

Process Control designates continuous processing operations, like heating Oil in a refinery or mixing drinking soda. Control loops in the Process Control industry operate at a very low rate, typically four times per second. Factory Automation, on the other hand, deals with discrete goods such as individual automobile parts, and requires faster loops, in the order of milliseconds. Motion control that monitors dynamic activities may require even faster rates in the order of and below the millisecond. Finally, some industries exhibit hybrid behaviors, like canned soup that will start as a process industry while mixing the food and then operate as a discrete manufacturing when putting the final product in cans and shipping them.

Bernardos, et al.

Expires 27 August 2022

[Page 11]

Internet-Draft

RAW use-cases scenarios

February 2022

In all those cases, a packet must flow reliably between the sensor and the PLC, be processed by the PLC, and sent to the actuator within the control loop period. In some particular use-cases that inherit from analog operations, jitter might also alter the operation of the control loop. A rare packet loss is usually admissible, but typically 4 losses in a row will cause an emergency halt of the production and incur a high cost for the manufacturer.

Additional details and use-cases related to Industrial applications and their RAW requirements can be found in [\[I-D.ietf-raw-industrial-requirements\]](#).

4.2.2. Unmeasured Data

A secondary use-case deals with monitoring and diagnostics. This so-called unmeasured data is essential to improve the performances of a production line, e.g., by optimizing real-time processing or maintenance windows using Machine Learning predictions. For the lack of wireless technologies, some specific industries such as Oil and Gas have been using serial cables, literally by the millions, to perform their process optimization over the previous decades. But few industries would afford the associated cost and the Holy Grail of the Industrial Internet of Things is to provide the same benefits to all industries, including SmartGrid, Transportation, Building, Commercial and Medical. This requires a cheap, available and

scalable IP-based access technology.

Inside the factory, wires may already be available to operate the Control Network. But unmeasured data are not welcome in that network for several reasons. On the one hand it is rich and asynchronous, meaning that it may influence the deterministic nature of the control operations and impact the production. On the other hand, this information must be reported to the carpeted floor over IP, which means the potential for a security breach via the interconnection of the Operational Technology (OT) network with the Internet technology (IT) network and possibly enable a rogue access.

[4.3.](#) The Need for Wireless

Ethernet cables used on a robot arm are prone to breakage after a few thousands of flexions, a lot faster than a power cable that is wider in diameter, and more resilient. In general, wired networking and mobile parts are not a good match, mostly in the case of fast and recurrent activities, as well as rotation.

When refurbishing older premises that were built before the Internet age, power is usually available everywhere, but data is not. It is often impractical, time consuming and expensive to deploy an Ethernet fabric across walls and between buildings. Deploying a wire may take months and cost tens of thousands of US Dollars.

Even when wiring exists, like in the case of an existing control network, asynchronous IP packets such as diagnostics may not be welcome for operational and security reasons. For those packets, the option to create a parallel wireless network offers a credible solution that can scale with the many sensors and actuators that equip every robot, every valve and fan that are deployed on the factory floor. It may also help detect and prevent a failure that could impact the production, like the degradation (vibration) of a cooling fan on the ceiling. IEEE Std. 802.15.4 Time-Slotted Channel Hopping (TSCH) [[RFC7554](#)] is a promising technology for that purpose, mostly if the scheduled operations enable to use the same network by asynchronous and deterministic flows in parallel.

[4.4.](#) Requirements for RAW

As stated by the "Deterministic Networking Problem Statement" [[RFC8557](#)], a Deterministic Network is backwards compatible with (capable of transporting) statistically multiplexed traffic while preserving the properties of the accepted deterministic flows. While the 6TiSCH Architecture [[RFC9030](#)] serves that requirement, the work at 6TiSCH was focused on best-effort IPv6 packet flows. RAW should be able to lock so-called hard cells for use by a centralized scheduler, and leverage time and spatial diversity over a graph of end-to-end paths called a Track that is based on those cells.

Over the course of the recent years, major Industrial Protocols (e.g., [[ODVA](#)] with EtherNet/IP [[EIP](#)] and [[PROFINET](#)]) have been migrating towards Ethernet and IP. In order to unleash the full power of the IP hourglass model, it should be possible to deploy any application over any network that has the physical capacity to transport the industrial flow, regardless of the MAC/PHY technology, wired or wireless, and across technologies. RAW mechanisms should be able to setup a Track over a wireless access segment and a wired or wireless backbone to report both sensor data and critical monitoring within a bounded latency and maintain the high reliability of the flows over time. It is also important to ensure that RAW solutions are interoperable with existing wireless solutions in place, and with legacy equipment which capabilities can be extended using retrofitting. Maintainability, as a broader concept than reliability is also important in industrial scenarios [[MAR19](#)].

[4.4.1.](#) Non-latency critical considerations

Monitoring and diagnostics applications do not require latency critical communications, but demand reliable and scalable communications. On the other hand, process control applications involve control loops that require a bounded latency, thus are latency critical, but can be managed end-to-end, and therefore DetNet mechanisms can be applied in conjunction with RAW mechanisms.

[5.](#) Pro Audio and Video

[5.1.](#) use-case Description

Many devices support audio and video streaming by employing 802.11 wireless LAN. Some of these applications require low latency capability. For instance, when the application provides interactive play, or when the audio plays in real time – meaning live for public addresses in train stations or in theme parks.

The professional audio and video industry ("ProAV") includes:

- * Virtual Reality / Augmented Reality (VR/AR)
- * Production and post-production systems such as CD and Blue-Ray disk mastering.
- * Public address, media and emergency systems at large venues (e.g., airports, train stations, stadiums, and theme parks).

[5.2.](#) Specifics

[5.2.1.](#) Uninterrupted Stream Playback

Considering the uninterrupted audio or video stream, a potential packet loss during the transmission of audio or video flows cannot be tackled by re-trying the transmission, as it is done with file transfer, because by the time the packet lost has been identified it is too late to proceed with packet re-transmission. Buffering might be employed to provide a certain delay which will allow for one or more re-transmissions, however such approach is not efficient in application where delays are not acceptable.

[5.2.2.](#) Synchronized Stream Playback

In the context of ProAV, latency is the time between the transmitted signal over a stream and its reception. Thus, for sound to remain synchronized to the movement in the video, the latency of both the audio and video streams must be bounded and consistent.

[5.3.](#) The Need for Wireless

The devices need the wireless communication to support video streaming via IEEE 802.11 wireless LAN for instance. Wireless

communications provide huge advantages in terms of simpler deployments in many scenarios, where the use of a wired alternative would not be feasible. Similarly, in live events, mobility support makes wireless communications the only viable approach.

Deployed announcement speakers, for instance along the platforms of the train stations, need the wireless communication to forward the audio traffic in real time.

[5.4.](#) Requirements for RAW

The network infrastructure needs to support heterogeneous types of traffic (including QoS).

Content delivery with bounded (lowest possible) latency.

The deployed network topology should allow for multipath. This will enable for multiple streams to have different (and multiple) paths (tracks) through the network to support redundancy.

[5.4.1.](#) Non-latency critical considerations

For synchronized streaming, latency must be bounded, and therefore, depending on the actual requirements, this can be considered as latency critical. However, the most critical requirement of this use-case is reliability, by the network providing redundancy. Note that in many cases, wireless is only present in the access, where RAW mechanisms could be applied, but other wired segments are also involved (like the Internet), and therefore latency cannot be guaranteed.

[6.](#) Wireless Gaming

[6.1.](#) use-case Description

The gaming industry includes [[IEEE80211RTA](#)] real-time mobile gaming, wireless console gaming and cloud gaming. For RAW, wireless console gaming is the most relevant one. We next summarize the three:

- * Real-time Mobile Gaming: Different from traditional games, real time mobile gaming is very sensitive to network latency and stability. The mobile game can connect multiple players together in a single game session and exchange data messages between game server and connected players. Real-time means the feedback should

present on screen as users operate in game. For good game experience, the end-to-end (E2E) latency plus game servers processing time must be the same for all players and should not be noticeable as the game is played.

- * **Wireless Console Gaming:** Playing online on a console has 2 types of internet connectivity, which is either wired or Wi-Fi. Most of the gaming consoles today support Wi-Fi 5. But Wi-Fi has an especially bad reputation among the gaming community. The main reasons are high latency, lag spikes, and jitter.
- * **Cloud Gaming:** The cloud gaming requires low latency capability as the user commands in a game session need to be sent back to the cloud server, the cloud server would update game context depending on the received commands, and the cloud server would render the picture/video to be displayed at user devices and stream the picture/video content to the user devices. User devices might very likely be connected wirelessly.

[6.2.](#) Specifics

While a lot of details can be found on [[IEEE80211RTA](#)], we next summarize the main requirements in terms of latency, jitter and packet loss:

- * Intra BSS latency is less than 5 ms.
- * Jitter variance is less than 2 ms.
- * Packet loss is less than 0.1 percent.

[6.3.](#) The Need for Wireless

Gaming is evolving towards wireless, as players demand being able to play anywhere, and the game requires a more immersive experience including body movements. Besides, the industry is changing towards playing from mobile phones, which are inherently connected via wireless technologies. Wireless controllers are the rule in modern gaming, with increasingly sophisticated interactions (e.g., haptic feedback, augmented reality).

[6.4.](#) Requirements for RAW

- * **Time sensitive networking extensions:** extensions, such as time-aware shaping and redundancy (FRE) can be explored to address congestion and reliability problems present in wireless networks.

- * Priority tagging (Stream identification): one basic requirement to provide better QoS for time-sensitive traffic is the capability to identify and differentiate time-sensitive packets from other (like best-effort) traffic.
- * Time-aware shaping: this capability (defined in IEEE 802.1Qbv) consists of gates to control the opening/closing of queues that share a common egress port within an Ethernet switch. A scheduler defines the times when each queue opens or close, therefore eliminating congestion and ensuring that frames are delivered within the expected latency bounds. Note though, that while this requirement needs to be signalled by RAW mechanisms, it would be actually served by the lower layer.
- * Dual/multiple link: due to the competitions and interference are common and hardly in control under wireless network, to improve the latency stability, dual/multiple link proposal is brought up to address this issue.
- * Admission Control: congestion is a major cause of high/variable latency and it is well known that if the traffic load exceeds the capability of the link, QoS will be degraded. QoS degradation maybe acceptable for many applications today, however emerging time-sensitive applications are highly susceptible to increased latency and jitter. To better control QoS, it is important to control access to the network resources.

[6.4.1.](#) Non-latency critical considerations

Depending on the actual scenario, and on use of Internet to interconnect different users, the communication's requirements of this use-case might be considered as latency critical due to the need of bounded latency. But note that in most of these scenarios, part of the communication path is not wireless and DetNet mechanisms cannot be applied easily (e.g., when the public Internet is involved), and therefore in these cases, reliability is the critical requirement.

[7.](#) Unmanned Aerial Vehicles and Vehicle-to-Vehicle platooning and control

[7.1.](#) use-case Description

Unmanned Aerial Vehicles (UAVs) are becoming very popular for many different applications, including military and civil use-cases. The term drone is commonly used to refer to a UAV.

UAVs can be used to perform aerial surveillance activities, traffic monitoring (i.e., the Spanish traffic control has recently introduced a fleet of drones for quicker reactions upon traffic congestion related events), support of emergency situations, and even transportation of small goods (e.g., medicine in rural areas).

Similarly to UAVs, other type of vehicles (such as cars) can also travel in platoons. Most of the considerations made for UAVs in this section apply to vehicle-to-vehicle (V2V) scenarios.

UAVs/vehicles typically have various forms of wireless connectivity:

- * Cellular: for communication with the control center, for remote maneuvering as well as monitoring of the drone;
- * IEEE 802.11: for inter-drone communications (i.e., platooning) and providing connectivity to other devices (i.e., acting as Access Point).

Note that autonomous cars share many of the characteristics of the aforementioned UAV case, and therefore it is of interest for RAW.

[7.2.](#) Specifics

Some of the use-cases/tasks involving UAVs require coordination among UAVs. Others involve complex compute tasks that might not be performed using the limited computing resources that a drone typically has. These two aspects require continuous connectivity with the control center and among UAVs.

Remote maneuvering of a drone might be performed over a cellular network in some cases, however, there are situations that need very low latency and deterministic behavior of the connectivity. Examples

involve platooning of drones or share of computing resources among drones (like, a drone offload some function to a neighboring drone).

[7.3.](#) The Need for Wireless

UAVs cannot be connected through any type of wired media, so it is obvious that wireless is needed.

[7.4.](#) Requirements for RAW

The network infrastructure is composed by the UAVs themselves, requiring self-configuration capabilities.

Bernardos, et al. Expires 27 August 2022 [Page 18]

Internet-Draft RAW use-cases scenarios February 2022

Heterogeneous types of traffic need to be supported, from extremely critical ones requiring ultra-low latency and high resiliency, to traffic requiring low-medium latency.

When a given service is decomposed into functions -- hosted at different UAVs -- chained, each link connecting two given functions would have a well-defined set of requirements (e.g., latency, bandwidth and jitter) that must be met.

[7.4.1.](#) Non-latency critical considerations

Today's solutions keep local the processing operations that are critical and would demand an ultra-low latency communication to be offloaded. Therefore, in this use-case, the critical requirement is reliability, and only for some platooning and inter-drone communications latency is critical.

[8.](#) Edge Robotics control

[8.1.](#) use-case Description

The Edge Robotics scenario consists of several robots, deployed in a given area (like a shopping mall), inter-connected via an access network to a network's edge device or a data center. The robots are connected to the edge so complex computational activities are not executed locally at the robots but offloaded to the edge. This

brings additional flexibility in the type of tasks that the robots do, as well as reducing the costs of robot manufacturing (due to their lower complexity), and enabling complex tasks involving coordination among robots (that can be more easily performed if robots are centrally controlled).

Simple examples of the use of multiples robots are cleaning, video surveillance, search and rescue operations, and delivering of goods from warehouses to shops. Multiple robots are simultaneously instructed to perform individual tasks by moving the robotic intelligence from the robots to the network's edge (like a data center). That enables easy synchronization, scalable solution, and on-demand option to create flexible fleet of robots.

Robots would have various forms of wireless connectivity:

- * IEEE 802.11: for connection to the edge and also inter-robot communications (i.e., for coordinated actions).
- * Cellular: as an additional communication link to the edge, though primarily as backup, since ultra-low latency is needed.

[8.2.](#) Specifics

Some of the use-cases/tasks involving robots might benefit from decomposition of a service in small functions that are distributed and chained among robots and the edge. These require continuous connectivity with the control center and among drones.

Robot control is an activity requiring very low latency between the robot and the location where the control intelligence resides (which might be the edge or another robot).

[8.3.](#) The Need for Wireless

Deploying robots in scenarios such as shopping malls for the applications mentioned cannot be done via wired connectivity.

[8.4.](#) Requirements for RAW

The network infrastructure needs to support heterogeneous types of

traffic, from robot control to video streaming.

When a given service is decomposed into functions -- hosted at different robots -- chained, each link connecting two given functions would have a well-defined set of requirements (latency, bandwidth and jitter) that must be met.

[8.4.1.](#) Non-latency critical considerations

This use-case might combine multiple communication flows, with some of them being latency critical (like those related to robot control tasks). Note that there are still many communication flows (like some offloading tasks) that only demand reliability and availability.

[9.](#) Emergencies: Instrumented emergency vehicle

[9.1.](#) use-case Description

An instrumented ambulance would be one that has a LAN to which are connected these end systems such as:

- * vital signs sensors attached to the casualty in the ambulance. Relay medical data to hospital emergency room,
- * radio-navigation sensor to relay position data to various destinations including dispatcher,
- * voice communication for ambulance attendant (like to consult with ER doctor), and

- * voice communication between driver and dispatcher.

The LAN needs to be routed through radio-WANs to complete the inter-network linkage.

[9.2.](#) Specifics

What we have today is multiple communications systems to reach the vehicle via:

- * A dispatching system,

- * a cellphone for the attendant,
- * a special purpose telemetering system for medical data,
- * etc.

This redundancy of systems, because of its stove-piping, does not contribute to availability.

Most of the scenarios involving the use of an instrumented ambulance are composed of many different flows, each of them with slightly different requirements in terms of reliability and latency. Destinations might be either at the ambulance itself (local traffic), at a near edge cloud or at the general Internet/cloud.

[9.3.](#) The Need for Wireless

Local traffic between the first responders/ambulance staff and the ambulance equipment cannot be done via wired connectivity as the responders perform initial treatment outside of the ambulance. The communications from the ambulance to external services must be wireless as well.

[9.4.](#) Requirements for RAW

We can derive some pertinent requirements from this scenario:

- * High availability of the inter-network is required.
- * The inter-network needs to operate in damaged state (e.g. during an earthquake aftermath, heavy weather, wildfire, etc.). In addition to continuity of operations, rapid restore is a needed characteristic.

- * E2E security, both authenticity and confidentiality, is required of traffic. All data needs to be authenticated; some like medical needs to be confidential.
- * The radio-WAN has characteristics similar to cellphone -- the

vehicle will travel from one radio footprint to another.

[9.4.1.](#) Non-latency critical considerations

In this case, all applications identified do not require latency critical communication, but do need of high reliability and availability.

[10.](#) Summary

This document enumerates several use-cases and applications that need RAW technologies, focusing on the requirements from reliability, availability and latency. Whereas some use-cases are latency-critical, there are also several applications that are non-latency critical, but that do pose strict reliability and availability requirements. Future revisions of this document will include specific text devoted to highlight this non-latency critical requirements.

[11.](#) IANA Considerations

This document has no IANA actions.

[12.](#) Security Considerations

This document covers several representative applications and network scenarios that are expected to make use of RAW technologies. Each of the potential RAW use-cases will have security considerations from both the use-specific perspective and the RAW technology perspective. [\[RFC9055\]](#) provides a comprehensive discussion of security considerations in the context of Deterministic Networking, which are generally applicable also to RAW.

[13.](#) Acknowledgments

Nils Maeurer, Thomas Graeupl and Corinna Schmitt have contributed significantly to this document, providing input for the Aeronautical communications section. Rex Buddenberg has also contributed to the document, providing input to the Emergency: instrumented emergency vehicle section.

The authors would like to thank Toerless Eckert, Xavi Vilajosana Guillen, Rute Sofia and Corinna Schmitt for their valuable comments on previous versions of this document.

The work of Carlos J. Bernardos in this draft has been partially supported by the H2020 5Growth (Grant 856709) and 5G-DIVE projects (Grant 859881), and UNICO 5G I+D 6G-DATADRIVEN-04 project.

14. References

14.1. Normative References

[I-D.ietf-raw-technologies]

Thubert, P., Cavalcanti, D., Vilajosana, X., Schmitt, C., and J. Farkas, "Reliable and Available Wireless Technologies", Work in Progress, Internet-Draft, [draft-ietf-raw-technologies-05](https://www.ietf.org/archive/id/draft-ietf-raw-technologies-05), 2 February 2022, <<https://www.ietf.org/archive/id/draft-ietf-raw-technologies-05.txt>>.

14.2. Informative References

[ACI19] Airports Council International (ACI), "Annual World Airport Traffic Report 2019", November 2019, <<https://store.aci.aero/product/annual-world-airport-traffic-report-2019/>>.

[DISNEY15] Wired, "Disney's \$1 Billion Bet on a Magical Wristband", March 2015, <<https://www.wired.com/2015/03/disney-magicband/>>.

[EIP] <http://www.odva.org/>, "EtherNet/IP provides users with the network tools to deploy standard Ethernet technology (IEEE 802.3 combined with the TCP/IP Suite) for industrial automation applications while enabling Internet and enterprise connectivity data anytime, anywhere.", <http://www.odva.org/Portals/0/Library/Publications/Numbered/PUB00138R3_CIP_Adv_Tech_Series_EtherNetIP.pdf>.

[FAA20] U.S. Department of Transportation Federal Aviation Administration (FAA), "Next Generation Air Transportation System", 2019, <<https://www.faa.gov/nextgen/>>.

[I-D.ietf-raw-industrial-requirements]

Sofia, R. C., Kovatsch, M., and P. M. Mendes, "Requirements for Reliable Wireless Industrial Services", Work in Progress, Internet-Draft, [draft-ietf-raw-](#)

Internet-Draft

RAW use-cases scenarios

February 2022

industrial-requirements-00, 10 December 2021,
<<https://www.ietf.org/archive/id/draft-ietf-raw-industrial-requirements-00.txt>>.

[I-D.ietf-raw-ldacs]

Maeurer, N., Graeupl, T., and C. Schmitt, "L-band Digital Aeronautical Communications System (LDACS)", Work in Progress, Internet-Draft, [draft-ietf-raw-ldacs-09](https://www.ietf.org/archive/id/draft-ietf-raw-ldacs-09), 22 October 2021, <<https://www.ietf.org/archive/id/draft-ietf-raw-ldacs-09.txt>>.

[IAC20] Iacus, S.M., Natale, F., Santamaria, C., Spyrtos, S., and V. Michele, "Estimating and projecting air passenger traffic during the COVID-19 coronavirus outbreak and its socio- economic impact", Safety Science 129 (2020) 104791 , 2020.

[IAT20] International Air Transport Association (IATA), "Economic Performance of the Airline Industry", November 2020, <<https://www.iata.org/en/iata-repository/publications/economic-reports/airline-industry-economic-performance---november-2020---report/>>.

[ICA018] International Civil Aviation Organization (ICAO), "L-Band Digital Aeronautical Communication System (LDACS)", International Standards and Recommended Practices Annex 10 - Aeronautical Telecommunications, Vol. III - Communication Systems , 2018.

[IEEE802.1TSN]

IEEE standard for Information Technology, "IEEE 802.1AS-2011 - IEEE Standard for Local and Metropolitan Area Networks - Timing and Synchronization for Time-Sensitive Applications in Bridged Local Area Networks".

[IEEE80211-RT-TIG]

IEEE, "IEEE 802.11 Real Time Applications TIG Report", November 2018,
<http://www.ieee802.org/11/Reports/rtatig_update.htm>.

[IEEE80211BE]

Cavalcanti, D. and G. Venkatesan, "802.1 TSN over 802.11

with updates from developments in 802.11be", IEEE plenary meeting , November 2020,
<<https://www.ieee802.org/1/files/public/docs2020/new-Cavalcanti-802-1TSN-over-802-11-1120-v02.pdf>>.

- [IEEE80211RTA] IEEE standard for Information Technology, "IEEE 802.11 Real Time Applications TIG Report", November 2018.
- [ISA100] ISA/ANSI, "ISA100, Wireless Systems for Automation", <<https://www.isa.org/isa100/>>.
- [KEAV20] T. Keaveney and C. Stewart, "Single European Sky ATM Research Joint Undertaking", 2019, <<https://www.sesarju.eu/>>.
- [KOB12] Kober, J., Glisson, M., and M. Mistry, "Playing catch and juggling with a humanoid robot.", 2012, <<https://doi.org/10.1109/HUMANOIDS.2012.6651623>>.
- [MAR19] Martinez, B., Cano, C., and X. Vilajosana, "A Square Peg in a Round Hole: The Complex Path for Wireless in the Manufacturing Industry", 2019, <<https://ieeexplore.ieee.org/document/8703476>>.
- [ODVA] <http://www.odva.org/>, "The organization that supports network technologies built on the Common Industrial Protocol (CIP) including EtherNet/IP."
- [PLA14] Plass, S., Hermenier, R., Luecke, O., Gomez Depoorter, D., Tordjman, T., Chatterton, M., Amirfeiz, M., Scotti, S., Cheng, Y.J., Pillai, P., Graeupl, T., Durand, F., Murphy, K., Marriott, A., and A. Zaytsev, "Flight Trial Demonstration of Seamless Aeronautical Networking", IEEE Communications Magazine, vol. 52, no. 5 , May 2014.
- [PROFINET] <http://us.profinet.com/technology/profinet/>, "PROFINET is a standard for industrial networking in automation.", <<http://us.profinet.com/technology/profinet/>>.

- [RFC7554] Watteyne, T., Ed., Palattella, M., and L. Grieco, "Using IEEE 802.15.4e Time-Slotted Channel Hopping (TSCH) in the Internet of Things (IoT): Problem Statement", [RFC 7554](#), DOI 10.17487/RFC7554, May 2015, <<https://www.rfc-editor.org/info/rfc7554>>.
- [RFC8557] Finn, N. and P. Thubert, "Deterministic Networking Problem Statement", [RFC 8557](#), DOI 10.17487/RFC8557, May 2019, <<https://www.rfc-editor.org/info/rfc8557>>.
- [RFC8578] Grossman, E., Ed., "Deterministic Networking Use Cases", [RFC 8578](#), DOI 10.17487/RFC8578, May 2019, <<https://www.rfc-editor.org/info/rfc8578>>.

Bernardos, et al.

Expires 27 August 2022

[Page 25]

Internet-Draft

RAW use-cases scenarios

February 2022

- [RFC8655] Finn, N., Thubert, P., Varga, B., and J. Farkas, "Deterministic Networking Architecture", [RFC 8655](#), DOI 10.17487/RFC8655, October 2019, <<https://www.rfc-editor.org/info/rfc8655>>.
- [RFC9030] Thubert, P., Ed., "An Architecture for IPv6 over the Time-Slotted Channel Hopping Mode of IEEE 802.15.4 (6TiSCH)", [RFC 9030](#), DOI 10.17487/RFC9030, May 2021, <<https://www.rfc-editor.org/info/rfc9030>>.
- [RFC9055] Grossman, E., Ed., Mizrahi, T., and A. Hacker, "Deterministic Networking (DetNet) Security Considerations", [RFC 9055](#), DOI 10.17487/RFC9055, June 2021, <<https://www.rfc-editor.org/info/rfc9055>>.

Authors' Addresses

Carlos J. Bernardos (editor)
Universidad Carlos III de Madrid
Av. Universidad, 30
28911 Leganes, Madrid
Spain
Phone: +34 91624 6236
Email: cjbc@it.uc3m.es
URI: <http://www.it.uc3m.es/cjbc/>

Georgios Z. Papadopoulos

IMT Atlantique
Office B00 - 114A
2 Rue de la Chataigneraie
35510 Cesson-Sevigne - Rennes
France
Phone: +33 299 12 70 04
Email: georgios.papadopoulos@imt-atlantique.fr

Pascal Thubert
Cisco Systems, Inc
Building D
45 Allee des Ormes - BP1200
06254 MOUGINS - Sophia Antipolis
France
Phone: +33 497 23 26 34
Email: pthubert@cisco.com

Bernardos, et al.

Expires 27 August 2022

[Page 26]

Internet-Draft

RAW use-cases scenarios

February 2022

Fabrice Theoleyre
CNRS
ICube Lab, Pole API
300 boulevard Sebastien Brant - CS 10413
67400 Illkirch
France
Phone: +33 368 85 45 33
Email: fabrice.theoleyre@cnrs.fr
URI: <https://fabrice.theoleyre.cnrs.fr/>

