

Routing Area Working Group
Internet-Draft
Intended status: Standards Track
Expires: September 5, 2015

S. Litkowski
B. Decraene
Orange
C. Filsfils
K. Raza
Cisco Systems
M. Horneffer
Deutsche Telekom
P. Sarkar
Juniper Networks
March 4, 2015

Operational management of Loop Free Alternates
draft-ietf-rtgwg-lfa-manageability-08

Abstract

Loop Free Alternates (LFA), as defined in [RFC 5286](#) is an IP Fast ReRoute (IP FRR) mechanism enabling traffic protection for IP traffic (and MPLS LDP traffic by extension). Following first deployment experiences, this document provides operational feedback on LFA, highlights some limitations, and proposes a set of refinements to address those limitations. It also proposes required management specifications.

This proposal is also applicable to remote LFA solution.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

Internet-Draft

LFA manageability

March 2015

This Internet-Draft will expire on September 5, 2015.

Copyright Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Definitions	3
2.	Introduction	3
3.	Operational issues with default LFA tie breakers	4
3.1.	Case 1: PE router protecting failures within core network	4
3.2.	Case 2: PE router chosen to protect core failures while P router LFA exists	5
3.3.	Case 3: suboptimal P router alternate choice	6
3.4.	Case 4: IS-IS overload bit on LFA computing node	7
4.	Need for coverage monitoring	8
5.	Need for LFA activation granularity	9
6.	Configuration requirements	9
6.1.	LFA enabling/disabling scope	9
6.2.	Policy based LFA selection	10
6.2.1.	Connected vs remote alternates	11
6.2.2.	Mandatory criteria	11
6.2.3.	Enhanced criteria	12
6.2.4.	Retrieving alternate path attributes	12
6.2.5.	ECMP LFAs	14
6.2.6.	SRLG	15
6.2.7.	Link coloring	16
6.2.8.	Bandwidth	17
6.2.9.	Alternate preference/Node coloring	18
7.	Operational aspects	19
7.1.	IS-IS overload bit on LFA computing node	19

7.2.	Manual triggering of FRR	20
7.3.	Required local information	21
7.4.	Coverage monitoring	21
7.5.	LFA and network planning	22
8.	Security Considerations	22

9.	Contributors	22
10.	Acknowledgements	23
11.	IANA Considerations	23
12.	References	23
12.1.	Normative References	23
12.2.	Informative References	23
	Authors' Addresses	24

[1.](#) Definitions

- o Per-prefix LFA : LFA computation, and best alternate evaluation is done for each destination prefix. As opposed to "Per-next hop" simplification also proposed in [\[RFC5286\] Section 3.8](#).
- o PE router : Provider Edge router. These routers are connecting customers
- o P router : Provider router. These routers are core routers, without customer connections. They provide transit between PE routers and they form the core network.
- o Core network : subset of the network composed by P routers and links between them.
- o Core link : network link part of the core network i.e. a P router to P router link.
- o Link-protecting LFA : alternate providing protection against link failure.
- o Node-protecting LFA : alternate providing protection against node failure.
- o Connected alternate : alternate adjacent (at IGP level) to the point of local repair (i.e. an IGP neighbor).

- o Remote alternate : alternate which is does not share an IGP adjacency with the point of local repair.

2. Introduction

Following the first deployments of Loop Free Alternates (LFA), this document provides feedback to the community about the management of LFA.

[Section 3](#) provides real uses cases illustrating some limitations and suboptimal behavior.

Litkowski, et al.

Expires September 5, 2015

[Page 3]

Internet-Draft

LFA manageability

March 2015

[Section 5](#) proposes requirements for activation granularity and policy based selection of the alternate.


[Section 6](#) express requirements for the operational management of LFA.

3. Operational issues with default LFA tie breakers

[RFC5286] introduces the notion of tie breakers when selecting the LFA among multiple candidate alternate next-hops. When multiple LFA exist, [RFC 5286](#) has favored the selection of the LFA providing the best coverage of the failure cases. While this is indeed a goal, this is one among multiple and in some deployment this lead to the selection of a suboptimal LFA. The following sections details real use cases of such limitations.

Note that the use case of LFA computation per destination (per-prefix LFA) is assumed throughout this analysis. We also assume in the network figures that all IP prefixes are advertised with zero cost.

3.1. Case 1: PE router protecting failures within core network

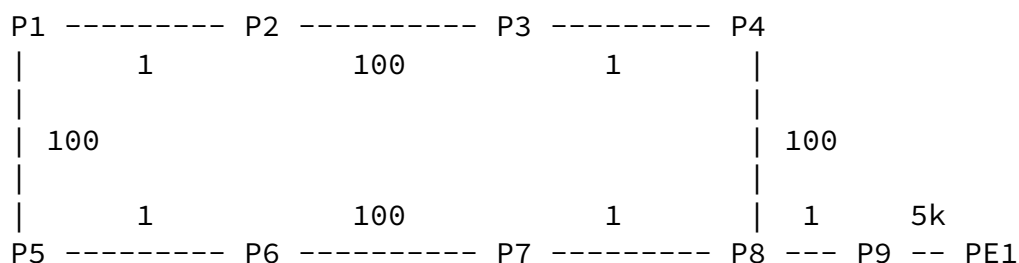

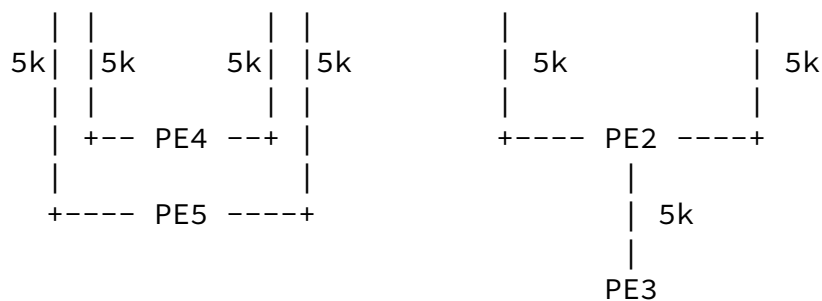


Figure 1

Px routers are P routers using $n \times 10G$ links. PEs are connected using links with lower bandwidth.

In figure 1, let us consider the traffic flowing from PE1 to PE4. The nominal path is P9-P8-P7-P6-PE4. Let us consider the failure of link P7-P8. For P8, P4 is not an LFA and the only available LFA is PE2.

When the core link P8-P7 fails, P8 switches all traffic destined to PE4/PE5 towards the node PE2. Hence a PE node and PE links are used to protect the failure of a core link. Typically, PE links have less capacity than core links and congestion may occur on PE2 links. Note that although PE2 was not directly affected by the failure, its links become congested and its traffic will suffer from the congestion.

In summary, in case of P8-P7 link failure, the impact on customer traffic is:

- o From PE2 point of view :
 - * without LFA: no impact
 - * with LFA: traffic is partially dropped (but possibly prioritized by a QoS mechanism). It must be highlighted that in such situation, traffic not affected by the failure may be affected by the congestion.
- o From P8 point of view:
 - * without LFA: traffic is totally dropped until convergence

occurs.

- * with LFA: traffic is partially dropped (but possibly prioritized by a QoS mechanism).

Besides the congestion aspects of using an Edge router as an alternate to protect a core failure, a service provider may consider this as a bad routing design and would like to prevent it.

[3.2.](#) Case 2: PE router chosen to protect core failures while P router LFA exists

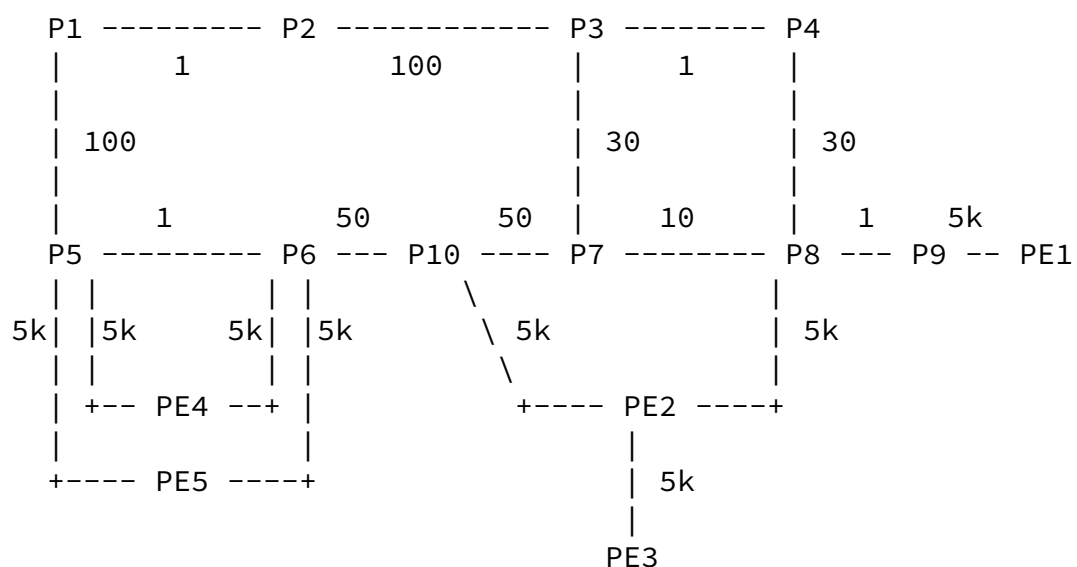
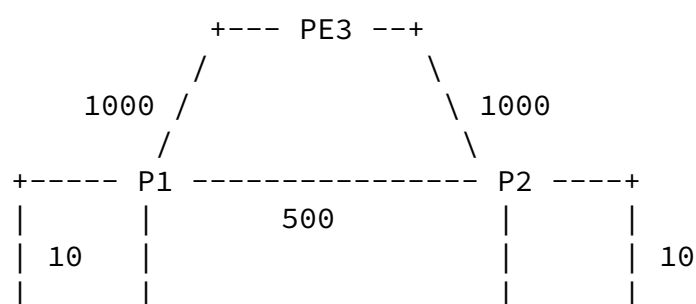


Figure 2

Px routers are P routers meshed with $n \times 10G$ links. PEs are meshed using links with lower bandwidth.

In the figure 2, let us consider the traffic coming from PE1 to PE4. Nominal path is P9-P8-P7-P10-P6-PE4. Let us consider the failure of the link P7-P8. For P8, P4 is a link-protecting LFA and PE2 is a node-protecting LFA. PE2 is chosen as best LFA due to its better protection type. Just like in case 1, this may lead to congestion on PE2 links upon LFA activation.

[3.3.](#) Case 3: suboptimal P router alternate choice



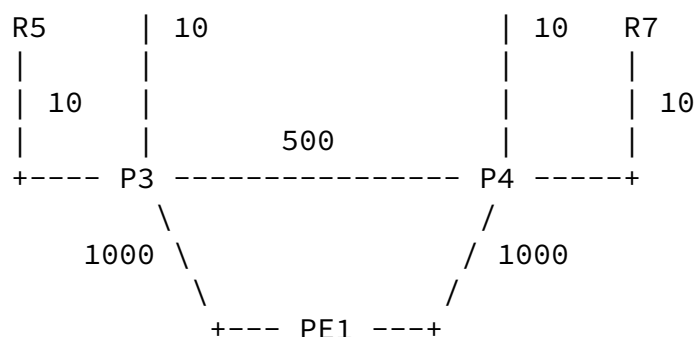


Figure 3

Px routers are P routers. P1-P2 and P3-P4 links are 1G links. All others inter Px links are 10G links.

In the figure above, let us consider the failure of link P1-P3. For destination PE3, P3 has two possible alternates:

- o P4, which is node-protecting
- o P5, which is link-protecting

P4 is chosen as best LFA due to its better protection type. However, it may not be desirable to use P4 for bandwidth capacity reason. A service provider may prefer to use high bandwidth links as preferred LFA. In this example, preferring shortest path over protection type may achieve the expected behavior, but in cases where metric are not reflecting bandwidth, it would not work and some other criteria would need to be involved when selecting the best LFA.

[3.4.](#) Case 4: IS-IS overload bit on LFA computing node




Figure 4

In the figure above, PE3 has its overload bit set (permanently, for design reason) and wants to protect traffic using LFA for destination PE2.

On PE3, the loop-free condition is not satisfied : $100 \nless 45 + 45$. PE1 is thus not considered as an LFA. However thanks to the overload bit set on PE3, we know that PE1 is loop-free so PE1 is an LFA to reach PE2.

In case of overload condition set on a node, LFA behavior must be clarified.

4. Need for coverage monitoring

As per [RFC6571], LFA coverage highly depends on the used network topology. Even if remote LFA ([I-D.ietf-rtgwg-remote-lfa]) extends significantly the coverage of the basic LFA specification, there is still some cases where protection would not be available. As network topologies are constantly evolving (network extension, capacity addings, latency optimization ...), the protection coverage may change. Fast reroute functionality may be critical for some services supported by the network, a service provider must constantly know what protection coverage is currently available on the network. Moreover, predicting the protection coverage in case of network topology change is mandatory.

Today network simulation tool associated with whatif scenarios functionality are often used by service providers for the overall network design (capacity, path optimization ...). [Section 7.5](#), [Section 7.4](#) and [Section 7.3](#) of this document propose to add LFA informations into such tool and within routers, so a service provider may be able :

- o to evaluate protection coverage after a topology change.

- o to adjust the topology change to cover the primary need (e.g. latency optimization or bandwidth increase) as well as LFA protection.
- o monitor constantly the LFA coverage in the live network and being alerted.

Implementers SHOULD document their LFA selection algorithms (default and tuning options) in order to leave possibility for 3rd party modules to model these policy-LFA expressions.

[5.](#) Need for LFA activation granularity

As all FRR mechanism, LFA installs backup paths in Forwarding Information Base (FIB). Depending of the hardware used by a service provider, FIB resource may be critical. Activating LFA, by default, on all available components (IGP topologies, interface, address families ...) may lead to waste of FIB resource as generally in a network only few destinations should be protected (e.g. loopback addresses supporting MPLS services) compared to the amount of destinations in RIB.

Moreover a service provider may implement multiple different FRR mechanism in its networks for different usages (MRT, TE FRR). In this scenario, an implementation MAY permit to compute alternates for a specific destination even if the destination is already protected by another mechanism. This will bring redundancy and let the ability for the operator to select the best option for FRR using a policy langage.

[Section 6](#) of this document propose some implementation guidelines.

[6.](#) Configuration requirements

Controlling best alternate and LFA activation granularity is a requirement for Service Providers. This section defines configuration requirements for LFA.

[6.1.](#) LFA enabling/disabling scope

The granularity of LFA activation should be controlled (as alternate next hop consume memory in forwarding plane).

An implementation of LFA SHOULD allow its activation with the following criteria:

- o Per routing context: VRF, virtual/logical router, global routing table, ...

- o Per interface
- o Per protocol instance, topology, area
- o Per prefixes: prefix protection SHOULD have a better priority compared to interface protection. This means that if a specific prefix must be protected due to a configuration request, LFA must be computed and installed for this prefix even if the primary outgoing interface is not configured for protection.

An implementation of LFA MAY allow its activation with the following criteria:

- o Per address-family: ipv4 unicast, ipv6 unicast
- o Per MPLS control plane: for MPLS control planes that inherit routing decision from the IGP routing protocol, MPLS dataplane may be protected by LFA. The implementation may allow operator to control this inheritance of protection from the IP prefix to the MPLS label bound to this prefix. The protection inheritance will concern : IP to MPLS, MPLS to MPLS, and MPLS to IP entries. As example, LDP and segment-routing extensions for ISIS and OSPF are control plane eligible to this inheritance of protection.

[6.2.](#) Policy based LFA selection

When multiple alternates exist, LFA selection algorithm is based on tie breakers. Current tie breakers do not provide sufficient control on how the best alternate is chosen. This document proposes an enhanced tie breaker allowing service providers to manage all specific cases:

1. An implementation of LFA SHOULD support policy-based decision for determining the best LFA.
2. Policy based decision SHOULD be based on multiple criterions, with each criteria having a level of preference.
3. If the defined policy does not permit to determine a unique best

LFA, an implementation SHOULD pick only one based on its own decision, as a default behavior. An implementation SHOULD also support election of multiple LFAs, for loadbalancing purposes.

4. Policy SHOULD be applicable to a protected interface or to a specific set of destinations. In case of application on the protected interface, all destinations primarily routed on this interface SHOULD use the interface policy.

5. It is an implementation choice to reevaluate policy dynamically or not (in case of policy change). If a dynamic approach is chosen, the implementation SHOULD recompute the best LFAs and reinstall them in FIB, without service disruption. If a non-dynamic approach is chosen, the policy would be taken into account upon the next IGP event. In this case, the implementation SHOULD support a command to manually force the recomputation/reinstallation of LFAs.

[6.2.1.](#) Connected vs remote alternates

In addition to connected LFAs, tunnels (e.g. IP, LDP, RSVP-TE or Segment Routing) to distant routers may be used to complement LFA coverage (tunnel tail used as virtual neighbor). When a router has multiple alternate candidates for a specific destination, it may have connected alternates and remote alternates (reachable via a tunnel). Connected alternates may not always provide an optimal routing path and it may be preferable to select a remote alternate over a connected alternate. Some usage of tunnels to extend LFA ([\[RFC5286\]](#)) coverage is described in either [\[I-D.ietf-rtgwg-remote-lfa\]](#) or [\[I-D.francois-segment-routing-ti-lfa\]](#). These documents present some use cases of LDP tunnels ([\[I-D.ietf-rtgwg-remote-lfa\]](#)) or Segment Routing tunnels ([\[I-D.francois-segment-routing-ti-lfa\]](#)). This document considers any type of tunneling techniques to reach remote alternates (IP, GRE, LDP, RSVP-TE, L2TP, Segment Routing ...) and does not restrict the remote alternates to the usage presented in the referenced document.

In figure 1, there is no P router alternate for P8 to reach PE4 or PE5, so P8 is using PE2 as alternate, which may generate congestion when FRR is activated. Instead, we could have a remote alternate for P8 to protect traffic to PE4 and PE5. For example, a tunnel from P8

to P3 (following shortest path) can be setup and P8 would be able to use P3 as remote alternate to protect traffic to PE4 and PE5. In this scenario, traffic will not use a PE link during FRR activation.

When selecting the best alternate, the selection algorithm MUST consider all available alternates (connected or tunnel). Especially, computation of PQ set ([\[I-D.ietf-rtgwg-remote-lfa\]](#)) SHOULD be performed before best alternate selection.

[6.2.2.](#) Mandatory criteria

An implementation of LFA MUST support the following criteria:

- o Non candidate link: A link marked as "non candidate" will never be used as LFA.

- o A primary next hop being protected by another primary next hop of the same prefix (ECMP case).
- o Type of protection provided by the alternate: link protection, node protection. In case of node protection preference, an implementation SHOULD support fall back to link protection if node protection is not available.
- o Shortest path: lowest IGP metric used to reach the destination.
- o SRLG (as defined in [\[RFC5286\]](#) [Section 3](#), see also [Section 6.2.6](#) for more details).

[6.2.3.](#) Enhanced criteria

An implementation of LFA SHOULD support the following enhanced criteria:

- o Downstreamness of an alternate : preference of a downstream path over a non downstream path SHOULD be configurable.
- o Link coloring with : include, exclude and preference based system (see [Section 6.2.7](#)).
- o Link Bandwidth (see [Section 6.2.8](#)).

- o Alternate preference/Node coloring (see [Section 6.2.9](#)).

[6.2.4.](#) Retrieving alternate path attributes

The policy to select the best alternate evaluate multiple criterions (e.g. metric, SRLG, link colors ...) which first need to be computed for each alternate.. In order to compare the different alternate path, a router must retrieve the attributes of each alternate path. The alternate path is composed of two distinct parts : PLR to alternate and alternate to destination.

[6.2.4.1.](#) Connected alternate

For alternate path using a connected alternate :

- o attributes from PLR to alternate path are retrieved from the interface connected to the alternate.
- o attributes from alternate to destination path are retrieved from SPF rooted at the alternate. As the alternate is a connected alternate, the SPF has already been computed to find the alternate, so there is no need of additional computation.

[6.2.4.2.](#) Remote alternate

For alternate path using a remote alternate (tunnel) :


- o attributes from the PLR to alternate path are retrieved using the PLR's primary SPF if P space is used or using the neighbor's SPF if extended P space is used, combined with the attributes of the link(s) to reach that neighbor. In both cases, no additional SPF is required.
- o attributes from alternate to destination path may be retrieved from SPF rooted at the remote alternate. An additional forward SPF is required for each remote alternate as indicated in [\[I-D.ietf-rtgwg-rlfa-node-protection\] section 3.2](#).. In some remote alternate scenarios, like [\[I-D.francois-segment-routing-ti-lfa\]](#), alternate to destination path attributes may be obtained using a different technique.

The number of remote alternates may be very high. In case of remote LFA, simulations of real-world network topologies, reveal that order of hundreths of PQ ...

To handle this situation, it is needed to limit the number of remote alternates to be evaluated to a finite number before collecting alternate path attributes and running the policy evaluation. [I-D.ietf-rtgwg-rlfa-node-protection] [Section 2.3.3](#) provides a way to reduce the number of PQ to be evaluated.

Some other remote alternate techniques using static or dynamic tunnels may not require this pruning.

	Link alternate	Remote alternate	Remote alternate
Alternates	LFA	rLFA (PQs)	Static/ Dynamic
sources			tunnels
		Prune some alternates	

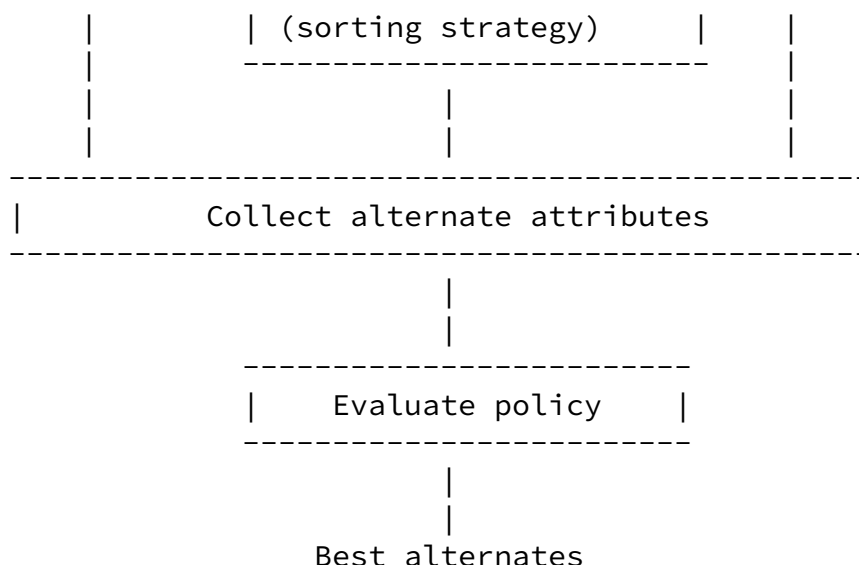

6.2.5. ECMP LFAs




Figure 5

Links between P1 and PE1 are L1 and L2, links between P2 and PE1 are L3 and L4

In the figure above, primary path from PE1 to PE2 is through P1 using ECMP on two parallel links L1 and L2. In case of standard ECMP behavior, if L1 is failing, postconvergence next hop would become L2 and there would be no longer ECMP. If LFA is activated, as stated in [\[RFC5286\] Section 3.4.](#), "alternate next-hops may themselves also be

primary next-hops, but need not be" and "alternate next-hops should maximize the coverage of the failure cases". In this scenario there is no alternate providing node protection, LFA will so prefer L2 as alternate to protect L1 which makes sense compared to postconvergence

behavior.

Considering a different scenario using figure 5, where L1 and L2 are configured as a layer 3 bundle using a local feature, as well as L3/L4 being a second layer 3 bundle. Layer 3 bundles are configured as if a link in the bundle is failing, the traffic must be rerouted out of the bundle. Layer 3 bundles are generally introduced to increase bandwidth between nodes. In nominal situation, ECMP is still available from PE1 to PE2, but if L1 is failing, postconvergence next hop would become ECMP on L3 and L4. In this case, LFA behavior SHOULD be adapted in order to reflect the bandwidth requirement.

We would expect the following FIB entry on PE1 :

```
On PE1 : PE2 +--> ECMP -> L1
              |      |
              |      +-----> L2
              |
              +--> LFA(ECMP) -> L3
                      |
                      +-----> L4
```

If L1 or L2 is failing, traffic must be switched on the LFA ECMP bundle rather than using the other primary next hop.

As mentioned in [\[RFC5286\] Section 3.4.](#), protecting a link within an ECMP by another primary next hop is not a MUST. Moreover, we already presented in this document, that maximizing the coverage of the failure case may not be the right approach and policy based choice of alternate may be preferred.

An implementation SHOULD permit to prefer to protect a primary next hop by another primary next hop. An implementation SHOULD permit to prefer to protect a primary next hop by a NON primary next hop. An implementation SHOULD permit to use an ECMP bundle as a LFA.

[6.2.6.](#) SRLG

[\[RFC5286\] Section 3.](#) proposes to reuse GMPLS IGP extensions to encode SRLGs ([\[RFC4205\]](#) and [\[RFC4203\]](#)). The section is also describing the algorithm to compute SRLG protection.

When SRLG protection is computed, and implementation SHOULD permit to :

- o Exclude alternates violating SRLG.
- o Maintain a preference system between alternates based on number of SRLG violations : more violations = less preference.

When applying SRLG criteria, the SRLG violation check SHOULD be performed on source to alternate as well as alternate to destination paths based on the SRLG set of the primary path. In the case of remote LFA, PQ to destination path attributes would be retrieved from SPT rooted at PQ.

[6.2.7.](#) Link coloring

Link coloring is a powerful system to control the choice of alternates. Protecting interfaces are tagged with colors. Protected interfaces are configured to include some colors with a preference level, and exclude others.

Link color information SHOULD be signalled in the IGP. How signalling is done is out of scope of the document but it may be useful to reuse existing admin-groups from traffic-engineering extensions.

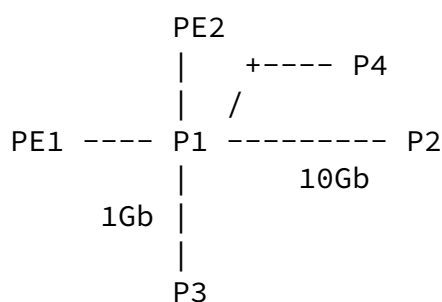


Figure 5

Example : P1 router is connected to three P routers and two PEs.

P1 is configured to protect the P1-P4 link. We assume that given the topology, all neighbors are candidate LFA. We would like to enforce a policy in the network where only a core router may protect against the failure of a core link, and where high capacity links are preferred.

In this example, we can use the proposed link coloring by:

- o Marking PEs links with color RED

- o Marking 10Gb CORE link with color BLUE
- o Marking 1Gb CORE link with color YELLOW
- o Configured the protected interface P1->P4 with :
 - * Include BLUE, preference 200
 - * Include YELLOW, preference 100
 - * Exclude RED

Using this, PE links will never be used to protect against P1-P4 link failure and 10Gb link will be preferred.

The main advantage of this solution is that it can easily be duplicated on other interfaces and other nodes without change. A Service Provider has only to define the color system (associate color with a significance), as it is done already for TE affinities or BGP communities.

An implementation of link coloring:

- o SHOULD support multiple include and exclude colors on a single protected interface.
- o SHOULD provide a level of preference between included colors.
- o SHOULD support multiple colors configuration on a single protecting interface.

[6.2.8.](#) Bandwidth

As mentionned in previous sections, not taking into account bandwidth of an alternate could lead to congestion during FRR activation. We propose to base the bandwidth criteria on the link speed information for the following reason :

- o if a router S has a set of X destinations primarily forwarded to N, using per prefix LFA may lead to have a subset of X protected by a

neighbor N1, another subset by N2, another subset by Nx ...

- o S is not aware about traffic flows to each destination and is not able to evaluate how much traffic will be sent to N1,N2, ... Nx in case of FRR activation.

Based on this, it is not useful to gather available bandwidth on alternate paths, as the router does not know how much bandwidth it

requires for protection. The proposed link speed approach provides a good approximation with a small cost as information is easily available.

The bandwidth criteria of the policy framework SHOULD work in two ways :

- o PRUNE : exclude a LFA if link speed to reach it is lower than the link speed of the primary next hop interface.
- o PREFER : prefer a LFA based on his bandwidth to reach it compared to the link speed of the primary next hop interface.

6.2.9. Alternate preference/Node coloring

Rather than tagging interface on each node (using link color) to identify alternate node type (as example), it would be helpful if routers could be identified in the IGP. This would permit a grouped processing on multiple nodes. As an implementation need to exclude some specific alternates (see [Section 6.2.3](#)), an implementation :

- o SHOULD be able to give a preference to specific alternate.
- o SHOULD be able to give a preference to a group of alternate.
- o SHOULD be able to exclude a group of alternate.

A specific alternate may be identified by its interface, IP address or router ID and group of alternates may be identified by a marker (tag) (for example, in case of IS-IS protocol [[I-D.ietf-isis-node-admin-tag](#)] can be used). Using a tag is referred as Node coloring in comparison to link coloring option presented in [Section 6.2.7](#).

Consider the following network:

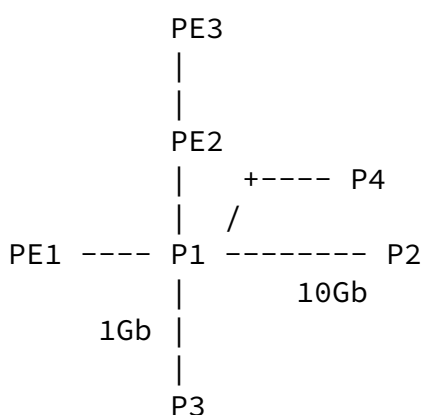


Figure 6

In the example above, each node is configured with a specific tag flooded through the IGP.

- o PE1,PE3: 200 (non candidate).
- o PE2: 100 (edge/core).
- o P1,P2,P3: 50 (core).

A simple policy could be configured on P1 to choose the best

alternate for P1->P4 based on router function/role as follows :

- o criteria 1 -> alternate preference: exclude tag 100 and 200.
- o criteria 2 -> bandwidth.

7. Operational aspects

7.1. IS-IS overload bit on LFA computing node

In [\[RFC5286\], Section 3.5](#), the setting of the overload bit condition in LFA computation is only taken into account for the case where a neighbor has the overload bit set.

In addition to [RFC 5286](#) inequality 1 Loop-Free Criterion ($\text{Distance_opt}(N, D) < \text{Distance_opt}(N, S) + \text{Distance_opt}(S, D)$), the IS-IS overload bit of the LFA calculating neighbor (S) SHOULD be taken into account. Indeed, if it has the overload bit set, no neighbor will loop back to traffic to itself.

7.2. Manual triggering of FRR

Service providers often perform manual link shutdown (using router CLI) to perform some network changes/tests. A manual link shutdown may be done at multiple level : physical interface, logical interface, IGP interface, BFD session ... Especially testing or troubleshooting FRR requires to perform the manual shutdown on the remote end of the link as generally a local shutdown would not trigger FRR.

To enhance such situation, an implementation SHOULD support triggering/activating LFA Fast Reroute for a given link when a manual shutdown is done on a component that currently supports FRR activation.

An implementation MAY also support FRR activation for a specific interface or a specific prefix on a primary next-hop interface and revert without any action on any running component of the node (links or protocols). In this use case, the FRR activation time need to be

controlled by a timer in case the operator forgot to revert traffic on primary path. When the timer expires, the traffic is automatically reverted to the primary path. This will make easier tests of fast-reroute path and then revert back to the primary path without causing a global network convergence.

For example :

- o if an implementation supports FRR activation upon BFD session down event, this implementation SHOULD support FRR activation when a manual shutdown is done on the BFD session. But if an implementation does not support FRR activation on BFD session down, there is no need for this implementation to support FRR activation on manual shutdown of BFD session.
- o if an implementation supports FRR activation on physical link down event (e.g. Rx laser Off detection, or error threshold raised ...), this implementation SHOULD support FRR activation when a manual shutdown at physical interface is done. But if an implementation does not support FRR activation on physical link down event, there is no need for this implementation to support FRR activation on manual physical link shutdown.
- o A CLI command may permit to switch from primary path to FRR path for testing FRR path for a specific. There is no impact on controlplane, only dataplane of the local node could be changed. A similar command may permit to switch back traffic from FRR path to primary path.

[7.3.](#) Required local information

LFA introduction requires some enhancement in standard routing information provided by implementations. Moreover, due to the non 100% coverage, coverage informations is also required.

Hence an implementation :

- o MUST be able to display, for every prefixes, the primary next hop as well as the alternate next hop information.
- o MUST provide coverage information per activation domain of LFA

(area, level, topology, instance, virtual router, address family ...).

- o MUST provide number of protected prefixes as well as non protected prefixes globally.
- o SHOULD provide number of protected prefixes as well as non protected prefixes per link.
- o MAY provide number of protected prefixes as well as non protected prefixes per priority if implementation supports prefix-priority insertion in RIB/FIB.
- o SHOULD provide a reason for choosing an alternate (policy and criteria) and for excluding an alternate.
- o SHOULD provide the list of non protected prefixes and the reason why they are not protected (no protection required or no alternate available).

[7.4.](#) Coverage monitoring

It is pretty easy to evaluate the coverage of a network in a nominal situation, but topology changes may change the coverage. In some situations, the network may no longer be able to provide the required level of protection. Hence, it becomes very important for service providers to get alerted about changes of coverage.

An implementation SHOULD :

- o provide an alert system if total coverage (for a node) is below a defined threshold or comes back to a normal situation.
- o provide an alert system if coverage of a specific link is below a defined threshold or comes back to a normal situation.

An implementation MAY :

- o provide an alert system if a specific destination is not protected anymore or when protection comes back up for this destination

Although the procedures for providing alerts are beyond the scope of this document, we recommend that implementations consider standard and well used mechanisms like syslog or SNMP traps.

[7.5.](#) LFA and network planning

The operator may choose to run simulations in order to ensure full coverage of a certain type for the whole network or a given subset of the network. This is particularly likely if he operates the network in the sense of the third backbone profiles described in [[RFC6571](#)], that is, he seeks to design and engineer the network topology in a way that a certain coverage is always achieved. Obviously a complete and exact simulation of the IP FRR coverage can only be achieved, if the behavior is deterministic and if the algorithm used is available to the simulation tool. Thus, an implementation SHOULD:

- o Behave deterministic in its selection LFA process. I.e. in the same topology and with the same policy configuration, the implementation MUST always choose the same alternate for a given prefix.
- o Document its behavior. The implementation SHOULD provide enough documentation of its behavior that allows an implementer of a simulation tool, to foresee the exact choice of the LFA implementation for every prefix in a given topology. This SHOULD take into account all possible policy configuration options. One possible way to document this behavior is to disclose the algorithm used to choose alternates.

[8.](#) Security Considerations

This document does not introduce any change in security consideration compared to [[RFC5286](#)].

[9.](#) Contributors

Significant contributions were made by Pierre Francois, Hannes Gredler, Chris Bowers, Jeff Tantsura, Uma Chunduri and Mustapha Aissaoui which the authors would like to acknowledge.

[10.](#) Acknowledgements

[11.](#) IANA Considerations

This document has no action for IANA.

[12.](#) References

[12.1.](#) Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC4203] Kompella, K. and Y. Rekhter, "OSPF Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 4203](#), October 2005.
- [RFC4205] Kompella, K. and Y. Rekhter, "Intermediate System to Intermediate System (IS-IS) Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 4205](#), October 2005.
- [RFC5286] Atlas, A. and A. Zinin, "Basic Specification for IP Fast Reroute: Loop-Free Alternates", [RFC 5286](#), September 2008.
- [RFC5307] Kompella, K. and Y. Rekhter, "IS-IS Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 5307](#), October 2008.
- [RFC6571] Filsfils, C., Francois, P., Shand, M., Decraene, B., Uttaro, J., Leymann, N., and M. Horneffer, "Loop-Free Alternate (LFA) Applicability in Service Provider (SP) Networks", [RFC 6571](#), June 2012.

[12.2.](#) Informative References

- [I-D.francois-segment-routing-ti-lfa]
Francois, P., Filsfils, C., Bashandy, A., and B. Decraene, "Topology Independent Fast Reroute using Segment Routing", [draft-francois-segment-routing-ti-lfa-00](#) (work in progress), November 2013.
- [I-D.ietf-isis-node-admin-tag]
Sarkar, P., Gredler, H., Hegde, S., Litkowski, S., Decraene, B., Li, Z., Aries, E., Rodriguez, R., and H. Raghuvver, "Advertising Per-node Admin Tags in IS-IS", [draft-ietf-isis-node-admin-tag-00](#) (work in progress), December 2014.

Internet-Draft

LFA manageability

March 2015

[I-D.ietf-rtgwg-remote-lfa]

Bryant, S., Filsfils, C., Previdi, S., Shand, M., and N. So, "Remote Loop-Free Alternate (LFA) Fast Re-Route (FRR)", [draft-ietf-rtgwg-remote-lfa-11](#) (work in progress), January 2015.

[I-D.ietf-rtgwg-rlfa-node-protection]

Sarkar, P., Gredler, H., Hegde, S., Bowers, C., Litkowski, S., and H. Raghuvver, "Remote-LFA Node Protection and Manageability", [draft-ietf-rtgwg-rlfa-node-protection-01](#) (work in progress), December 2014.

Authors' Addresses

Stephane Litkowski
Orange

Email: stephane.litkowski@orange.com

Bruno Decraene
Orange

Email: bruno.decraene@orange.com

Clarence Filsfils
Cisco Systems

Email: cfilsfil@cisco.com

Kamran Raza
Cisco Systems

Email: skraza@cisco.com

Martin Horneffer
Deutsche Telekom

Email: Martin.Horneffer@telekom.de

Pushpasis Sarkar
Juniper Networks

Email: psarkar@juniper.net

Litkowski, et al.

Expires September 5, 2015

[Page 24]