

Network Working Group  
INTERNET-DRAFT

Ken Morneault  
Cisco Systems  
Mallesh Kalla  
Telcordia  
Greg Sidebottom  
Nortel Networks  
Ram Dantu  
Alcatel

Expires in six months

October 1999

**SS7 MTP2-User Adaptation Layer**  
<[draft-ietf-sigtran-m2ua-01.txt](#)>

Status of This Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC 2026](#). Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as 'work in progress.'

The list of current Internet-Drafts can be accessed at  
<http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at  
<http://www.ietf.org/shadow.html>.

To learn the current status of any Internet-Draft, please check the '1id-abstracts.txt' listing contained in the Internet- Drafts Shadow Directories on ftp.is.co.za (Africa), nic.nordu.net (Europe), munnari.oz.au (Pacific Rim), ftp.ietf.org (US East Coast), or ftp.isi.edu (US West Coast).

Abstract

This Internet Draft defines a protocol for backhauling of SS7 MTP2 User signaling messages over IP using the Simple Control Transmission Protocol (SCTP). One application of this protocol would be to use it between a Signaling Gateway (SG) and Media Gateway Controller (MGC).

In this case, the Signaling Gateway would be acting as a Signaling Link Terminal. Another application of this protocol would be to use it between a SG and a SCP. In either application, it is assumed that the SG receives SS7 signaling over a standard SS7 interface using the SS7 Message Transfer Part (MTP) to provide transport.

## TABLE OF CONTENTS

<a href="#">1.</a>	<a href="#">Introduction.....</a>	<a href="#">2</a>
<a href="#">1.1</a>	<a href="#">Scope.....</a>	<a href="#">2</a>
<a href="#">1.2</a>	<a href="#">Terminology.....</a>	<a href="#">3</a>
<a href="#">1.3</a>	<a href="#">Signaling Transport Architecture.....</a>	<a href="#">3</a>
<a href="#">1.4</a>	<a href="#">Services Provide by the M2UA Adaptation Layer.....</a>	<a href="#">4</a>
<a href="#">1.5</a>	<a href="#">Function Provided by the M2UA Layer.....</a>	<a href="#">6</a>
<a href="#">1.6</a>	<a href="#">Definition of the M2UA Boundaries.....</a>	<a href="#">7</a>
<a href="#">2.</a>	<a href="#">Protocol Elements.....</a>	<a href="#">8</a>
<a href="#">2.1</a>	<a href="#">Common Message Header.....</a>	<a href="#">8</a>
<a href="#">2.2</a>	<a href="#">M2UA Message Header.....</a>	<a href="#">9</a>
<a href="#">2.3</a>	<a href="#">M2UA Messages.....</a>	<a href="#">10</a>
<a href="#">3.</a>	<a href="#">Procedures.....</a>	<a href="#">17</a>
<a href="#">3.1</a>	<a href="#">Procedures to Support Service in <a href="#">Section 1.4.1</a>.....</a>	<a href="#">17</a>
<a href="#">3.2</a>	<a href="#">Procedures to Support Service in <a href="#">Section 1.4.2</a>.....</a>	<a href="#">17</a>
<a href="#">3.3</a>	<a href="#">Procedures to Support Service in <a href="#">Section 1.4.3</a>.....</a>	<a href="#">17</a>
<a href="#">4.</a>	<a href="#">Examples of MTP2 User Adaptation (M2UA) Procedures.....</a>	<a href="#">22</a>
<a href="#">4.1</a>	<a href="#">Establishment of associations between SG and MGC.....</a>	<a href="#">22</a>
	examples	
<a href="#">4.2</a>	<a href="#">MTP Level 2 / MTP Level 3 Boundary Examples.....</a>	<a href="#">23</a>
<a href="#">4.3</a>	<a href="#">Layer Management Communication Examples.....</a>	<a href="#">25</a>
<a href="#">5.</a>	<a href="#">Security.....</a>	<a href="#">31</a>
<a href="#">6.</a>	<a href="#">Acknowledgements.....</a>	<a href="#">31</a>
<a href="#">7.</a>	<a href="#">References.....</a>	<a href="#">31</a>
<a href="#">8.</a>	<a href="#">Author's Addresses.....</a>	<a href="#">32</a>

## [1.](#) Introduction

### [1.1](#) Scope

There is a need for SCN signaling protocol delivery from an Signaling Gateway (SG) to a Media Gateway Controller (MGC) or Signaling Control Point (SCP). The delivery mechanism should meet the following criteria:

- \* Support for MTP Level 2 / MTP Level 3 interface boundary
- \* Support for communication between Layer Management modules on SG and MGC
- \* Support for management of active associations between the SG and MGC

In other words, the Signaling Gateway will transport MTP Level 3 messages to a Media Gateway Controller (MGC) or Signaling Control Point (SCP).



## **1.2 Terminology**

MTP2-User - A protocol that normally uses the services of MTP Level 2 (i.e. MTP3).

Interface - For the purposes of this document, an interface is a SS7 signaling link.

Association - An association refers to a SCTP association. The association will provide the transport for the delivery of protocol data units for one or more interfaces.

Stream - A stream refers to a SCTP stream. For the purposes of this document, a stream will be mapped to a SS7 signaling link, or interface.

Backhaul - Refers to the transport of signaling from the point of interface for the associated data stream (i.e., SG function in the MGU) back to the point of call processing (i.e., the MGCU), if this is not local [\[4\]](#).

Application Server (AS) - A logical entity serving a specific application instance. An example of an Application Server is a MGC handling the MTP Level 3 and call processing for SS7 links terminated by the Signaling Gateways. Practically speaking, an AS is modeled at the SG as an ordered list of one or more related Application Server Processes (e.g., primary, secondary, tertiary, ).

Application Server Process (ASP) - A process instance of an Application Server. Examples of Application Server Processes are primary or backup MGC instances.

Application Server Process Path (ASP Path or just Path) - A Path to a remote Application Server Process instance. A Path maps 1:1 to an SCTP association.

Fail-over - The capability to re-route signaling traffic as required to a next-preferred Application Server Process within an Application Server in the event of failure or unavailability of the currently used Application Server Process (e.g., from primary MGC to back-up MGC). Fail-over may also apply upon the return to service of a previously unavailable Application Server Process.

Signaling Link Terminal (SLT) - Refers to the means of performing all of the functions defined at MTP level 2 regardless of their implementation [\[2\]](#).




### 1.3 Signaling Transport Architecture

The architecture that has been defined for SCN signaling transport over IP uses multiple components, including an IP transport protocol, a signaling common transport protocol (SCTP) and an adaptation module to support the functions expected by a particular SCN signaling protocol from its underlying protocol layer.

In reference to the SIGTRAN framework architecture [4], this document defines a SCN adaptation module that is suitable for the transport of SS7 MTP2 User. The only SS7 MTP2 User is MTP3.

#### 1.3.1 Case 1: SG to MGC

In a Signaling Gateway, it is expected that the SS7 signaling is received over a standard SS7 network termination, using the SS7 Message Transfer Part (MTP) to provide transport of SS7 signaling messages to and from an SS7 Signaling End Point (SEP) or SS7 Signaling Transfer Point (STP). In other words, the SG acts as a Signaling Link Terminal (SLT) [2]. The SG then provides interworking of transport functions with IP Signaling Transport, in order to transport the MTP3 signaling messages to the MGC where the peer MTP3 protocol layer exists, as shown below:

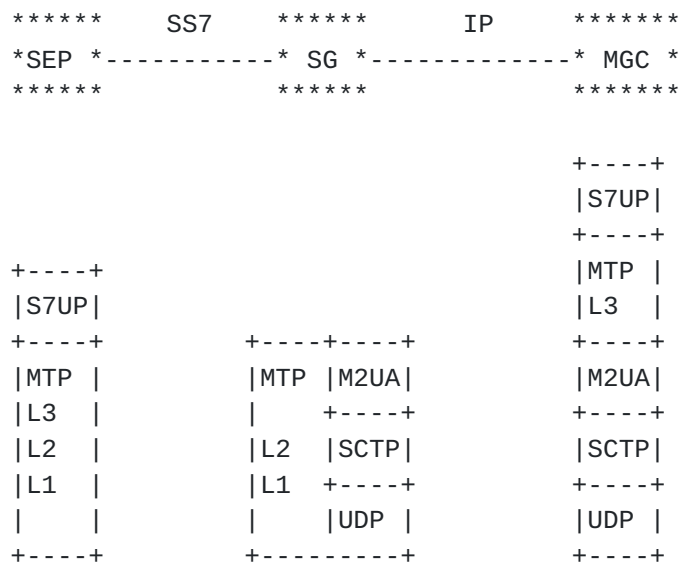

SEP - SS7 Signaling Endpoint  
 UDP - User Datagram Protocol  
 SCTP - Simple Control Transmission Protocol  
 (Refer to Reference [5])

Figure 1: M2UA in the SG to MGC Application


Note: STPs may be present in the SS7 path between the SEP and the SG.





### 1.3.2 Case 2: SG to IPSCP

The following figure shows the seamless interworking at MTP3 layer. MTP3 is adapted to SCTP layer using MTP2 User Adaptation Layer. In this example, the Signaling Gateway can be a STP. All the primitives between MTP3 and MTP2 are supported using MTP2 User Adaptation Layer (MTP2UA). In the following example, the Signaling Gateway could also have SCCP layer for providing Gateway Screening functionality for the IPSCP.

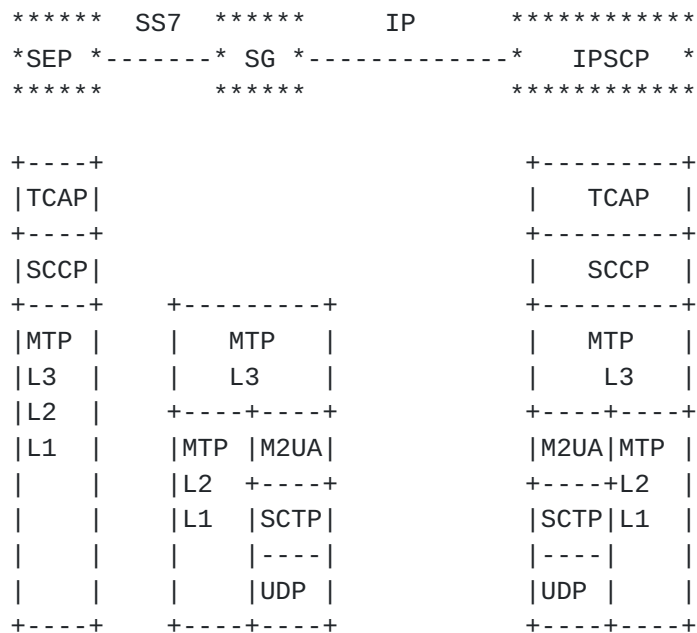

SEP - SS7 Signaling Endpoint  
IPSCP - IP Signaling Control Point  
UDP - User Datagram Protocol  
SCTP - Simple Control Transmission Protocol  
(Refer to Reference [5])

Figure 2: M2UA in the SG to IPSCP Application

Note that in this case, the SCTP association acts as a SS7 link between the SG and IPSCP. The IPSCP may or may not have a termination to the SS7 network.

### 1.3.3 UDP port

A request will be made to IANA to assign a UDP port for M2UA.

## 1.4 Services Provided by the M2UA Adaptation Layer

The SS7 MTP3/MTP2(MTP2-User) interface is retained at the termination point in the IP network, so that the M2UA protocol layer is required to provide the equivalent set of services to its users as provided by the MTP Level 2 to MTP Level 3.



This includes the following services:

#### **1.4.1 Support for MTP Level 2 / MTP Level 3 interface boundary**

Also provision is made for protocol elements that enable a seamless, or as seamless as possible, operation of the MTP2-User peers in the SS7 and IP domains. This includes

##### Data

Provides the ability to transport MTP2 User information (in this case, MTP Level 3 PDUs).

##### Link Establish

Provides the ability to request MTP Level 2 to bring SS7 links in-service.

##### Link Release

Provides the ability to request MTP Level 2 to take SS7 links out-of-service. Also, provides mechanism for MTP2 to autonomously indicate that SS7 link(s) have gone out-of-service.

##### Link State

Provides the ability to request state change or information on a per link basis. Some examples would be the forcing of Local Processor Outage or flushing buffers.

##### Link Status

Provides a means for asynchronous notification of link state changes to be reported to the upper layer (MTP Level 3). An examples would be the reporting of remote processor outage event.

##### Data Retrieval

Provides a mechanism to perform SS7 link changeover procedure in the case of a SS7 link failure.

#### **1.4.2 Support for communication between Layer Management modules on SG and MGC**

It is envisioned that the M2UA layer needs to provide some messages that will facilitate communication between Layer Management modules on the SG and MGC.

To facilitate reporting of errors that arise because of backhauling MTP

Level 3 scenario, the following primitive is defined:

Morneault, et al

[Page 6]

#### M-ERROR

The M-ERROR message is used to indicate an error with a received M2UA message (e.g., interface identifier value is not known to the SG).

#### **1.4.3 Support for management of active associations between SG and MGC**

The M2UA layer on the SG keeps the state of various ASPs it is associated with. A set of primitives between M2UA layer and the Layer Management are defined below to help the Layer Management manage the association(s) between the SG and the MGC.

#### M-SCTP ESTABLISH

The M-SCTP ESTABLISH primitive is used to request, indicate and confirm the establishment of SCTP association to a peer M2UA node.

The M2UA layer may also need to inform the status of the SCTP association(s) to the Layer Management. This can be achieved using the following primitive.

#### M-SCTP STATUS

The M-SCTP STATUS primitive is used to request and indicate the status of underlying SCTP association(s).

The Layer Management may need to inform the M2UA layer of a user status (i.e., failure, active, etc.), so that messages can be exchanged between M2UA layer peers to stop traffic to the local M2UA user. This can be achieved using the following primitive.

#### M-ASP STATUS

The M-ASP STATUS primitive is used by the Layer Management to indicate the status of the local M2UA user to the M2UA layer.

### **1.5 Functions Provided by the M2UA Layer**

#### **1.5.1 Mapping**

The M2UA layer must maintain a map of a Interface ID to a physical interface on the Signaling Gateway. A physical interface would be a **V.35 line, T1 line/timeslot, E1 line/timeslot, etc.** The M2UA layer must also maintain a map of Interface ID to SCTP association and to a stream within the association.



### **1.5.2 Status of ASPs**

The M2UA layer on the Signaling Gateway must maintain the state of one or more Application Server Process(es) it is associated with. The state of an ASP changes because of reception of peer-to-peer messages or reception of indications from the local SCTP association. ASP state transition procedures are described in Section [Section 3.3](#).

### **1.5.3 Flow Control / Congestion**

It is possible for the M2UA layer to be informed of IP network congestion by means of an implementation-dependent function (i.e. an indication from the SCTP). If the M2UA layer receives this indication, the action(s) taken are implementation dependent.

### **1.5.4 SCTP Stream Management**

SCTP allows user specified number of streams to be opened during the initialization. It is the responsibility of the M2UA layer to ensure proper management of these streams. SCTP streams provide a means for avoiding head of line blocking. For that reason, a stream will be used per SS7 signaling link terminated by the Signaling Gateway. The SS7 signaling link can be identified by the optional Interface Identifier in the M2UA specific message header (refer to [Section 2.2](#)).

### **1.5.5 Seamless SS7 Network Management Interworking**

If the SG loses the SCTP association to the MGC, it should follow MTP 2 processor outage procedures [2].

### **1.5.6 Management Inhibit/Uninhibit**

Local Management may wish to stop traffic across an SCTP association in order to temporarily remove the association from service or to perform testing and maintenance activity. The function could optionally be used to manage the start of traffic on to a newly-available SCTP association.

## **1.6 Definition of the M2UA Boundaries**

### **1.6.1 Definition of the M2UA / MTP Level 3 boundary**

DATA  
ESTABLISH  
RELEASE  
STATE  
STATUS  
RETRIEVAL  
DATA RETRIEVAL  
DATA RETRIEVAL COMPLETE





### [1.6.2](#) Definition of the M2UA / MTP Level 2 boundary

DATA  
 ESTABLISH  
 RELEASE  
 STATE  
 STATUS  
 RETRIEVAL  
 DATA RETRIEVAL  
 DATA RETRIEVAL COMPLETE

### [1.6.3](#) Definition of the Lower Layer Boundary between M2UA and SCTP

The upper layer and layer management primitives provided by SCTP are provided in Reference [6] [Section 9](#).

### [1.6.4](#) Definition of Layer Management / M2UA Boundary

M-ERROR  
 M-SCTP ESTABLISH  
 M-SCTP STATUS  
 M-ASP STATUS

## [2.0](#) Protocol Elements

This section describes the format of various messages used in this protocol.

### [2.1](#) Common Message Header

The protocol messages for MTP2 User Adaptation require a message header structure which contains a version, message type and message length. This message header is common among all SCN adaptation layers.

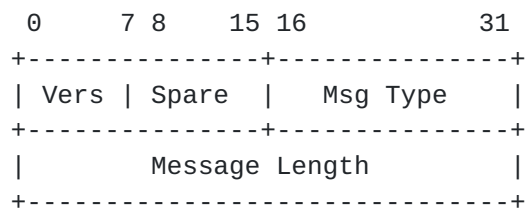


Figure 2 Common Message Header

#### [2.1.1](#) Version

The version field (vers) contains the version of the M2UA adaptation layer. The supported versions are:



### [2.1.2](#) Message Type

The valid message types are defined in [Section 2.2.2](#) and the message contents are described in [Section 2.3](#). Each message can contain parameters.

The following list contains the message types for the defined messages.

#### MTP2 User Adaptation (MAUP) Messages

Data Request	0601
Data Indication	0602
Establish Request	0603
Establish Confirm	0604
Release Request	0605
Release Confirm	0606
Release Indication	0607
State Request	0608
State Confirm	0609
State Indication	060a
Data Retrieval Request	060b
Data Retrieval Confirm	060c
Data Retrieval Indication	060d
Data Retrieval Complete Indication	060e

#### Application Server Process Maintenance (ASPM) Messages

ASP Up (ASPUP)	0301
ASP Down (ASPDN)	0302
ASP Active (ASPAC)	0401
ASP Inactive (ASPIA)	0402

#### Management (MGMT) Messages

Error	0001
-------	------

### [2.1.3](#) Message Length

The Message length defines the length of the message in octets, not including the header.

## [2.2](#) M2UA Message Header

In addition to the common message header, there will be a M2UA specific message header. The M2UA specific message header will immediately follow the common message header, but will only be used with MAUP and MGMT messages.

This message header will contain the Interface Identifier. The Interface

Identifier identifies the physical interface at the SG for which the signaling messages are sent/received. Or, the Interface Identifier

can be left empty (a null string of length zero). The Interface Identifier follows the same endpoint naming scheme provided in MGCP [7]. For example, if a Signaling Gateway terminates a E1 and the SS7 signaling link is one timeslot 16, the interface identifier could be the following:

e1/16@sgw1.example.net

The use of wildcards is not acceptable.

Note: The Interface Identifier string should be padded to 32-bit boundaries. The length field indicates the end of the string.

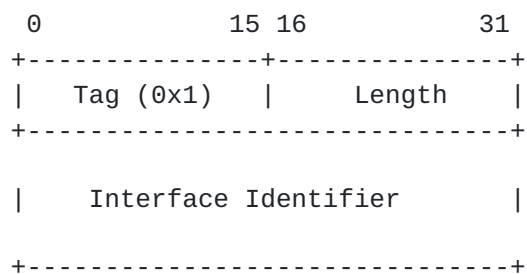


Figure 3 M2UA Message Header

The Tag value for Interface Identifier is 0x1. The length provides the length of the Interface Identifier string in bytes.

## 2.3 M2UA Messages


The following section defines the messages and parameter contents. The M2UA messages will use the command header and the M2UA specific header.

### 2.3.1 MTP2 User Adaptation Messages

#### 2.3.1.1 Data (Request, Indication)

The Data message contains an SS7 MTP2-User Protocol Data Unit (PDU). The Data message contains the protocol data.


The format for the Data Message parameters is as follows:

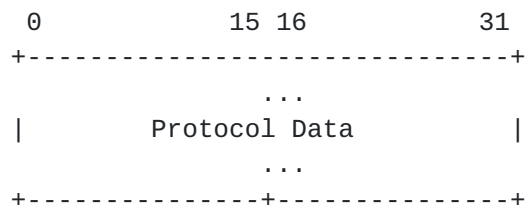

The Protocol Data field contains the MTP2-User application message.

### **2.3.1.2 Establish (Request, Confirmation)**

The Establish Request message is used to establish the channel or to indicate that the channel has been established. Note that the gateway may already have the channel established at its layer. If so, upon receipt of an Establish Request, the gateway takes no action except to send an Establish Confirm.




The valid values for State are shown in the following table.

Define	Value	Description
ESTABLISH_NORMAL	0x0	Follow normal procedure for establishing a SS7 link
ESTABLISH_EMERGENCY	0x1	Follow emergency procedure for establishing a SS7 link

### **2.3.1.3 Release (Request, Indication, Confirmation)**

This Release Request message is used to release the channel. The Release Confirm and Indication messages are used to indicate that the channel has been released.



The valid values for Reason are shown in the following table.

Define	Value	Description
RELEASE_MGMT	0x0	Management layer generated release.
RELEASE_PHYS	0x1	Physical layer alarm generated release.
RELEASE_SIOS	0x2	Receipt of SIOS
RELEASE_OTHER	0x3	Other reason SS7 link out-of-service


(should we keep it simple, or provide list of reasons that would enable debugging)

### **2.3.1.4 State (Request, Confirm)**

The State Request message can be sent from a MGC to cause an action on a particular SS7 link supported by the Signaling Gateway. The gateway sends a State Confirm to the MGC if the action has been successfully completed. The State Confirm reflects that state value received

in the State Request message.






The valid values for State are shown in the following table.

Define	Value	Description
STATUS_LOC_PROC_SET	0x0	Request local processor outage.
STATUS_LOC_PROC_CLEAR	0x1	Request local processor outage recovered.
STATUS_EMER_SET	0x2	Request emergency alignment procedure.
STATUS_EMER_CLEAR	0x3	Request normal alignment (cancel emergency) procedure.
STATUS_FLUSH_BUFFERS	0x4	Flush transmit and retransmit buffers.
STATUS_CONTINUE	0x5	Continue.

#### [2.3.1.5](#) State Indication

The MTP2 State Indication message can be sent from a gateway to a call agent to indicate a condition on a channel.




The valid values for State are shown in the following table.

Define	Value	Description
EVENT_ENTER_LPO	0x0	Entered local processor outage.
EVENT_EXIT_LPO	0x1	Exited local processor outage.
EVENT_ENTER_CONG	0x2	Entered a congested state.
EVENT_EXIT_CONG	0x3	Exited a congested state.
EVENT_PHYS_UP	0x4	Physical interface up.
EVENT_PHYS_DOWN	0x5	Physical interface down.
EVENT_PROTOCOL_ERR	0x6	Protocol error occurred.
EVENT_REM_ENTER_CONG	0xc	Remote entered congestion.
EVENT_REM_EXIT_CONG	0xd	Remote exited congestion.
EVENT_REM_ENTER_PO	0xe	Remote entered processor outage.
EVENT_REM_EXIT_PO	0xf	Remote exited processor outage.

#### [2.3.1.6](#) Retrieval (Request, Confirm)

The MTP2 Retrieval Request message is used during the MTP Level 3 changeover procedure to request the BSN, to retrieve PDUs from the retransmit queue or to flush PDUs from the retransmit queue.



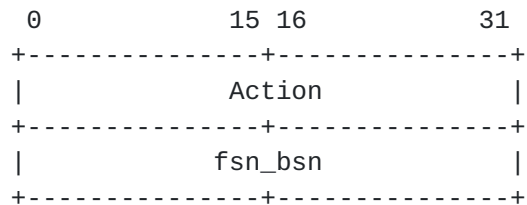

The valid values for Action are shown in the following table.


Define	Value	Description
ACTION_RTRV_BSN	0x1	Retrieve the backward sequence number.
ACTION_RTRV_MSGS	0x2	Retrieve the PDUs from the retransmit queue.
ACTION_DROP_MSGS	0x3	Drop the PDUs in the retransmit queue.

In the Retrieval Request message, the fsn\_bsn field contains the FSN of the far end if the action is ACTION\_RTRV\_MSGS.

When the Signaling Gateway sends a Retrieval Confirm to this request, it echos the action and puts the BSN in the fsn\_bsn field if the action was ACTION\_RTRV\_BSN.

#### [2.3.1.7](#) Retrieval Indication

The Retrieval Indication message is sent by the Signaling Gateway with a PDU from the retransmit queue. The Retrieval Indication message does not contain the Action or fsn\_bsn fields, just a PDU from the retransmit queue.

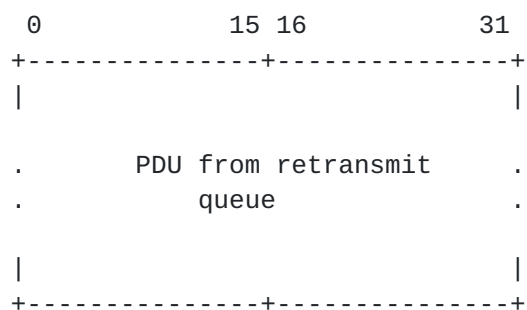

#### [2.3.1.8](#) Retrieval Complete Indication

The MTP2 Retrieval Complete Indication message is exactly the same as the MTP2 Retrieval Indication message except that it also indicates that it contains the last PDU from the retransmit queue.

### [2.3.2](#) Application Server Process Maintenance (ASPM) Messages

The ASPM messages will only use the common header.



### [2.3.2.1](#) ASP UP (ASPUP)

The ASPUP message is used to indicate to a remote M2UA peer that the layer is ready to receive traffic or maintenance messages.

The ASPUP message contains the following parameters:

Adaptation Layer Identifier (optional)  
SCN Protocol Identifier (optional)

The Adaptation Layer Identifier is a string that identifies the adaptation layer. This string must be set to "M2UA" which means the length will be 4.

The Protocol Identifier field contains the identity of the specific SCN signaling protocol being transported. The Protocol ID defines the protocol type, variant, and version, and thereby specifies the components and encoding of the PROTOCOL DATA field. The Protocol Identifier also defines what SCN protocol message components are included in the PROTOCOL DATA.

(Ed. Note: Need encoding of mime-type value or OID or fixed string/integer that will be administered outside of this document (IANA). Also, perhaps bring in text from Christian's mime document - See "[draft-ietf-sigtran-mime-isup.txt](#)" for an example of an application/ISUP media type defined according to the rules defined in [RFC 2048](#).)

The format for the ASPUP message is as follows:

```

      0                15 16                31
+-----+-----+-----+
|  Tag (0x2)  |  Length  |
+-----+-----+-----+

| Adaptation Layer Identifier |

+-----+-----+-----+
|  Tag (0x3)  |  Length  |
+-----+-----+-----+

|      Protocol Identifier      |

+-----+-----+-----+
|  Tag (0x4)  |  Length  |
+-----+-----+-----+

|      INFO String      |

+-----+-----+-----+
```

Note: Strings are padded to 32-bit boundaries. The length field indicates the end of the string.

### 2.3.2.2 ASP Down (ASPDN)

The ASPDN message is used to indicate to a remote M2UA peer that the layer is not ready to receive traffic or maintenance messages.

The ASPDN message contains the following parameters:

INFO String

The format for the ASPDN message is as follows:

```

      0             15 16             31
+-----+-----+
|   Tag (0x4)   |   Length   |
+-----+-----+

|           INFO String           |
+-----+-----+

```

#####

We discussed adding a reason code. Reason could be failure or management inhibit.

#####

### 2.3.2.3 ASP Active (ASPAC)

The ASPAC message is sent by an ASP to indicate to an SG that it is the active ASP to be used from within a list of primary and back-up ASPs for a particular signaling mapping relationship.

The ASPAC message contains the following parameters:

Controlled/Forced flag (C/F flag)  
INFO String

The format for the ASPAC message is as follows:

```

      0             15 16             31
+-----+-----+
|           C/F flag           |
+-----+-----+
|   Tag (0x4)   |   Length   |
+-----+-----+

|           INFO String           |
+-----+-----+

```





The valid values for C/F flag are shown in the following table.

Define	Value	Description
FORCED	0x0	Force sending of all messages to ASP
CONTROLLED	0x1	Only send "new work" to ASP

#### **2.3.2.4 ASP Inactive (ASPIA)**

The ASPIA message is sent by an ASP to indicate to an SG that it is no longer the the active ASP to be used from within a list of primary and back-up ASP for a particular signaling mapping relationship. The SG will respond with an ASPIA message and either buffer or discard incoming messages for a timed period and then discard.

The ASPIA message contains the following parameters:

INFO String

The format for the ASPIA message is as follows:

```

      0             15 16             31
+-----+-----+
|  Tag (0x4)  |  Length  |
+-----+-----+

|          INFO String          |
+-----+-----+
```

### **2.3.3 Layer Management (MGMT) Messages**

#### **2.3.3.1 Error (ERR)**

The ERR message is sent when an invalid value is found in an incoming messages.

The ERR message contains the following parameters:

Error Code

The format for the ERR message is as follows:

```

      0      7 8      15 16             31
+-----+-----+-----+
|          Error Code          |
+-----+-----+-----+
```



The Error Code can be one of the following values:

Invalid Version	0x1
Invalid Interface Identifier	0x2
Invalid SCN Version	0x3
Invalid Adaptation Layer Identifier	0x4
Invalid Stream Identifier	0x5
Invalid Message Type	0x6

### **3.0 Procedures**

The M2UA layers needs to respond to various primitives it receives from other layers as well as messages it receives from the peer-to-peer messages. This section describes various procedures involved in response to these events.

#### **3.1 Procedures to Support Service in [Section 1.4.1](#)**

These procedures achieve the M2UA layer's "Transport of MTP Level 2 / MTP Level 3 boundary" service.

##### **3.1.1 MTP Level 2 / MTP Level 3 Boundary Procedures**

On receiving a primitives from the local layer, the M2UA layer will send the corresponding MAUP message (see [Section 2](#)) to its peer. The M2UA layer must fill in various fields of the common and specific headers correctly. In addition the message needs to be sent on the SCTP stream that corresponds to the SS7 link.

##### **3.1.2 MAUP Message Procedures**

On receiving MAUP messages from a peer M2UA layer, the M2UA layer on an SG or MGC needs to invoke the corresponding layer primitives to the local MTP Level 2 or MTP Level 3 layer.

#### **3.2 Procedures to Support Service in [Section 1.4.2](#)**

##### **3.2.1 LM primitives procedures**

On receiving these primitives from the local layer, the M2UA layer will send the corresponding LM message (Error) to its peer. The M2UA layer must fill in the various fields of the common and specific headers correctly.

##### **3.2.2 LM message procedures**

Upon receipt of LM messages the M2UA layer must invoke the corresponding Layer Management primitives (M-ERROR) to the local layer management.

#### **3.3 Procedures to Support Service in [Section 1.4.3](#)**

These procedures achieve the M2UA layer's "Support for management of active associations between SG and MGC" service.

### 3.3.1 State Maintenance

#### 3.3.1.1 ASP States

The state of the each ASP is maintained in the M2UA layer on the SG. The state of an ASP changes due to events. The events include:

- \* Reception messages from peer M2UA layer
- \* Reception of indications from layers below


The ASP state transition diagram is shown in Figure 4. The possible states of an ASP are:

ASP-DOWN: Application Server Process is unavailable. Initially all ASPs are in this state.

ASP-UP: Application Server Process is available but application traffic is stopped.

ASP-ACTIVE: Application Server Process is available and application traffic is active. At most one ASP per AS can be in the active state.

Figure 4: ASP State Transition Diagram

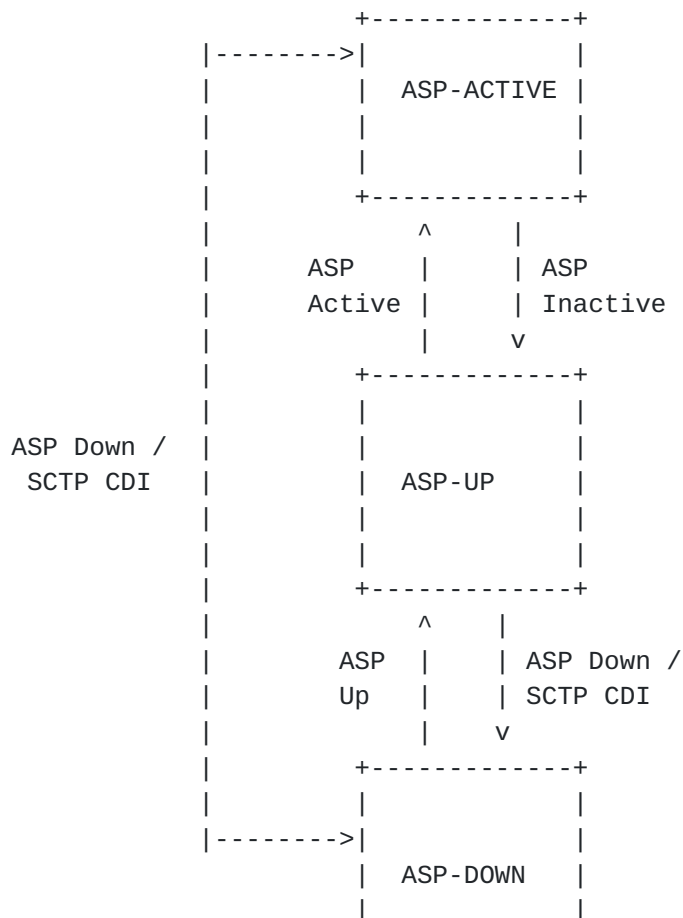

| |  
+-----+

SCTP CDI: Local SCTP layer's Communication Down Indication to the Upper Layer Protocol (M2UA) on an SG. SCTP will send this indication when it detects the loss of connectivity to ASP's SCTP layer.

### **3.3.1.2 AS States**

The state of the AS is maintained in the ITUN layer on the SG.

The state of an AS changes due to events. These events include:

- \* ASP state transitions
- \* Recovery timer triggers

The possible states of an AS are:

AS-DOWN: Application Server is unavailable. This state implies that all ASPs are in the ASP-DOWN state for this AS.

AS-UP: One or more ASPs are in the ASP-UP state.


AS-ACTIVE: Application Server is available and application traffic is active. This state implies that one ASP is in the ASP-ACTIVE state.

AS-PENDING: Currently Active ASP became inactive or SCTP association with it is lost. A Recovery timer will be started and in coming SCN messages will be queued by the SG. If an ASP becomes Active before the recovery timer expires, AS will move to AS-ACTIVE state and all the queued messages will be sent to the active ASP. If the recovery timer expires before an ASP becomes active, SG stops queuing messages and discards all queued messages. AS will move to AS-UP if at least one ASP is in ASP-UP state, otherwise it will move to AS-DOWN state.

If T(r) expires before an ASP becomes active, the SG stops queuing messages and discards all previously queued messages. The AS will move to AS-UP if at least one ASP is in ASP-UP state, otherwise it will move to AS-DOWN state.





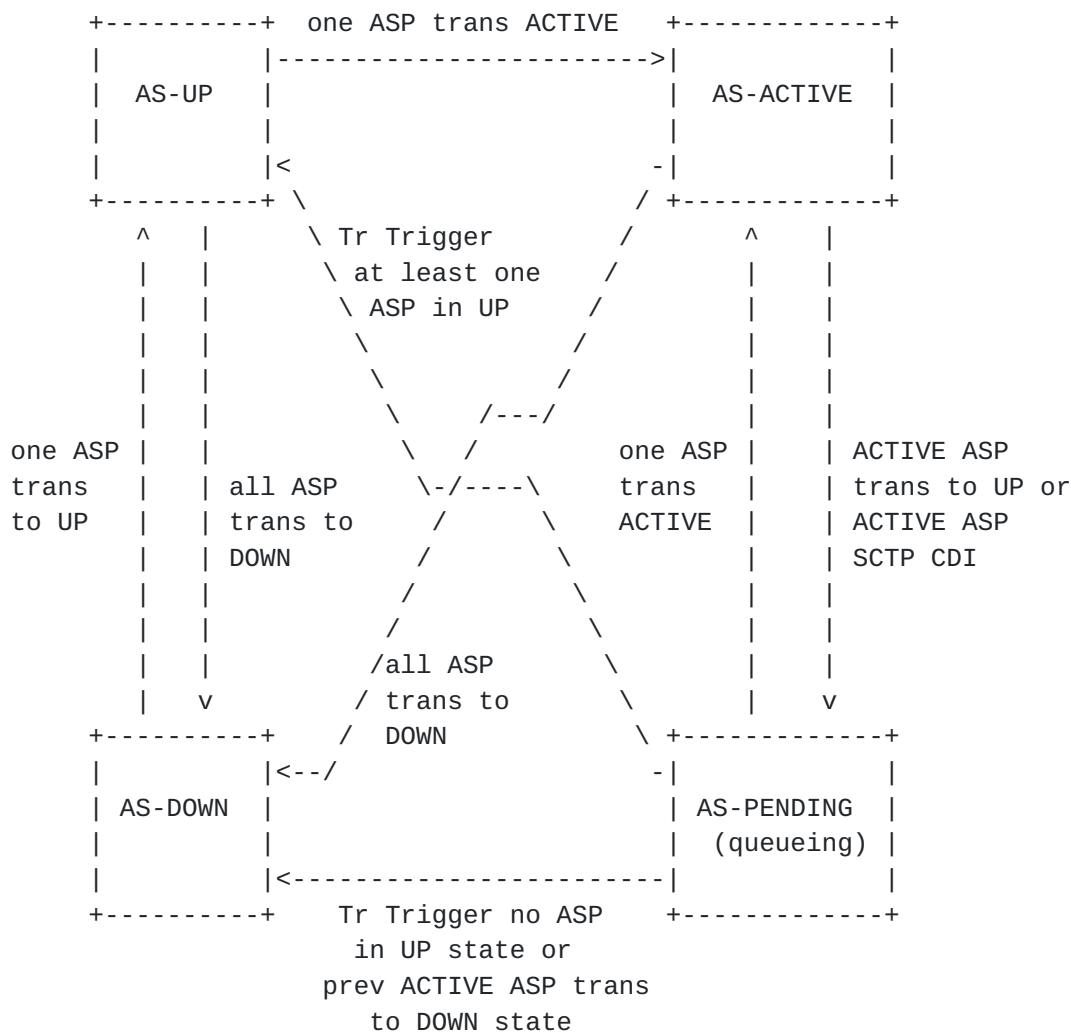

Tr = Recovery Timer

Figure 5: AS State Transition Diagram

Note: If AS moves from AS-PENDING state to AS-UP or AS-DOWN states, the Layer Management on MG may take appropriate SCN notification actions.

### 3.3.2 ASPM procedures for primitives

Before the establishment of an SCTP association the ASP state at both the SG and ASP is assumed to be "Down".

When the M2UA layer receives an M-SCTP ESTABLISH request primitive from the Layer Management, the M2UA layer will try to establish an SCTP association with the remote M2UA peer. Upon reception of an eventual SCTP-Communication Up confirm primitive from the SCTP, the M2UA layer will invoke the primitive M-SCTP ESTABLISH confirm to the Layer Management.



Alternatively, if the remote M2UA-peer establishes the SCTP association first, the M2UA layer will receive an SCTP Communication Up indication primitive from the SCTP. The M2UA layer will then invoke the primitive M-SCTP ESTABLISH indication to the Layer Management.

Once the SCTP association is established, The M2UA layer at an ASP will then find out the state of its local M2UA-user from the Layer Management using the primitive M-ASP STATUS. Based on the status of the local M2UA-User, the local ASP ITUN Application Server Process Maintenance (ASPM) function will initiate the ASPM procedures, using the ASP-Up/-Down/-Active/-Inactive messages to convey the ASP-state to the SG - see [Section 3.3.3](#).

If the M2UA layer subsequently receives an SCTP-Communication Down indication from the underlying SCTP layer, it will inform the Layer Management by invoking the M-SCTP STATUS indication primitive. The state of the ASP will be moved to "Down" at both the SG and ASP.

At an ASP, the Layer Management may try to reestablish the SCTP association using M-SCTP ESTABLISH request primitive.

### **[3.3.3](#) ASPM procedures for peer-to-peer messages**

#### **[3.3.3.1](#) ASP UP**

The SG will mark the path as up if an explicit ASP UP (ASPUP) message is received and internally the path is allowed to come up (i.e., not in a locked local maintenance state). An ASP UP (ASPUP) message will be sent to acknowledge the received ASPUP. The SG will respond to a ASPUP with a ASPDN message if the path is in a locked maintenance state.

The SG will send a ASPUP message in response to a received ASPUP message from the MGC even if that path was already marked as UP at the SG.

The paths are controlled by the MGC. The SG will only send ASPUP in response to the reception of a ASPUP message.

The MGC will send ASPUP messages every 2 (add text regarding this being a configurable timer) seconds until the path comes up (i.e. until it receives a ASPUP message from the SG for that path). The MGC may decide to reduce the frequency (say to every 5 seconds) if the an acknowledge-ment is not received after a few tries.

The MGC should wait for the ASPUP message from the SG before transmitting ASP maintenance messages (ASPIA or ASPAC) or M2UA messages or it will risk message loss. The ASPUP message received from the SG is not acknowledged by the MGC.

#### **[3.3.3.2](#) ASP Down**

The SG will mark the ASP as down and send a ASPDN message to the MGC if

one of the following events occur:

Morneault, et al

[Page 22]

- a ASP Down(ASPDN) message is received from the MGC,
- the ASP is locked by local maintenance.

The SG will also send a ASPDN message when the ASP is already down and a ASPDN) message is received from the MGC.

The MGC will send ASPDN whenever it wants to take down a ASP. Since the ASPDN messages to the SG or the ASPDN responses from the SG can be lost (for example, during a MGC node failover), the MGC can send ASPDN messages every 2 seconds until the path comes down (i.e. until it receives a ASPDN message from the SG for that path).

#### **3.3.4 ASP Version Control**

If a ASP Up message with an unknown version is received, the receiving end will respond with an Error message. This will indicate to the sender which version the receiving node supports.

This is useful when protocol version upgrades are being performed. A node with the newer version should support the older versions used on other nodes it is communicating with.

The version field in the Error message header associated with the will indicate the version supported by the node.

#### **3.3.5 ASP Inactive**

When a ASPIA message is received, message transmission to that ASP ceases. The SG will either discard all incoming messages or start buffering the incoming messages for N seconds after which messages will be discarded.

If the ASP is down, all of the Paths that were supported by that ASP are, by default, down.

#### **3.3.6 ASP Active**

When a ASP Active (ASPAC) message is received, the SG will start routing to that ASP. Reception of a ASPAC message overrides any previous ASPAC messages and results in the ASP associated with the ASPAC message to become the newly active ASP.

### **4.0 Examples of MTP2 User Adaptation (M2UA) Procedures**

#### **4.1 Establishment of associations between SG and MGC examples**

An example of the message flows for establishing active associations between SG and MGC is shown below.

SG

ASP1

```

                <----- ASP Up
ASP Up ----->
(ACK)
                <----- ASP Active
ASP Active ----->
(ACK)
```

An example of message flows for establishment of associations with two ASPs and the message flows for take-over of the primary (ASP1) by the secondary (ASP2).

```

                SG                ASP1                ASP2

                <----- ASP Up
ASP Up ----->
(ACK)
                <----- ASP Up
ASP Up ----->
(ACK)
                <----- ASP Active
ASP Active ----->
(ACK)
                ...
                <----- ASP Inactive
ASP Inactive ----->
(ACK)

                (this message is optional)
ASP Inactive ----->
                <----- ASP Active
ASP Active ----->
(ACK)

```

An example of message flows for establishment of associations with two ASPs and the message flows for controlled take-over of the primary (ASP1) by the secondary (ASP2). In this case, the SG sends new work to ASP2.

```

                SG                ASP1                ASP2

                <----- ASP Up
ASP Up ----->
(ACK)
                <----- ASP Up
ASP Up ----->
(ACK)
                <----- ASP Active
ASP Active ----->
(ACK)
                ...
                <----- ASP Active
                                (New Work)
ASP Active ----->
(ACK)

```

```

                                <----- ASP Inactive
ASP Inactive ----->
(ACK)
```

## **4.2 Case 1: SG to MGC, MTP Level 2 to MTP Level 3 Boundary Procedures**

### **4.2.1 SS7 Link Alignment**

The MGC can request that a SS7 link be brought into alignment using the normal or emergency procedure. An example of the message flow to bring a SS7 link in-service using the normal alignment procedure is shown below.

```

SG                                MGC

                                <----- Establish Request (ESTABLISH_NORMAL)
Establish Response ----->
```

An example of the message flow to bring a SS7 link in-service using the emergency alignment procedure.

```

SG                                MGC

                                <----- Establish Request (ESTABLISH_EMER)
Establish Response ----->
```



#### [4.2.2](#) SS7 Link Release

The MGC can request that a SS7 link be taken out-of-service. It uses the Release Request message as shown below.

```

SG                                MGC

                                <----- Release Request (RELEASE_MGMT)
Release Response  ----->
```

The SG can autonomously indicate that a SS7 link has gone out-of-service as shown below.

```

SG                                MGC

Release Indication ----->
(RELEASE_PHYS)
```

#### [4.2.3](#) Set and Clear Local Processor Outage

to be added

#### [4.2.4](#) Notification of Processor Outage (local or remote)

to be added

#### [4.2.5](#) Flush Buffers or Continue

to be added

#### [4.2.6](#) SS7 Link Changeover

An example of the message flow for a changeover is shown below.

```

SG                                MGC

                                <----- Retrieval Request (MTP2_RTRV_BSN)
Retrieval Confirm ----->
(with BSN)

                                <----- Retrieval Request (MTP2_RTRV_MSGS
                                                with FSN)
Retrieval Confirm ----->

Retrieval Ind ----->
Retrieval Ind ----->
Rtrvl Complete Ind ----->
```

Note: The number of Retrieval Indication is dependent on the number of messages in the retransmit queue that have been requested. Only one Retrieval Complete Indication should be sent.



### [4.3](#) Case 2: SG to IPSCP, MTP Level 2 to MTP Level 3 Boundary Procedures

#### [4.3.1](#) Message Transmission

Messages are transmitted using the Data Request primitive from MTP3 to MTP2UA.

```

MTP2UA          MTP3
<----- Message For Transmission (Data Request)

```

#### [4.3.2](#) Message Reception

Messages are received using the Data Indication primitive from MTP2UA to MTP3.

```

MTP2UA          MTP3
-----> Received Message (Data Indication)

```

#### [4.3.3](#) Link Status Indication

The MTP2UA layer sends Link\_In\_Service and Link\_out\_Of\_Service after receiving indication from SCTP layer.

```

MTP3      MTP2UA      SCTP      SCTP      MTP2UA      MTP3

<-----
Communication Up
Link proving is done
By MTP2UA at this moment.
<-----
Link_In_Service

<-----
Communication Lost
<-----
Link Out of Service

```

#### [4.3.4](#) Link Alignment

The MTP3 layer in the IPSCP can request that a SS7 link be brought into alignment using the normal or emergency procedure. An example of the message flow to bring a SS7 link in-service using the normal alignment procedure is shown below.

```

MTP2UA          MTP3
<----- Establish Request (ESTABLISH_NORMAL)

```

Establish Response ----->

An example of the message flow to bring a SS7 link in-service using the emergency alignment procedure.

```

MTP2UA                                MTP3

                                <----- Establish Request (ESTABLISH_EMER)
Establish Response ----->

```

#### [4.3.5](#) Link Proving (During Emergency)

There are two alignment procedures used: normal alignment and emergency alignment. During normal alignment, communication to other end is tested for a period of time for making sure that the communication link does satisfy the performance requirements of the application. The examples are RTT and packet loss. Normal alignment is used when there are other links associated with the affected link. The other links should be to the same destination. Emergency alignment is used when there are no other links to the same destination. During emergency, link is not tested for long period of time but instead, an indication from SCTP layer is used to bring the link in service.

```

MTP3      MTP2UA      SCTP      SCTP      MTP2UA      MTP3

----->
Emergency      Disable Proving

      <-----
      Communication UP
      ----->
      Status (validate the SCTP association meets
              application requirement)

<-----
Link_In_Service

```

#### [4.3.6](#) Link Proving (Emergency Ceased)

One function of the adaptation layer is to make sure that the link meets the performance requirements of the application. This is usually done by proving the link. For example, for proving the link, we need the adaptation layer to issue an heartbeat/RTT to its peer. This is done before declaring link is in service to its application. For this purpose, the existing "status" command is used. Note that how to the link meets performance requirements is implementation dependent. Also, the proving period can be configurable.



MTP3            MTP2UA            SCTP            SCTP            MTP2UA            MTP3

```

----->
Emergency            Enable Proving
ceased

<-----
Communication UP
-----> RTT
    Status            ----->
    RTTs are           ----->
    Sent for a        ----->
    Period of         .....
    3 seconds        ----->
                        RTT
<-----
Link_In_Service (After checking that link is sane)

```

#### [4.3.7](#) Congestion Notification to Upper layer

MTP3 layer expects notification of the link congestion. For example, this is accomplished by two messages: I) Link Congested ii) Link Congestion Ceased. Congestion is assumed if MTP2UA layer notices repeated failures to send requests to SCTP (this is implementation dependent and it is assumed that the SEND Failure has an error code "life time expired"). Subsequently MTP2UA can start polling status of SCTP. If all the messages are successfully transmitted over a period of time (implementation dependent) then it is assumed that the congestion is abated. If the congestion condition should continue, the link will be taken out of service. In this case, it is possible to start link change over procedure.

MTP3            MTP2UA            SCTP            SCTP            MTP2UA            MTP3

```

<-----
Send Failure
<-----
Send Failure
<-----
Send Failure
("N" consecutive fails)
(implementation specific)
<-----
Congestion Detected
----->
    Status
----->
    Status
----->

```

polled for certain time  
till the congestion ceased  
(implementation specific)

<-----

Congestion ceased



#### 4.3.8 Link Change Over due to Congestion

Due to sustained congestion, MTP2UA can take the link out of service. Next, MTP2UA sends an indication to MTP3 regarding link is out service due to congestion. In this context, MTP3 can initiate a link change over to its peer.

```

MTP3          MTP2UA          SCTP          SCTP          MTP2UA          MTP3
              <-----
              Send Failure
              <-----
              Send Failure
              <-----
              Send Failure
              ("N" consecutive fails)
              (implementation specific)
<-----
Congestion Detected
              ----->
              Terminate
              <-----
              Terminate Successful
              <-----
              Communication Lost
<-----
Link Out of Service

```

#### 4.3.9 Link Release

The MTP3 can request that a SS7-IP link be taken out-of-service. It uses the Release Request message as shown below.

```

MTP2UA                                     MTP3
                                     <----- Release Request
Release Response ----->

```

The SG can autonomously indicate that a SS7 link has gone out-of-service as shown below.

MTP2UA

MTP3

Release Indication ----->  
 (Link\_Out\_Of\_Service)

NOTE: We may be able to effective use of "State" primitives here.  
 For further investigation

#### [4.3.10](#) Link Change Over

The objective of the change over is to ensure that signaling traffic carried by the unavailable signaling link is diverted to the alternative signaling link as quickly as possible while avoiding message loss, duplication or mis-sequencing. For this purpose, the changeover procedure includes data retrieval, which is performed before reopening the alternative signaling links to the diverted traffic. Data retrieval consists of identifying all those messages in the retransmission buffer of the unavailable signaling link which have not been received by the far end. Retrieval includes transferring the concerned messages to the transmission buffers of the alternative links. In order to support changeover, the SCTP TSN must be mapped to FSN/BSN of SS7.

Transmit Sequence Numbers used by SCTP (Signaling Control Transport Protocol) are of sixteen bits. MTP2's forward and backward sequence numbers of only seven bits. Hence it is required to map the sixteen bit TSN to seven bit FSN/BSN. For simplicity, it is assumed that only least seven significant seven bits of TSN are used. There can be a configuration, where the links in the link set are of not equal bandwidth. Further investigation is required for this scenario.

15	8	0													
-----															
0	0	0	0	0	0	0	0	0	X	X	X	X	X	X	X
-----															
<-----FSN/BSN----->															

In order to convert TSN to FSN and BSN, the following formula is used:

FSN, BSN = (Transmit Sequence Number - 1) MODULO 255

For data retrieval, MTP3 requests Backward Sequence Number (BSN) from MTP2UA. This the sequence number of the last message received by the local end. During normal period, SCTP delivers ordered messages to the application. However, during congestion or failure condition, the sequence numbers of the acknowledged messages can have gaps. In particular, the SACK (selective acknowledgement message) message can have several of these gaps. Hence, it is important to scan through these gaps and find the

sequence number before first gap. This is the number from which the remote

end has to transmit the messages. So, this is the number considered as the Backward Sequence Number and communicated to the remote end. In a similar way, the remote end also, detects the BSN and indicates to local end. As soon, the MTP3 of local end receives this BSN, MTP3 retrieves all the unacknowledged messages starting from BSN. This is accomplished through "Retrieve FSN" message. After all the messages are sent from MTP2UA to MTP3, a retrieval complete message is sent.

```

MTP3           MTP2UA           SCTP           SCTP           MTP2UA           MTP3

                <-----
                Communication Lost
<-----
Link Out of Service

-----> Find the gaps
Retrieve BSN   in the rcvd. Msgs
               And locate the first gap
<-----
Indicate BSN
----->
COO (BSN)
<-----
Retrieve BSN
----->
Indicate BSN
<-----
COA (BSN)

----->Go through the transmit
Retrieve FSN   queue and find unack. Msgs.
<----- FSB Not retrievable (in case)
<----- Retrieved Message
<----- Retrieved Message
...
<----- Retrieval Complete

```

#### 4.4 Layer Management Communication Examples

An example of the message flows for communication between Layer Management modules between SG and MGC is shown below. An active association between MGC and SG is established ([section 4.1](#)) prior to the following message flows.

```

SG           MGC

                <----- Establish Request
Error ----->

```

(Invalid Interface Id)

Morneault, et al

[Page 31]

## **5.0 Security**

SCN adaptation layers rely on SCTP to provide security.

## **6.0 Acknowledgements**

The authors would like to thank Ian Rytina for his valuable comments and suggestions.

## **7.0 References**

- [1] ITU-T Recommendation Q.700, 'Introduction To ITU-T Signalling System No. 7 (SS7)'
- [2] ITU-T Recommendation Q.701-Q.705, 'Signalling System No. 7 (SS7) - Message Transfer Part (MTP)'
- [3] Bellcore GR-246-CORE 'Bell Communications Research Specification of Signaling System Number 7', Volume 1, December 1995
- [4] Framework Architecture for Signaling Transport, [draft-ietf-sigtran-framework-arch-03.txt](#), June 1999
- [5] Simple Control Transmission Protocol, [draft-ietf-sigtran-sctp-00.txt](#), August 1999
- [6] Media Gateway Control Protocol (MGCP), [draft-huitema-megaco-mgcp-v1-03.txt](#), August 1999



## **8.0 Author's Addresses**

Ken Morneault  
Cisco Systems Inc.  
**13615 Dulles Technology Drive**  
Herndon, VA. 20171  
USA

Tel: +1-703-484-3323  
EMail: kmorneau@cisco.com

Malleswar Kalla  
Telcordia Technologies  
MCC 1J211R  
**445 South Street**  
Morristown, NJ 07960  
USA

Tel: +1-973-829-5212  
EMail: kalla@research.telcordia.com

Greg Sidebottom  
Nortel Networks  
**3685 Richmond Rd,**  
Nepean, Ontario  
Canada K2H5B7

Tel: +1-613-763-7305  
EMail: gregside@nortelnetworks.com

Ram Dantu, Ph.D.  
Alcatel USA  
**1000 Coit Road**  
Plano, Tx. 74075

Tel: +1-972-477-8446  
EMail: ram.dantu@usa.alcatel.com

This Internet Draft expires April 2000.