

SIP	J. Fischl	
Internet-Draft	CounterPath Corporation	
Intended status: Standards Track	H. Tschofenig	
Expires: September 10, 2009	Nokia Siemens Networks	
	E. Rescorla	
	RTFM, Inc.	
	March 09, 2009	

[TOC](#)

Framework for Establishing an SRTP Security Context using DTLS draft-ietf-sip-dtls-srtp-framework-07.txt

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of BCP 78 and BCP 79. This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on September 10, 2009.

Copyright Notice

Copyright (c) 2009 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents in effect on the date of publication of this document (<http://trustee.ietf.org/license-info>). Please review these documents carefully, as they describe your rights and restrictions with respect to this document.

Abstract

This document specifies how to use the Session Initiation Protocol (SIP) to establish an Secure Real-time Transport Protocol (SRTP) security context using the Datagram Transport Layer Security (DTLS) protocol. It describes a mechanism of transporting a fingerprint attribute in the Session Description Protocol (SDP) that identifies the key that will be presented during the DTLS handshake. The key exchange travels along the media path as opposed to the signaling path. The SIP Identity mechanism can be used to protect the integrity of the fingerprint attribute from modification by intermediate proxies.

Table of Contents

- [1.](#) Introduction
- [2.](#) Overview
- [3.](#) Motivation
- [4.](#) Terminology
- [5.](#) Establishing a Secure Channel
- [6.](#) Miscellaneous Considerations
 - [6.1.](#) Anonymous Calls
 - [6.2.](#) Early Media
 - [6.3.](#) Forking
 - [6.4.](#) Delayed Offer Calls
 - [6.5.](#) Multiple Associations
 - [6.6.](#) Session Modification
 - [6.7.](#) Middlebox Interaction
 - [6.7.1.](#) ICE Interaction
 - [6.7.2.](#) Latching Control Without ICE
 - [6.8.](#) Rekeying
 - [6.9.](#) Conference Servers and Shared Encryptions Contexts
 - [6.10.](#) Media over SRTP
 - [6.11.](#) Best Effort Encryption
- [7.](#) Example Message Flow
 - [7.1.](#) Basic Message Flow with Early Media and Identity
 - [7.2.](#) Basic Message Flow with Connected Identity (RFC 4916)
 - [7.3.](#) Basic Message Flow with STUN check for NAT Case

- [8.](#) Security Considerations
 - [8.1.](#) Responder Identity
 - [8.2.](#) SIPS
 - [8.3.](#) S/MIME
 - [8.4.](#) Continuity of Authentication
 - [8.5.](#) Short Authentication String
 - [8.6.](#) Limits of Identity Assertions
 - [8.7.](#) Third Party Certificates
 - [8.8.](#) Perfect Forward Secrecy
- [9.](#) IANA Considerations
- [10.](#) Acknowledgments
- [11.](#) References
 - [11.1.](#) Normative References
 - [11.2.](#) Informational References
- [Appendix A.](#) Requirements Analysis
 - [A.1.](#) Forking and retargeting (R-FORK-RETARGET, R-BEST-SECURE, R-DISTINCT)
 - [A.2.](#) Distinct Cryptographic Contexts (R-DISTINCT)
 - [A.3.](#) Reusage of a Security Context (R-REUSE)
 - [A.4.](#) Clipping (R-AVOID-CLIPPING)
 - [A.5.](#) Passive Attacks on the Media Path (R-PASS-MEDIA)
 - [A.6.](#) Passive Attacks on the Signaling Path (R-PASS-SIG)
 - [A.7.](#) (R-SIG-MEDIA, R-ACT-ACT)
 - [A.8.](#) Binding to Identifiers (R-ID-BINDING)
 - [A.9.](#) Perfect Forward Secrecy (R-PFS)
 - [A.10.](#) Algorithm Negotiation (R-COMPUTE)
 - [A.11.](#) RTP Validity Check (R-RTP-VALID)
 - [A.12.](#) 3rd Party Certificates (R-CERTS, R-EXISTING)
 - [A.13.](#) FIPS 140-2 (R-FIPS)
 - [A.14.](#) Linkage between Keying Exchange and SIP Signaling (R-ASSOC)
 - [A.15.](#) Denial of Service Vulnerability (R-DOS)
 - [A.16.](#) Crypto-Agility (R-AGILITY)
 - [A.17.](#) Downgrading Protection (R-DOWNGRADE)
 - [A.18.](#) Media Security Negotiation (R-NEGOTIATE)
 - [A.19.](#) Signaling Protocol Independence (R-OTHER-SIGNALING)
 - [A.20.](#) Media Recording (R-RECORDING)
 - [A.21.](#) Interworking with Intermediaries (R-TRANSCODER)
 - [A.22.](#) PSTN Gateway Termination (R-PSTN)
 - [A.23.](#) R-ALLOW-RTP
 - [A.24.](#) R-HERFP
- [§](#) Authors' Addresses

1. Introduction

The Session Initiation Protocol (SIP) [[RFC3261](#)] ([Rosenberg, J., Schulzrinne, H., Camarillo, G., Johnston, A., Peterson, J., Sparks, R., Handley, M., and E. Schooler, "SIP: Session Initiation Protocol," June 2002.](#)) and the Session Description Protocol (SDP) [[RFC4566](#)] ([Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol," July 2006.](#)) are used to set up multimedia sessions or calls. SDP is also used to set up TCP [[RFC4145](#)] ([Yon, D. and G. Camarillo, "TCP-Based Media Transport in the Session Description Protocol \(SDP\)," September 2005.](#)) and additionally TCP/TLS connections for usage with media sessions [[RFC4572](#)] ([Lennox, J., "Connection-Oriented Media Transport over the Transport Layer Security \(TLS\) Protocol in the Session Description Protocol \(SDP\)," July 2006.](#)). The Real-time Transport Protocol (RTP) [[RFC3550](#)] ([Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-time Applications," July 2003.](#)) is used to transmit real time media on top of UDP and TCP [[RFC4571](#)] ([Lazzaro, J., "Framing Real-time Transport Protocol \(RTP\) and RTP Control Protocol \(RTCP\) Packets over Connection-Oriented Transport," July 2006.](#)). Datagram TLS [[RFC4347](#)] ([Rescorla, E. and N. Modadugu, "Datagram Transport Layer Security," April 2006.](#)) was introduced to allow TLS functionality to be applied to datagram transport protocols, such as UDP and DCCP. This draft provide guidelines on how to establish SRTP [[RFC3711](#)] ([Baugher, M., McGrew, D., Naslund, M., Carrara, E., and K. Norrman, "The Secure Real-time Transport Protocol \(SRTP\)," March 2004.](#)) security over UDP using an extension to DTLS (see [[I-D.ietf-avt-dtls-srtp](#)] ([McGrew, D. and E. Rescorla, "Datagram Transport Layer Security \(DTLS\) Extension to Establish Keys for Secure Real-time Transport Protocol \(SRTP\)," February 2009.](#))).

The goal of this work is to provide a key negotiation technique that allows encrypted communication between devices with no prior relationships. It also does not require the devices to trust every call signaling element that was involved in routing or session setup. This approach does not require any extra effort by end users and does not require deployment of certificates that are signed by a well-known certificate authority to all devices.

The media is transported over a mutually authenticated DTLS session where both sides have certificates. It is very important to note that certificates are being used purely as a carrier for the public keys of the peers. This is required because DTLS does not have a mode for carrying bare keys, but it is purely an issue of formatting. The certificates can be self-signed and completely self-generated. All major TLS stacks have the capability to generate such certificates on demand. However, third party certificates MAY also be used if the peers have them (thus reducing the need to trust intermediaries). The certificate fingerprints are sent in SDP over SIP as part of the offer/answer exchange.

The fingerprint mechanism allows one side of the connection to verify that the certificate presented in the DTLS handshake matches the certificate used by the party in the signalling. However, this requires some form of integrity protection on the signalling. S/MIME signatures, as described in RFC 3261, or SIP Identity, as described in [\[RFC4474\]](#) (Peterson, J. and C. Jennings, "Enhancements for Authenticated Identity Management in the Session Initiation Protocol (SIP)," August 2006.) provides the highest level of security because they are not susceptible to modification by malicious intermediaries. However, even hop-by-hop security such as provided by SIPS provides some protection against modification by attackers who are not in control of on-path signaling elements. Because DTLS-SRTP only requires message integrity and not confidentiality for the signaling, the number of elements which must have credentials and be trusted is significantly reduced. In particular, if RFC 4474 is used, only the Authentication Service need have a certificate and be trusted. Intermediate elements cannot undetectably modify the message and therefore cannot mount a MITM attack. By comparison, because SDESCRIPTORS [\[RFC4568\]](#) (Andreasen, F., Baugher, M., and D. Wing, "Session Description Protocol (SDP) Security Descriptions for Media Streams," July 2006.) requires confidentiality for the signaling, all intermediate elements must be trusted. This approach differs from previous attempts to secure media traffic where the authentication and key exchange protocol (e.g., MIKEY [\[RFC3830\]](#) (Arkko, J., Carrara, E., Lindholm, F., Naslund, M., and K. Norrman, "MIKEY: Multimedia Internet KEYing," August 2004.)) is piggybacked in the signaling message exchange. With DTLS-SRTP, establishing the protection of the media traffic between the endpoints is done by the media endpoints with only a cryptographic binding of the media keying to the SIP/SDP communication. It allows RTP and SIP to be used in the usual manner when there is no encrypted media. In SIP, typically the caller sends an offer and the callee may subsequently send one-way media back to the caller before a SIP answer is received by the caller. The approach in this specification, where the media key negotiation is decoupled from the SIP signaling, allows the early media to be set up before the SIP answer is received while preserving the important security property of allowing the media sender to choose some of the keying material for the media. This also allows the media sessions to be changed, re-keyed, and otherwise modified after the initial SIP signaling without any additional SIP signaling. Design decisions that influence the applicability of this specification are discussed in [Section 3 \(Motivation\)](#).

2. Overview

[TOC](#)

Endpoints wishing to set up an RTP media session do so by exchanging offers and answers in SDP messages over SIP. In a typical use case, two

endpoints would negotiate to transmit audio data over RTP using the UDP protocol.

[Figure 1 \(DTLS Usage in the SIP Trapezoid\)](#) shows a typical message exchange in the SIP Trapezoid.

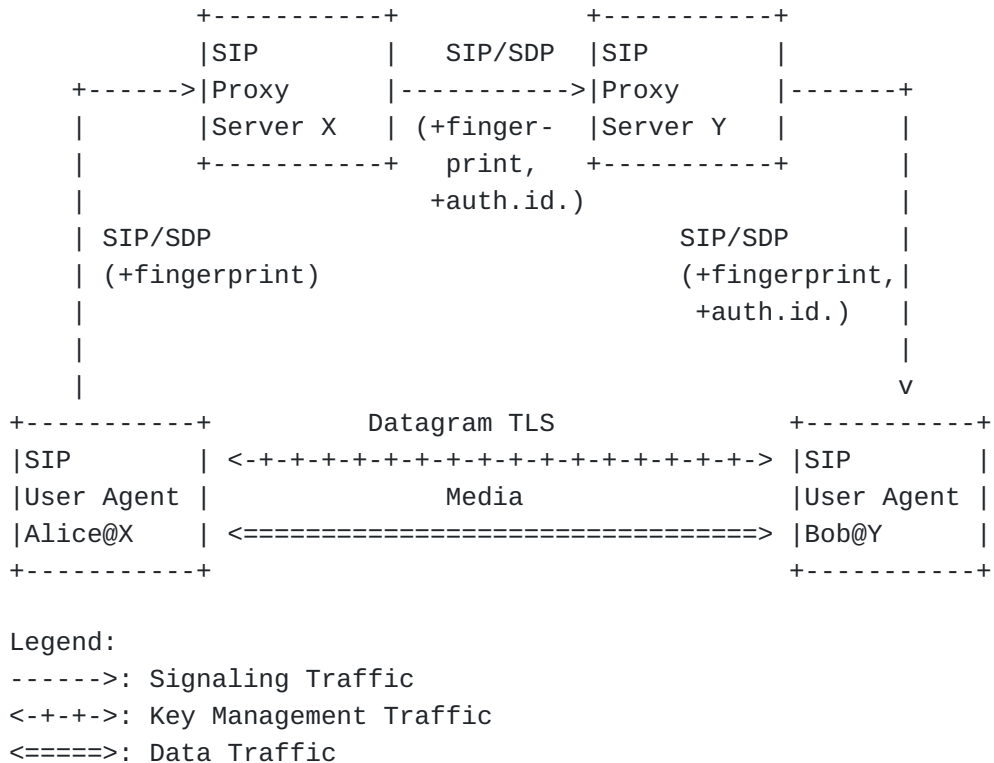


Figure 1: DTLS Usage in the SIP Trapezoid

Consider Alice wanting to set up an encrypted audio session with Bob. Both Bob and Alice could use public-key based authentication in order to establish a confidentiality protected channel using DTLS. Since providing mutual authentication between two arbitrary end points on the Internet using public key based cryptography tends to be problematic, we consider more deployment-friendly alternatives. This document uses one approach and several others are discussed in [Section 8 \(Security Considerations\)](#).

Alice sends an SDP offer to Bob over SIP. If Alice uses only self-signed certificates for the communication with Bob, a fingerprint is included in the SDP offer/answer exchange. This fingerprint binds the DTLS key exchange in the media plane to the signaling plane. The fingerprint alone protects against active attacks on the media but not active attacks on the signalling. In order to prevent active attacks on the signalling, [Enhancements for Authenticated Identity Management in SIP \(Peterson, J. and C. Jennings, "Enhancements for](#)

[Authenticated Identity Management in the Session Initiation Protocol \(SIP\),” August 2006.](#)) [RFC4474] may be used. When Bob receives the offer, the peers establish some number of DTLS connections (depending on the number of media sessions) with mutual DTLS authentication (i.e., both sides provide certificates) At this point, Bob can verify that Alice's credentials offered in TLS match the fingerprint in the SDP offer, and Bob can begin sending media to Alice. Once Bob accepts Alice's offer and sends an SDP answer to Alice, Alice can begin sending confidential media to Bob over the appropriate streams. Alice and Bob will verify that the fingerprints from the certificates received over the DTLS handshakes match with the fingerprints received in the SDP of the SIP signaling. This provides the security property that Alice knows that the media traffic is going to Bob and vice-versa without necessarily requiring global PKI certificates for Alice and Bob. (see [Section 8 \(Security Considerations\)](#) for detailed security analysis.)

3. Motivation

[TOC](#)

Although there is already prior work in this area (e.g., [Security Descriptions for SDP \(Andreasen, F., Baugher, M., and D. Wing, “Session Description Protocol \(SDP\) Security Descriptions for Media Streams,” July 2006.\)](#) [RFC4568], [Key Management Extensions \(Arkko, J., Lindholm, F., Naslund, M., Norrman, K., and E. Carrara, “Key Management Extensions for Session Description Protocol \(SDP\) and Real Time Streaming Protocol \(RTSP\),” July 2006.\)](#) [RFC4567] combined with MIKEY [RFC3830] (Arkko, J., Carrara, E., Lindholm, F., Naslund, M., and K. Norrman, “MIKEY: Multimedia Internet KEYing,” August 2004.) for authentication and key exchange), this specification is motivated as follows:

- *TLS will be used to offer security for connection-oriented media. The design of TLS is well-known and implementations are widely available.
- *This approach deals with forking and early media without requiring support for PRACK [\[RFC3262\] \(Rosenberg, J. and H. Schulzrinne, “Reliability of Provisional Responses in Session Initiation Protocol \(SIP\),” June 2002.\)](#) while preserving the important security property of allowing the offerer to choose keying material for encrypting the media.
- *The establishment of security protection for the media path is also provided along the media path and not over the signaling path. In many deployment scenarios, the signaling and media traffic travel along a different path through the network.

*When RFC 4474 Identity is used, this solution works even when the SIP proxies downstream of the authentication service are not trusted. There is no need to reveal keys in the SIP signaling or in the SDP message exchange, as is done in SDESCRIPTORS [\[RFC4568\] \(Andreasen, F., Baugher, M., and D. Wing, "Session Description Protocol \(SDP\) Security Descriptions for Media Streams," July 2006.\)](#). Retargeting of a dialog-forming request (changing the value of the Request-URI), the UA that receives it (the User Agent Server, UAS) can have a different identity from that in the To header field. When RFC 4916 is used then it is possible to supply its identity to the peer UA by means of a request in the reverse direction, and for that identity to be signed by an Authentication Service.

*In this method, SSRC collisions do not result in any extra SIP signaling.

*Many SIP endpoints already implement TLS. The changes to existing SIP and RTP usage are minimal even when DTLS-SRTP [\[I-D.ietf-avt-dtls-srtp\] \(McGrew, D. and E. Rescorla, "Datagram Transport Layer Security \(DTLS\) Extension to Establish Keys for Secure Real-time Transport Protocol \(SRTP\)," February 2009.\)](#) is used.

4. Terminology

[TOC](#)

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [\[RFC2119\] \(Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels," March 1997.\)](#).

DTLS/TLS uses the term "session" to refer to a long-lived set of keying material that spans associations. In this document, consistent with SIP/SDP usage, we use it to refer to a multimedia session and use the term "TLS session" to refer to the TLS construct. We use the term "association" to refer to a particular DTLS ciphersuite and keying material set which is associated with a single host/port quartet. The same DTLS/TLS session can be used to establish the keying material for multiple associations. For consistency with other SIP/SDP usage, we use the term "connection" when what's being referred to is a multimedia stream that is not specifically DTLS/TLS.

In this document, the term "Mutual DTLS" indicates that both the DTLS client and server present certificates even if one or both certificates are self-signed.

5. Establishing a Secure Channel

[TOC](#)

The two endpoints in the exchange present their identities as part of the DTLS handshake procedure using certificates. This document uses certificates in the same style as described in Comedia over TLS in SDP [\[RFC4572\] \(Lennox, J., "Connection-Oriented Media Transport over the Transport Layer Security \(TLS\) Protocol in the Session Description Protocol \(SDP\)," July 2006.\)](#).

If self-signed certificates are used, the content of the subjectAltName attribute inside the certificate MAY use the uniform resource identifier (URI) of the user. This is useful for debugging purposes only and is not required to bind the certificate to one of the communication endpoints. The integrity of the certificate is ensured through the fingerprint attribute in the SDP. The subjectAltName is not an important component of the certificate verification.

The generation of public/private key pairs is relatively expensive. Endpoints are not required to generate certificates for each session. The offer/answer model, defined in [\[RFC3264\] \(Rosenberg, J. and H. Schulzrinne, "An Offer/Answer Model with Session Description Protocol \(SDP\)," June 2002.\)](#), is used by protocols like the Session Initiation Protocol (SIP) [\[RFC3261\] \(Rosenberg, J., Schulzrinne, H., Camarillo, G., Johnston, A., Peterson, J., Sparks, R., Handley, M., and E. Schooler, "SIP: Session Initiation Protocol," June 2002.\)](#) to set up multimedia sessions. In addition to the usual contents of an SDP [\[RFC4566\] \(Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol," July 2006.\)](#) message, each media description ('m' line and associated parameters) will also contain several attributes as specified in [\[I-D.ietf-avt-dtls-srtp\] \(McGrew, D. and E. Rescorla, "Datagram Transport Layer Security \(DTLS\) Extension to Establish Keys for Secure Real-time Transport Protocol \(SRTP\)," February 2009.\)](#), [\[RFC4145\] \(Yon, D. and G. Camarillo, "TCP-Based Media Transport in the Session Description Protocol \(SDP\)," September 2005.\)](#) and [\[RFC4572\] \(Lennox, J., "Connection-Oriented Media Transport over the Transport Layer Security \(TLS\) Protocol in the Session Description Protocol \(SDP\)," July 2006.\)](#).

When an endpoint wishes to set up a secure media session with another endpoint it sends an offer in a SIP message to the other endpoint. This offer includes, as part of the SDP payload, the fingerprint of the certificate that the endpoint wants to use. The endpoint SHOULD send the SIP message containing the offer to the offerer's sip proxy over an integrity protected channel. The proxy SHOULD add an Identity header field according to the procedures outlined in [\[RFC4474\]](#). The SIP message containing the offer SHOULD be sent to the offerer's sip proxy over an integrity protected channel. When the far endpoint receives the SIP message it can verify the identity of the sender using the Identity header field. Since the Identity header field is a digital signature across several SIP header fields, in addition to the body of the SIP message, the receiver can also be certain that the message has not been

tampered with after the digital signature was applied and added to the SIP message.

The far endpoint (answerer) may now establish a DTLS association with DTLS to the offerer. Alternately, it can indicate in its answer that the offerer is to initiate the TLS association. In either case, mutual DTLS certificate-based authentication will be used. After completing the DTLS handshake, information about the authenticated identities, including the certificates, are made available to the endpoint application. The answerer is then able to verify that the offerer's certificate used for authentication in the DTLS handshake can be associated to the certificate fingerprint contained in the offer in the SDP. At this point the answerer may indicate to the end user that the media is secured. The offerer may only tentatively accept the answerer's certificate since it may not yet have the answerer's certificate fingerprint.

When the answerer accepts the offer, it provides an answer back to the offerer containing the answerer's certificate fingerprint. At this point the offerer can accept or reject the peer's certificate and the offerer can indicate to the end user that the media is secured.

Note that the entire authentication and key exchange for securing the media traffic is handled in the media path through DTLS. The signaling path is only used to verify the peers' certificate fingerprints.

The offer and answer MUST be conform to the following requirements.

*The endpoint MUST use the setup attribute defined in [\[RFC4145\]](#) ([Yon, D. and G. Camarillo, "TCP-Based Media Transport in the Session Description Protocol \(SDP\)," September 2005.](#)). The endpoint which is the offerer MUST use the setup attribute value of setup:actpass and be prepared to receive a client_hello before it receives the answer. The answerer MUST use either a setup attribute value of setup:active or setup:passive. Note that if the answerer uses setup:passive, then the DTLS handshake will not begin until the answerer is received, which adds additional latency. setup:active allows the answer and the DTLS handshake to occur in parallel. Thus, setup:active is RECOMMENDED. Whichever party is active MUST initiate a DTLS handshake by sending a ClientHello over each flow (host/port quartet).

*The endpoint MUST NOT use the connection attribute defined in [\[RFC4145\]](#) ([Yon, D. and G. Camarillo, "TCP-Based Media Transport in the Session Description Protocol \(SDP\)," September 2005.](#)).

*The endpoint MUST use the certificate fingerprint attribute as specified in [\[RFC4572\]](#) ([Lennox, J., "Connection-Oriented Media Transport over the Transport Layer Security \(TLS\) Protocol in the Session Description Protocol \(SDP\)," July 2006.](#)).

*The certificate presented during the DTLS handshake MUST match the fingerprint exchanged via the signaling path in the SDP. The

security properties of this mechanism are described in [Section 8 \(Security Considerations\)](#).

*If the fingerprint does not match the hashed certificate then the endpoint MUST tear down the media session immediately. Note that it is permissible to wait until the other side's fingerprint has been received before establishing the connection, however this may have undesirable latency effects.

6. Miscellaneous Considerations

[TOC](#)

6.1. Anonymous Calls

[TOC](#)

The use of DTLS-SRTP does not provide anonymous calling, however it also does not prevent it. However, if care is not taken when anonymous calling features such as those described in [\[RFC3325\] \(Jennings, C., Peterson, J., and M. Watson, "Private Extensions to the Session Initiation Protocol \(SIP\) for Asserted Identity within Trusted Networks," November 2002.\)](#) or [\[I-D.ietf-sip-ua-privacy\] \(Munakata, M., Schubert, S., and T. Ohba, "UA-Driven Privacy Mechanism for SIP," May 2009.\)](#) are used DTLS-SRTP may allow deanonymizing an otherwise anonymous call. When anonymous calls are being made, the following procedures SHOULD be used to prevent deanonymization.

When making anonymous calls, a new self-signed certificate SHOULD be used for each call so that the calls can not be correlated as to being from the same caller. In situations where some degree of correlation is acceptable, the same certificate SHOULD be used for a number of calls in order to enable continuity of authentication, see [Section 8.4 \(Continuity of Authentication\)](#).

Additionally note that in networks that deploy [\[RFC3325\] \(Jennings, C., Peterson, J., and M. Watson, "Private Extensions to the Session Initiation Protocol \(SIP\) for Asserted Identity within Trusted Networks," November 2002.\)](#), RFC 3325 requires that the Privacy header field value defined in [\[RFC3323\] \(Peterson, J., "A Privacy Mechanism for the Session Initiation Protocol \(SIP\)," November 2002.\)](#) needs to be set to 'id'. This is used in conjunction with the SIP identity mechanism to ensure that the identity of the user is not asserted when enabling anonymous calls. Furthermore, the content of the subjectAltName attribute inside the certificate MUST NOT contain information that either allows correlation or identification of the user that wishes to place an anonymous call. Note that following this recommendation is not sufficient to provide anonymization.

6.2. Early Media

[TOC](#)

If an offer is received by an endpoint that wishes to provide early media, it MUST take the setup:active role and can immediately establish a DTLS association with the other endpoint and begin sending media. The setup:passive endpoint may not yet have validated the fingerprint of the active endpoint's certificate. The security aspects of media handling in this situation are discussed in [Section 8 \(Security Considerations\)](#).

6.3. Forking

[TOC](#)

In SIP, it is possible for a request to fork to multiple endpoints. Each forked request can result in a different answer. Assuming that the requester provided an offer, each of the answerers' will provide a unique answer. Each answerer will form a DTLS association with the offerer. The offerer can then securely correlate the SDP answer received in the SIP message by comparing the fingerprint in the answer to the hashed certificate for each DTLS association.

6.4. Delayed Offer Calls

[TOC](#)

An endpoint may send a SIP INVITE request with no offer in it. When this occurs, the receiver(s) of the INVITE will provide the offer in the response and the originator will provide the answer in the subsequent ACK request or in the PRACK request [\[RFC3262\] \(Rosenberg, J. and H. Schulzrinne, "Reliability of Provisional Responses in Session Initiation Protocol \(SIP\)," June 2002.\)](#) if both endpoints support reliable provisional responses. In any event, the active endpoint still establishes the DTLS association with the passive endpoint as negotiated in the offer/answer exchange.

6.5. Multiple Associations

[TOC](#)

When there are multiple flows (e.g., multiple media streams, non-multiplexed RTP and RTCP, etc.) the active side MAY perform the DTLS handshakes in any order. Appendix B of [\[I-D.ietf-avt-dtls-srtp\] \(McGrew, D. and E. Rescorla, "Datagram Transport Layer Security \(DTLS\)](#)

[Extension to Establish Keys for Secure Real-time Transport Protocol \(SRTP\)," February 2009.](#)) provides some guidance on the performance of parallel DTLS handshakes. Note that if the answerer ends up being active, it may only initiate handshakes on some subset of the potential streams (e.g., if audio and video are offered but it only wishes to do audio.) If the offerer ends up being active, the complete answer will be received before the offerer begins initiating handshakes.

6.6. Session Modification

[TOC](#)

Once an answer is provided to the offerer, either endpoint MAY request a session modification which MAY include an updated offer. This session modification can be carried in either an INVITE or UPDATE request. The peers can reuse the the existing associations if they are compatible (i.e., they have the same key fingerprints and transport parameters), or establish a new one following the same rules as for initial exchanges, tearing down the existing association as soon as the offer/answer exchange is completed. Note that if the active/passive status of the endpoints changes, a new connection MUST be established.

6.7. Middlebox Interaction

[TOC](#)

There are a number of potentially bad interactions between DTLS-SRTP and middleboxes, as documented in [\[I-D.ietf-mmusic-media-path-middleboxes\] \(Stucker, B. and H. Tschofenig, "Analysis of Middlebox Interactions for Signaling Protocol Communication along the Media Path," March 2009.\)](#), which also provides recommendations for avoiding such problems.

6.7.1. ICE Interaction

[TOC](#)

Interactive Connectivity Establishment (ICE), as specified in [\[I-D.ietf-mmusic-ice\] \(Rosenberg, J., "Interactive Connectivity Establishment \(ICE\): A Protocol for Network Address Translator \(NAT\) Traversal for Offer/Answer Protocols," October 2007.\)](#), provides a methodology of allowing participants in multi-media sessions to verify mutual connectivity. When ICE is being used the ICE connectivity checks are performed before the DTLS handshake begins. Note that if aggressive nomination mode is used, multiple candidate pairs may be marked valid before ICE finally converges on a single candidate pair. Implementations MUST treat all ICE candidate pairs associated with a

single component as part of the same DTLS association. Thus, there will be only one DTLS handshake even if there are multiple valid candidate pairs. Note that this may mean adjusting the endpoint IP addresses if the selected candidate pair shifts, just as if the DTLS packets were an ordinary media stream.

Note that STUN packets are sent directly over UDP, not over DTLS.

[\[I-D.ietf-avt-dtls-srtp\]](#) (McGrew, D. and E. Rescorla, "Datagram Transport Layer Security (DTLS) Extension to Establish Keys for Secure Real-time Transport Protocol (SRTP)," February 2009.) describes how to demultiplex STUN packets from DTLS packets and SRTP packets.

6.7.2. Latching Control Without ICE

[TOC](#)

If ICE is not being used, then there is potential for a bad interaction with SBCs via "latching", as described in

[\[I-D.ietf-mmusic-media-path-middleboxes\]](#) (Stucker, B. and H. Tschofenig, "Analysis of Middlebox Interactions for Signaling Protocol Communication along the Media Path," March 2009.). In order to avoid this issue, if ICE is not being used and the DTLS handshake has not completed, upon receiving the other side's SDP then the passive side MUST do a single unauthenticated STUN [\[RFC5389\]](#) (Rosenberg, J., Mahy, R., Matthews, P., and D. Wing, "Session Traversal Utilities for NAT (STUN)," October 2008.) connectivity check in order to open up the appropriate pinhole. All implementations MUST be prepared to answer this request during the handshake period even if they do not otherwise do ICE. However, the active side MUST proceed with the DTLS handshake as appropriate even if no such STUN check is received and the passive MUST NOT wait for a STUN answer before sending its ServerHello.

6.8. Rekeying

[TOC](#)

As with TLS, DTLS endpoints can rekey at any time by redoing the DTLS handshake. While the rekey is under way, the endpoints continue to use the previously established keying material for usage with DTLS. Once the new session keys are established the session can switch to using these and abandon the old keys. This ensures that latency is not introduced during the rekeying process.

Further considerations regarding rekeying in case the SRTP security context is established with DTLS can be found in Section 3.7 of [\[I-D.ietf-avt-dtls-srtp\]](#) (McGrew, D. and E. Rescorla, "Datagram Transport Layer Security (DTLS) Extension to Establish Keys for Secure Real-time Transport Protocol (SRTP)," February 2009.).

6.9. Conference Servers and Shared Encryptions Contexts

[TOC](#)

It has been proposed that conference servers might use the same encryption context for all of the participants in a conference. The advantage of this approach is that the conference server only needs to encrypt the output for all speakers instead of once per participant. This shared encryption context approach is not possible under this specification because each DTLS handshake establishes fresh keys which are not completely under the control of either side. However, it is argued that the effort to encrypt each RTP packet is small compared to the other tasks performed by the conference server such as the codec processing.

Future extensions such as [\[I-D.mcgregw-srtp-ekt\]](#) (McGrew, D., Andreasen, F., Wing, D., and L. Dondeti, "Encrypted Key Transport for Secure RTP," October 2009.) or [\[I-D.wing-avt-dtls-srtp-key-transport\]](#) (Wing, D., "DTLS-SRTP Key Transport (KTR)," March 2009.) could be used to provide this functionality in concert with the mechanisms described in this specification.

6.10. Media over SRTP

[TOC](#)

Because DTLS's data transfer protocol is generic, it is less highly optimized for use with RTP than is SRTP [\[RFC3711\]](#) (Baugher, M., McGrew, D., Naslund, M., Carrara, E., and K. Norrman, "The Secure Real-time Transport Protocol (SRTP)," March 2004.), which has been specifically tuned for that purpose. DTLS-SRTP [\[I-D.ietf-avt-dtls-srtp\]](#) (McGrew, D. and E. Rescorla, "Datagram Transport Layer Security (DTLS) Extension to Establish Keys for Secure Real-time Transport Protocol (SRTP)," February 2009.), has been defined to provide for the negotiation of SRTP transport using a DTLS connection, thus allowing the performance benefits of SRTP with the easy key management of DTLS. The ability to reuse existing SRTP software and hardware implementations may in some environments provide another important motivation for using DTLS-SRTP instead of RTP over DTLS. Implementations of this specification MUST support DTLS-SRTP [\[I-D.ietf-avt-dtls-srtp\]](#) (McGrew, D. and E. Rescorla, "Datagram Transport Layer Security (DTLS) Extension to Establish Keys for Secure Real-time Transport Protocol (SRTP)," February 2009.).

6.11. Best Effort Encryption

[TOC](#)

[\[I-D.ietf-sip-media-security-requirements\]](#) (Wing, D., Fries, S., Tschofenig, H., and F. Audet, "Requirements and Analysis of Media Security Management Protocols," January 2009.) describes a requirement

for best effort encryption where SRTP is used where both endpoints support it and key negotiation succeeds, otherwise RTP is used. [\[I-D.ietf-mmusic-sdp-capability-negotiation\] \(Andreasen, F., "SDP Capability Negotiation," March 2010.\)](#) describes a mechanism which can signal both RTP and SRTP as an alternative. This allows an offerer to express a preference for SRTP, but RTP is the default and will be understood by endpoints that do not understand SRTP or this key exchange mechanism. Implementations of this document MUST support [\[I-D.ietf-mmusic-sdp-capability-negotiation\] \(Andreasen, F., "SDP Capability Negotiation," March 2010.\)](#).

7. Example Message Flow

[TOC](#)

Prior to establishing the session, both Alice and Bob generate self-signed certificates which are used for a single session or, more likely, reused for multiple sessions. In this example, Alice calls Bob. In this example we assume that Alice and Bob share the same proxy.

7.1. Basic Message Flow with Early Media and Identity

[TOC](#)

This example shows the SIP message flows where Alice acts as the passive endpoint and Bob acts as the active endpoint meaning that as soon as Bob receives the INVITE from Alice, with DTLS specified in the 'm' line of the offer, Bob will begin to negotiate a DTLS association with Alice for both RTP and RTCP streams. Early media (RTP and RTCP) starts to flow from Bob to Alice as soon as Bob sends the DTLS finished message to Alice. Bi-directional media (RTP and RTCP) can flow after Alice receives the SIP 200 response and once Alice has sent the DTLS finished message.

The SIP signaling from Alice to her proxy is transported over TLS to ensure an integrity protected channel between Alice and her identity service. Transport between proxies should also be protected somehow, especially if Identity is not in use.

Alice	Proxies	Bob
(1) INVITE		
----->		
	(2) INVITE	
	----->	
	(3) hello	
<-----		
(4) hello		
----->		
	(5) finished	
<-----		
	(6) media	
<-----		
(7) finished		
----->		
	(8) 200 OK	
	<-----	
(9) 200 OK		
<-----		
	(10) media	
<----->		
(11) ACK		
----->		

Message (1): INVITE Alice -> Proxy

This shows the initial INVITE from Alice to Bob carried over the TLS transport protocol to ensure an integrity protected channel between Alice and her proxy which acts as Alice's identity service. Alice has requested to be either the active or passive endpoint by specifying a=setup:actpass in the SDP. Bob chooses to act as the DTLS client and will initiate the session. Also note that there is a fingerprint attribute in the SDP. This is computed from Alice's self-signed certificate. This offer includes a default m-line offering RTP in case the answerer does not support SRTP. However, the potential configuration utilizing a transport of SRTP is preferred. See [\[I-D.ietf-mmusic-sdp-capability-negotiation\] \(Andreasen, F., "SDP Capability Negotiation," March 2010.\)](#) for more details on the details of SDP capability negotiation.

```
INVITE sip:bob@example.com SIP/2.0
To: <sip:bob@example.com>
From: "Alice"<sip:alice@example.com>;tag=843c7b0b
Via: SIP/2.0/TLS ua1.example.com;branch=z9hG4bK-0e53sadfkasldkfj
Contact: <sip:alice@ua1.example.com>
Call-ID: 6076913b1c39c212@REVMTEpG
CSeq: 1 INVITE
Allow: INVITE, ACK, CANCEL, OPTIONS, BYE, UPDATE
Max-Forwards: 70
Content-Type: application/sdp
Content-Length: xxxx
Supported: from-change
```

```
v=0
o=- 1181923068 1181923196 IN IP4 ua1.example.com
s=example1
c=IN IP4 ua1.example.com
a=setup:actpass
a=fingerprint: SHA-1 \
    4A:AD:B9:B1:3F:82:18:3B:54:02:12:DF:3E:5D:49:6B:19:E5:7C:AB
t=0 0
m=audio 6056 RTP/AVP 0
a=sendrecv
a=tcap:1 UDP/TLS/RTP/SAVP RTP/AVP
a=pcfg:1 t=1
```

Message (2): INVITE Proxy -> Bob

This shows the INVITE being relayed to Bob from Alice (and Bob's) proxy. Note that Alice's proxy has inserted an Identity and Identity-Info header. This example only shows one element for both proxies for the purposes of simplification. Bob verifies the identity provided with the INVITE.

```
INVITE sip:bob@ua2.example.com SIP/2.0
To: <sip:bob@example.com>
From: "Alice"<sip:alice@example.com>;tag=843c7b0b
Via: SIP/2.0/TLS proxy.example.com;branch=z9hG4bK-0e53sadfkasldk
Via: SIP/2.0/TLS ua1.example.com;branch=z9hG4bK-0e53sadfkasldkfj
Record-Route: <sip:proxy.example.com;lr>
Contact: <sip:alice@ua1.example.com>
Call-ID: 6076913b1c39c212@REVMTEpG
CSeq: 1 INVITE
Allow: INVITE, ACK, CANCEL, OPTIONS, BYE, UPDATE
Max-Forwards: 69
Identity: CyI4+nAkHrH3ntmaxgr01TMxTmtjP7MASwliNRdupRI1vpkXRvZXx1ja9k
          3W+v1PDsy32MaqZi0M5WfEkXxbgTnPYW0jIoK8HMyY1VT7egt0kk4XrKFC
          HYWGCl0nB2sNsM9CG4hq+YJZTMA SR0oMUBhikVIjnQ8ykeD6UXN0yfI=
Identity-Info: https://example.com/cert
Content-Type: application/sdp
Content-Length: xxxx
Supported: from-change

v=0
o=- 1181923068 1181923196 IN IP4 ua1.example.com
s=example1
c=IN IP4 ua1.example.com
a=setup:actpass
a=fingerprint: SHA-1 \
  4A:AD:B9:B1:3F:82:18:3B:54:02:12:DF:3E:5D:49:6B:19:E5:7C:AB
t=0 0
m=audio 6056 RTP/AVP 0
a=sendrecv
a=tcap:1 UDP/TLS/RTP/SAVP RTP/AVP
a=pcfg:1 t=1
```

Message (3): ClientHello Bob -> Alice

Assuming that Alice's identity is valid, Line 3 shows Bob sending a DTLS ClientHello(s) directly to Alice. In this case two DTLS ClientHello messages would be sent to Alice: one to ua1.example.com:6056 for RTP and another to port 6057 for RTCP, but only one arrow is drawn for compactness of the figure.

Message (4): ServerHello+Certificate Alice -> Bob

Alice sends back a ServerHello, Certificate, ServerHelloDone for both RTP and RTCP associations. Note that the same certificate is used for both the RTP and RTCP associations. If RTP/RTCP

multiplexing [\[I-D.ietf-avt-rtp-and-rtcp-mux\] \(Perkins, C. and M. Westerlund, "Multiplexing RTP Data and Control Packets on a Single Port," August 2007.\)](#) were being used only a single association would be required.

Message (5): Certificate Bob -> Alice

Bob sends a Certificate, ClientKeyExchange, CertificateVerify, change_cipher_spec and Finished for both RTP and RTCP associations. Again note that Bob uses the same server certificate for both associations.

Message (6): Early Media Bob -> Alice

At this point, Bob can begin sending early media (RTP and RTCP) to Alice. Note that Alice can't yet trust the media since the fingerprint has not yet been received. This lack of trusted, secure media is indicated to Alice via the UA user interface.

Message (7): Finished Alice -> Bob

After Message 7 is received by Bob, Alice sends change_cipher_spec and Finished.

Message (8): 200 OK Bob -> Alice

When Bob answers the call, Bob sends a 200 OK SIP message which contains the fingerprint for Bob's certificate. Bob signals the actual transport protocol configuration of SRTP over DTLS in the acfg parameter.

```
SIP/2.0 200 OK
To: <sip:bob@example.com>;tag=6418913922105372816
From: "Alice" <sip:alice@example.com>;tag=843c7b0b
Via: SIP/2.0/TLS proxy.example.com:5061;branch=z9hG4bK-0e53sadfkasldk
Via: SIP/2.0/TLS ua1.example.com;branch=z9hG4bK-0e53sadfkasldkfj
Record-Route: <sip:proxy.example.com;lr>
Call-ID: 6076913b1c39c212@REVMTEpG
CSeq: 1 INVITE
Contact: <sip:bob@ua2.example.com>
Content-Type: application/sdp
Content-Length: xxxx
Supported: from-change
```

```
v=0
o=- 6418913922105372816 2105372818 IN IP4 ua2.example.com
s=example2
c=IN IP4 ua2.example.com
a=setup:active
a=fingerprint: SHA-1 \
    FF:FF:FF:B1:3F:82:18:3B:54:02:12:DF:3E:5D:49:6B:19:E5:7C:AB
t=0 0
m=audio 12000 UDP/TLS/RTP/SAVP 0
a=acfg:1 t=1
```

Message (9): 200 OK Proxy -> Alice

Alice receives the message from her proxy and validates the certificate presented in Message 7. The endpoint now shows Alice that the call as secured.

Message (10): RTP+RTCP Alice -> Bob

At this point, Alice can also start sending RTP and RTCP to Bob.

Message (11): ACK Alice -> Bob

Finally, Alice sends the SIP ACK to Bob.

7.2. Basic Message Flow with Connected Identity (RFC 4916)

The previous example did not show the use of RFC 4916 for connected identity. The following example does:

```
Alice          Proxies          Bob
|(1) INVITE    |                  | |
|----->|    |                  |
|              |(2) INVITE      |
|              |----->|    |
|              |(3) hello       |
|<-----|    |                  |
|(4) hello    |                  |
|----->|    |                  |
|              |(5) finished    |
|<-----|    |                  |
|              |(6) media       |
|<-----|    |                  |
|(7) finished |                  |
|----->|    |                  |
|              |(8) 200 OK      |
|<-----|    |                  |
|(9) ACK      |                  |
|----->|    |                  |
|              |(10) UPDATE     |
|              |<-----|    |
|(11) UPDATE  |                  |
|<-----|    |                  |
|(12) 200 OK  |                  |
|----->|    |                  |
|              |(13) 200 OK     |
|              |----->|    |
|              |(14) media     |
|<----->|    |                  |
```

The first 9 messages of this example are the same as before. However, messages 10-13, performing the RFC 4916 UPDATE, are new.

Message (10): UPDATE Bob -> Proxy

Bob sends an RFC 4916 UPDATE towards Alice. This update contains his fingerprint. Bob's UPDATE contains the same session information that he provided in his 200 OK (message (8)). Note that in principle an UPDATE here can be used to modify session parameters. However, in this case it's being used solely to confirm the fingerprint.

```
UPDATE sip:alice@ua1.example.com SIP/2.0
Via: SIP/2.0/TLS ua2.example.com;branch=z9hG4bK-0e53sdfkasldkfj
To: "Alice" <sip:alice@example.com>;tag=843c7b0b
From <sip:bob@example.com>;tag=6418913922105372816
Route: <sip:proxy.example.com;lr>
Call-ID: 6076913b1c39c212@REVMTEpG
CSeq: 2 UPDATE
Contact: <sip:ua2.example.com>
Content-Type: application/sdp
Content-Length: xxxx
Supported: from-change
Max-Forwards: 70
```

```
v=0
o=- 6418913922105372816 2105372818 IN IP4 ua2.example.com
s=example2
c=IN IP4 ua2.example.com
a=setup:active
a=fingerprint: SHA-1 \
    FF:FF:FF:B1:3F:82:18:3B:54:02:12:DF:3E:5D:49:6B:19:E5:7C:AB
t=0 0
m=audio 12000 UDP/TLS/RTP/SAVP 0
a=acfg:1 t=1
```

Message (11): UPDATE Proxy -> Alice

This shows the UPDATE being relayed to Alice from Bob (and Alice's proxy). Note that Bob's proxy has inserted an Identity and Identity-Info header. As above, we only show one element for both proxies for purposes of simplification. Alice verifies the identity provided [Note: the actual identity signatures here are incorrect and provided merely as examples.]

```
UPDATE sip:alice@ua1.example.com SIP/2.0
Via: SIP/2.0/TLS proxy.example.com;branch=z9hG4bK-0e53sadfkasldkfj
Via: SIP/2.0/TLS ua2.example.com;branch=z9hG4bK-0e53sadfkasldkfj
To: "Alice" <sip:alice@example.com>;tag=843c7b0b
From <sip:bob@example.com>;tag=6418913922105372816
Call-ID: 6076913b1c39c212@REVMTEpG
CSeq: 2 UPDATE
Contact: <sip:bob@ua2.example.com>
Content-Type: application/sdp
Content-Length: xxxx
Supported: from-change
Max-Forwards: 69
Identity: CyI4+nAkHrH3ntmaxgr01TMxTmtjP7MASwliNRdupRI1vpkXRvZXx1ja9k
          3W+v1PDsy32MaqZi0M5WfEkXxbgTnPYW0jIoK8HMY1VT7egt0kk4XrKFC
          HYWGC10nB2sNsM9CG4hq+YJZTMaSR0oMUBhikVIjnQ8ykeD6UXN0yfI=
Identity-Info: https://example.com/cert
```

```
v=0
o=- 6418913922105372816 2105372818 IN IP4 ua2.example.com
s=example2
c=IN IP4 ua2.example.com
a=setup:active
a=fingerprint: SHA-1 \
  FF:FF:FF:B1:3F:82:18:3B:54:02:12:DF:3E:5D:49:6B:19:E5:7C:AB
t=0 0
m=audio 12000 UDP/TLS/RTP/SAVP 0
a=acfg:1 t=1
```

Message (12): 200 OK Alice -> Bob

This shows Alice's 200 OK response to Bob's UPDATE. Because Bob has merely sent the same session parameters he sent in his 200 OK, Alice can simply replay her view of the session parameters as well.


```
SIP/2.0 200 OK
To: "Alice" <sip:alice@example.com>;tag=843c7b0b
From <sip:bob@example.com>;tag=6418913922105372816
Via: SIP/2.0/TLS proxy.example.com;branch=z9hG4bK-0e53sadfkasldkfj
Via: SIP/2.0/TLS ua2.example.com;branch=z9hG4bK-0e53sadfkasldkfj
Call-ID: 6076913b1c39c212@REVMTEpG
CSeq: 2 UPDATE
Contact: <sip:bob@ua2.example.com>
Content-Type: application/sdp
Content-Length: xxxx
Supported: from-change
```

```
v=0
o=- 1181923068 1181923196 IN IP4 ua2.example.com
s=example1
c=IN IP4 ua2.example.com
a=setup:actpass
a=fingerprint: SHA-1 \
    4A:AD:B9:B1:3F:82:18:3B:54:02:12:DF:3E:5D:49:6B:19:E5:7C:AB
t=0 0
m=audio 6056 RTP/AVP 0
a=sendrecv
a=tcap:1 UDP/TLS/RTP/SAVP RTP/AVP
a=pcfg:1 t=1
```

7.3. Basic Message Flow with STUN check for NAT Case

[TOC](#)

In the previous examples, the DTLS handshake has already completed by the time Alice receives Bob's 200 OK (8). Therefore, no STUN check is sent. However, if Alice had a NAT, then Bob's ClientHello might get blocked by that NAT, in which case Alice would send the the STUN check described in [Section 6.7.1 \(ICE Interaction\)](#) upon receiving the 200 OK, as shown below:

Alice	Proxies	Bob
(1) INVITE		
----->		
	(2) INVITE	
	----->	
	(3) hello	
	X<-----	
	(4) 200 OK	
<-----		
(5) conn-check		
----->		
	(6) conn-response	
<-----		
	(7) hello (rtx)	
<-----		
(8) hello		
----->		
	(9) finished	
<-----		
	(10) media	
<-----		
(11) finished		
----->		
	(11) media	
----->		
(12) ACK		
----->		

The messages here are the same as in the first example (for simplicity this example omits an UPDATE), with the following three new messages:

Message (5): STUN connectivity-check Alice -> Bob

[Section 6.7.1 \(ICE Interaction\)](#) describes an approach to avoid an SBC interaction issue where the endpoints do not support ICE. Alice (the passive endpoint) sends a STUN connectivity check to Bob. This opens a pinhole in Alice's NAT/firewall.

Message (6): STUN connectivity-check response Bob -> Alice

Bob (the active endpoint) sends a response to the STUN connectivity check (Message 3) to Alice. This tells Alice that her connectivity check has succeeded and she can stop the retransmit state machine.

Message (7): Hello (retransmit) Bob -> Alice

Bob retransmits his DTLS ClientHello which now passes through the pinhole created in Alice's firewall. At this point, the DTLS handshake proceeds as before.

8. Security Considerations

[TOC](#)

DTLS or TLS media signalled with SIP requires a way to ensure that the communicating peers' certificates are correct.

The standard TLS/DTLS strategy for authenticating the communicating parties is to give the server (and optionally the client) a PKIX [\[RFC5280\] \(Cooper, D., Santesson, S., Farrell, S., Boeyen, S., Housley, R., and W. Polk, "Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List \(CRL\) Profile," May 2008.\)](#) certificate. The client then verifies the certificate and checks that the name in the certificate matches the server's domain name. This works because there are a relatively small number of servers with well-defined names; a situation which does not usually occur in the VoIP context.

The design described in this document is intended to leverage the authenticity of the signaling channel (while not requiring confidentiality). As long each side of the connection can verify the integrity of the SDP received from the other side, then the DTLS handshake cannot be hijacked via a man-in-the-middle attack. This integrity protection is easily provided by the caller to the callee (see Alice to Bob in [Section 7 \(Example Message Flow\)](#)) via the SIP Identity [\[RFC4474\] \(Peterson, J. and C. Jennings, "Enhancements for Authenticated Identity Management in the Session Initiation Protocol \(SIP\)," August 2006.\)](#) mechanism. Other mechanisms, such as the S/MIME mechanism described in RFC 3261, or perhaps future mechanisms yet to be defined could also serve this purpose.

While this mechanism can still be used without such integrity mechanisms, the security provided is limited to defense against passive attack by intermediaries. An active attack on the signaling plus an active attack on the media plane can allow an attacker to attack the connection (R-SIG-MEDIA in the notation of [\[I-D.ietf-sip-media-security-requirements\] \(Wing, D., Fries, S., Tschofenig, H., and F. Audet, "Requirements and Analysis of Media Security Management Protocols," January 2009.\)](#)).

8.1. Responder Identity

[TOC](#)

SIP Identity does not support signatures in responses. Ideally Alice would want to know that Bob's SDP had not been tampered with and who it

was from so that Alice's User Agent could indicate to Alice that there was a secure phone call to Bob. [\[RFC4916\] \(Elwell, J., "Connected Identity in the Session Initiation Protocol \(SIP\)," June 2007.\)](#) defines an approach for a UA to supply its identity to its peer UA and for this identity to be signed by an authentication service. For example, using this approach, Bob sends an answer, then immediately follows up with an UPDATE that includes the fingerprint and uses the SIP Identity mechanism to assert that the message is from Bob@example.com. The downside of this approach is that it requires the extra round trip of the UPDATE. However, it is simple and secure even when not all of the proxies are trusted. In this example, Bob only needs to trust his proxy. Offerers SHOULD support this mechanism and Answerers SHOULD use it.

In some cases, answerers will not send an UPDATE and in many calls, some media will be sent before the UPDATE is received. In these cases, no integrity is provided for the fingerprint from Bob to Alice. In this approach, an attacker that was on the signaling path could tamper with the fingerprint and insert themselves as a man-in-the-middle on the media. Alice would know that she had a secure call with someone but would not know if it was with Bob or a man-in-the-middle. Bob would know that an attack was happening. The fact that one side can detect this attack means that in most cases where Alice and Bob both wish the communications to be encrypted there is not a problem. Keep in mind that in any of the possible approaches Bob could always reveal the media that was received to anyone. We are making the assumption that Bob also wants secure communications. In this do nothing case, Bob knows the media has not been tampered with or intercepted by a third party and that it is from Alice@example.com. Alice knows that she is talking to someone and that whoever that is has probably checked that the media is not being intercepted or tampered with. This approach is certainly less than ideal but very usable for many situations.

8.2. SIPS

[TOC](#)

If SIP Identity is not used, but the signaling is protected by SIPS, the security guarantees are weaker. Some security is still provided as long as all proxies are trusted. This provides integrity for the fingerprint in a chain-of-trust security model. Note, however, that if the proxies are not trusted, then the level of security provided is limited.

[TOC](#)

8.3. S/MIME

[RFC 3261 \(Rosenberg, J., Schulzrinne, H., Camarillo, G., Johnston, A., Peterson, J., Sparks, R., Handley, M., and E. Schooler, "SIP: Session Initiation Protocol," June 2002.\)](#) [RFC3261] defines a S/MIME security mechanism for SIP that could be used to sign that the fingerprint was from Bob. This would be secure.

8.4. Continuity of Authentication

[TOC](#)

One desirable property of a secure media system is to provide continuity of authentication: being able to ensure cryptographically that you are talking to the same person as before. With DTLS, continuity of authentication is achieved by having each side use the same public key/self-signed certificate for each connection (at least with a given peer entity). It then becomes possible to cache the credential (or its hash) and verify that it is unchanged. Thus, once a single secure connection has been established, an implementation can establish a future secure channel even in the face of future insecure signalling.

In order to enable continuity of authentication, implementations SHOULD attempt to keep a constant long-term key. Verifying implementations SHOULD maintain a cache of the key used for each peer identity and alert the user if that key changes.

8.5. Short Authentication String

[TOC](#)

An alternative available to Alice and Bob is to use human speech to verify each others' identity and then to verify each others' fingerprints also using human speech. Assuming that it is difficult to impersonate another's speech and seamlessly modify the audio contents of a call, this approach is relatively safe. It would not be effective if other forms of communication were being used such as video or instant messaging. DTLS supports this mode of operation. The minimal secure fingerprint length is around 64 bits.

ZRTP [[I-D.zimmermann-avt-zrtp](#)] ([Zimmermann, P., Johnston, A., and J. Callas, "ZRTP: Media Path Key Agreement for Unicast Secure RTP," April 2010.](#)) includes Short Authentication String mode in which a unique per-connection bitstring is generated as part of the cryptographic handshake. The SAS can be as short as 25 bits and so is somewhat easier to read. DTLS does not natively support this mode. Based on the level of deployment interest a TLS extension [[RFC4366](#)] ([Blake-Wilson, S., Nystrom, M., Hopwood, D., Mikkelsen, J., and T. Wright, "Transport Layer Security \(TLS\) Extensions," April 2006.](#)) could

provide support for it. Note that SAS schemes only work well when the endpoints recognize each other's voices, which is not true in many settings (e.g., call centers).

8.6. Limits of Identity Assertions

[TOC](#)

When RFC 4474 is used to bind the media keying material to the SIP signalling, the assurances about the provenance and security of the media are only as good as those for the signalling. There are two important cases to note here:

*RFC 4474 assumes that the proxy with the certificate "example.com" controls the namespace "example.com". Therefore the RFC 4474 authentication service which is authoritative for a given namespace can control which user is assigned each name. Thus, the authentication service can take an address formerly assigned to Alice and transfer it to Bob. This is an intentional design feature of RFC 4474 and a direct consequence of the SIP namespace architecture.

*When phone number URIs (e.g., 'sip:+17005551008@chicago.example.com' or 'sip:+17005551008@chicago.example.com;user=phone') are used, there is no structural reason to trust that the domain name is authoritative for a given phone number, although individual proxies and UAs may have private arrangements that allow them to trust other domains. This is a structural issue in that PSTN elements are trusted to assert their phone number correctly and that there is no real concept of a given entity being authoritative for some number space.

In both of these cases, the assurances that DTLS-SRTP provides in terms of data origin integrity and confidentiality are necessarily no better than SIP provides for signalling integrity when RFC 4474 is used. Implementors should therefore take care not to indicate misleading peer identity information in the user interface. e.g. If the peer's identity is sip:+17005551008@chicago.example.com, it is not sufficient to display that the identity of the peer as +17005551008, unless there is some policy that states that the domain "chicago.example.com" is trusted to assert the E.164 numbers it is asserting. In cases where the UA can determine that the peer identity is clearly an E.164 number, it may be less confusing to simply identify the call as encrypted but to an unknown peer.

In addition, some middleboxes (B2BUAs and Session Border Controllers) are known to modify portions of the SIP message which are included in the RFC 4474 signature computation, thus breaking the signature. This sort of man-in-the-middle operation is precisely the sort of message

modification that 4474 is intended to detect. In cases where the middlebox is itself permitted to generate valid RFC 4474 signatures (e.g., it is within the same administrative domain as the RFC 4474 authentication service), then it may generate a new signature on the modified message. Alternately, the middlebox may be able to sign with some other identity that it is permitted to assert. Otherwise, the recipient cannot rely on the RFC 4474 Identity assertion and the UA MUST NOT indicate to the user that a secure call has been established to the claimed identity. Implementations which are configured to only establish secure calls SHOULD terminate the call in this case. If SIP Identity or an equivalent mechanism is not used, then only protection against attackers who cannot actively change the signaling is provided. While this is still superior to previous mechanisms, the security provided is inferior to that provided if integrity is provided for the signaling.

8.7. Third Party Certificates

[TOC](#)

This specification does not depend on the certificates being held by endpoints being independently verifiable (e.g., being issued by a trusted third party.) However, there is no limitation on such certificates being used. Aside from the difficulty of obtaining such certificates, it is not clear what identities those certificates would contain---RFC 3261 specifies a convention for S/MIME certificates which could also be used here, but that has seen only minimal deployment. However, in closed or semi-closed contexts where such a convention can be established, third party certificates can reduce the reliance on trusting even proxies in the endpoint's domains.

8.8. Perfect Forward Secrecy

[TOC](#)

One concern about the use of a long-term key is that compromise of that key may lead to compromise of past communications. In order to prevent this attack, DTLS supports modes with Perfect Forward Secrecy using Diffie-Hellman and Elliptic-Curve Diffie-Hellman cipher suites. When these modes are in use, the system is secure against such attacks. Note that compromise of a long-term key may still lead to future active attacks. If this is a concern, a backup authentication channel such as manual fingerprint establishment or a short authentication string should be used.

[TOC](#)

9. IANA Considerations

This specification does not require any IANA actions.

10. Acknowledgments

[TOC](#)

Cullen Jennings contributed substantial text and comments to this document. This document benefited from discussions with Francois Audet, Nagendra Modadugu, and Dan Wing. Thanks also for useful comments by Flemming Andreasen, Jonathan Rosenberg, Rohan Mahy, David McGrew, Miguel Garcia, Steffen Fries, Brian Stucker, Robert Gilman, David Oran, and Peter Schneider.

We would like to thank Thomas Belling, Guenther Horn, Steffen Fries, Brian Stucker, Francois Audet, Dan Wing, Jari Arkko, and Vesa Lehtovirta for their input regarding traversal of SBCs.

11. References

[TOC](#)

11.1. Normative References

[TOC](#)

[RFC2119]	Bradner, S. , " Key words for use in RFCs to Indicate Requirement Levels ," BCP 14, RFC 2119, March 1997 (TXT , HTML , XML).
[RFC3261]	Rosenberg, J., Schulzrinne, H., Camarillo, G., Johnston, A., Peterson, J., Sparks, R., Handley, M., and E. Schooler, " SIP: Session Initiation Protocol ," RFC 3261, June 2002 (TXT).
[RFC3264]	Rosenberg, J. and H. Schulzrinne, " An Offer/Answer Model with Session Description Protocol (SDP) ," RFC 3264, June 2002 (TXT).
[RFC5280]	Cooper, D., Santesson, S., Farrell, S., Boeyen, S., Housley, R., and W. Polk, " Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile ," RFC 5280, May 2008 (TXT).
[RFC3323]	Peterson, J., " A Privacy Mechanism for the Session Initiation Protocol (SIP) ," RFC 3323, November 2002 (TXT).
[RFC3550]	Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, " RTP: A Transport Protocol for Real-Time Applications ," STD 64, RFC 3550, July 2003 (TXT , PS , PDF).

[RFC4145]	Yon, D. and G. Camarillo, " TCP-Based Media Transport in the Session Description Protocol (SDP) ," RFC 4145, September 2005 (TXT).
[RFC4347]	Rescorla, E. and N. Modadugu, " Datagram Transport Layer Security ," RFC 4347, April 2006 (TXT).
[RFC4474]	Peterson, J. and C. Jennings, " Enhancements for Authenticated Identity Management in the Session Initiation Protocol (SIP) ," RFC 4474, August 2006 (TXT).
[RFC4566]	Handley, M., Jacobson, V., and C. Perkins, " SDP: Session Description Protocol ," RFC 4566, July 2006 (TXT).
[RFC4572]	Lennox, J., " Connection-Oriented Media Transport over the Transport Layer Security (TLS) Protocol in the Session Description Protocol (SDP) ," RFC 4572, July 2006 (TXT).
[RFC5389]	Rosenberg, J., Mahy, R., Matthews, P., and D. Wing, " Session Traversal Utilities for NAT (STUN) ," RFC 5389, October 2008 (TXT).

11.2. Informational References

[TOC](#)

[RFC4571]	Lazzaro, J., " Framing Real-time Transport Protocol (RTP) and RTP Control Protocol (RTCP) Packets over Connection-Oriented Transport ," RFC 4571, July 2006 (TXT).
[RFC3325]	Jennings, C., Peterson, J., and M. Watson, " Private Extensions to the Session Initiation Protocol (SIP) for Asserted Identity within Trusted Networks ," RFC 3325, November 2002 (TXT).
[I-D.ietf-mmusic-ice]	Rosenberg, J., " Interactive Connectivity Establishment (ICE): A Protocol for Network Address Translator (NAT) Traversal for Offer/Answer Protocols ," draft-ietf-mmusic-ice-19 (work in progress), October 2007 (TXT).
[RFC4567]	Arkko, J., Lindholm, F., Naslund, M., Norrman, K., and E. Carrara, " Key Management Extensions for Session Description Protocol (SDP) and Real Time Streaming Protocol (RTSP) ," RFC 4567, July 2006 (TXT).
[RFC4568]	Andreasen, F., Baugher, M., and D. Wing, " Session Description Protocol (SDP) Security Descriptions for Media Streams ," RFC 4568, July 2006 (TXT).
[I-D.zimmermann-avt-zrtp]	Zimmermann, P., Johnston, A., and J. Callas, " ZRTP: Media Path Key Agreement for Unicast Secure RTP ," draft-zimmermann-avt-zrtp-18 (work in progress), April 2010 (TXT).

[I-D.mcgrew-srtp-ekt]	McGrew, D., Andreasen, F., Wing, D., and L. Dondeti, " Encrypted Key Transport for Secure RTP ," draft-mcgrew-srtp-ekt-06 (work in progress), October 2009 (TXT).
[I-D.ietf-avt-dtls-srtp]	McGrew, D. and E. Rescorla, " Datagram Transport Layer Security (DTLS) Extension to Establish Keys for Secure Real-time Transport Protocol (SRTP) ," draft-ietf-avt-dtls-srtp-07 (work in progress), February 2009 (TXT).
[I-D.ietf-sip-media-security-requirements]	Wing, D., Fries, S., Tschofenig, H., and F. Audet, " Requirements and Analysis of Media Security Management Protocols ," draft-ietf-sip-media-security-requirements-09 (work in progress), January 2009 (TXT).
[I-D.ietf-mmusic-sdp-capability-negotiation]	Andreasen, F., " SDP Capability Negotiation ," draft-ietf-mmusic-sdp-capability-negotiation-13 (work in progress), March 2010 (TXT).
[I-D.ietf-avt-rtp-and-rtcp-mux]	Perkins, C. and M. Westerlund, " Multiplexing RTP Data and Control Packets on a Single Port ," draft-ietf-avt-rtp-and-rtcp-mux-07 (work in progress), August 2007 (TXT).
[RFC3262]	Rosenberg, J. and H. Schulzrinne, " Reliability of Provisional Responses in Session Initiation Protocol (SIP) ," RFC 3262, June 2002 (TXT).
[RFC4366]	Blake-Wilson, S., Nystrom, M., Hopwood, D., Mikkelsen, J., and T. Wright, " Transport Layer Security (TLS) Extensions ," RFC 4366, April 2006 (TXT).
[RFC4916]	Elwell, J., " Connected Identity in the Session Initiation Protocol (SIP) ," RFC 4916, June 2007 (TXT).
[RFC3711]	Baughner, M., McGrew, D., Naslund, M., Carrara, E., and K. Norrman, " The Secure Real-time Transport Protocol (SRTP) ," RFC 3711, March 2004 (TXT).
[RFC3830]	Arkko, J., Carrara, E., Lindholm, F., Naslund, M., and K. Norrman, " MIKEY: Multimedia Internet KEYing ," RFC 3830, August 2004 (TXT).
[I-D.wing-sipping-srtp-key]	Wing, D., Audet, F., Fries, S., Tschofenig, H., and A. Johnston, " Secure Media Recording and Transcoding with the Session Initiation Protocol ," draft-wing-sipping-srtp-key-04 (work in progress), October 2008 (TXT).
[I-D.wing-avt-dtls-srtp-key-transport]	Wing, D., " DTLS-SRTP Key Transport (KTR) ," draft-wing-avt-dtls-srtp-key-transport-03 (work in progress), March 2009 (TXT).
	Stucker, B. and H. Tschofenig, " Analysis of Middlebox Interactions for Signaling Protocol

[I-D.ietf-mmusic-media-path-middleboxes]	Communication along the Media Path ," draft-ietf-mmusic-media-path-middleboxes-02 (work in progress), March 2009 (TXT).
[I-D.ietf-sip-ua-privacy]	Munakata, M., Schubert, S., and T. Ohba, " UA-Driven Privacy Mechanism for SIP ," draft-ietf-sip-ua-privacy-08 (work in progress), May 2009 (TXT).

Appendix A. Requirements Analysis

[TOC](#)

[\[I-D.ietf-sip-media-security-requirements\]](#) (Wing, D., Fries, S., Tschofenig, H., and F. Audet, "Requirements and Analysis of Media Security Management Protocols," January 2009.) describes security requirements for media keying. This section evaluates this proposal with respect to each requirement.

A.1. Forking and retargeting (R-FORK-RETARGET, R-BEST-SECURE, R-DISTINCT)

[TOC](#)

In this draft, the SDP offer (in the INVITE) is simply an advertisement of the capability to do security. This advertisement does not depend on the identity of the communicating peer, so forking and retargeting work when all the endpoints will do SRTP. When a mix of SRTP and non-SRTP endpoints are present, we use the SDP capabilities mechanism currently being defined [\[I-D.ietf-mmusic-sdp-capability-negotiation\]](#) (Andreasen, F., "SDP Capability Negotiation," March 2010.) to transparently negotiate security where possible. Because DTLS establishes a new key for each session, only the entity with which the call is finally established gets the media encryption keys (R3).

A.2. Distinct Cryptographic Contexts (R-DISTINCT)

[TOC](#)

DTLS performs a new DTLS handshake with each endpoint, which establishes distinct keys and cryptographic contexts for each endpoint.

A.3. Reusage of a Security Context (R-REUSE)

[TOC](#)

DTLS allows sessions to be resumed with the 'TLS session resumption' functionality. This feature can be used to lower the amount of

cryptographic computation that needs to be done when two peers re-initiates the communication. See [\[I-D.ietf-avt-dtls-srtp\] \(McGrew, D. and E. Rescorla, "Datagram Transport Layer Security \(DTLS\) Extension to Establish Keys for Secure Real-time Transport Protocol \(SRTP\)," February 2009.\)](#) for more on session resumption in this context.

A.4. Clipping (R-AVOID-CLIPPING)

[TOC](#)

Because the key establishment occurs in the media plane, media need not be clipped before the receipt of the SDP answer. Note, however, that only confidentiality is provided until the offerer receives the answer: the answerer knows that they are not sending data to an attacker but the offerer cannot know that they are receiving data from the answerer.

A.5. Passive Attacks on the Media Path (R-PASS-MEDIA)

[TOC](#)

The public key algorithms used by DTLS ciphersuites, such as RSA, Diffie-Hellman, and Elliptic Curve Diffie-Hellman, are secure against passive attacks.

A.6. Passive Attacks on the Signaling Path (R-PASS-SIG)

[TOC](#)

DTLS provides protection against passive attacks by adversaries on the signaling path since only a fingerprint is exchanged using SIP signaling.

A.7. (R-SIG-MEDIA, R-ACT-ACT)

[TOC](#)

An attacker who controls the media channel but not the signalling channel can perform a MITM attack on the DTLS handshake but this will change the certificates which will cause the fingerprint check to fail. Thus, any successful attack requires that the attacker modify the signalling messages to replace the fingerprints.

If RFC 4474 Identity or an equivalent mechanism is used, a attacker who controls the signalling channel at any point between the proxies performing the Identity signatures cannot modify the fingerprints without invalidating the signature. Thus, even an attacker who controls both signalling and media paths cannot successfully attack the media traffic. Note that the channel between the UA and the authentication

service MUST be secured and the authentication service MUST verify the UA's identity in order for this mechanism to be secure.

Note that an attacker who controls the authentication service can impersonate the UA using that authentication service. This is an intended feature of SIP Identity--the authentication service owns the namespace and therefore defines which user has which identity.

A.8. Binding to Identifiers (R-ID-BINDING)

[TOC](#)

When an end-to-end mechanism such as SIP-Identity [[RFC4474](#)] ([Peterson, J. and C. Jennings, "Enhancements for Authenticated Identity Management in the Session Initiation Protocol \(SIP\)," August 2006.](#)) and SIP-Connected-Identity [[RFC4916](#)] ([Elwell, J., "Connected Identity in the Session Initiation Protocol \(SIP\)," June 2007.](#)) or S/MIME are used, they bind the endpoint's certificate fingerprints to the From: address in the signalling. The fingerprint is covered by the Identity signature. When other mechanisms (e.g., SIPS) are used, then the binding is correspondingly weaker.

A.9. Perfect Forward Secrecy (R-PFS)

[TOC](#)

DTLS supports Diffie-Hellman and Elliptic Curve Diffie-Hellman cipher suites which provide PFS.

A.10. Algorithm Negotiation (R-COMPUTE)

[TOC](#)

DTLS negotiates cipher suites before performing significant cryptographic computation and therefore supports algorithm negotiation and multiple cipher suites without additional computational expense.

A.11. RTP Validity Check (R-RTP-VALID)

[TOC](#)

DTLS packets do not pass the RTP validity check. The first byte of a DTLS packet is the content type and All current DTLS content types have the first two bits set to zero, resulting in a version of 0, thus failing the first validity check. DTLS packets can also be distinguished from STUN packets. See [[I-D.ietf-avt-dtls-srtp](#)] ([McGrew, D. and E. Rescorla, "Datagram Transport Layer Security \(DTLS\) Extension](#)

[to Establish Keys for Secure Real-time Transport Protocol \(SRTP\),” February 2009.](#)) for details on demultiplexing.

A.12. 3rd Party Certificates (R-CERTS, R-EXISTING)

[TOC](#)

Third party certificates are not required because signalling (e.g., [\[RFC4474\] \(Peterson, J. and C. Jennings, “Enhancements for Authenticated Identity Management in the Session Initiation Protocol \(SIP\),” August 2006.\)](#)) is used to authenticate the certificates used by DTLS. However, if the parties share an authentication infrastructure that is compatible with TLS (3rd party certificates or shared keys) it can be used.

A.13. FIPS 140-2 (R-FIPS)

[TOC](#)

TLS implementations already may be FIPS 140-2 approved and the algorithms used here are consistent with the approval of DTLS and DTLS-SRTP.

A.14. Linkage between Keying Exchange and SIP Signaling (R-ASSOC)

[TOC](#)

The signaling exchange is linked to the key management exchange using the fingerprints carried in SIP and the certificates are exchanged in DTLS.

A.15. Denial of Service Vulnerability (R-DOS)

[TOC](#)

DTLS offers some degree of DoS protection as a built-in feature (see Section 4.2.1 or RFC 4347).

A.16. Crypto-Agility (R-AGILITY)

[TOC](#)

DTLS allows ciphersuites to be negotiated and hence new algorithms can be incrementally deployed. Work on replacing the fixed MD5/SHA-1 key derivation function is ongoing.

A.17. Downgrading Protection (R-DOWNGRADE)

[TOC](#)

DTLS provides protection against downgrading attacks since the selection of the offered ciphersuites is confirmed in a later stage of the handshake. This protection is efficient unless an adversary is able to break a ciphersuite in real-time. RFC 4474 is able to prevent an active attacker on the signalling path from downgrading the call from SRTP to RTP.

A.18. Media Security Negotiation (R-NEGOTIATE)

[TOC](#)

DTLS allows a User Agent to negotiate media security parameters for each individual session.

A.19. Signaling Protocol Independence (R-OTHER-SIGNALING)

[TOC](#)

The DTLS-SRTP framework does not rely on SIP; every protocol that is capable of exchanging a fingerprint and the media description can be secured.

A.20. Media Recording (R-RECORDING)

[TOC](#)

An extension, see [\[I-D.wing-sipping-srtp-key\] \(Wing, D., Audet, F., Fries, S., Tschofenig, H., and A. Johnston, "Secure Media Recording and Transcoding with the Session Initiation Protocol," October 2008.\)](#), has been specified to support media recording that does not require intermediaries to act as a MITM. When media recording is done by intermediaries then they need to act as a MITM.

A.21. Interworking with Intermediaries (R-TRANSCODER)

[TOC](#)

In order to interface with any intermediary that transcodes the media, the transcoder must have access to the keying material and be treated as an endpoint for the purposes of this document.

A.22. PSTN Gateway Termination (R-PSTN)

[TOC](#)

The DTLS-SRTP framework allows the media security to terminate at a PSTN gateway. This does not provide end-to-end security, but is consistent with the security goals of this framework because the gateway is authorized to speak for the PSTN namespace.

A.23. R-ALLOW-RTP

[TOC](#)

DTLS-SRTP allows RTP media to be received by the calling party until SRTP has been negotiated with the answerer, after which SRTP is preferred over RTP.

A.24. R-HERFP

[TOC](#)

The Heterogeneous Error Response Forking Problem (HERFP) is not applicable to DTLS-SRTP since the key exchange protocol will be executed along the media path and hence error messages are communicated along this path and proxies do not need to progress them.

Authors' Addresses

[TOC](#)

	Jason Fischl
	CounterPath Corporation
	Suite 300, One Bentall Centre, 505 Burrard Street
	Vancouver, BC V7X 1M3
	Canada
Phone:	+1 604 320-3340
Email:	jason@counterpath.com
	Hannes Tschofenig
	Nokia Siemens Networks
	Otto-Hahn-Ring 6
	Munich, Bavaria 81739
	Germany
Email:	Hannes.Tschofenig@nsn.com
URI:	http://www.tschofenig.com

	Eric Rescorla
	RTFM, Inc.
	2064 Edgewood Drive
	Palo Alto, CA 94303
	USA
Email:	ekr@rtfm.com