

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: August 30, 2018

M. Boucadair
C. Jacquenet
Orange
S. Sivakumar
Cisco Systems
February 26, 2018

A YANG Data Module for Dual-Stack Lite (DS-Lite)
draft-ietf-softwire-dslite-yang-15

Abstract

This document defines a YANG module for the DS-Lite Address Family Transition Router (AFTR) and Basic Bridging BroadBand (B4) elements.

Editorial Note (To be removed by RFC Editor)

Please update these statements with the RFC number to be assigned to this document:

- o "This version of this YANG module is part of RFC XXXX;"
- o "RFC XXXX: A YANG Data Module for Dual-Stack Lite (DS-Lite)";
- o "reference: RFC XXXX"

Please update the "revision" date of the YANG module.

Also, update this sentence with the RFC number to be assigned to this document:

- o "RFC YYYY: A YANG Module for Network Address Translation (NAT) and Network Prefix Translation (NPT)"

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any

Internet-Draft

DS-Lite YANG Module

February 2018

time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on August 30, 2018.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.


Table of Contents

| | | |
|-----------------------------|--|--------------------|
| 1. | Introduction | 2 |
| 1.1. | Terminology | 4 |
| 2. | DS-Lite YANG Module: An Overview | 4 |
| 3. | DS-Lite YANG Module | 6 |
| 4. | Security Considerations | 15 |
| 5. | IANA Considerations | 16 |
| 6. | Acknowledgements | 16 |
| 7. | References | 16 |
| 7.1. | Normative references | 16 |
| 7.2. | Informative references | 17 |
| Appendix A. | B4 Example | 19 |
| Appendix B. | AFTR Examples | 19 |
| | Authors' Addresses | 20 |

[1.](#) Introduction

This document defines a data model for DS-Lite [[RFC6333](#)], using the YANG data modeling language [[RFC7950](#)]. Both the Address Family Transition Router (AFTR) and Basic Bridging BroadBand (B4) elements are covered by this specification.

As a reminder, Figure 1 illustrates an overview of the DS-Lite architecture that involves AFTR and B4 elements.

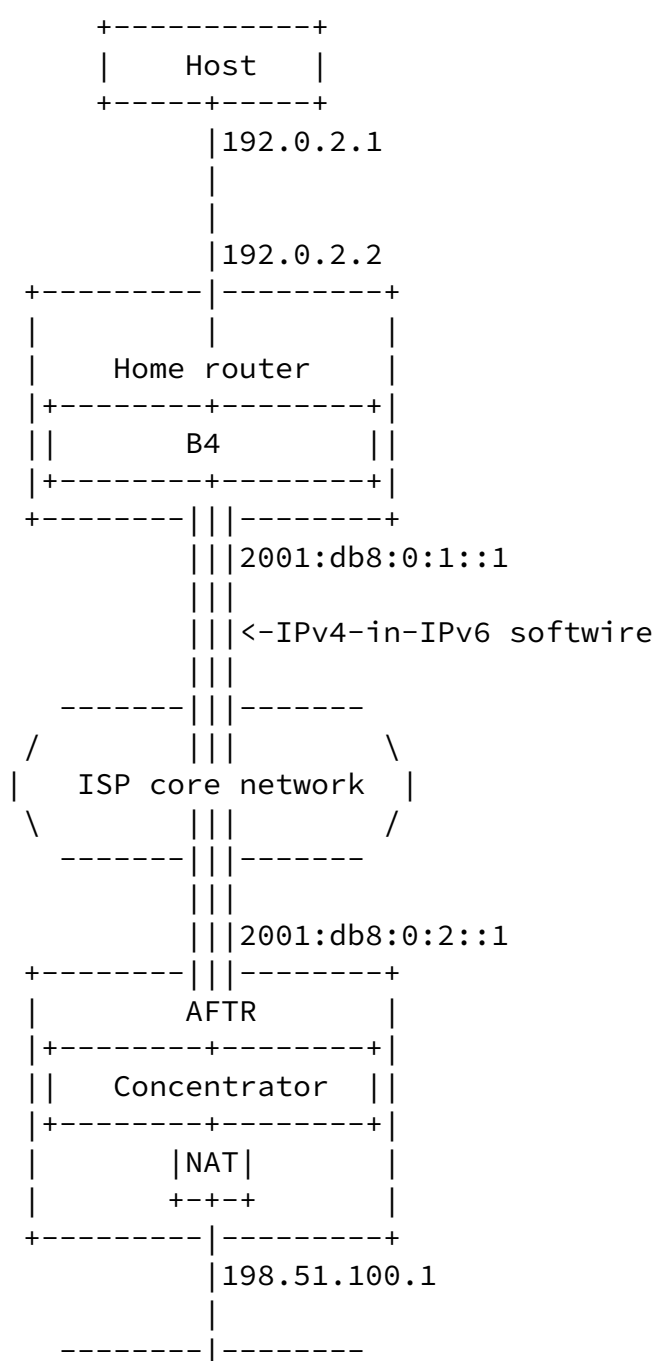

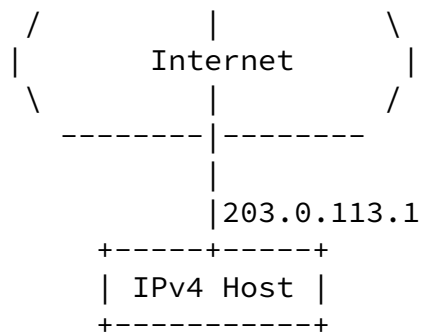


Figure 1: DS-Lite Base Architecture

DS-Lite deployment considerations are discussed in [\[RFC6908\]](#).

This document follows the guidelines of [\[RFC6087\]](#), uses the common YANG types defined in [\[RFC6991\]](#), and adopts the Network Management Datastore Architecture (NMDA).

1.1. Terminology

This document makes use of the terms defined in [Section 3 of \[RFC6333\]](#).

The terminology for describing YANG data modules is defined in [\[RFC7950\]](#).

The meaning of the symbols in tree diagrams is defined in [\[I-D.ietf-netmod-yang-tree-diagrams\]](#).

2. DS-Lite YANG Module: An Overview

As shown in Figure 1:

- o The AFTR element is a combination of an IPv4-in-IPv6 tunnel and a NAT function ([Section 2.2 of \[RFC3022\]](#)).
- o The B4 element is an IPv4-in-IPv6 tunnel.

Therefore, the DS-Lite YANG module is designed to augment both the Interfaces YANG module [\[I-D.ietf-netmod-rfc7223bis\]](#) and the NAT YANG module [\[I-D.ietf-opsawg-nat-yang\]](#) with DS-Lite specific features.

The YANG "feature" statement is used to distinguish which of the DS-Lite elements ('aftr' or 'b4') is relevant for a specific data node.

Concretely, the DS-Lite YANG module (Figure 2) augments the Interfaces YANG module with the following:

- o An IPv6 address used by the tunnel endpoint (AFTR or B4) for sending and receiving IPv4-in-IPv6 packets (ipv6-address).
- o An IPv4 address that is used by the tunnel endpoint (AFTR or B4) for troubleshooting purposes (ipv4-address).
- o An IPv6 address used by a B4 element to reach its AFTR (aftr-ipv6-addr).
- o The tunnel MTU used to avoid fragmentation (tunnel-mtu).

- o A policy to instruct the tunnel endpoint (AFTR or B4) whether it must preserve DSCP marking when encapsulating/decapsulating packets (v6-v4-dscp-preservation).

In addition, the DS-Lite YANG module augments the NAT YANG module (policy, in particular) with the following:

- o A policy to limit the number of DS-Lite softwires per subscriber (max-softwire-per-subscriber).
- o A policy to instruct the AFTR whether a state can be automatically migrated (state-migrate).
- o Further, in order to prevent a denial-of-service by frequently changing the source IPv6 address, 'b4-address-change-limit' is used to rate-limit such changes.
- o An instruction to rewrite the TCP Maximum Segment Size (MSS) option (mss-clamping) to avoid TCP fragmentation.

Given that the NAT table of the AFTR element is extended to include the source IPv6 address of incoming packets, the DS-Lite YANG module

augments the NAPT44 mapping-entry with the following:

- o b4-ipv6-address which is used to record the source IPv6 address of a packet received from a B4 element. This IPv6 address is required to disambiguate between the overlapping IPv4 address space of subscribers.
- o The value of the Traffic Class field in the IPv6 header as received from a B4 element (v6-dscp): This information is used to preserve DSCP marking when encapsulating/decapsulationg at the AFTR.
- o The IPv4 DSCP marking of the IPv4 packet received from a B4 element (internal-v4-dscp): This information can be used by the AFTR for setting the DSCP of packets relayed to a B4 element.
- o The IPv4 DSCP marking as set by the AFTR in its external interface (external-v4-dscp): An AFTR can be instructed to preserve the same marking or to set it to another value when forwarding an IPv4 packet upstream.

Access Control List (ACL) and Quality of Service (QoS) policies discussed in [Section 2.5 of \[RFC6908\]](#) are out of scope. A YANG module for ACLs is documented in [[I-D.ietf-netmod-acl-model](#)].

Likewise, PCP-related considerations discussed in [Section 8.5 of \[RFC6333\]](#) are out of scope. A YANG module for PCP is documented in [[I-D.boucadair-pcp-yang](#)].

The YANG module "ietf-dslite" has the following structure:

```
module: ietf-dslite
  augment /if:interfaces/if:interface:
    +--rw ipv6-address?          inet:ipv6-address
    +--rw ipv4-address?          inet:ipv4-address
    +--rw aftr-ipv6-addr?        inet:ipv6-address {b4}?
    +--rw tunnel-mtu?            uint16
    +--rw v6-v4-dscp-preservation? boolean
  augment /nat:nat/nat:instances/nat:instance/nat:policy:
    +--rw max-softwires-per-subscriber? uint8 {aftr}?
```

```

+--rw state-migrate?                boolean {aftr}?
+--rw b4-address-change-limit?      uint32 {aftr}?
+--rw mss-clamping {aftr}?
    +--rw enable?                   boolean
    +--rw mss-value?                uint16
augment /nat:nat/nat:instances/nat:instance
    /nat:mapping-table/nat:mapping-entry:
+--rw b4-ipv6-address {aftr}?
|   +--rw address?                  inet:ipv6-address
|   +--rw last-address-change?      yang:date-and-time
+--rw v6-dscp?                      uint8 {aftr}?
+--rw internal-v4-dscp?             uint8 {aftr}?
+--rw external-v4-dscp?             uint8 {aftr}?
augment /nat:nat/nat:instances/nat:instance
    /nat:statistics/nat:mappings-statistics:
+--ro active-sofwires?              yang:gauge32 {aftr}?

notifications:
+--n b4-address-change-limit-policy-violation {aftr}?
    +--ro id                        -> /nat:nat/instances/instance/id
    +--ro policy-id                 -> /nat:nat/instances/instance/policy/id
    +--ro address                    inet:ipv6-address

```

Figure 2: DS-Lite YANG tree diagram

Examples to illustrate the use of the "ietf-dslite" module are provided in [Appendix A](#) and [Appendix B](#).

3. DS-Lite YANG Module

This module uses the tunnel interface identity defined in [\[RFC7224\]](#).

<CODE BEGINS> file "ietf-dslite@2018-02-26.yang"

```

module ietf-dslite {
  yang-version 1.1;

  namespace "urn:ietf:params:xml:ns:yang:ietf-dslite";
  prefix dslite;

  import ietf-inet-types {
    prefix inet;

```

```

reference
  "Section 4 of RFC 6991";
}

import ietf-interfaces {
  prefix if;
  reference
    "RFC 8343: A YANG Data Model for Interface Management";
}

import iana-if-type {
  prefix ianaift;
  reference
    "RFC 7224: IANA Interface Type YANG Module";
}

import ietf-nat {
  prefix nat;
  reference
    "RFC YYYY: A YANG Module for Network Address Translation (NAT)
      and Network Prefix Translation (NPT)";
}

import ietf-yang-types {
  prefix yang;
  reference
    "Section 3 of RFC 6991";
}

organization "IETF Softwire Working Group";

contact

  "WG Web:  <https://datatracker.ietf.org/wg/softwire/>
  WG List:  <mailto:softwires@ietf.org>

  Editor:   Mohamed Boucadair
            <mailto:mohamed.boucadair@orange.com>

  Author:   Christian Jacquenet

```


Author: Senthil Sivakumar
<mailto:ssenthil@cisco.com>;

description

"This module is a YANG module for DS-Lite AFTR and B4 implementations.

Copyright (c) 2018 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Simplified BSD License set forth in [Section 4.c](#) of the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>).

This version of this YANG module is part of RFC XXXX; see the RFC itself for full legal notices.";

revision 2018-02-26 {

description

"Initial revision.";

reference

"RFC XXXX: A YANG Data Module for Dual-Stack Lite (DS-Lite)";

}

/*

* Features

*/

feature b4 {

description

"The B4 element is a function implemented on a dual-stack-capable node, either a directly connected device or a CPE, that creates a tunnel to an AFTR.";

reference

"[Section 5 of RFC 6333](#).";

}

feature aftr {

description

"An AFTR element is the combination of an IPv4-in-IPv6 tunnel endpoint and an IPv4-IPv4 NAT implemented on the same node.";

reference

"[Section 6 of RFC 6333](#).";

```
}
```

```
/*
```

```
 * Augments
```

```
*/
```

```
augment "/if:interfaces/if:interface" {  
  when 'derived-from(if:type, "ianaift:tunnel)';  
  description  
    "Augments Interface module with DS-Lite parameters.
```

```
  IANA interface types are maintained at this registry:  
  https://www.iana.org/assignments/ianaifttype-mib/ianaifttype-mib.
```

```
  tunnel (131),      -- Encapsulation interface";
```

```
leaf ipv6-address {  
  type inet:ipv6-address;  
  description  
    "IPv6 address of the local DS-Lite endpoint (AFTR or B4).";  
  reference  
    "RFC 6333: Dual-Stack Lite Broadband Deployments Following  
      IPv4 Exhaustion";  
}
```

```
leaf ipv4-address {  
  type inet:ipv4-address;  
  description  
    "IPv4 address of the local DS-Lite AFTR or B4.  
  
    192.0.0.1 is reserved for the AFTR element, while  
    192.0.0.0/29 is reserved for the B4 element.  
  
    This address can be used to report ICMP problems and will  
    appear in traceroute outputs.";  
  reference  
    "RFC 6333: Dual-Stack Lite Broadband Deployments Following  
      IPv4 Exhaustion";  
}
```

```
leaf aftr-ipv6-addr {  
  if-feature b4;  
  type inet:ipv6-address;  
  description  
    "Indicates the AFTR's IPv6 address to be used by a B4 element.";  
  reference
```

Internet-Draft

DS-Lite YANG Module

February 2018

```
}

leaf tunnel-mtu {
  type uint16;
  description
    "Configures a tunnel MTU.

    [RFC6908] specifies that since fragmentation and reassembly
    is not optimal, the operator should do everything possible
    to eliminate the need for it.  If the operator uses simple
    IPv4-in-IPv6 software, it is recommended that the MTU size
    of the IPv6 network between the B4 and the AFTR accounts for
    the additional overhead (40 bytes).";
  reference
    "RFC 6908: Deployment Considerations for Dual-Stack Lite";
}

leaf v6-v4-dscp-preservation {
  type boolean;
  description
    "Copies the DSCP value from the IPv6 header and vice versa.

    According to Section 2.10 of \[RFC6908\], operators should
    use this model by provisioning the network such that the
    AFTR/B4 copies the DSCP value in the IPv4 header to
    the Traffic Class field in the IPv6 header, after the
    encapsulation for the downstream traffic.";
  reference
    "Section 2.10 of RFC 6908.";
}

augment "/nat:nat/nat:instances/nat:instance/nat:policy" {
  when "derived-from-or-self(/nat:nat/nat:instances/nat:instance/" +
    "nat:type, 'nat:napt44')" +
    " and /nat:nat/nat:instances/nat:instance/" +
    "nat:per-interface-binding='dslite'";
  if-feature aftr;
  description
```

"Augments the NAPT44 module with AFTR parameters.";

```
leaf max-sofwires-per-subscriber {  
  type uint8;  
  default 1;  
  description  
    "Configures the maximum softwires per subscriber feature.
```

A subscriber is uniquely identified by means

of a subscriber mask (subscriber-mask-v6).

This policy aims to prevent a misbehaving subscriber from mounting several DS-Lite softwires that would consume additional AFTR resources (e.g., get more external ports if the quota were enforced on a per-softwire basis, consume extra processing due to a large number of active softwires).";

reference

```
"Section 4 of RFC 7785.";
```

```
}
```

```
leaf state-migrate {  
  type boolean;  
  default true;  
  description  
    "State migration is enabled by default.
```

In the event a new IPv6 address is assigned to the B4 element, the AFTR should migrate existing state to be bound to the new IPv6 address. This operation ensures that traffic destined to the previous B4's IPv6 address will be redirected to the newer B4's IPv6 address. The destination IPv6 address for tunneling return traffic from the AFTR should be the last seen as the B4's IPv6 source address from the user device (e.g., CPE).

The AFTR uses the subscriber-mask-v6 to determine whether two IPv6 addresses belong to the same CPE (e.g., if the subscriber-mask-v6 is set to 56, the AFTR concludes that 2001:db8:100:100::1 and 2001:db8:100:100::2 belong to the same CPE assigned with 2001:db8:100:100::/56).";

```

reference
  "RFC 7785: Recommendations for Prefix Binding in the Context
    of Softwire Dual-Stack Lite";
}

leaf b4-address-change-limit {
  type uint32;
  units "seconds";
  default '1800';
  description
    "Minimum number of seconds between successive B4's IPv6 address
      change from the same prefix.

      Changing the source B4's IPv6 address may be used as an attack
      vector. Packets with a new B4's IPv6 address from the same

```

```

  prefix should be rate-limited.

  It is recommended to set this rate limit to 30 minutes; other
  values can be set on a per-deployment basis.";

reference
  "RFC 7785: Recommendations for Prefix Binding in the Context
    of Softwire Dual-Stack Lite";
}

container mss-clamping {
  description
    "MSS rewriting configuration to avoid IPv6 fragmentation.";

  leaf enable {
    type boolean;
    description
      "Enable/disable MSS rewriting feature.";
  }

  leaf mss-value {
    type uint16;
    units "octets";
    description
      "Sets the MSS value to be used for MSS rewriting.";
  }

```

```

    }
  }
}

augment "/nat:nat/nat:instances/nat:instance/" +
  "nat:mapping-table/nat:mapping-entry" {
  when "derived-from-or-self(/nat:nat/nat:instances/nat:instance/" +
    "nat:type, 'nat:napt44')" +
    " and /nat:nat/nat:instances/nat:instance/" +
    "nat:per-interface-binding='dslite'";
  if-feature aftr;
  description
    "Augments the NAPT44 mapping table with DS-Lite specifics.";

  container b4-ipv6-address {
    description
      "Records the IPv6 address used by a B4 element and the last
        time that address changed.";

    leaf address {
      type inet:ipv6-address;
      description
        "Corresponds to the IPv6 address used by a B4 element.";
    }
  }
}

```

```

    reference
      "RFC 6333: Dual-Stack Lite Broadband Deployments Following
        IPv4 Exhaustion";
  }

  leaf last-address-change {
    type yang:date-and-time;
    description
      "Records the last time when the address changed.";
  }
}

leaf v6-dscp {
  when "/if:interfaces/if:interface/" +
    "dslite:v6-v4-dscp-preservation='true'";
  type uint8;
  description
    "DSCP value used at the software level (i.e., IPv6 header).";
}

```

```

    }

    leaf internal-v4-dscp {
        when "/if:interfaces/if:interface/" +
            "dslite:v6-v4-dscp-preservation='true'";
        type uint8;
        description
            "DSCP value of the encapsulated IPv4 packet.";
    }

    leaf external-v4-dscp {
        when "/if:interfaces/if:interface/" +
            "dslite:v6-v4-dscp-preservation='true'";
        type uint8;
        description
            "DSCP value of the translated IPv4 packet as marked by
            the AFTR.";
    }
}

augment "/nat:nat/nat:instances/nat:instance/nat:statistics/" +
    "nat:mappings-statistics" {
    if-feature aftr;
    description
        "Indicates the number of active softwires.";

    leaf active-softwires{
        type yang:gauge32;
        description
            "The number of currently active softwires on the AFTR

```

```

        instance.";
    }
}

/*
 * Notifications
 */

notification b4-address-change-limit-policy-violation {
    if-feature aftr;
    description

```

"Generates notifications when a B4 unsuccessfully attempts to change IPv6 address in a time shorter than the value of b4-address-change-limit.

Notifications are rate-limited (notify-interval).";

```
leaf id {
  type leafref {
    path "/nat:nat/nat:instances/nat:instance/nat:id";
  }
  mandatory true;
  description
    "NAT instance identifier.";
}

leaf policy-id {
  type leafref {
    path "/nat:nat/nat:instances/nat:instance/nat:policy/nat:id";
  }
  mandatory true;
  description
    "Policy Identifier.";
}

leaf address {
  type inet:ipv6-address;
  mandatory true;
  description
    "B4's IPv6 address.";
}
}
}
<CODE ENDS>
```

[4.](#) Security Considerations

The YANG module defined in this document is designed to be accessed via network management protocols such as NETCONF [[RFC6241](#)] or

RESTCONF [[RFC8040](#)]. The lowest NETCONF layer is the secure transport layer, and the mandatory-to-implement secure transport is Secure Shell (SSH) [[RFC6242](#)]. The lowest RESTCONF layer is HTTPS, and the mandatory-to-implement secure transport is TLS [[RFC5246](#)].

The NETCONF access control model [[I-D.ietf-netconf-rfc6536bis](#)] provides the means to restrict access for particular NETCONF or RESTCONF users to a preconfigured subset of all available NETCONF or RESTCONF protocol operations and content.

All data nodes defined in the YANG module which can be created, modified and deleted (i.e., config true, which is the default) are considered sensitive. Write operations (e.g., edit-config) applied to these data nodes without proper protection can negatively affect network operations. An attacker who is able to access to the B4/AFTR can undertake various attacks, such as:

- o Set the value of 'aftr-ipv6-addr' on the B4 to point to an illegitimate AFTR so that it can intercept all the traffic sent by a B4. Illegitimately intercepting users' traffic is a attack with severe implications on privacy.
- o Set the MTU to a low value which may increase the number of fragments ('tunnel-mtu' for both B4 and AFTR).
- o Set 'max-softwire-per-subscriber' to an arbitrary high value, which will be exploited by a misbehaving user to grab more resources (by mounting as many softwires as required to get more external IP addresses/ports) or to perform a Denial-of-Service on the AFTR by mounting a massive number of softwires.
- o Set 'state-migrate' to 'false' on the AFTR. This action may lead to a service degradation for the users.
- o Set 'b4-address-change-limit' to an arbitrary low value can ease DoS attacks based on frequent change of B4 IPv6 address.
- o Set 'v6-v4-dscp-preservation' to 'false' may lead to a service degradation if some policies are applied on the network based on the DSCP value.

Additional security considerations are discussed in [[I-D.ietf-opsawg-nat-yang](#)].

Security considerations related to DS-Lite are discussed in [\[RFC6333\]](#).

5. IANA Considerations

This document requests IANA to register the following URI in the "IETF XML Registry" [\[RFC3688\]](#):

```
URI: urn:ietf:params:xml:ns:yang:ietf-dslite
Registrant Contact: The IESG.
XML: N/A; the requested URI is an XML namespace.
```

This document requests IANA to register the following YANG module in the "YANG Module Names" registry [\[RFC7950\]](#).

```
name: ietf-dslite
namespace: urn:ietf:params:xml:ns:yang:ietf-dslite
prefix: dslite
reference: RFC XXXX
```

6. Acknowledgements

Thanks to Qin Wu, Benoit Claise, and Andy Bierman who helped for identifying compiling errors. Mahesh Jethanandani provided early yangdoctors reviews; many thanks to him.

Many thanks to Ian Farrer and Tom Petch for the review and comments.

7. References

7.1. Normative references

[I-D.ietf-netconf-rfc6536bis]

Bierman, A. and M. Bjorklund, "Network Configuration Access Control Module", [draft-ietf-netconf-rfc6536bis-09](#) (work in progress), December 2017.

[I-D.ietf-netmod-rfc7223bis]

Bjorklund, M., "A YANG Data Model for Interface Management", [draft-ietf-netmod-rfc7223bis-03](#) (work in progress), January 2018.

[I-D.ietf-opsawg-nat-yang]

Boucadair, M., Sivakumar, S., Jacquenet, C., Vinapamula, S., and Q. Wu, "A YANG Module for Network Address Translation (NAT) and Network Prefix Translation (NPT)", [draft-ietf-opsawg-nat-yang-13](#) (work in progress), February

- [RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/info/rfc3688>>.
- [RFC5246] Dierks, T. and E. Rescorla, "The Transport Layer Security (TLS) Protocol Version 1.2", [RFC 5246](#), DOI 10.17487/RFC5246, August 2008, <<https://www.rfc-editor.org/info/rfc5246>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", [RFC 6242](#), DOI 10.17487/RFC6242, June 2011, <<https://www.rfc-editor.org/info/rfc6242>>.
- [RFC6333] Durand, A., Droms, R., Woodyatt, J., and Y. Lee, "Dual-Stack Lite Broadband Deployments Following IPv4 Exhaustion", [RFC 6333](#), DOI 10.17487/RFC6333, August 2011, <<https://www.rfc-editor.org/info/rfc6333>>.
- [RFC6991] Schoenwaelder, J., Ed., "Common YANG Data Types", [RFC 6991](#), DOI 10.17487/RFC6991, July 2013, <<https://www.rfc-editor.org/info/rfc6991>>.
- [RFC7224] Bjorklund, M., "IANA Interface Type YANG Module", [RFC 7224](#), DOI 10.17487/RFC7224, May 2014, <<https://www.rfc-editor.org/info/rfc7224>>.
- [RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", [RFC 7950](#), DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/info/rfc7950>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", [RFC 8040](#), DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/info/rfc8040>>.

[7.2](#). Informative references

[I-D.boucadair-pcp-yang]

Boucadair, M., Jacquenet, C., Sivakumar, S., and S. Vinapamula, "YANG Modules for the Port Control Protocol (PCP)", [draft-boucadair-pcp-yang-05](#) (work in progress), October 2017.

Boucadair, et al.

Expires August 30, 2018

[Page 17]

Internet-Draft

DS-Lite YANG Module

February 2018

[I-D.ietf-netmod-acl-model]

Jethanandani, M., Huang, L., Agarwal, S., and D. Blair, "Network Access Control List (ACL) YANG Data Model", [draft-ietf-netmod-acl-model-16](#) (work in progress), February 2018.

[I-D.ietf-netmod-yang-tree-diagrams]

Bjorklund, M. and L. Berger, "YANG Tree Diagrams", [draft-ietf-netmod-yang-tree-diagrams-06](#) (work in progress), February 2018.

[RFC3022] Srisuresh, P. and K. Egevang, "Traditional IP Network Address Translator (Traditional NAT)", [RFC 3022](#), DOI 10.17487/RFC3022, January 2001, <<https://www.rfc-editor.org/info/rfc3022>>.

[RFC6087] Bierman, A., "Guidelines for Authors and Reviewers of YANG Data Model Documents", [RFC 6087](#), DOI 10.17487/RFC6087, January 2011, <<https://www.rfc-editor.org/info/rfc6087>>.

[RFC6908] Lee, Y., Maglione, R., Williams, C., Jacquenet, C., and M. Boucadair, "Deployment Considerations for Dual-Stack Lite", [RFC 6908](#), DOI 10.17487/RFC6908, March 2013, <<https://www.rfc-editor.org/info/rfc6908>>.

[RFC7785] Vinapamula, S. and M. Boucadair, "Recommendations for Prefix Binding in the Context of Software Dual-Stack Lite", [RFC 7785](#), DOI 10.17487/RFC7785, February 2016, <<https://www.rfc-editor.org/info/rfc7785>>.

[Appendix A.](#) B4 Example

The following example shows a B4 element (2001:db8:0:1::1) that is configured with an AFTR element (2001:db8:0:2::1). The B4 element is also instructed to preserve the DSCP marking.

```
<interfaces>
  <interface>
    <name>myB4</name>
    <type>ianaift:tunnel</type>
    <enabled>true</enabled>
    <dslite:ipv6-address>
      2001:db8:0:1::1
    </dslite:ipv6-address>
    <dslite:aftr-ipv6-addr>
      2001:db8:0:2::1
    </dslite:aftr-ipv6-addr>
    <dslite:v6-v4-dscp-preservation>
      true
    </dslite:v6-v4-dscp-preservation>
  </interface>
</interfaces>
```

[Appendix B.](#) AFTR Examples

The following example shows an AFTR that is reachable at

2001:db8:0:2::1. Also, this XML snippet indicates that the AFTR is provided with an IPv4 address (192.0.0.1) to be used for troubleshooting purposes such as reporting problems to B4s.

Note that a subscriber is identified by a subscriber mask ([[RFC7785](#)]) that can be configured by means of [[I-D.ietf-opsawg-nat-yang](#)].

```
<interfaces>
  <interface>
    <name>myAFTR</name>
    <type>ianaift:tunnel</type>
    <enabled>true</enabled>
    <dslite:ipv6-address>2001:db8:0:2::1</dslite:ipv6-address>
    <dslite:ipv4-address>192.0.0.1</dslite:ipv4-address>
  </interface>
</interfaces>
```

The following shows an XML excerpt depicting a dynamic UDP mapping entry maintained by a DS-Lite AFTR for a packet received from the B4 element introduced in [Appendix A](#). Concretely, this UDP packet received with a source IPv6 address (2001:db8:0:1::1), a source IPv4 address (192.0.2.1), and source port number (1568) is translated into

a UDP packet having a source IPv4 address (198.51.100.1) and source port number (15000). The remaining lifetime of this mapping is 300 seconds.

```
<mapping-entry>
  <index>15</index>
  <type>
    dynamic-explicit
  </type>
  <transport-protocol>
    17
  </transport-protocol>
  <dslite:b4-ipv6-address>
    <dslite:address>
      2001:db8:0:1::1
    </dslite:address>
  </dslite:b4-ipv6-address>
  <internal-src-address>
    192.0.2.1
```

```
</internal-src-address>
<internal-src-port>
  <start-port-number>
    1568
  </start-port-number>
</internal-src-port>
<external-src-address>
  198.51.100.1
</external-src-address>
<external-src-port>
  <start-port-number>
    15000
  </start-port-number>
</external-src-port>
<lifetime>
  300
</lifetime>
</mapping-entry>
```

Authors' Addresses

Mohamed Boucadair
Orange
Rennes 35000
France

EMail: mohamed.boucadair@orange.com

Boucadair, et al.

Expires August 30, 2018

[Page 20]

Internet-Draft

DS-Lite YANG Module

February 2018

Christian Jacquenet
Orange
Rennes 35000
France

EMail: christian.jacquenet@orange.com

Senthil Sivakumar
Cisco Systems
7100-8 Kit Creek Road
Research Triangle Park, North Carolina 27709

USA

Phone: +1 919 392 5158

EMail: ssenthil@cisco.com