

Software
Ed.
Internet-Draft
Ltd
Intended status: Standards Track
Ed.
Expires: February 8, 2018
CNNIC

S. Jiang,
Huawei Technologies Co.,
Y. Fu,
B.
Liu
Huawei Technologies Co.,
Ltd
P.
Deacon
IEA Software,
Inc.
C.
Xie
China
Telecom
T.
Li
Tsinghua
University
August 7,
2017

**RADIUS Attribute for Software Address plus Port based Mechanisms
draft-ietf-software-map-radius-13**

Abstract

IPv4-over-IPv6 transition mechanisms provide both IPv4 and IPv6 connectivity services simultaneously during the IPv4/IPv6 co-existing period. The Dynamic Host Configuration Protocol for IPv6 (DHCPv6) options have been defined to configure Customer Edge (CE) in MAP-E, MAP-T, and Lightweight 4over6. However, in many networks, the configuration information may be stored in an Authentication Authorization and Accounting (AAA) server, while user configuration information is mainly provided by the Broadband Network Gateway (BNG) through the DHCPv6 protocol. This document defines two new Remote Authentication Dial In User Service (RADIUS) attributes that carry CE configuration information from an AAA server to BNG.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-

Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on February 8, 2018.

Jiang, Ed., et al.
1]

Expires February 8, 2018

[Page

Copyright Notice

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1](#). Introduction [3](#)
- [2](#). Terminology [3](#)
- [3](#). Configuration process with RADIUS [4](#)
- [4](#). Attributes [6](#)
 - [4.1](#). Softwire46-Configuration Attribute [6](#)
 - [4.2](#). S46 Container Options [7](#)
 - [4.3](#). Sub Options for S46 Container Option [8](#)
 - [4.3.1](#). S46-Rule Sub Option [8](#)
 - [4.3.2](#). S46-BR Sub Option [9](#)
 - [4.3.3](#). S46-DMR Sub Option [10](#)
 - [4.3.4](#). S46-V4V6Bind Sub Option [11](#)
 - [4.3.5](#). S46-PORTPARAMS Sub Option [12](#)
 - [4.4](#). Sub Options for S46-Rule Sub Option [12](#)
 - [4.4.1](#). Rule-IPv6-Prefix Sub Option [12](#)
 - [4.4.2](#). Rule-IPv4-Prefix Sub Option [13](#)
 - [4.4.3](#). EA Length Sub Option [14](#)
 - [4.5](#). Sub Options for S46-v4v6Bind Sub Option [14](#)

14	4.5.1.	The IPv4-address Sub Option
14	4.5.2.	The Bind-IPv6-Prefix Sub Option
15	4.6.	Sub Options for S46-PORTPARAMS Sub Option
15	4.6.1.	The PSID-offset Sub Option
16	4.6.2.	The PSID-len Sub Option
16	4.6.3.	The PSID Sub Option
16	4.7.	Softwire46 Sub Options Encapsulation
17	4.8.	Softwire46-Priority Attribute
17	4.9.	Table of attributes
18	5.	Diameter Considerations
18	6.	IANA Considerations
18	6.1.	S46 Mechanisms and Their Identifying Option Codes
19	7.	Security Considerations
20	8.	Acknowledgements

[9.](#) References
[20](#) [9.1.](#) Normative References
[20](#) [9.2.](#) Informative References
[21](#) Additional Authors
[22](#) Authors' Addresses
[23](#)

1. Introduction

Recently providers have started to deploy IPv6 and consider how to transit to IPv6. Many transition mechanisms based on the Address plus Port (A+P) [[RFC6346](#)] have been proposed for running IPv4 over IPv6-only infrastructure, including MAP-E, MAP-T, and Lightweight 4over6. Mapping of Address and Port with Encapsulation(MAP-E)[[RFC7597](#)], Mapping of Address and Port using Translation(MAP-T)[[RFC7599](#)] are stateless mechanisms for running IPv4 over IPv6-only infrastructure. Lightweight 4over6[[RFC7596](#)] is a hub-and-spoke

IPv4-

over-IPv6 tunneling mechanism, with complete independence of IPv4

and

IPv6 addressing. They provide both IPv4 and IPv6 connectivity services simultaneously during the IPv4/IPv6 co-existing period. MAP-E, MAP-T and Lightweight 4over6 have adopted Dynamic Host Configuration Protocol for IPv6 (DHCPv6) [[RFC3315](#)] as auto-configuring protocol. The Customer Edge (CE) uses DHCPv6 options to discover the Border Relay (BR) and get Softwire46 (S46) configurations.

In many networks, user configuration information may be stored in an Authentication, Authorization, and Accounting (AAA) server.

Currently the AAA servers communicate using the Remote

Authentication

Dial In User Service (RADIUS) [[RFC2865](#)] protocol. In a fixed line broadband network, a Broadband Network Gateway (BNG) acts as the access gateway of users. The BNG is assumed to embed a DHCPv6

server

function that allows it to locally handle any DHCPv6 requests initiated by hosts.

Since the S46 configuration information is stored in an AAA servers and user configuration information is mainly transmitted through DHCPv6 protocol between the BNGs and hosts/CEs, new RADIUS

attributes

are needed to propagate the information from the AAA servers to BNGs.

The RADIUS attributes designed in this document are especially for the MAP-E[[RFC7597](#)], MAP-T[[RFC7599](#)] and Lightweight 4over6[[RFC7596](#)], providing enough information to form the correspondent DHCPv6

configuration options[RFC7598].

2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

2. When the BNG receives the Solicit message, it should initiate a radius Access-Request message, in which an User-Name attribute (1) should be filled by a CE MAC address or interface-id or both, to the RADIUS server and a User-password attribute (2) should be filled by the shared password that has been preconfigured on the DHCPv6 server, requesting authentication as defined in [[RFC2865](#)] with the corresponding Softwire46-Configuration Attribute, which will be defined in the next Section.

3. If the authentication request is approved by the AAA server, an Access-Accept message MUST be acknowledged with the corresponding Softwire46-Configuration Attribute.

4. After receiving the Access-Accept message with the corresponding Attribute, the BNG SHOULD respond to the DHCPv6 Client (CE) with an Advertisement message.
5. After receiving the Advertise message, the CE MAY request for the corresponding S46 Container option, by including the S46 Container option in the Request message.
6. After receiving the client's Request message, containing the corresponding S46 Container option the BNG SHOULD reply to the CE with the message containing the S46 Container option. The recommended format of the MAC address is defined as Calling-Station-Id ([Section 3.20 in \[RFC3580\]](#) without the SSID (Service Set Identifier) portion.

For Lightweight 4over6 [\[RFC7596\]](#), the subscriber's binding state should be synchronized between the AAA server and lwAFTR. If the bindings are pre-configured statically, in both the AAA server and lwAFTR, an AAA server does not need to configure the lwAFTR anymore. Otherwise, if the bindings are locally created on-demand in an AAA server, it should inform the lwAFTR with the subscriber's binding state, in order to synchronize the binding information of the lwB4 with the lwAFTR.

The authorization operation could also be done independently after the authentication process. In such a scenario, after the authentication operation, the client MAY initiate a DHCPv6 Request message that includes the corresponding S46 Container options. Similar to the above scenario, the ORO with the corresponding S46 Container option code in the initial DHCPv6 request could be

optional

if the network was planned as being S46-enabled by default. When the

BNG receives the DHCPv6 Request, it SHOULD initiate the radius Access-Request message, which MUST contain a Service-Type attribute (6) with the value Authorize Only (17), the corresponding Softwire46-Configuration Attribute, and a State attribute obtained from the previous authentication process according to [\[RFC5080\]](#). If the authorization request is approved by an AAA server, an Access-Accept message MUST be acknowledged with the corresponding Softwire46-Configuration Attribute. The BNG SHOULD then send the DHCPv6 Reply message containing the S46 Container option.

In both the above-mentioned scenarios, Message-authenticator (type 80) [\[RFC2869\]](#) SHOULD be used to protect both Access-Request and Access-Accept messages.

If the BNG does not receive the corresponding Softwire46-Configuration Attribute in the Access-Accept message it MAY fallback to a pre-configured default S46 configuration, if any.

If the BNG does not have any pre-configured default S46 configuration, or if the BNG receives an Access-Reject, then S46 connection cannot be established.

As specified in [\[RFC3315\]](#), [section 18.1.4](#), "Creation and Transmission of Rebind Messages ", if the DHCPv6 server to which the DHCPv6 Renew message was sent at time T1 has not responded by time T2, the CE (DHCPv6 client) SHOULD enter the Rebind state and attempt to contact any available server. In this situation, the secondary BNG receiving the DHCPv6 message MUST initiate a new Access-Request message towards the AAA server. The secondary BNG MAY include the Softwire46-Configuration Attribute in its Access-Request message.

4. Attributes


This section defines the Softwire46-Configuration Attribute and the Softwire46-Priority Attribute. The attribute design follows [\[RFC6158\]](#) and refers to [\[RFC6929\]](#). The Softwire46-Configuration Attribute carries the configuration information for MAP-E, MAP-T, and

Lightweight 4over6. The configuration information for each S46 mechanism is carried in the corresponding S46 Container option. Different sub options are required for each type of S46 Container option. The RADIUS attribute for Dual-Stack Lite [\[RFC6333\]](#) is defined in [\[RFC6519\]](#).

A client may be capable of supporting several different S46 mechanisms. Depending on the deployment scenario, a client might request for more than one S46 mechanism at a time. The Softwire46-Priority Attribute contains information allowing the client to prioritize which mechanism to use, corresponding to OPTION_S46_PRIORITY defined in [\[RFC8026\]](#).

4.1. Softwire46-Configuration Attribute

The Softwire46-Configuration Attribute can only encapsulate S46 Container Option(s). The Softwire46-Configuration Attribute is structured as follows:

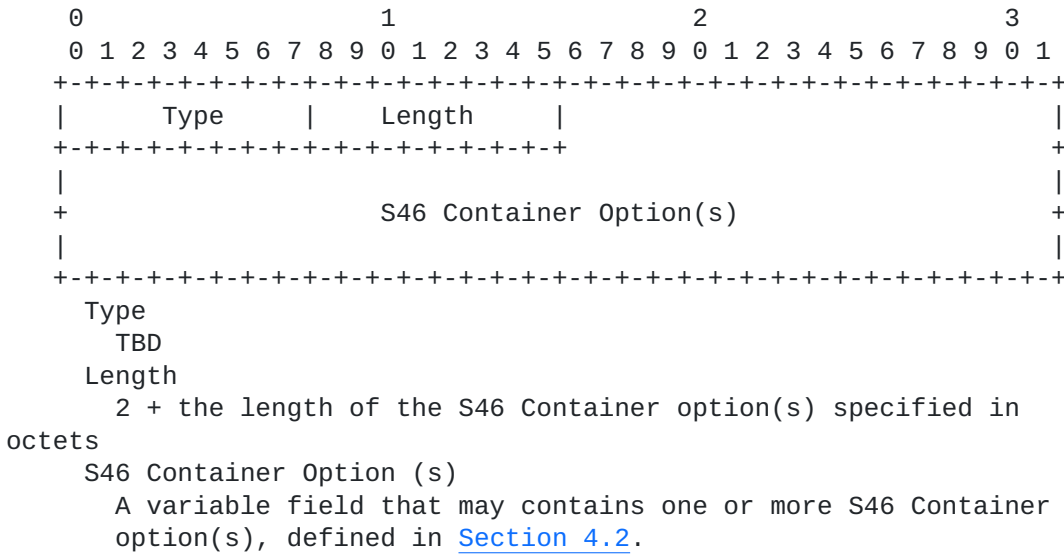

4.2. S46 Container Options

The S46 Container Option can only be encapsulated in the Softwire46-Configuration Attribute. Depending on the deployment scenario, a client might request for more than one transition mechanism at a time, there MUST be at least one S46 Container option encapsulated in one Softwire46-Configuration Attribute. There MUST be at most one instance of each type of S46 Container Option encapsulated in one Softwire46-Configuration Attribute.


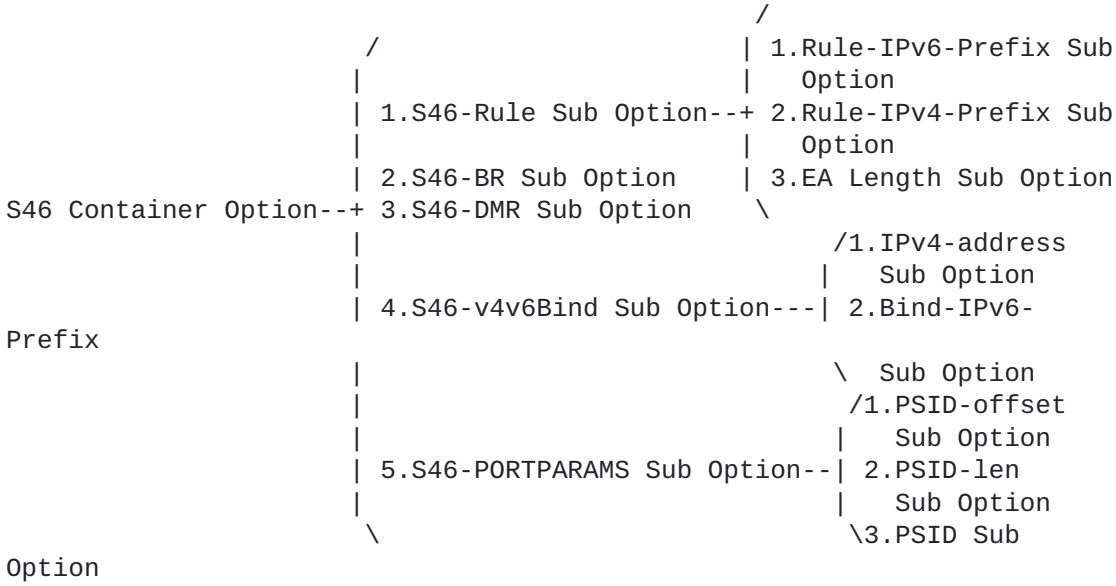


Figure 2: S46 Container Option Hierarchy

There are three types of S46 Container Options, namely MAP-E Container Option, MAP-T Container Option, Lightweight 4over6 Container Option. Each type of S46 Container Option contains a number of sub options, defined in [Section 4.3](#). The hierarchy of the S46 Container Option is shown in Figure 2. [Section 4.5](#) describes which Sub Options are mandatory, optional, or not permitted for each defined S46 Container Option.

There are three types of S46-Rule Sub Options, namely Basic Mapping Rule, Forwarding Mapping Rule, Basic and Forwarding Mapping Rule. Each type of S46-Rule Sub Option also contains a number of Sub Options. The Rule-IPv6-Prefix Sub Option is necessary for every type of S46-Rule Sub Option. It should appear for once and only once.

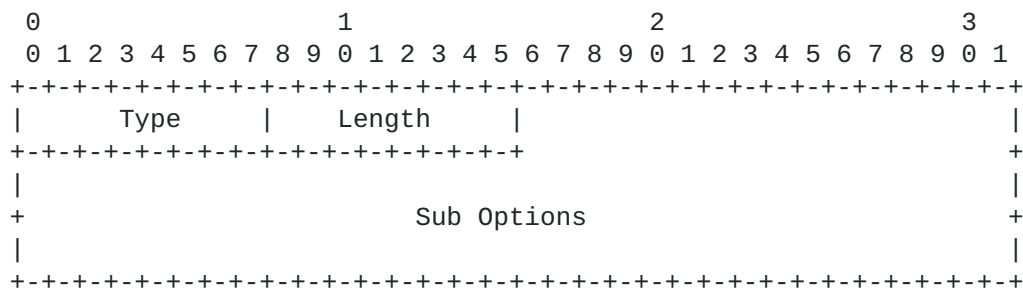

Type
 TBD1 MAP-E Container Option
 TBD2 MAP-T Container Option
 TBD3 Lightweight 4over6 Container Option
 Length
 2 + the length of the Sub Options specified in octets
 Sub Option
 A variable field that contains necessary sub options defined in [Section 4.3](#) and zero or several optional sub options, defined in [Section 4.4](#).


NOTE: The Type values for each S46 Container Option are the same as the S46-option-code values of the corresponding S46 Mechanisms specified in [Section 6.1](#).

[4.3](#). Sub Options for S46 Container Option

[4.3.1](#). S46-Rule Sub Option


The S46-Rule Sub Option can only be encapsulated in the MAP-E Container Option or the MAP-T Container Option. Depending on deployment scenario, one Basic Mapping Rule and zero or more Forwarding Mapping Rules MUST be included in one MAP-E Container Option or MAP-T Container Option.

Each type of S46-Rule Sub Option also contains a number of sub options, including Rule-IPv6-Prefix Sub Option, Rule-IPv4-Prefix Sub Option, and EA Length Sub Option. The structure of the sub options for S46-Rule Sub Option is defined in [section 4.4](#).

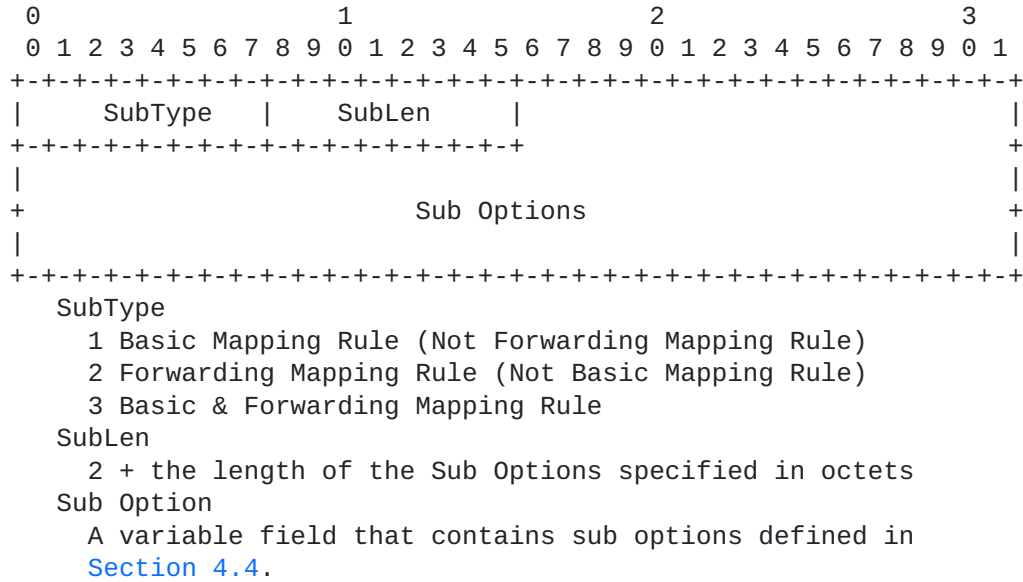

4.3.2. S46-BR Sub Option

The S46-BR Sub Option can only be encapsulated in the MAP-E Container Option or the Lightweight 4over6 Container Option. There MUST be at least one S46-BR Sub Option included in each MAP-E Container Option or Lightweight 4over6 Container Option.

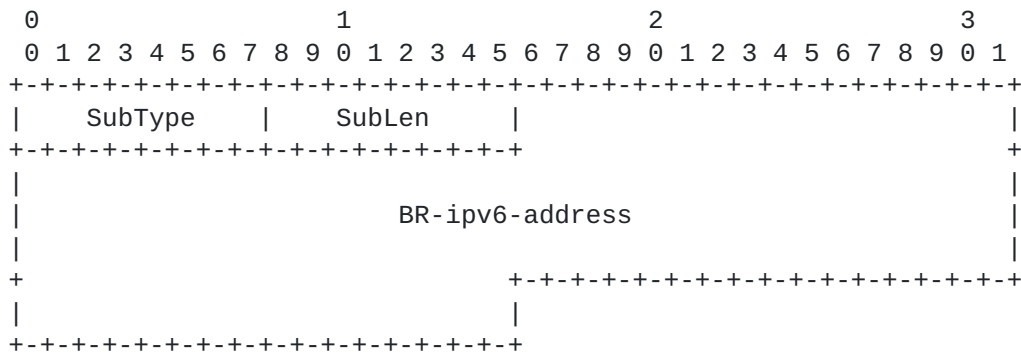

SubType

4 (SubType number, for the S46-BR sub option)

SubLen

18 (the length of the S46-BR sub option)

BR-ipv6-address

a fixed-length field of 16 octets that specifies the IPv6


address

for the S46 BR.

4.3.3. S46-DMR Sub Option

The S46-DMR Sub Option can only appear in the MAP-T Container Option.

There MUST be exactly one S46-DMR Sub Option included in one MAP-T Container Option.

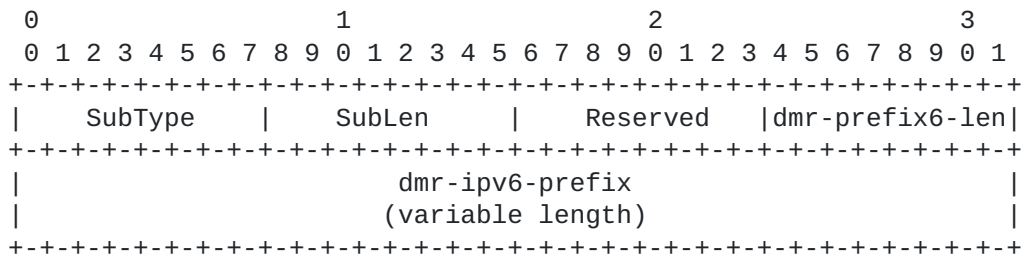

SubType

5 (SubType number, for the S46-DMR Sub Option)

SubLen

4 + length of dmr-ipv6-prefix specified in octets

Reserved

Reserved for future usage. It should be set to all zero.

dmr-prefix6-len

8 bits long; expresses the bitmask length of the IPv6 prefix specified in the dmr-ipv6-prefix field. Allowed values range from 0 to 96.

dmr-ipv6-prefix


a variable-length field specifying the IPv6 prefix or address for the BR. This field is right-padded with zeros to the

nearest

octet boundary when dmr-prefix6-len is not divisible by 8.

4.3.4. S46-V4V6Bind Sub Option

The S46-V4V6Bind Sub Option can only be encapsulated in the Lightweight 4over6 Container Option. There MUST be at most one S46-V4V6Bind Sub Option included in each Lightweight 4over6 Container Option.

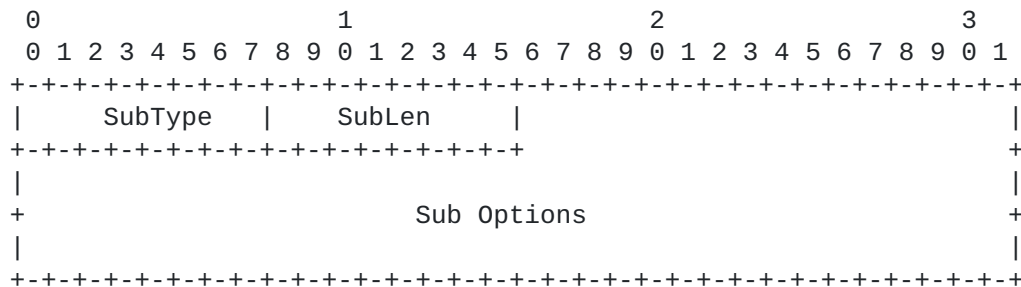

SubType

6 (SubType number, for the S46-V4V6Bind sub option)

SubLen


2 + the length of the Sub Options specified in octets

Sub Option

A variable field that contains sub options defined in [Section 4.5](#).

4.3.5. S46-PORTPARAMS Sub Option

The S46-PORTPARAMS Sub Option specifies optional port set information that MAY be provided to CEs. The S46-PORTPARAMS sub option can be included optionally by each type of S46 Container Option.

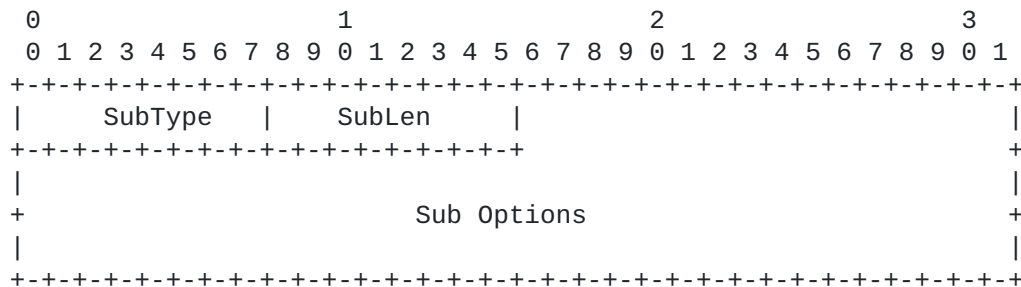

SubType
 7 (SubType number, for the S46-PORTPARAMS Sub Option)
 SubLen
 2 + the length of the Sub Options specified in octets
 Sub Option
 A variable field that contains sub options defined in [Section 4.6](#).

4.4. Sub Options for S46-Rule Sub Option

4.4.1. Rule-IPv6-Prefix Sub Option

The Rule-IPv6-Prefix Sub Option is necessary for every S46-RULE sub option. There MUST be exactly one S46-IPv6-Prefix Sub Option encapsulated in each type of S46-Rule Sub Option.

The IPv6 Prefix sub option is followed the framed IPv6 prefix designed in [[RFC3162](#)].




SubType
8 (SubType number, for the Rule-IPv6-Prefix Sub Option)
SubLen
20 (the length of the Rule-IPv6-Prefix Sub Option)
Reserved
Reserved for future usage. It always set to zero. This field

is

one octet in length.
ruleprefix6-len
the length of IPv6 prefix, specified in the rule-ipv6-prefix field, expressed in bits.
rule-ipv6-prefix
a 128-bits field that specifies an IPv6 prefix that appears in a MAP rule.

4.4.2. Rule-IPv4-Prefix Sub Option

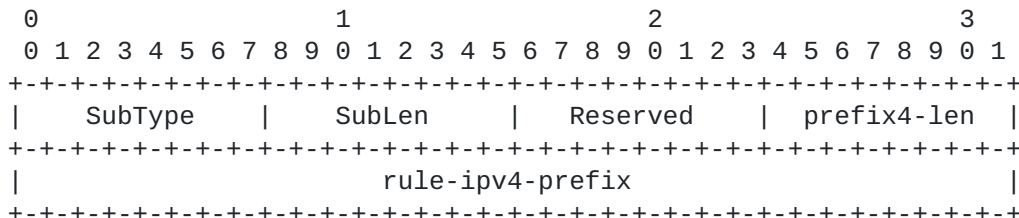


SubType
9 (SubType number, for the Rule-IPv4-Prefix Sub Option)
SubLen
8 (the length of the Rule-IPv4-Prefix Sub Option)
Reserved
Reserved for future usage. It always set to zero. This field

is

one octet in length.
Prefix4-len
the length of IPv4 prefix, specified in the rule-ipv4-prefix field, expressed in bits.
rule-ipv4-prefix
a 32-bits field that specifies an IPv4 prefix that appears in a MAP rule.

4.4.3. EA Length Sub Option

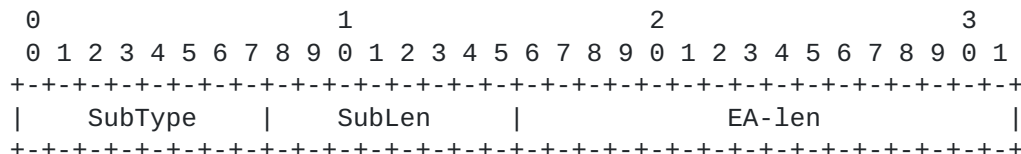


SubType
10 (SubType number, for the EA Length Sub Option)
SubLen
4 (the length of the EA Length Sub Option)
EA-len
16 bits long field that specifies the Embedded-Address (EA) bit length. Allowed values range from 0 to 48.

4.5. Sub Options for S46-v4v6Bind Sub Option

4.5.1. The IPv4-address Sub Option


The IPv4-address Sub Option MAY be used to specify the full or shared IPv4 address of the CE.

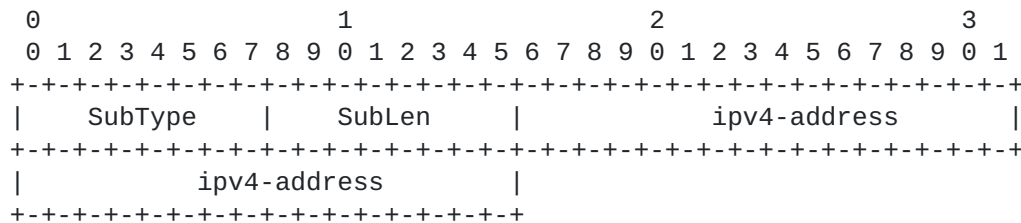

SubType
11 (SubType number, for the IPv4-address Sub Option)
SubLen
6 (the length of the Rule-IPv4-Prefix Sub Option)
ipv4-address
a 32-bits field that specifies an IPv4 address that appears in the V4V6Bind Option

4.5.2. The Bind-IPv6-Prefix Sub Option

The IPv6 prefix field specified in this field is used by the CE to identify the correct prefix to use for the tunnel source.

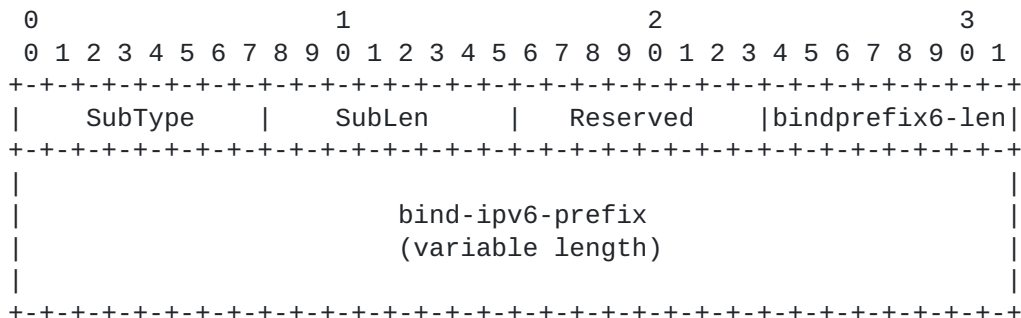

SubType

12 (SubType number, for the Bind-IPv6-Prefix Sub Option)

SubLen

20 (the length of the Bind-IPv6-Prefix Sub Option)

Reserved

Reserved for future usage. It always set to zero. This field is one octet in length.

bindprefix6-len

8 bits long; expresses the bitmask length of the IPv6 prefix specified in the bind-ipv6-prefix field. Allowed values range

from


0 to 96.

bind-ipv6-prefix

a variable-length field specifying the IPv6 prefix or address for the S46 CE. This field is right-padded with zeros to the nearest octet boundary when bindprefix6-len is not divisible by 8.

4.6. Sub Options for S46-PORTPARAMS Sub Option

4.6.1. The PSID-offset Sub Option

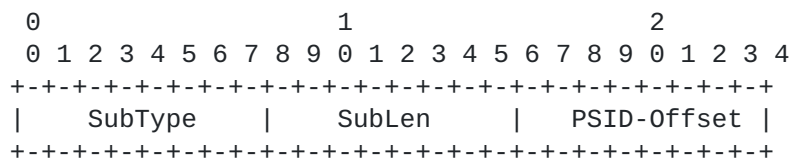

SubType

13 (SubType number, for the PSID-offset Sub Option)

SubLen

3 (the length of the PSID-offset Sub Option)

PSID Offset

8 bits long field that specifies the numeric value for the S46 algorithm's excluded port range/ offset bits (a bits), as per [Section 5.1 of RFC7597](#). Allowed values are between 0 and 15. Default values for this field are specific to the Softwire mechanism being implemented and are defined in the relevant specification document.

4.6.2. The PSID-len Sub Option

```

0                               1                               2
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   SubType   |   SubLen   |   PSID-len   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+
SubType
  14 (SubType number, for the PSID-len Sub Option)
SubLen
  3 (the length of the PSID-len Sub Option)
PSID-len
  8 bits long; specifies the number of significant bits in the
PSID
  field. (also known as 'k'). When set to 0, the PSID field is to
  be ignored. After the first 'a' bits, there are k bits in the
  port number representing valid of PSID. Subsequently, the
  address sharing ratio would be 2 ^k.

```

4.6.3. The PSID Sub Option

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   SubType   |   SubLen   |           PSID           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
SubType
  15 (SubType number, for the PSID Sub Option)
SubLen
  4 (the length of the PSID Sub Option)
PSID (Port-set ID)
  Explicit 16-bit (unsigned word) PSID value. The PSID value
  algorithmically identifies a set of ports assigned to a CE. The
  first k-bits on the left of this 2-octets field is the PSID
  value. The remaining (16-k) bits on the right are padding
zeros.

```

4.7. Softwire46 Sub Options Encapsulation


The table below shows which encapsulated Sub Options are mandatory, optional, or not permitted for each defined S46 Container Option.

Sub Option	MAP-E	MAP-T	Lightweight 4over6
S46-BR	M	N/P	M
S46-Rule	M	M	N/P
S46-DMR	N/P	M	N/P
S46-V4V6Bind	N/P	N/P	0
S46-PORTPARAMS	0	0	0

M - Mandatory, 0 - Optional, N/P - Not Permitted

4.8. Softwire46-Priority Attribute

The S46-Priority Attribute is structured as follows:

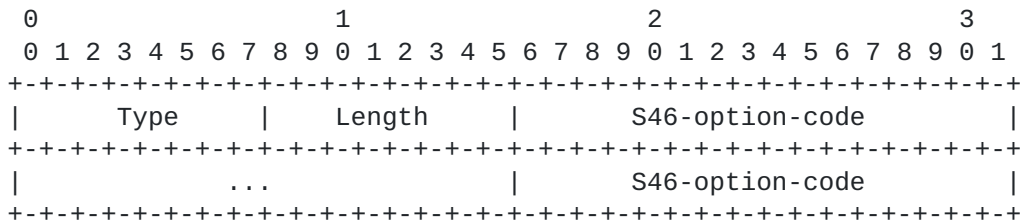

Type

TBD

Length

2 + the length of the S46-option-code(s) specified in octets

S46-option-code

16-bit IANA-registered option code of the DHCPv6 option that is used to identify the softwire mechanisms. S46 mechanisms are prioritized in the appearance order of the S46-option-

code(s)

in the Softwire46-Priority Attribute. A Softwire46-Priority Attribute MUST contain at least one S46-option-code. The option codes of the corresponding S46 mechanisms are listed in [Section 6.1](#).

4.9. Table of attributes

The following table provides a guide to which attributes may be found in which kinds of packets, and in what quantity.

Request	Accept	Reject	Challenge	Accounting Request	#	Attribute
0-1	0-1	0	0	0-1	TBD1	Softwire46- Configuration
0-1	0-1	0	0	0-1	TBD2	Softwire46- Priority
0-1	0-1	0	0	0-1	1	User-Name
0-1	0	0	0	0	2	User-Password
0-1	0-1	0	0	0-1	6	Service-Type
0-1	0-1	0-1	0-1	0-1	80	Message- Authenticator

The following table defines the meaning of the above table entries.

- 0 This attribute MUST NOT be present in packet.
- 0+ Zero or more instances of this attribute MAY be present in packet.
- 0-1 Zero or one instance of this attribute MAY be present in packet.
- 1 Exactly one instance of this attribute MUST be present in packet.

5. Diameter Considerations

S46 Configuration using Diameter [[RFC6733](#)] is specified in [[RFC7678](#)].

6. IANA Considerations

This document requires the assignment of two new RADIUS Attribute Type in the "Radius Types" registry (currently located at <http://www.iana.org/assignments/radius-types> for the following attributes:

- o Softwire46-Configuration Attribute TBD1
- o Softwire46-Priority Attribute TBD2

IANA should allocate the numbers from the standard RADIUS Attributes space using the "IETF Review" policy [[RFC5226](#)].

6.1. S46 Mechanisms and Their Identifying Option Codes

The Softwire46-Priority Attribute defines a 16-bit S46-option-code field, for which IANA is to create and maintain a new registry entitled "Option Codes Permitted in the Softwire46-Priority Attribute". This document requires IANA to register four option codes of the Softwire46 mechanisms permitted to be included in the Softwire46-Priority Attribute. Additional options may be added to

this list in the future using the IETF Review process described in [Section 4.1 of \[RFC5226\]](#).

The following table shows the option codes that are required and the S46 mechanisms that they represent. The option code for DS-Lite is derived from the IANA allocated RADIUS Attribute Type value for DS-Lite [\[RFC6519\]](#). The option codes for MAP-E, MAP-T and Lightweight 4over6 need to be determined. The option codes for MAP-E, MAP-T, and Lightweight 4over6 should also be used as the option Type values for the MAP-E, MAP-T, and Lightweight 4over6 Container Options defined in [Section 4.2](#).

Option Code	S46 Mechanism	Reference
TBD1	MAP-E	RFC7597
TBD2	MAP-T	RFC7599
TBD3	Lightweight 4over6	RFC7596
144	DS-Lite	RFC6519

Table 1: Option Codes to S46 Mechanisms

7. Security Considerations

Known security vulnerabilities of the RADIUS protocol are discussed in [\[RFC2607\]](#), [\[RFC2865\]](#), and [\[RFC2869\]](#). Use of IPsec [\[RFC4301\]](#) for providing security when RADIUS is carried in IPV6 is discussed in [\[RFC3162\]](#).

A malicious user may use MAC address spoofing on the shared password that has been preconfigured on the DHCPv6 server to get unauthorized configuration information.

Security considerations for MAP specific between the MAP CE and the BNG are discussed in [\[RFC7597\]](#). Security considerations for Lightweight 4over6 are discussed in [\[RFC7596\]](#). Security considerations for DHCPv6-Based S46 Prioritization Mechanism are discussed in [\[RFC8026\]](#). Furthermore, generic DHCPv6 security mechanisms can be applied DHCPv6 intercommunication between the CE and the BNG.

Security considerations for the Diameter protocol are discussed in [\[RFC6733\]](#).

8. Acknowledgements

The authors would like to thank the valuable comments made by Peter Lothberg, Wojciech Dec, Ian Farrer, Suresh Krishnan and Mohamed Boucadair for this document. This document was merged with [draft-sun-softwire-lw4over6-radext-01](#), thanks to everyone who contributed to this draft.

This document was produced using the xml2rfc tool [[RFC7991](#)].

9. References

9.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC2865] Rigney, C., Willens, S., Rubens, A., and W. Simpson, "Remote Authentication Dial In User Service (RADIUS)", [RFC 2865](#), DOI 10.17487/RFC2865, June 2000, <<http://www.rfc-editor.org/info/rfc2865>>.
- [RFC3162] Aboba, B., Zorn, G., and D. Mitton, "RADIUS and IPv6", [RFC 3162](#), DOI 10.17487/RFC3162, August 2001, <<http://www.rfc-editor.org/info/rfc3162>>.
- [RFC3315] Droms, R., Ed., Bound, J., Volz, B., Lemon, T., Perkins, C., and M. Carney, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", [RFC 3315](#), DOI 10.17487/RFC3315, July 2003, <<http://www.rfc-editor.org/info/rfc3315>>.
- [RFC5080] Nelson, D. and A. DeKok, "Common Remote Authentication Dial In User Service (RADIUS) Implementation Issues and Suggested Fixes", [RFC 5080](#), DOI 10.17487/RFC5080, December 2007, <<http://www.rfc-editor.org/info/rfc5080>>.
- [RFC6158] DeKok, A., Ed. and G. Weber, "RADIUS Design Guidelines", [BCP 158](#), [RFC 6158](#), DOI 10.17487/RFC6158, March 2011, <<http://www.rfc-editor.org/info/rfc6158>>.
- [RFC6929] DeKok, A. and A. Lior, "Remote Authentication Dial In User Service (RADIUS) Protocol Extensions", [RFC 6929](#), DOI 10.17487/RFC6929, April 2013, <<http://www.rfc-editor.org/info/rfc6929>>.

[RFC8026] Boucadair, M. and I. Farrer, "Unified IPv4-in-IPv6
Based
Softwire Customer Premises Equipment (CPE): A DHCPv6-
Prioritization Mechanism", [RFC 8026](#), DOI 10.17487/
RFC8026,
November 2016, <<http://www.rfc-editor.org/info/rfc8026>>.

9.2. Informative References

- [RFC2607] Aboba, B. and J. Vollbrecht, "Proxy Chaining and Policy
Implementation in Roaming", [RFC 2607](#),
DOI 10.17487/RFC2607, June 1999,
<<http://www.rfc-editor.org/info/rfc2607>>.
- [RFC2869] Rigney, C., Willats, W., and P. Calhoun, "RADIUS
Extensions", [RFC 2869](#), DOI 10.17487/RFC2869, June 2000,
<<http://www.rfc-editor.org/info/rfc2869>>.
- [RFC3580] Congdon, P., Aboba, B., Smith, A., Zorn, G., and J.
Roese,
"IEEE 802.1X Remote Authentication Dial In User Service
(RADIUS) Usage Guidelines", [RFC 3580](#),
DOI 10.17487/RFC3580, September 2003,
<<http://www.rfc-editor.org/info/rfc3580>>.
- [RFC4301] Kent, S. and K. Seo, "Security Architecture for the
Internet Protocol", [RFC 4301](#), DOI 10.17487/RFC4301,
December 2005, <<http://www.rfc-editor.org/info/rfc4301>>.
- [RFC5226] Narten, T. and H. Alvestrand, "Guidelines for Writing an
IANA Considerations Section in RFCs", [RFC 5226](#),
DOI 10.17487/RFC5226, May 2008,
<<http://www.rfc-editor.org/info/rfc5226>>.
- [RFC6333] Durand, A., Droms, R., Woodyatt, J., and Y. Lee, "Dual-
Stack Lite Broadband Deployments Following IPv4
Exhaustion", [RFC 6333](#), DOI 10.17487/RFC6333, August 2011,
<<http://www.rfc-editor.org/info/rfc6333>>.
- [RFC6346] Bush, R., Ed., "The Address plus Port (A+P) Approach to
the IPv4 Address Shortage", [RFC 6346](#),
DOI 10.17487/RFC6346, August 2011,
<<http://www.rfc-editor.org/info/rfc6346>>.
- [RFC6519] Maglione, R. and A. Durand, "RADIUS Extensions for Dual-
Stack Lite", [RFC 6519](#), DOI 10.17487/RFC6519, February
2012, <<http://www.rfc-editor.org/info/rfc6519>>.

- [RFC6733] Fajardo, V., Ed., Arkko, J., Loughney, J., and G. Zorn, Ed., "Diameter Base Protocol", [RFC 6733](#), DOI 10.17487/RFC6733, October 2012, <<http://www.rfc-editor.org/info/rfc6733>>.
- [RFC7596] Cui, Y., Sun, Q., Boucadair, M., Tsou, T., Lee, Y., and I. Farrer, "Lightweight 4over6: An Extension to the Dual-Stack Lite Architecture", [RFC 7596](#), DOI 10.17487/RFC7596, July 2015, <<http://www.rfc-editor.org/info/rfc7596>>.
- [RFC7597] Troan, O., Ed., Dec, W., Li, X., Bao, C., Matsushima, S., Murakami, T., and T. Taylor, Ed., "Mapping of Address and Port with Encapsulation (MAP-E)", [RFC 7597](#), DOI 10.17487/RFC7597, July 2015, <<http://www.rfc-editor.org/info/rfc7597>>.
- [RFC7598] Mrugalski, T., Troan, O., Farrer, I., Perreault, S., Dec, W., Bao, C., Yeh, L., and X. Deng, "DHCPv6 Options for Configuration of Softwire Address and Port-Mapped Clients", [RFC 7598](#), DOI 10.17487/RFC7598, July 2015, <<http://www.rfc-editor.org/info/rfc7598>>.
- [RFC7599] Li, X., Bao, C., Dec, W., Ed., Troan, O., Matsushima, S., and T. Murakami, "Mapping of Address and Port using Translation (MAP-T)", [RFC 7599](#), DOI 10.17487/RFC7599, July 2015, <<http://www.rfc-editor.org/info/rfc7599>>.
- [RFC7678] Zhou, C., Taylor, T., Sun, Q., and M. Boucadair, "Attribute-Value Pairs for Provisioning Customer Equipment Supporting IPv4-Over-IPv6 Transitional Solutions", [RFC 7678](#), DOI 10.17487/RFC7678, October 2015, <<http://www.rfc-editor.org/info/rfc7678>>.
- [RFC7991] Hoffman, P., "The "xml2rfc" Version 3 Vocabulary", [RFC 7991](#), DOI 10.17487/RFC7991, December 2016, <<http://www.rfc-editor.org/info/rfc7991>>.

Additional Authors

Qiong Sun
China Telecom
Beijing China
Email: sunqiong@ctbri.com.cn

Qi Sun
Tsinghua University
Department of Computer Science, Tsinghua University
Beijing 100084
P.R.China
Phone: +86-10-6278-5822
Email: sunqibupt@gmail.com

Cathy Zhou
Huawei Technologies
Bantian, Longgang District
Shenzhen 518129
Email: cathy.zhou@huawei.com

Tina Tsou
Huawei Technologies(USA)
2330 Central Expressway
Santa Clara, CA 95050
USA
Email: Tina.Tsou.Zouting@huawei.com

ZiLong Liu
Tsinghua University
Beijing 100084
P.R.China
Phone: +86-10-6278-5822
Email: liuzilong8266@126.com

Yong Cui
Tsinghua University
Beijing 100084
P.R.China
Phone: +86-10-62603059
Email: yong@csnet1.cs.tsinghua.edu.cn

Authors' Addresses

Internet-Draft
2017

[draft-ietf-softwire-map-radius-13](#)

August

Sheng Jiang
Huawei Technologies Co., Ltd
Q14, Huawei Campus, No.156 Beiqing Road
Hai-Dian District, Beijing, 100095
P.R. China

Email: jiangsheng@huawei.com

Yu Fu
CNNIC
No.4 South 4th Street, Zhongguancun
Hai-Dian District, Beijing, 100190
P.R. China

Email: fuyu@cnnic.cn

Bing Liu
Huawei Technologies Co., Ltd
Q14, Huawei Campus, No.156 Beiqing Road
Hai-Dian District, Beijing, 100095
P.R. China

Email: leo.liubing@huawei.com

Peter Deacon
IEA Software, Inc.
P.O. Box 1170
Veradale, WA 99037
USA

Email: peterd@iea-software.com

Chongfeng Xie
China Telecom
Beijing
P.R. China

Email: xiechf.bri@chinatelecom.cn

Internet-Draft
2017

[draft-ietf-softwire-map-radius-13](#)

August

Tianxiang Li
Tsinghua University
Beijing 100084
P.R.China

Email: peter416733@gmail.com

