

Workgroup: SPRING
Internet-Draft:
draft-ietf-spring-compression-analysis-02
Published: 27 September 2022
Intended Status: Informational
Expires: 31 March 2023
Authors: R. Bonica W. Cheng D. Dukes, Ed.
 Juniper China Mobile Cisco Systems
 W. Henderickx C. Li P. Shaofu C. Xie
 Nokia Huawei ZTE China Telecom
Compressed SRv6 SID List Analysis

Abstract

Several mechanisms have been proposed to compress the SRv6 SID list. This document analyzes each mechanism with regard to the requirements stated in the companion requirements document.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 31 March 2023.

Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

- [1. Introduction](#)
- [2. SRv6 Compression Requirements](#)
 - [2.1. Encapsulation Header Size](#)
 - [2.1.1. Reference Scenarios](#)
 - [2.2. Forwarding Efficiency](#)
 - [2.2.1. Headers Parsed](#)
 - [2.2.2. Lookups Performed \(LKU\)](#)
 - [2.3. State Efficiency](#)
- [3. SRv6 Specific Requirements](#)
 - [3.1. SRv6 Based](#)
 - [3.2. Functional Requirements](#)
 - [3.2.1. SRv6 Functionality](#)
 - [3.2.2. Heterogeneous SID Lists](#)
 - [3.2.3. SID List Length](#)
 - [3.2.4. SID Summarization](#)
 - [3.3. Operational Requirements](#)
 - [3.3.1. Lossless Compression](#)
 - [3.3.2. Preservation of non-routing information](#)
 - [3.3.3. Address Planning](#)
 - [3.4. Scalability Requirements](#)
 - [3.4.1. Compression Levels](#)
- [4. Protocol Design Requirements](#)
 - [4.1. SRv6 Base Coexistence](#)
- [5. Security Requirements](#)
 - [5.1. Security Mechanisms](#)
 - [5.2. SR Domain Protection](#)
- [6. Conclusions](#)
- [7. Normative References](#)
- [Appendix A. Encapsulation analysis](#)
 - [A.1. CRH note](#)
 - [A.2. Analysis results](#)
- [Authors' Addresses](#)

1. Introduction

The following mechanisms are proposed to compress the SRv6 SID list:

- *CSID - [[I-D.filsfilscheng-spring-srv6-srh-comp-sl-enc](#)] - Describes two new SRv6 SID flavors, a combination of SID flavors from [[I-D.filsfils-spring-net-pgm-extension-srv6-usid](#)] and [[I-D.cl-spring-generalized-srv6-for-cmpr](#)]
- *CRH - [[I-D.bonica-6man-comp-rtg-hdr](#)] - Requires two new routing header types and a label mapping technique.
- *VSID - [[I-D.decraene-spring-srv6-vlsid](#)] - Defines a set of SID behaviors to access smaller SIDs within the SR header.
- *UIDSR - [[I-D.mirsky-6man-unified-id-sr](#)] - Extends the SRH to carry MPLS labels or IPv6 addresses.

This document analyzes each mechanism against the requirements stated in [[I-D.srcompdt-spring-compression-requirement](#)]. Each section of this document corresponds to a similarly named section in [[I-D.srcompdt-spring-compression-requirement](#)]. Each section reiterates corresponding requirements and analyzes each proposal against the those requirements.

The terms compression mechanism, compression solution, and compression proposal are used interchangeably within this document.

2. SRv6 Compression Requirements

An SR domain consisting of 3 sub-domains is shown to illustrate the scenarios associated with encapsulation header size, forwarding efficiency and state efficiency.

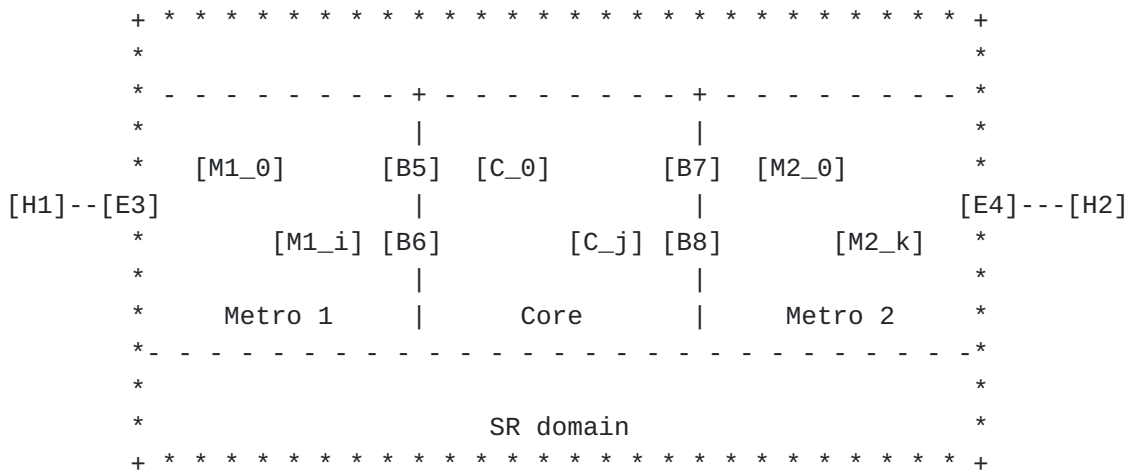


Figure 1: Sample SR Domain

- *H1 and H2 are hosts outside the SR domain
- *E3 and E4 are SR domain edge routers
- *Metro 1, Core and Metro 2 are sub-domains with independent IGP instances
- *B5 and B6 are border routers between the Metro 1 and Core
- *B7 and B8 are border routers between the Metro 2 and Core
- *M1_1..M1_i are routers in Metro 1
- *C_1..C_j are routers in Core
- *M2_1..M2_k are routers in Metro 2
- *If Metro and Core are different AS's the border routers (B5 to B8) may be replaced by pairs of ASBRs
- *Flexible algorithms may be deployed within each sub-domain

2.1. Encapsulation Header Size

The compression proposal MUST reduce the size of the SRv6 encapsulation header.

Encapsulation header size is evaluated against a set of reference scenarios.

2.1.1. Reference Scenarios

A service provider offers a VPN service with underlay optimization in the SR domain.

- *Hosts H1 and H2 are located in two different sites of a VPN customer.
- *Edge nodes E3 and E4 encapsulate/decapsulate traffic between H1 and H2 to provide the VPN service.
- *The encapsulation consists of a VPN SID (V) (eg END.DT etc) and an SR policy with between 0 and 15 transport segments (T) (eg END or END.X)
- *The SR domain has a block size (B) of 48 bits
- *These independent variables are used to uniquely identify each scenario. For example

-A scenario with 48bit block size, 3 transport segments and a VPN segment is named 48B.3T.V

Proposals are evaluated against the set of scenarios to calculate the encapsulation in octets (E) and the encapsulation savings (ES) as a fraction of the SRv6 base encapsulation in octets.

E and ES were evaluated for:

- *each proposal in two variants
 - 16-bit SID
 - 32-bit SID
- *48-bit SRv6 block, 0 to 15 transport segments and a VPN segment (expressed in short form as 48B.0-15T.V)

The average encapsulation savings for each proposal is shown below. The complete analysis is recorded in Appendix:

16-bit SIDs	CSID	CRH	CRH+TPF	VSID	UIDSR
Average ES	54.3%	54.2%	50.4%	51.6%	49.2%

Table 1: Average ES, 16-bit SIDs, 48B.0-15T.V

32-bit SIDs	CSID	CRH	CRH+TPF	VSID	UIDSR
Average ES	42.5%	45.5%	43.2%	45.5%	42.5%

Table 2: Average ES, 32-bit SIDs, 48B.0-15T.V

E and ES are also evaluated for 32bit and 64bit SRv6 block sizes. The CSID 16-bit ES averages 57.4% for 32-bit blocks and 49.9% for 64-bit blocks, other proposals are unchanged.

Conclusion: All proposals meet the requirement to reduce the size of the SRv6 encapsulation header. Variances between proposals are negligible.

2.2. Forwarding Efficiency

The compression proposal SHOULD minimize the number of required hardware resources accessed to process a segment.

2.2.1. Headers Parsed

Forwarding efficiency is calculated against the reference scenarios above, recording and summarizing the differences in header parsing for different segment lists.

The following tables indicate the number of headers parsed for each proposal.

16-bit	CSID	CRH	CRH+TPF	VSID	UIDSR
PRS(48B.0T).V)	IPv6	IPv6	IPv6	IPv6	IPv6
PRS(48B.1-4T).V)	IPv6	IPv6	IPv6	IPv6	IPv6
		CRH	CRH	SRH	SRH
PRS(48B.5-15T).V)	IPv6	IPv6	IPv6	IPv6	IPv6
	SRH	CRH	CRH	SRH	SRH

Table 3: Headers parsed on non-decapsulating SR segment endpoint nodes, 16-bit SIDs, 48B.0-15T.V

16-bit	CSID	CRH	CRH+TPF	VSID	UIDSR
PRS(48B.0T).V)	IPv6	IPv6	IPv6	IPv6	IPv6
PRS(48B.1-4T).V)	IPv6	IPv6	IPv6	IPv6	IPv6
		CRH	CRH	SRH	SRH
			TPF		
PRS(48B.5-15T).V)	IPv6	IPv6	IPv6	IPv6	IPv6
	SRH	CRH	CRH	SRH	SRH
			TPF		

Table 4: Headers parsed on decapsulating SR segment endpoint nodes, 16-bit SIDs, 48B.0-15T.V

32-bit	CSID	CRH	CRH+TPF	VSID	UIDSR
PRS(48B.0T.V)	IPv6	IPv6	IPv6	IPv6	IPv6
PRS(48B.1-15T.V)	IPv6	IPv6	IPv6	IPv6	IPv6
	SRH	CRH	CRH	SRH	SRH

Table 5: Headers parsed on non-decapsulating SR segment endpoint nodes, 32-bit SIDs, 48B.0-15T.V

32-bit	CSID	CRH	CRH+TPF	VSID	UIDSR
PRS(48B.0T.V)	IPv6	IPv6	IPv6	IPv6	IPv6
PRS(48B.1-15T.V)	IPv6	IPv6	IPv6	IPv6	IPv6
	SRH	CRH	CRH	SRH	SRH
			TPF		

Table 6: Headers parsed on decapsulating SR segment endpoint nodes, 32-bit SIDs, 48B.0-15T.V

Conclusion: Overall, the CSID parses the fewest headers. When per packet state is processed per segment, CSID, VSID and UIDSR proposals may include it in the routing header, CRH may include it in a destination option preceding the CRH.

2.2.2. Lookups Performed (LKU)

Some proposals require a different number of lookups per packet, depending on the active segment in a segment list.

An implementation may perform lookups as longest prefix match (LPM) or exact match (EM). CSID, VSID and UIDSR describe SRv6 SID lookup from the IPv6 destination address as an LPM, however an implementation may use either an LPM or EM lookup for SRv6 SIDs. CRH implementations must always uses an exact match for CRH SID lookups.

The following table describes the number of lookups per proposal per segment type.

	CSID	CRH	VSID	UIDSR
Adjacency and	LPM (a)	LPM (a)	LPM (a)	LPM (a)
VPN Segments		EM (b)		
		EM (b,c)		
Prefix Segments	LPM (a)	LPM (a)	LPM (a)	LPM (a)
	LPM (d)	EM (b)	LPM (d)	LPM (d)

Table 7: Lookups

- *[a] On active SID, appearing in the IPv6 Destination address
- *[b] On SID in CRH header
- *[c] This lookup is required only when the IPv6 next hop node is not non-CRH aware
- *[d] On next SID, appearing in the IPv6 destination address

Note: [[I-D.filsfils-spring-net-pgm-extension-srv6-usid](#)] Section 5 describes an optional local implementation to reduce CSID 16-bit

lookups, in some cases, by adding local forwarding state. The analysis of this implementation option is not included in this version of the document.

Conclusion: CSID, VSID, and UIDSR require a single lookup to process an adjacency or VPN segment. CRH always requires 2 lookups for VPN segments, and 2 and sometimes 3 lookups for adjacency segments. All proposals require two lookups to process a prefix segment and the next segment.

2.3. State Efficiency

The compression proposal SHOULD minimize the amount of additional forwarding state stored at a node.

State efficiency is analyzed in a sub-domain of the SR domain, with the following parameters:

- *N: the number of SRv6 nodes in the sub-domain
- *I: the number of IGP algorithms [[I-D.ietf-lsr-flex-algo](#)] configured
- *A: the number of local adjacency SIDs at a node
- *D: the number of attached SR sub-domains at a border node
- *V: the number of VPN services at edge nodes

For a sub-domain consisting of:

- *1000 SRv6 nodes (N=1000) with some number of non-SRv6 nodes
- *2 IGP algorithms (I=2)
- *100 adjacencies per SRv6 node (A=100)
- *up to 10 attached sub-domains per border node (D=10)
- *1000 VPN service segments per edge (V=1000)

The number of forwarding entries at a node is calculated for any node, a border node, and an edge node.

UIDSR, CSID and VSID require the following entries:

- *a FIB entry for the node's prefix segment (1), per algorithm (I=2).
- *a FIB entry per local adjacency SID (A=100) **Note1
- *At border nodes (or any SRv6 nodes) either:
 - A.1) a FIB entry per domain (D=10) to swap the IPv6 destination address prefix.
 - A.2) no additional FIB entries, and the SR source places a 128-bit SID in the segment list of a packet if needed.
- *At edge nodes, a FIB entry per VPN segment (V=1000)

CRH requires:

*a CFIB entry per CRH node per IGP algorithm for local and remote prefix segments ($N \cdot I = 2000$)

*a CFIB entry per local adjacency segment ($A = 100$) **Note1

-When non-CRH adjacent nodes are present, additional state is required for CRH as per [\[I-D.bonica-6man-comp-rtg-hdr\]](#) Appendix B (note, only the second option in the appendix is considered feasible due to state explosion)

oB.1) Up to one CFIB entry per next endpoint and an additional CFIB entry per adjacency to support non-CRH adjacent endpoints, assuming IP flex algo is not implemented on non-CRH nodes ($I = 1$) ($(N + A) \cdot I = 1200$).

*At border nodes, assuming two inter-domain links per adjacent domain for redundancy, additional state is required as per [\[I-D.bonica-6man-comp-rtg-hdr\]](#) Appendix B (note, only the second option in the appendix is considered feasible due to state explosion):

-C.1) In a common CRH network topology, the remote sub-domain borders support CRH: a CFIB entry per CRH node per IGP algorithm for local and remote prefix segments ($N \cdot I$) plus a CFIB entry per local adjacency segment (A) plus a CFIB entry per connected remote border router (20) ($N \cdot I + A + 20 = 2120$).

-C.2) In a poorly designed CRH network topology, the remote sub-domain borders do not support CRH: a CFIB entry per unique endpoint ($N \cdot D \cdot I$), plus a CFIB entry per local adjacency segment (A), assuming IP flex algo is not implemented on non-CRH border domain ($I = 1$), plus inter-domain adjacency (20) ($N \cdot D \cdot I + 2 = 10120$).

*At edge nodes, $V = 1000$ entries for SRv6 based VPN SIDs and another $V = 1000$ entries for CFIB and TPF VPN SIDs.

**Note1: there may be additional adjacency SIDs for protected, unprotected, and per algorithm adjacencies, resulting in some multiple of A . This is common for all compression proposals.

16-bit and 32-bit	CSID	CRH	VSID	UIDSR
$S(N1000, I2, A100, D10)$	102	2100	102	102
	A.1:112		A.1:112	A.1:112
	A.2:102		A.2:102	A.2:102
		B.1:3300		
		C.1:2120		
		C.2:10120		
$S(V1000)$	1000	2000	1000	1000

Table 8: Forwarding State Maintained

Conclusion: CSID, VSID and UIDSR minimize forwarding state stored at a node. CRH moves per segment state from the packet to the FIB.

3. SRv6 Specific Requirements

3.1. SRv6 Based

A solution to compress SRv6 SID Lists SHOULD be based on the SRv6 architecture, control plane and data plane. The compression solution MAY be based on a different data plane and control plane, provided that it derives sufficient benefit.

This section records the use of SRv6 standards for compression.

	CSID	CRH	VSID	UIDSR
U.RFC8402	Yes	Yes - update required for SRv6 data plane	Yes	Yes
U.RFC8754	Yes	No	Yes - update required for segments left	Yes - update for flags and segments left
U.PGM	Yes	No	Yes - update required for SID behaviors	Yes
U.IGP	Yes	No	Yes	Yes - additional extensions
U.BGP	Yes	No	Yes	Yes
U.POL	Yes	No	Yes	Yes
U.BLS	Yes	No	Yes	Yes - additional extensions
U.SVC	Yes	No	Yes	Yes
U.ALG	Yes	Yes - Adds IP flex Algo	Yes	Yes
U.OAM	Yes	No	Yes	Yes

Table 9: SRv6 Based

Conclusion: CSID is SRv6 based, requiring no updates to existing SRv6 standards, VSID and UIDSR require updates. CRH is not strictly based on SRv6 but is able to provide equivalent functionality.

3.2. Functional Requirements

3.2.1. SRv6 Functionality

A solution to compress an SRv6 SID list MUST support the functionality of SRv6. This requirement ensures no SRv6

functionality is lost. It is particularly important to understand how a proposal, as evaluated in section "SRv6 Based", provides this functionality.

Functional requirements and the drafts defining how a proposal provides the functionality are documented in the table below.

Draft reference Abbreviations	
RFC8986:	[RFC8986]
SRV6POL:	[I-D.ietf-spring-segment-routing-policy]
SRV6EXT:	[I-D.ietf-lsr-isis-srv6-extensions]
SRV6BGPSVC:	[I-D.ietf-bess-srv6-services]
SRV6BGPLS:	[I-D.ietf-idr-bgpls-srv6-ext]
SRV6SVCP:	[I-D.ietf-spring-sr-service-programming]
SRV6OAM:	[I-D.ietf-6man-spring-srv6-oam]
SRV6FLEXALG:	[I-D.ietf-lsr-flex-algo]
SRV6TILFA:	[I-D.ietf-rtgwg-segment-routing-ti-lfa]
RFC8402:	[RFC8402]
RFC8754:	[RFC8754]
CRH:	[I-D.bonica-6man-comp-rtg-hdr]
VSID:	[I-D.decraene-spring-srv6-vlsid]
UIDSR:	[I-D.mirsky-6man-unified-id-sr]
IPFLEXALG:	[I-D.ietf-lsr-ip-flexalgo]
CRHEXT:	[I-D.bonica-lsr-crh-isis-extensions]
SRM6BGPSVC:	[I-D.ssangli-bess-bgp-vpn-srm6]
CSID:	[I-D.filsfilscheng-spring-srv6-srh-comp-sl-enc]

Table 10: Abbreviations

	CSID	CRH	VSID	UIDSR
F.SID	RFC8402	CRH	RFC8402	RFC8402 1
F.Scope	RFC8402	CRH	RFC8402	RFC8402 1
F.PFX	RFC8402, RFC8986, CSID adds an END SID flavor	CRH	RFC8402, RFC8986, VSID updates the End behavior	RFC8402, RFC8986 with new flavor 1
F.ADJ	RFC8402, RFC8986, CSID adds an END.X flavor	CRH	RFC8402, RFC8986, VSID updates the End.X behavior	RFC8402, RFC8986 with new flavor 1
F.BIND	RFC8402, RFC8986	CRH	RFC8402, RFC8986, VSID updates the End.B behaviors	RFC8402, RFC8986 with new flavor 1
F.PEER	RFC8402, RFC8986, CSID	CRH	RFC8402, RFC8986, VSID	RFC8402, RFC8986 with

	CSID	CRH	VSID	UIDSR
	adds an END.X. flavor		updates the End.X behaviors	new flavor 1,2
F.SVC	RFC8986	CRH	RFC8986, VSID updates the service segment behaviors	RFC8986 1
F.ALG	SRV6FLEXALG	IPFLEXALG	SRV6FLEXALG	SRV6FLEXALG
F.TILFA	SRV6TILFA	SRV6TILFA	SRV6TILFA	SRV6TILFA 3
F.SEC	RFC8754	CRH	RFC8754	RFC8754
F.IGP	SRV6EXT	CRH-EXT	SRV6EXT	SRV6EXT 1,4
F.BGP	SRV6BGPSVC	SRM6BGPSVC	SRV6BGPSVC	SRV6BGPSVC 1
F.POL	SRV6SRPOL	SRV6SRPOL update required	SRV6SRPOL	SRV6SRPOL
F.BLS	SRV6BGPLS	(specification required)	SRV6BGPLS and addition for VSID Length	SRV6BGPLS 5
F.SFC	SRV6SVCP	CRH	SRV6SVC	SRV6SVCP 1
F.PING	SRV60AM	CRH	SRV60AM	SRV60AM

Table 11: SRv6 Functionality

1. UIDSR with Global Container SID + local index enhancement
2. draft-peng-spring-truncates-sid-inter-domain
3. For protections described in section 6.1.2.1, 6.1.2.2, and 6.2, to get next-next SID from SRH with the help of draft-pl-spring-compr-path-recover.
4. Need more extensions to advertise the capability of U-SID compression (32bits, 16bits, etc.). Note: Global Container SID + local index enhancement.
5. IGP extensions

Conclusion: CSID supports SRv6 functionality. CRH VSID and UID support SRv6 functionality or equivalent with some new specifications.

3.2.2. Heterogeneous SID Lists

The compression proposal SHOULD support a combination of compressed and non-compressed segments in a single path. As an example, a solution may satisfy this requirement without being SRv6 based by using a binding SID to impose an additional SRv6 header (IPv6 header plus optional SRH) with non-compressed SID.

	CSID	CRH	VSID	UIDSR
Heterogeneous SID Lists	Yes	Yes	Yes	Yes

Table 12: Heterogeneous SID Lists

VSID require a binding SID with an additional SRv6 encapsulation to encode non-compressed segments in a single path. VSID changes the interpretation of the SRH Segments Left field, which makes it capable of carrying only compressed segments.

The CRH can include a binding SID that imposes a new IPv6 header with an SRH. This is required when the next segment endpoint in the path can process the SRH, but not the CRH. The next segment endpoint or a subsequent endpoint can execute decapsulation, removing the new IPv6 header and exposing the old one with its CRH. This is required because an IPv6 packet can carry only one routing header.

CSID and UIDSR permit the encoding of, and processing of, any combination of compressed or non-compressed segments in a segment list of an SRH.

CSID makes use of the SRH, without modification, to encode CSIDs as 128 bits, supporting the use of non-compressed segments within the SRH.

UIDSR modifies the interpretation of the SRH Segments Left field at segment endpoint nodes to allow variable segment lengths within a segment list.

Conclusion: All proposals support heterogeneous SID lists. CSID and UIDSR support heterogeneous SID lists in the SRH, while CRH and VSID require installation of binding SIDs at midpoint nodes.

3.2.3. SID List Length

The compression proposal MUST be able to represent SR paths that contain up to 16 segments.

	CSID	CRH	VSID	UIDSR
16 Segments	Yes	Yes	Yes	Yes

Table 13: SID List Length

Conclusion: All proposals support segment lists of at least 16 segments.

3.2.4. SID Summarization

The solution MUST be compatible with segment summarization.

In inter sub-domain deployments with summarization:

- *Any node can reach any other node in another sub-domain via a prefix segment.
- *Prefixes are summarized for advertisement between domains.

Without summarization, border router SIDs must be leaked:

- *An additional global prefix segment is required for each domain border to be traversed.

	CSID	CRH	VSID	UIDSR
SID Summarization	Yes	No	Yes	Yes

Table 14: SID Summarization

Conclusion: CSID, VSID and UIDSR support segment summarization, CRH does not.

3.3. Operational Requirements

3.3.1. Lossless Compression

A path traversed using a compressed SID list MUST always be the same as the path traversed using the uncompressed SID list if no compression was applied.

	CSID	CRH	VSID	UIDSR
Lossless Compression	Yes	Yes	Yes	Yes

Table 15: Lossless Compression

Conclusion: All proposals provide lossless compression.

3.3.2. Preservation of non-routing information

The compression mechanism MUST NOT cause the loss of non-routing information when delivering a packet from the SR ingress node to the egress/penultimate SR node

	CSID	CRH	VSID	UIDSR
Preserves Non-Routing Information	Complies	Complies	Complies	Complies

Table 16: Preservation of non-routing information

Conclusion: All proposals preserve non-routing information.

3.3.3. Address Planning

Description: Network operators require addressing plan flexibility, The compression mechanism MUST support flexible IPv6 address planning, it MUST support deployment by using GUA from different address blocks.

	CSID	CRH	VSID	UIDSR
Flexible Address Planning	Yes	Yes	Yes	Yes

Table 17: Address Planning

All compression mechanisms provide the encapsulation savings described in Tables 1 and 2. CRH provides these encapsulation savings regardless of the IPv6 addressing scheme. CSID adds a CSID container, or one compressed SID (END.X with XPS behavior), for each change in locator block in a segment list. VSID (via XPS behavior) and UIDSR add one compressed SID for each change in locator block in the segment list.

The XPS behavior draws the new address block from the control plane. At the time of publication, this control plane behavior is undefined. Therefore XPS impact on the control plane is not entirely understood. While it may be possible to define these mechanisms without impacting the control plane, specifications are not yet available.

Conclusion: All proposals support flexible IPv6 planning.

3.4. Scalability Requirements

The compression proposal MUST be capable of representing 65000 adjacency segments per node.

The compression proposal MUST be capable of representing 1 million prefix segments per SID numbering space.

The compression proposal MUST be capable of representing 1 million services per node.

	CSID	CRH	VSID	UIDSR
Adjacency Segment Scale 65000	Yes	Yes	Yes	Yes
Prefix Segment Scale 1000000	Yes	Yes	Yes	Yes
Service Scale 1000000	Yes	Yes	Yes	Yes

Table 18: Scale Requirements

The 32-bit variants of all proposals support this scale of prefix, adjacency and services at a node.

Each proposals 16-bit variant supports a lesser scale. All proposals can encode 2^{16} prefix, adjacency and service segments. However, each proposal has various ways of supporting some larger scale per node if required.

CRH 16-bit proposes the encoding of the ultimate segment in a TPF destination option instead of the CRH. This supports 2^{32} service segments per node.

VSID proposes the combination of multiple vSIDs, by copying multiple SIDs to a destination address or looking up the next segment in the segment list. This supports more than 2^{16} adjacency and service segments per node.

CSID 16-bit variant uses a LIB for adjacency and service segments, the LIB allows local definition of SIDs longer than 16-bits when needed. This supports more than 2^{16} adjacency and service segments per node.

UIDSR defines a segment type that modifies the value of SRH segments left field to support variable segment sizes within the segment list. This supports 2^{32} adjacency and service segments per node.

Conclusion: All proposals meet scalability requirements.

3.4.1. Compression Levels

The compression proposal SHOULD be able to support multiple levels of compression.

	CSID	CRH	VSID	UIDSR
Multiple compression Levels	Yes	Yes	Yes	Yes

Table 19: Compression Levels

Conclusion: All proposals support 16-bit and 32-bit SID variants.

4. Protocol Design Requirements

4.1. SRv6 Base Coexistence

The compression proposal MUST support deployment in SRv6 networks.

	CSID	CRH	VSID	UIDSR
SRv6 Base Coexistence	Yes	Yes	Yes	Yes

Table 20: SRv6 Base Coexistence

Conclusion: All proposals can be deployed simultaneously with the SRv6 base solution.

5. Security Requirements

5.1. Security Mechanisms

The compression solution SHOULD be able to address security issues that it introduces, using existing security mechanisms.

	CSID	CRH	VSID	UIDSR
Security Mechanisms	Yes	Yes	Yes	Yes

Table 21: Security Mechanisms

Conclusion: All proposals address security issues they may introduce with existing security mechanisms.

5.2. SR Domain Protection

A compression solution must not require nodes outside the SR domain to know SID values within the SR domain, and it must provide the ability to block nodes outside an SR domain from accessing SIDs.

	CSID	CRH	VSID	UIDSR
SR Domain Protection	Yes	Yes	Yes	Yes

Table 22: SR Domain Protection

Conclusion: All proposals protect SIDs within the SR domain.

6. Conclusions

Encapsulation Header Size

*All proposals meet the requirement to reduce the size of the SRv6 encapsulation header. Variances between proposals are negligible.

Forwarding Efficiency

*Overall, the CSID parses the fewest headers. When per packet state is processed per segment, CSID, VSID and UIDSR proposals may include it in the routing header, CRH may include it in a destination option preceding the CRH.

*CSID, VSID, and UIDSR require a single lookup to process an adjacency or VPN segment. CRH always requires 2 lookups for VPN segments, and 2 and sometimes 3 lookups for adjacency segments. All proposals require two lookups to process a prefix segment and the next segment.

State Efficiency

- *CSID, VSID and UIDSR minimize forwarding state stored at a node. CRH moves per segment state from the packet to the FIB.

SRv6 Based

- *CSID is SRv6 based, requiring no updates to existing SRv6 standards, VSID and UIDSR require updates. CRH is not strictly based on SRv6 but is able to provide equivalent functionality.

SRv6 Functionality

- *CSID supports SRv6 functionality. CRH VSID and UID support SRv6 functionality or equivalent with some new specifications.

Heterogeneous SID lists

- *All proposals support heterogeneous SID lists. CSID and UIDSR support heterogeneous SID lists in the SRH, while CRH and VSID require installation of binding SIDs at midpoint nodes.

SID List Length

- *All proposals support segment lists of at least 16 segments.

SID Summarization

- *VSID, CSID and UIDSR support segment summarization, CRH does not.

Operational Requirements

- *All proposals provide lossless compression.
- *All proposals preserve non-routing information.
- *All proposals support flexible IPv6 planning.

Scalability Requirements

- *All proposals meet scalability requirements.
- *All proposals support 16-bit and 32-bit SID variants.

Protocol Design Requirements

- *All proposals can be deployed simultaneously with the SRv6 base solution.

Security Requirements

- *All proposals address security issues they may introduce with existing security mechanisms.

*All proposals protect SIDs within the SR domain.

7. Normative References

- [I-D.bonica-6man-comp-rtg-hdr] Bonica, R., Kamite, Y., Alston, A., Henriques, D., and L. Jalil, "The IPv6 Compact Routing Header (CRH)", Work in Progress, Internet-Draft, draft-bonica-6man-comp-rtg-hdr-28, 18 May 2022, <<https://www.ietf.org/archive/id/draft-bonica-6man-comp-rtg-hdr-28.txt>>.
- [I-D.bonica-6man-vpn-dest-opt] Bonica, R., Kamite, Y., Jalil, L., Zhou, Y., and G. Chen, "The IPv6 Tunnel Payload Forwarding (TPF) Option", Work in Progress, Internet-Draft, draft-bonica-6man-vpn-dest-opt-18, 27 July 2022, <<https://www.ietf.org/archive/id/draft-bonica-6man-vpn-dest-opt-18.txt>>.
- [I-D.bonica-lsr-crh-isis-extensions] Kaneriy, P., Shetty, R., Hegde, S., and R. Bonica, "IS-IS Extensions To Support The IPv6 Compressed Routing Header (CRH)", Work in Progress, Internet-Draft, draft-bonica-lsr-crh-isis-extensions-06, 24 February 2022, <<https://www.ietf.org/archive/id/draft-bonica-lsr-crh-isis-extensions-06.txt>>.
- [I-D.cl-spring-generalized-srv6-for-cmpr] (editor), W. C., Li, Z., (editor), C. L., Clad, F., Liu, A., Xie, C., Liu, Y., and S. Zadok, "Generalized SRv6 Network Programming for SRv6 Compression", Work in Progress, Internet-Draft, draft-cl-spring-generalized-srv6-for-cmpr-05, 24 April 2022, <<https://www.ietf.org/archive/id/draft-cl-spring-generalized-srv6-for-cmpr-05.txt>>.
- [I-D.dekraene-spring-srv6-vlsid] Decraene, B., Raszuk, R., Li, Z., and C. Li, "SRv6 vSID: Network Programming extension for variable length SIDs", Work in Progress, Internet-Draft, draft-dekraene-spring-srv6-vlsid-07, 7 March 2022, <<https://www.ietf.org/archive/id/draft-dekraene-spring-srv6-vlsid-07.txt>>.
- [I-D.filsfils-spring-net-pgm-extension-srv6-usid] Filsfils, C., Garvia, P. C., Cai, D., Voyer, D., Meilik, I., Patel, K., Henderickx, W., Jonnalagadda, P., Melman, D., Liu, Y., and J. Guichard, "Network Programming extension: SRv6 uSID instruction", Work in Progress, Internet-Draft, draft-filsfils-spring-net-pgm-extension-srv6-usid-13, 13 June 2022, <<https://www.ietf.org/>

[archive/id/draft-filsfils-spring-net-pgm-extension-srv6-usid-13.txt](https://www.ietf.org/archive/id/draft-filsfils-spring-net-pgm-extension-srv6-usid-13.txt)>.

[I-D.filsfilscheng-spring-srv6-srh-comp-sl-enc]

Cheng, W., Filsfils, C., Li, Z., Cai, D., Voyer, D., Clad, F., Zadok, S., Guichard, J. N., and L. Aihua, "Compressed SRv6 Segment List Encoding in SRH", Work in Progress, Internet-Draft, draft-filsfilscheng-spring-srv6-srh-comp-sl-enc-03, 20 May 2021, <<https://www.ietf.org/archive/id/draft-filsfilscheng-spring-srv6-srh-comp-sl-enc-03.txt>>.

[I-D.ietf-6man-spring-srv6-oam] Ali, Z., Filsfils, C., Matsushima, S., Voyer, D., and M. Chen, "Operations, Administration, and Maintenance (OAM) in Segment Routing Networks with IPv6 Data plane (SRv6)", Work in Progress, Internet-Draft, draft-ietf-6man-spring-srv6-oam-13, 23 January 2022, <<https://www.ietf.org/archive/id/draft-ietf-6man-spring-srv6-oam-13.txt>>.

[I-D.ietf-bess-srv6-services]

Dawra, G., Talaulikar, K., Raszuk, R., Decraene, B., Zhuang, S., and J. Rabadan, "SRv6 BGP based Overlay Services", Work in Progress, Internet-Draft, draft-ietf-bess-srv6-services-15, 22 March 2022, <<https://www.ietf.org/archive/id/draft-ietf-bess-srv6-services-15.txt>>.

[I-D.ietf-idr-bgppls-srv6-ext]

Dawra, G., Filsfils, C., Talaulikar, K., Chen, M., Bernier, D., and B. Decraene, "BGP Link State Extensions for SRv6", Work in Progress, Internet-Draft, draft-ietf-idr-bgppls-srv6-ext-09, 10 November 2021, <<https://www.ietf.org/archive/id/draft-ietf-idr-bgppls-srv6-ext-09.txt>>.

[I-D.ietf-lsr-flex-algo] Psenak, P., Hegde, S., Filsfils, C., Talaulikar, K., and A. Gulko, "IGP Flexible Algorithm", Work in Progress, Internet-Draft, draft-ietf-lsr-flex-algo-23, 19 September 2022, <<https://www.ietf.org/archive/id/draft-ietf-lsr-flex-algo-23.txt>>.

[I-D.ietf-lsr-ip-flexalgo] Britto, W., Hegde, S., Kaneriy, P., Shetty, R., Bonica, R., and P. Psenak, "IGP Flexible Algorithms (Flex-Algorithm) In IP Networks", Work in Progress, Internet-Draft, draft-ietf-lsr-ip-flexalgo-06, 16 May 2022, <<https://www.ietf.org/archive/id/draft-ietf-lsr-ip-flexalgo-06.txt>>.

[I-D.ietf-lsr-isis-srv6-extensions]

Psenak, P., Filsfils, C., Bashandy, A., Decraene, B., and Z. Hu, "IS-IS Extensions to Support Segment Routing over IPv6 Dataplane", Work in Progress, Internet-Draft, draft-ietf-lsr-isis-srv6-extensions-18, 20 October 2021, <<https://www.ietf.org/archive/id/draft-ietf-lsr-isis-srv6-extensions-18.txt>>.

[I-D.ietf-rtgwg-segment-routing-ti-lfa]

Litkowski, S., Bashandy, A., Filsfils, C., Francois, P., Decraene, B., and D. Voyer, "Topology Independent Fast Reroute using Segment Routing", Work in Progress, Internet-Draft, draft-ietf-rtgwg-segment-routing-ti-lfa-08, 21 January 2022, <<https://www.ietf.org/archive/id/draft-ietf-rtgwg-segment-routing-ti-lfa-08.txt>>.

[I-D.ietf-spring-segment-routing-policy]

Filsfils, C., Talaulikar, K., Voyer, D., Bogdanov, A., and P. Mattes, "Segment Routing Policy Architecture", Work in Progress, Internet-Draft, draft-ietf-spring-segment-routing-policy-22, 22 March 2022, <<https://www.ietf.org/archive/id/draft-ietf-spring-segment-routing-policy-22.txt>>.

[I-D.ietf-spring-sr-service-programming]

Clad, F., Xu, X., Filsfils, C., Bernier, D., Li, C., Decraene, B., Ma, S., Yadlapalli, C., Henderickx, W., and S. Salsano, "Service Programming with Segment Routing", Work in Progress, Internet-Draft, draft-ietf-spring-sr-service-programming-06, 9 June 2022, <<https://www.ietf.org/archive/id/draft-ietf-spring-sr-service-programming-06.txt>>.

[I-D.mirsky-6man-unified-id-sr] Weiqiang, C., Mirsky, G., Shaofu, P., Aihua, L., and G. S. Mishra, "Unified Identifier in IPv6 Segment Routing Networks", Work in Progress, Internet-Draft, draft-mirsky-6man-unified-id-sr-10, 25 September 2021, <<https://www.ietf.org/archive/id/draft-mirsky-6man-unified-id-sr-10.txt>>.

[I-D.srcomptd-spring-compression-requirement]

Cheng, W., Xie, C., Bonica, R., Dukes, D., Li, C., Shaofu, P., and W. Henderickx, "Compressed SRv6 SID List Requirements", Work in Progress, Internet-Draft, draft-srcomptd-spring-compression-requirement-07, 11 July 2021,

<<https://www.ietf.org/archive/id/draft-srcompdt-spring-compression-requirement-07.txt>>.

[I-D.ssangli-bess-bgp-vpn-srm6] Sangli, S. and R. Bonica, "BGP based Virtual Private Network (VPN) Services over SRm6 enabled IPv6 networks", Work in Progress, Internet-Draft, draft-ssangli-bess-bgp-vpn-srm6-02, 7 September 2020, <<https://www.ietf.org/archive/id/draft-ssangli-bess-bgp-vpn-srm6-02.txt>>.

[RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", RFC 8402, DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.

[RFC8754] Filsfils, C., Ed., Dukes, D., Ed., Previdi, S., Leddy, J., Matsushima, S., and D. Voyer, "IPv6 Segment Routing Header (SRH)", RFC 8754, DOI 10.17487/RFC8754, March 2020, <<https://www.rfc-editor.org/info/rfc8754>>.

[RFC8986] Filsfils, C., Ed., Camarillo, P., Ed., Leddy, J., Voyer, D., Matsushima, S., and Z. Li, "Segment Routing over IPv6 (SRv6) Network Programming", RFC 8986, DOI 10.17487/RFC8986, February 2021, <<https://www.rfc-editor.org/info/rfc8986>>.

Appendix A. Encapsulation analysis

A.1. CRH note

CRH compression efficiency statistics are derived as follows:

If an SR path contains no transport segments and a VPN segment, the SR path is encoded in a single IPv6 header (40 bytes). The destination address in the IPv6 header is a classic SRv6 SID (e.g., END.DT4, END.DT6).

If the SR path contains T transport segments and a VPN segment, and T is greater than 0, the SR path can be encoded:

*With an IPv6 Tunnel Payload Function (TPF) Option [[I-D.bonica-6man-vpn-dest-opt](#)]

*Without a TPF Option

If the SR path is encoded with a TPF Option, the packet includes a single IPv6 Header (40 bytes), a CRH (variable length), and a Destination Options header (8 bytes). The destination address in the IPv6 header represents the IPv6 address of an interface on the first transport segment endpoint. The CRH must be large enough to contain the subsequent T segments.

If the SR path is encoded without a TPF Option, the packet includes a single IPv6 Header (40 bytes) plus a CRH (variable length). The destination address in the IPv6 header represents the IPv6 address of an interface on the first transport segment endpoint. The CRH must be large enough to contain T+1 segments. In the CRH, SID[1] maps to the IPv6 address of the PE router. SID[0] maps to a classic SRv6 SID (e.g., END.DT4) that is instantiated on the PE router.

In some deployment scenarios, each encoding strategy yields better compression.

A.2. Analysis results

The detailed encapsulation and encapsulation savings per proposal with one VPN segment and "T" transport segments:

T	CSID	CRH	CRH+TPF	VSID	UIDSR
0	40	40	40	40	40
1	40	48	56	56	64
2	40	56	56	56	64
3	40	56	64	56	64
4	64	56	64	64	64
5	64	56	64	64	64
6	64	64	64	64	64
7	64	64	72	64	64
8	64	64	72	72	64
9	80	64	72	72	80
10	80	72	72	72	80
11	80	72	80	72	80
12	80	72	80	80	80
13	80	72	80	80	80
14	96	80	80	80	80
15	96	80	88	80	80

Table 23: Encapsulation (E) octets,
16bit SIDS, 48B.0-15T.V

T	CSID	CRH	CRH+TPF	VSID	UIDSR
0	0.0%	0.0%	0.0%	0.0%	0.0%
1	37.5%	25.0%	12.5%	12.5%	0.0%
2	50.0%	30.0%	30.0%	30.0%	20.0%
3	58.3%	41.7%	33.3%	41.7%	33.3%
4	42.9%	50.0%	42.9%	42.9%	42.9%
5	50.0%	56.3%	50.0%	50.0%	50.0%
6	55.6%	55.6%	55.6%	55.6%	55.6%
7	60.0%	60.0%	55.0%	60.0%	60.0%
8	63.6%	63.6%	59.1%	59.1%	63.6%
9	58.3%	66.7%	62.5%	62.5%	58.3%

T	CSID	CRH	CRH+TPF	VSID	UIDSR
10	61.5%	65.4%	65.4%	65.4%	61.5%
11	64.3%	67.9%	64.3%	67.9%	64.3%
12	66.7%	70.0%	66.7%	66.7%	66.7%
13	68.8%	71.9%	68.8%	68.8%	68.8%
14	64.7%	70.6%	70.6%	70.6%	70.6%
15	66.7%	72.2%	69.4%	72.2%	72.2%

Table 24: Encapsulation Savings (ES),
16bit SIDS, 48B.0-15T.V

T	CSID	CRH	CRH+TPF	VSID	UIDSR
0	40	40	40	40	40
1	64	56	56	56	64
2	64	56	64	56	64
3	64	64	64	64	64
4	64	64	72	64	64
5	80	72	72	72	80
6	80	72	80	72	80
7	80	80	80	80	80
8	80	80	88	80	80
9	96	88	88	88	96
10	96	88	96	88	96
11	96	96	96	96	96
12	96	96	104	96	96
13	112	104	104	104	112
14	112	104	112	104	112
15	112	112	112	112	112

Table 25: Encapsulation (E) octets,
32bit SIDS, 48B.0-15T.V

T	CSID	CRH	CRH+TPF	VSID	UIDSR
0	0.0%	0.0%	0.0%	0.0%	0.0%
1	0.0%	12.5%	12.5%	12.5%	0.0%
2	20.0%	30.0%	20.0%	30.0%	20.0%
3	33.3%	33.3%	33.3%	33.3%	33.3%
4	42.9%	42.9%	35.7%	42.9%	42.9%
5	37.5%	43.8%	43.8%	43.8%	37.5%
6	44.4%	50.0%	44.4%	50.0%	44.4%
7	50.0%	50.0%	50.0%	50.0%	50.0%
8	54.5%	54.5%	50.0%	54.5%	54.5%
9	50.0%	54.2%	54.2%	54.2%	50.0%
10	53.8%	57.7%	53.8%	57.7%	53.8%
11	57.1%	57.1%	57.1%	57.1%	57.1%
12	60.0%	60.0%	56.7%	60.0%	60.0%
13	56.3%	59.4%	59.4%	59.4%	56.3%
14	58.8%	61.8%	58.8%	61.8%	58.8%
15	61.1%	61.1%	61.1%	61.1%	61.1%

Table 26: Encapsulation Savings (ES),
32bit SIDS, 48B.0-15T.V

Authors' Addresses

Ron Bonica
Juniper

Email: rbonica@juniper.net

Weiqiang Cheng
China Mobile

Email: chengweiqiang@chinamobile.com

Darren Dukes (editor)
Cisco Systems

Email: ddukes@cisco.com

Wim Henderickx
Nokia

Email: wim.henderickx@nokia.com

Cheng Li
Huawei

Email: c.l@huawei.com

Peng Shaofu
ZTE

Email: peng.shaofu@zte.com.cn

Chongfeng Xie
China Telecom

Email: xiechf@chinatelecom.cn