

SPRING Working Group
Internet-Draft
Intended status: Standards Track
Expires: February 21, 2022

W. Cheng
H. Li
China Mobile
M. Chen
Huawei
R. Gandhi
Cisco Systems, Inc.
R. Zigler
Broadcom
August 20, 2021

Path Segment in MPLS Based Segment Routing Network
draft-ietf-spring-mpls-path-segment-05

Abstract

A Segment Routing (SR) path is identified by an SR segment list. Only the complete segment list can identify the end-to-end SR path, and a sub-set of segments from the segment list cannot distinguish one SR path from another as they may be partially congruent. SR path identification is a pre-requisite for various use-cases such as Performance Measurement (PM), bidirectional paths correlation, and end-to-end 1+1 path protection.

In SR for MPLS data plane (SR-MPLS), the segment identifiers are stripped from the packet through label popping as the packet transits the network. This means that when a packet reaches the egress of the SR path, it is not possible to determine on which SR path it traversed the network.

This document defines a new type of segment that is referred to as Path Segment, which is used to identify an SR path in an SR-MPLS network. When used, it is inserted by the ingress node of the SR path and immediately follows the last segment identifier in the segment list of the SR path. The Path Segment will not be popped off until it reaches the egress node of the SR path. The Path Segment then can be used by the egress node to implement SR path identification and correlation.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute

working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on February 21, 2022.

Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
1.1.	Requirements Language	3
1.2.	Abbreviations	3
2.	Path Segment	4
3.	Path Segment Allocation	6
4.	Nesting of Path Segments	7
5.	Path Segment for Performance Measurement	8
6.	Path Segment for Bidirectional SR Path	9
7.	Path Segment for End-to-end Path Protection	9
8.	Security Considerations	10
9.	IANA Considerations	10
10.	References	10
10.1.	Normative References	10
10.2.	Informative References	11
	Acknowledgements	12
	Contributors	13
	Authors' Addresses	13

1. Introduction

Segment Routing (SR) [[RFC8402](#)] is a source routed forwarding method that allows to directly encode forwarding instructions (called segments) in each packet, hence it enables steering traffic through a network without the per-flow states maintained on the transit nodes. Segment Routing can be instantiated on an MPLS data plane or an IPv6 data plane. The former is called SR-MPLS [[RFC8660](#)], the latter is called SRv6 [[RFC8402](#)]. SR-MPLS leverages the MPLS label stack to construct an SR path.

In an SR-MPLS network, when a packet is transmitted along an SR path, the labels in the MPLS label stack will be swapped or popped. So that no label or only the last label (e.g. Explicit-Null label) may be left in the MPLS label stack when the packet reaches the egress node. Thus, the egress node cannot determine along which SR path the packet came.

However, to support various use-cases in SR-MPLS networks, like end-to-end 1+1 path protection (Live-Live case) [[RFC4426](#)], bidirectional path [[RFC5654](#)], or Performance Measurement (PM) [[RFC7799](#)], the ability to implement path identification on the egress node is a pre-requisite.

Therefore, this document introduces a new segment type that is referred to as the Path Segment. A Path Segment is defined to uniquely identify an SR path in an SR-MPLS network in the context of the egress node. It is normally used by the egress nodes for path identification hence to support various use-cases including SR path PM, end-to-end 1+1 SR path protection, and bidirectional SR paths correlation.

1.1. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

1.2. Abbreviations

DM: Delay Measurement.

LM: Loss Measurement.

MPLS: Multiprotocol Label Switching.

MSD: Maximum SID Depth.

PM: Performance Measurement.

PSID: Path Segment ID.

SID: Segment ID.

SL: Segment List.

SR: Segment Routing.

SRLB: SR Local Block

SRGB: SR Global Block

SR-MPLS: Segment Routing instantiated on MPLS data plane.

2. Path Segment

A Path Segment is a single label that is assigned from the Segment Routing Local Block (SRLB) [[RFC8402](#)] or Segment Routing Global Block (SRGB) [[RFC8402](#)] or dynamic MPLS label pool of the egress node of an SR path. It means that the Path Segment is unique in the context of the egress node of the SR path. When a Path Segment is used, the Path Segment MUST be inserted at the ingress node and MUST immediately follow the last label of the SR path, in other words, inserted after the routing segment (adjacency/node/prefix segment) pointing to the egress node.

The term of SR path used in this document is a general term that can be used to describe a SR Policy, a Candidate-Path (CP), or a SID List (SL) [[I-D.ietf-spring-segment-routing-policy](#)]. Therefore, the Path Segment may be used to identify an SR Policy, its CP, or a SL terminating on an egress node depending on the use-case.

The value of the TTL field in the MPLS label stack entry containing the Path Segment MUST be set to the same value as the TTL of the last label stack entry for the last segment in the SR path. If the Path Segment is the bottom label, the S bit MUST be set.

Normally, the intermediate nodes will not see the Path Segment label. A Path Segment presenting to an intermediate node is an error condition.

A Path Segment can be used in the case of Penultimate Hop Popping (PHP), where some labels are be popped off at the penultimate hop of

an SR path, but the Path Segment MUST NOT be popped off until it reaches at the egress node.

The egress node MUST pop the Path Segment. The egress node MAY use the Path Segment for further processing. For example, when performance measurement is enabled on the SR path, it can trigger packet counting or timestamping.

In some deployments, service labels may be added after the Path Segment label in the MPLS label stack. In this case, the egress node MUST be capable of processing more than one label. The additional processing required, may have an impact on forwarding performance.

Generic Associated Label (GAL) is used for Operations, Administration and Maintenance (OAM) in MPLS networks [[RFC5586](#)]. When GAL is used, it MUST be added at the bottom of the label stack after the Path Segment label.

Entropy label and Entropy Label Indicator (ELI) as described in [[RFC8662](#)] for SR-MPLS path, can be placed before or after the Path Segment label in the MPLS label stack.

The SR path computation needs to know the Maximum SID Depth (MSD) that can be imposed at each node/link of a given SR path [[RFC8664](#)]. This ensures that the SID stack depth of a computed path does not exceed the number of SIDs the node is capable of imposing. The MSD used for path computation MUST include the Path Segment label.

The label stack with Path Segment is shown in Figure 1:

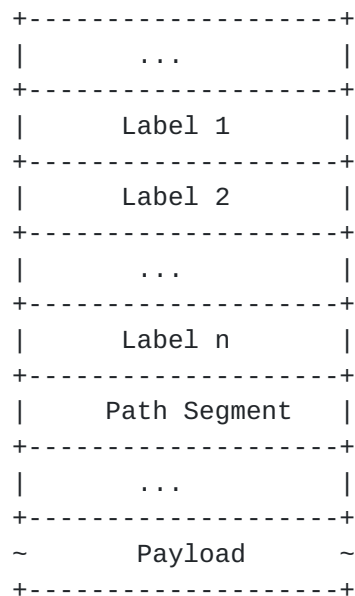


Figure 1: Label Stack with Path Segment

Where:

- o The Labels 1 to n are the segment label stack used to direct how to steer the packets along the SR path.
- o The Path Segment identifies the SR path in the context of the egress node of the SR path.

3. Path Segment Allocation

Several ways can be used to allocate the Path Segment.

One way is to set up a communication channel (e.g., MPLS Generic Associated Channel (G-ACh)) [[RFC5586](#)] between the ingress node and the egress node, and the ingress node of the SR path can directly send a request to the egress node to allocate a Path Segment. The detail of G-ACh based solution is left for future study and out of the scope of this document.

Another way is to leverage a centralized controller (e.g., SDN controller) to assign the Path Segment. In this case, the controller will deliver the Path Segment and corresponding path information (e.g., SR policy) to the ingress node. Path Computation Element Communication Protocol (PCEP) based Path Segment allocation for SR Policy is defined in [[I-D.ietf-pce-sr-path-segment](#)], BGP based Path Segment allocation for SR Policy is defined in [[I-D.ietf-idr-sr-policy-path-segment](#)]. At the same time, the

controller MUST make sure (e.g., by some capability discovery mechanisms outside the scope of this document) that the egress node knows the Path Segment and it can process it, as well as the label does not collide with any label allocation done by the egress node.

4. Nesting of Path Segments

Binding SID (BSID) [[RFC8402](#)] can be used for SID list compression. With BSID, an end-to-end SR path can be split into several sub-paths, each sub-path is identified by a BSID. Then an end-to-end SR path can be identified by a list of BSIDs, therefore, it can provide better scalability.

BSID and Path SID (PSID) can be combined to achieve both sub-path and end-to-end path monitoring. A reference model for such a combination in (Figure 2) shows an end-to-end path (A->D) that spans three domains (Access, Aggregation and Core domain) and consists of three sub-paths, one in each sub-domain (sub-path (A->B), sub-path (B->C) and sub-path (C->D)). Each sub-path is allocated a BSID. For nesting the sub-paths, each sub-path is allocated a PSID. Then, the SID list of the end-to-end path can be expressed as <BSID1, BSID2, ..., BSIDn, e-PSID>, where the e-PSID is the PSID of the end-to-end path. The SID list of a sub-path can be expressed as <SID1, SID2, ...SIDn, s-PSID>, where the s-PSID is the PSID of the sub-path.

Figure 2 shows the details of the label stacks when PSID and BSID are used to support both sub-path and end-to-end path monitoring in a multi-domain scenario.

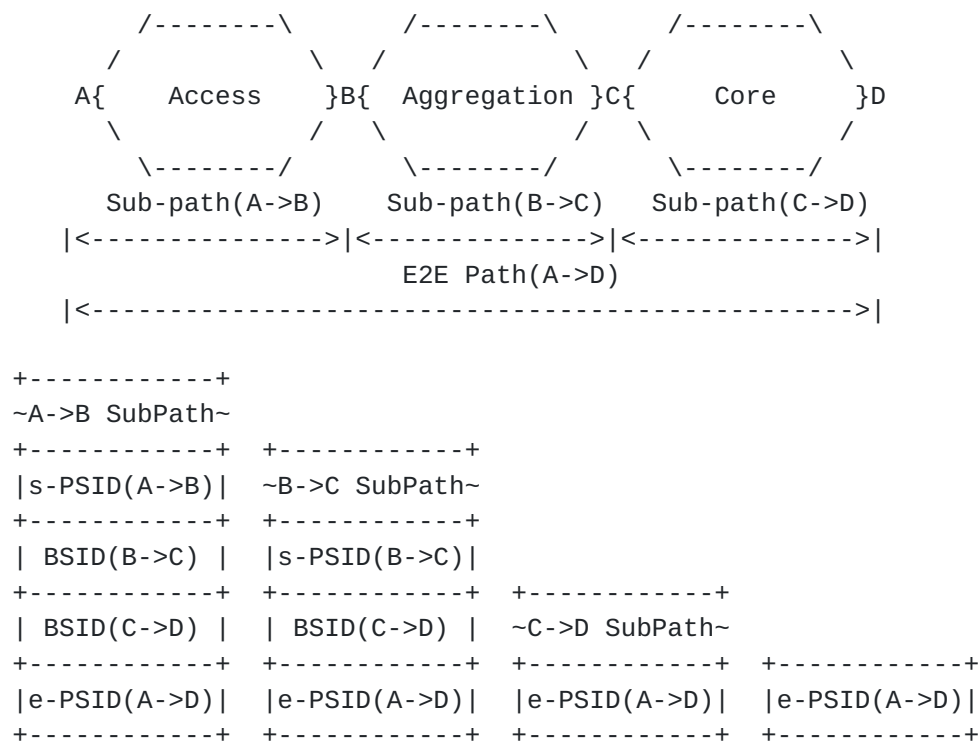


Figure 2: Nesting of Path Segments

5. Path Segment for Performance Measurement

As defined in [RFC7799], performance measurement can be classified into Passive, Active, and Hybrid measurement. Since Path Segment is encoded in the SR-MPLS Label Stack as shown in Figure 1, existing implementation on the egress node can be leveraged for measuring packet counts using the incoming SID (the Path Segment). A different scheme such as carrying such identifier after the bottom of the label stack may require new implementation.

For Passive performance measurement, path identification at the measuring points is the prerequisite. Path Segment can be used by the measuring points (e.g., the ingress and egress nodes of the SR path or a centralized controller) to measure packet counts on the egress node and to correlate the packet counters and timestamps from the ingress and egress nodes for a specific SR path, then packet loss and delay can be calculated for the end-to-end path, respectively.

Path Segment can also be used for Active performance measurement for an end-to-end SR path in SR-MPLS networks for measuring packet counts on the egress node and for collecting the packet counters and timestamps from the egress node associated with the SR path using probe messages [I-D.ietf-mpls-rfc6374-sr] and [I-D.ietf-spring-stamp-srpm].

Path Segment can also be used for In-situ OAM (IOAM) for SR-MPLS to identify the SR path associated with the in-situ data fields in the data packets on the egress node [[I-D.ietf-ippm-ioam-data](#)].

Path Segment can also be used for In-band PM with Alternate Marking Method for SR-MPLS to identify the SR Path associated with the performance metrics collected [[I-D.ietf-mpls-inband-pm-encapsulation](#)].

6. Path Segment for Bidirectional SR Path

In some scenarios, for example, mobile backhaul transport networks, there are requirements to support bidirectional paths, and the path is normally treated as a single entity. The both directions of the path have the same fate, for example, failure in one direction will result in switching traffic at both directions. MPLS supports this by introducing the concepts of co-routed bidirectional LSP and associated bidirectional LSP [[RFC5654](#)].

In the current SR architecture, an SR path is a unidirectional path [[RFC8402](#)]. In order to support bidirectional SR paths, a straightforward way is to bind two unidirectional SR paths to a single bidirectional SR path. Path Segments can then be used to identify and correlate the traffic for the two unidirectional SR paths at both ends of the bidirectional path.

[[I-D.ietf-pce-sr-bidir-path](#)] defines procedures on how to use PCEP for SR Policy to initiate a bidirectional SR path. Also, [[I-D.ietf-idr-sr-policy-path-segment](#)] defines procedures on how to use BGP for SR Policy to initiate a bidirectional SR path.

7. Path Segment for End-to-end Path Protection

For end-to-end 1+1 path protection (i.e., Live-Live case), the egress node of the path needs to know the set of paths that constitute the primary and the secondaries, in order to select the primary path packets for onward transmission, and to discard the packets from the secondaries [[RFC4426](#)].

To do this in Segment Routing, each SR path needs a path identifier that is unique at the egress node. For SR-MPLS, this can be the Path Segment label allocated by the egress node.

There then needs to be a method of binding this SR path identifiers into equivalence groups such that the egress node can determine for example, the set of packets that represent a single primary path. It is obvious that this equivalence group can be instantiated in the network by an SDN controller using the Path Segments of the SR paths.

8. Security Considerations

Path Segment in SR-MPLS does not introduce any new behavior or any change in the way the MPLS data plane works. [Section 8.1 of \[RFC8402\]](#) describe the security consideration for SR-MPLS. Path segment is additional metadata that is added to the packet consisting of the SR path.

An attacker could exploit path segment to manipulate the accounting of SR traffic at the egress. Path segment could also be used to monitor traffic patterns for the E2E paths. The control protocols used to allocate path segments could also be exploited to disseminate incorrect path segment information. Note that, the path segment is imposed at the ingress and removed at the egress boundary and is not leaked out of the administered domain.

9. IANA Considerations

This document does not require any IANA actions.

10. References

10.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", [RFC 8402](#), DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.
- [RFC8660] Bashandy, A., Ed., Filsfils, C., Ed., Previdi, S., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing with the MPLS Data Plane", [RFC 8660](#), DOI 10.17487/RFC8660, December 2019, <<https://www.rfc-editor.org/info/rfc8660>>.

10.2. Informative References

- [I-D.ietf-idr-sr-policy-path-segment]
Li, C., Li, Z., Yin, Y., Cheng, W., and K. Talaulikar, "SR Policy Extensions for Path Segment and Bidirectional Path", [draft-ietf-idr-sr-policy-path-segment-04](#) (work in progress), July 2021.
- [I-D.ietf-ippm-ioam-data]
Brockners, F., Bhandari, S., and T. Mizrahi, "Data Fields for In-situ OAM", [draft-ietf-ippm-ioam-data-14](#) (work in progress), June 2021.
- [I-D.ietf-mpls-inband-pm-encapsulation]
Cheng, W., Min, X., Zhou, T., Dong, X., and Y. Peleg, "Encapsulation For MPLS Performance Measurement with Alternate Marking Method", [draft-ietf-mpls-inband-pm-encapsulation-01](#) (work in progress), April 2021.
- [I-D.ietf-mpls-rfc6374-sr]
Gandhi, R., Filsfils, C., Voyer, D., Salsano, S., and M. Chen, "Performance Measurement Using [RFC 6374](#) for Segment Routing Networks with MPLS Data Plane", [draft-ietf-mpls-rfc6374-sr-03](#) (work in progress), July 2021.
- [I-D.ietf-pce-sr-bidir-path]
Li, C., Chen, M., Cheng, W., Gandhi, R., and Q. Xiong, "Path Computation Element Communication Protocol (PCEP) Extensions for Associated Bidirectional Segment Routing (SR) Paths", [draft-ietf-pce-sr-bidir-path-07](#) (work in progress), July 2021.
- [I-D.ietf-pce-sr-path-segment]
Li, C., Chen, M., Cheng, W., Gandhi, R., and Q. Xiong, "Path Computation Element Communication Protocol (PCEP) Extension for Path Segment in Segment Routing (SR)", [draft-ietf-pce-sr-path-segment-04](#) (work in progress), August 2021.
- [I-D.ietf-spring-segment-routing-policy]
Filsfils, C., Talaulikar, K., Voyer, D., Bogdanov, A., and P. Mattes, "Segment Routing Policy Architecture", [draft-ietf-spring-segment-routing-policy-13](#) (work in progress), May 2021.

[I-D.ietf-spring-stamp-srpm]

Gandhi, R., Filsfils, C., Voyer, D., Chen, M., Janssens, B., and R. Foote, "Performance Measurement Using Simple TWAMP (STAMP) for Segment Routing Networks", [draft-ietf-spring-stamp-srpm-01](#) (work in progress), July 2021.

[RFC4426] Lang, J., Ed., Rajagopalan, B., Ed., and D. Papadimitriou, Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Recovery Functional Specification", [RFC 4426](#), DOI 10.17487/RFC4426, March 2006, <<https://www.rfc-editor.org/info/rfc4426>>.

[RFC5586] Bocci, M., Ed., Vigoureux, M., Ed., and S. Bryant, Ed., "MPLS Generic Associated Channel", [RFC 5586](#), DOI 10.17487/RFC5586, June 2009, <<https://www.rfc-editor.org/info/rfc5586>>.

[RFC5654] Niven-Jenkins, B., Ed., Brungard, D., Ed., Betts, M., Ed., Sprecher, N., and S. Ueno, "Requirements of an MPLS Transport Profile", [RFC 5654](#), DOI 10.17487/RFC5654, September 2009, <<https://www.rfc-editor.org/info/rfc5654>>.

[RFC7799] Morton, A., "Active and Passive Metrics and Methods (with Hybrid Types In-Between)", [RFC 7799](#), DOI 10.17487/RFC7799, May 2016, <<https://www.rfc-editor.org/info/rfc7799>>.

[RFC8662] Kini, S., Kompella, K., Sivabalan, S., Litkowski, S., Shakir, R., and J. Tantsura, "Entropy Label for Source Packet Routing in Networking (SPRING) Tunnels", [RFC 8662](#), DOI 10.17487/RFC8662, December 2019, <<https://www.rfc-editor.org/info/rfc8662>>.

[RFC8664] Sivabalan, S., Filsfils, C., Tantsura, J., Henderickx, W., and J. Hardwick, "Path Computation Element Communication Protocol (PCEP) Extensions for Segment Routing", [RFC 8664](#), DOI 10.17487/RFC8664, December 2019, <<https://www.rfc-editor.org/info/rfc8664>>.

Acknowledgements

The authors would like to thank Adrian Farrel, Stewart Bryant, Shuangping Zhan, Alexander Vainshtein, Andrew G. Malis, Ketan Talaulikar, Shraddha Hegde, and Loa Andersson for their review, suggestions and comments to this document.

The authors would like to acknowledge the contribution from Alexander Vainshtein on "Nesting of Path Segments".

Contributors

The following people have substantially contributed to this document:

Cheng Li
Huawei Technologies

Email: chengli13@huawei.com

Lei Wang
China Mobile

Email: wangleiyj@chinamobile.com

Aihua Liu
ZTE Corp

Email: liu.aihua@zte.com.cn

Greg Mirsky
ZTE Corp

Email: gregimirsky@gmail.com

Authors' Addresses

Weiqiang Cheng
China Mobile

Email: chengweiqiang@chinamobile.com

Han Li
China Mobile

Email: lihan@chinamobile.com

Mach(Guoyi) Chen
Huawei

Email: mach.chen@huawei.com

Rakesh Gandhi
Cisco Systems, Inc.
Canada

Email: rgandhi@cisco.com

Royi Zigler
Broadcom

Email: royi.zigler@broadcom.com