

SPRING Working Group
Internet-Draft
Intended status: Standards Track
Expires: 19 August 2022

X. Geng
M. Chen
F. Yang, Ed.
Huawei Technologies
P. Camarillo
Cisco Systems, Inc.
G. Mishra
Verizon Inc.
15 February 2022

SRv6 for Redundancy Protection
draft-ietf-spring-sr-redundancy-protection-01

Abstract

Redundancy Protection is a generalized protection mechanism to achieve the high reliability of service transmission in Segment Routing network. The mechanism inherits the "Live-Live" methodology, targeting to enhance the functionalities of Segment Routing over IPv6. Inspired by DetNet Packet Replication and Packet Elimination functions, two new Segments are introduced to provide replication and elimination functions on specific network nodes by leveraging SRv6 Segment programming capabilities.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in .

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 19 August 2022.

Internet-Draft

SRv6 for Redundancy Protection

February 2022

Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Revised BSD License.

Table of Contents

1.	Introduction	2
2.	Terminology	3
2.1.	Requirements Language	3
2.2.	Terminology and Conventions	3
3.	Redundancy Protection in Segment Routing Scenario	4
4.	Segment to Support Redundancy Protection	5
4.1.	Redundancy Segment	5
4.2.	Merging Segment	6
5.	Meta Data to Support Redundancy Protection	7
6.	Segment Routing Policy to Support Redundancy Protection	8
7.	IANA Considerations	8
8.	Security Considerations	9
9.	Acknowledgements	9
10.	References	9
10.1.	Normative References	9
10.2.	Informative References	9
	Authors' Addresses	10

[1.](#) Introduction

Redundancy Protection is a generalized protection mechanism to achieve the high reliability of service transmission in Segment Routing network. Specifically, packets of flows are replicated at a network node into two or more copies, which are transported via different and disjoint paths in parallel. When copies of packets are received and merged at one network node, the redundant packets are determined and further eliminated to guarantee only one copy of

packets is transmitted. The mechanism inherits the "Live-Live" methodology, targeting to enhance the functionalities of Segment Routing over IPv6 [[RFC8986](#)]. Inspired by DetNet [[RFC8655](#)] Packet Replication and Packet Elimination Functions, two new Segments are introduced to provide the replication and elimination functions on

specific network nodes by leveraging SRv6 Segment programming capabilities. As it is unnecessary to perform switchover of receiving packets between different paths, redundancy protection can facilitate to achieve zero packet loss target when failure on either path happens.

Redundancy protection provides ultra reliable protection to many services, for example Cloud VR/Game, IPTV service and other type of video services, high value private line service etc. In this document, redundancy protection is applied to point-to-point service. The mechanism for point-to-multipoint service stays out of the scope of this document.

Segment Routing (SR) leverages the source routing paradigm. An ingress node steers a packet through an ordered list of instructions, called "segments". A segment can be associated to an arbitrary processing of the packet in the node identified by the segment.

This document extends the Segment Routing capabilities to support the redundancy protection in an SRv6 environment, including the definitions of two new Segments, meta data encapsulation, and a variation of Segment Routing Policy.

[2.](#) Terminology

[2.1.](#) Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

[2.2.](#) Terminology and Conventions

SR: Segment Routing

URLLC: Ultra-Reliable Low-Latency Communication

VR: Virtual Reality

Red node: Redundancy node

Mer node: Merging node

FID: Flow IDentification

SN: Sequence Number

3. Redundancy Protection in Segment Routing Scenario

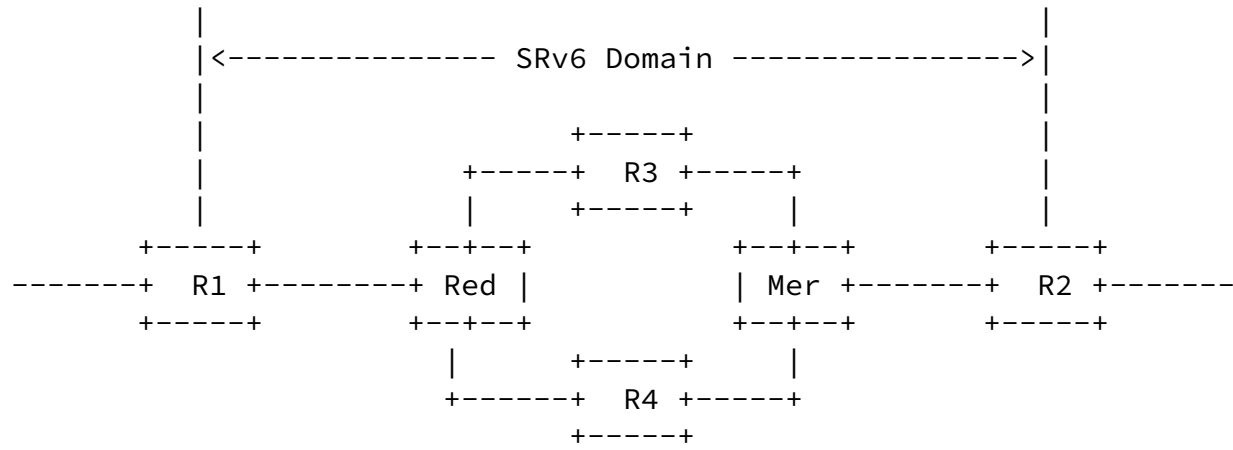


Figure 1: Example Scenario of Redundancy Protection in SRv6 Domain

This figure shows an example of redundancy protection used in SRv6 domain. R1, R2, R3, R4, Red and Mer are SR-capable nodes. When a flow is sent into SRv6 domain, the process is:

- 1) R1 receives the traffic flow and encapsulates packets with a list of segments destined to R2, which is instantiated as an ordered list of SRv6 SIDs.
- 2) When the packet flow arrives at Red node, known as Redundancy node, each packet is replicated into two or more copies. Each copy

of the packet is encapsulated with a new segment list, which represents different disjoint forwarding paths.

3) Meta data information such as flow identification (FID) and sequence number (SN) is used to facilitate the packet elimination on Merging node (Mer). Flow identification identifies the specific flow, and sequence number distinguishes the packet sequence of a flow. Meta data is either carried in the packet before it arrives at redundancy node, or added to each of the replicas at redundancy node.

4) The multiple replicas go through different paths until the Mer node, known as Merging node. The first received copy of each flow packet is transmitted from Merging node to R2, and the redundant packets are eliminated.

5) When there is any failures or packet loss in one path, the service transmission continues through the other path non-disruptively.

6) Sometimes, out-of-order packets may occur since service packets are recovered from different forwarding paths. In this case, the merging node or other network nodes behind merging node is desired to include a reordering function, which is implementation specific and out of the scope of this document.

In this example, service protection is supported by utilizing two packet flows transmitted over two forwarding paths. It is noted that there is no limitation of the number of replicas. For a unidirectional flow, Red node supports replication function, and Mer node supports elimination function. Reordering function MAY be required in combination of elimination function on merging node. To minimize the jitter caused by random packet loss, the disjoint paths are recommended to have similar path forwarding delay.

[4.](#) Segment to Support Redundancy Protection

To achieve the packet replication and elimination functions, Redundancy Segment and Merging Segment, as well as the related SRv6 Endpoint Behavior are introduced.

[4.1.](#) Redundancy Segment

Redundancy Segment is the identifier of packets which need to be replicated on redundancy node. It is a variation of Binding SID (BSID) to associate with a Redundancy Policy, instantiation of which provides segment lists of different disjoint paths. Similar to the relationship between BSID and SR Policy [[I-D.ietf-spring-segment-routing-policy](#)], the use of Redundancy Segment would trigger the Redundancy Policy instantiation on redundancy node.

Redundancy Segment is associated with service instructions, indicating the following operations:

- * Steers the packet into the corresponding redundancy policy
- * Encapsulates flow identification and sequence number in packets if the two information is not carried in packets
- * Packet replication and segment encapsulation based on the information of redundancy policy, e.g., the number of replication copies, an ordered list of segments with a topological instruction

In the case of SRv6, a new behavior End.R for Redundancy Segment is defined. An instance of a redundancy SID is associated with a redundancy policy B and a source address A. In the following description, End.R behavior is specified in the encapsulation mode. The End.R behavior in the insertion mode is for further study.

When an SRv6-capable node (N) receives an IPv6 packet whose destination address matches a local IPv6 address instantiated as an SRv6 SID (S), and S is a Redundancy SID, N does:

```
S01. When an SRH is processed {
S02.   If (Segments Left>0)   {
S03.     Decrement IPv6 Hop Limit by 1
S04.     Decrement Segments Left by 1
S05.     Update IPv6 DA with Segment List[Segments Left]
```

S06. Add flow identification and sequence number if indicated*

S07. Duplicate the packets (as number of active SID lists in B)

S08. Push the new IPv6 headers to each replica. The IPv6 header contains an SRH with the SID list in B

S09. Set the outer IPv6 SA to A

S10. Set the outer IPv6 DA to the first SID of new SRH SL

S11. Set the outer Payload Length, Traffic Class, Flow Label, Hop Limit and Next-Header fields

S12. Submit the packet to the egress IPv6 FIB lookup for transmission to the new destination

S13. }

S14. }

* Adding flow identification and sequence number is an optional behavior for Redundancy Segment. The instruction execution is determined and explicitly indicated by SR policy or Segment itself.

[4.2.](#) Merging Segment

Merging Segment is associated with service instructions, indicates the following operations:

- * Packet merging and elimination: forward the first received packets and eliminate the redundant packets

In order to eliminate the redundant packet of a flow, merging node utilizes sequence number to evaluate the redundant status of a packet. Note that implementation specific mechanism could be applied to control the amount of state monitored on sequence number, so that system memory usage can be limited at a reasonable level.

As merging node needs to maintain the state of flows, a centralized controller should have a knowledge of merging nodes capability, and never provision the redundancy policy to redundancy node when the

computation result goes beyond the flow recovery capability of merging node. The capability advertisement of merging node will be specified separately elsewhere, which is not within the scope of this document.

In the case of SRv6, a new behavior End.M for Merging Segment is defined.

When an SRv6-capable node (N) receives an IPv6 packet whose destination address matches a local IPv6 address instantiated as an SRv6 SID (S), and S is a Merging SID, N does:

```
S01. When an SRH is processed {
S02.   If (Segments Left > 0) {
S03.     Acquire the sequence number of received packet and
       look it up in table
S04.     If (this sequence number does not exist in the table) {
S05.       Store this sequence number in table
S06.       Remove the outer IPv6+SRH header
S07.       Decrement IPv6 Hop Limit by 1 in inner SRH
S08.       Decrement Segments Left by 1 in inner SRH
S09.       Update IPv6 DA with Segment List[Segments Left] in inner SRH
S10.       Submit the packet to the egress IPv6 FIB lookup and transmit
S11.     }
S12.   ELSE {
S13.     Drop the packet
S14.   }
S15. }
S16. }
```

[5.](#) Meta Data to Support Redundancy Protection

To support the redundancy protection function, flow identification and sequence number are added in the packet and further used at merging node when the merging function is executed. Flow identification identifies one specific flow of redundancy protection, and is usually allocated from centralized controller to SR ingress node or redundancy node in SR network. Note that flow identification can also be allocated and advertised by merging node. BGP, PCEP or Netconf protocols can facilitate the advertisement and distribution of flow identification among controller, redundancy node and merging node. Sequence number distinguishes the packets within a flow by specifying the order of packets. Not like the uniqueness of flow identification to one specific flow, sequence number keeps changing to each packet within a flow. It is RECOMMENDED to add the sequence number in forwarding plane as performance and scalability is required.

Figure 4 suggests an encapsulation of flow identification and

sequence number in Segment Routing Header (SRH) [[RFC8754](#)] when redundancy protection is used in SRv6 network.

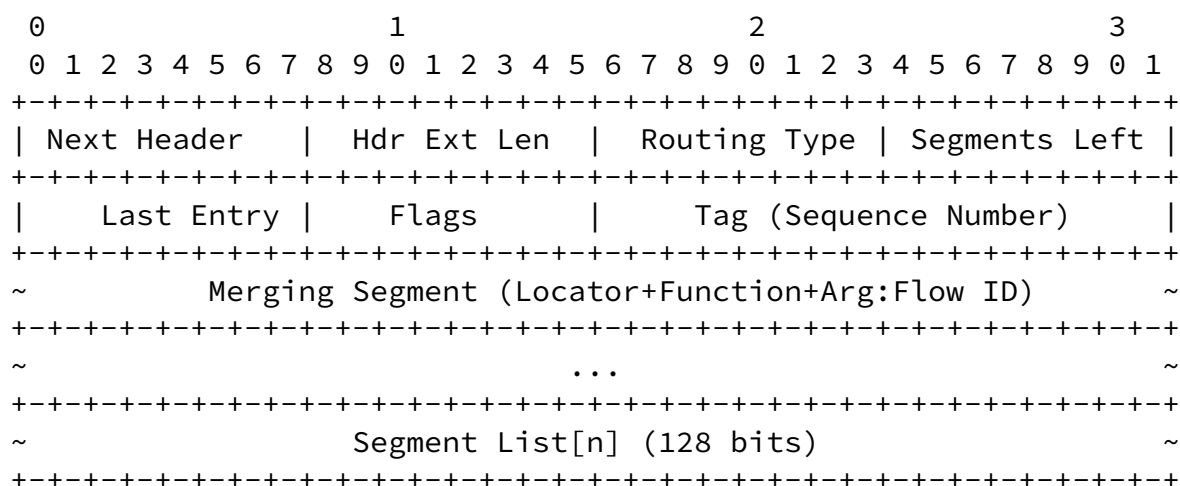


Figure 4 Encapsulation of Flow Identification and Sequence Number

Since the flow identification is only used at merging node to identify the specific flow of redundancy protection, it is RECOMMENDED to be encapsulated in the Arguments of Merging Segment in SRH. The length of flow identification is not limited, however in practice it is suggested to be 16 bits.

All the duplicates of the same packet need to be tagged for deduplication at the merging node. For this purpose, we will use a sequence number. It is RECOMMENDED to encode the seq number in the Tag field of the SRH, with a length of 16bits.

6. Segment Routing Policy to Support Redundancy Protection

Redundancy Policy is a variation of SR Policy to conduct the replicas to multiple disjoint paths for redundancy protection. It extends SR policy [[I-D.ietf-spring-segment-routing-policy](#)] to include more than one active and parallel ordered lists of segments between redundancy node and merging node, and all the ordered lists of segments are used at the same time to steer each copy of flow into different disjoint paths.

7. IANA Considerations

This document requires registration of End.R behavior and End.M behavior in "SRv6 Endpoint Behaviors" sub-registry of "Segment Routing Parameters" registry.

[8.](#) Security Considerations

TBD

[9.](#) Acknowledgements

The authors would like to thank Bruno Decraene, Ron Bonica, James Guichard, Jeffrey Zhang, Balazs Varga for their valuable comments and discussions.

[10.](#) References

[10.1.](#) Normative References

- [I-D.ietf-spring-segment-routing-policy]
Filsfils, C., Talaulikar, K., Voyer, D., Bogdanov, A., and P. Mattes, "Segment Routing Policy Architecture", Work in Progress, Internet-Draft, [draft-ietf-spring-segment-routing-policy-16](#), 28 January 2022, <<https://www.ietf.org/archive/id/draft-ietf-spring-segment-routing-policy-16.txt>>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8754] Filsfils, C., Ed., Dukes, D., Ed., Previdi, S., Leddy, J., Matsushima, S., and D. Voyer, "IPv6 Segment Routing Header (SRH)", [RFC 8754](#), DOI 10.17487/RFC8754, March 2020, <<https://www.rfc-editor.org/info/rfc8754>>.
- [RFC8986] Filsfils, C., Ed., Camarillo, P., Ed., Leddy, J., Voyer, D., Matsushima, S., and Z. Li, "Segment Routing over IPv6 (SRv6) Network Programming", [RFC 8986](#), DOI 10.17487/RFC8986, February 2021, <<https://www.rfc-editor.org/info/rfc8986>>.

[10.2.](#) Informative References

- [RFC8655] Finn, N., Thubert, P., Varga, B., and J. Farkas, "Deterministic Networking Architecture", [RFC 8655](#),

Internet-Draft

SRv6 for Redundancy Protection

February 2022

Authors' Addresses

Xuesong Geng
Huawei Technologies
China

Email: gengxuesong@huawei.com

Mach(Guoyi) Chen
Huawei Technologies
China

Email: mach.chen@huawei.com

Fan Yang
Huawei Technologies
China

Email: shirley.yangfan@huawei.com

Pablo Camarillo Garvia
Cisco Systems, Inc.
Spain

Email: pcamaril@cisco.com

Gyan Mishra
Verizon Inc.

Email: gyan.s.mishra@verizon.com

