

INTERNET-DRAFT
Expires 04 September 2002

Supratik Bhattacharyya
Christophe Diot
Sprint ATL
Leonard Giuliano
Juniper Networks
Rob Rockell
Sprint E|Solutions
John Meylor
Cisco Systems
David Meyer
Sprint E|Solutions
Greg Shepherd
Juniper Networks
Brian Haberman
No Affiliation
04 March 2002

An Overview of Source-Specific Multicast (SSM)
<[draft-ietf-ssm-overview-03.txt](#)>

Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC 2119](#)].

Abstract

This document provides an overview of the Source-Specific Multicast (SSM) service and its deployment using the PIM-SM and IGMP/MLD protocols. The network layer service provided by SSM is a "channel", identified by an SSM destination IP address (G) and a source IP address S. An IPv4 address range has been reserved by IANA for use by the SSM service. An SSM destination address range already exists for IPv6. A source S transmits IP datagrams to an SSM destination address G. A receiver can receive these datagrams by subscribing to the channel (S,G). Channel subscription is supported by version 3 of the IGMP protocol for IPv4 and version 2 of the MLD protocol for IPv6. The interdomain tree for forwarding IP multicast datagrams is rooted at the source S, and is constructed using the PIM Sparse Mode [PIM-SM-NEW] protocol.

This document is not intended to be a standard for Source-Specific Multicast (SSM). Instead, its goal is to serve as an introduction to SSM and its benefits for anyone interested in deploying SSM services. It provides an overview of SSM and how it solves a number of problems faced in the deployment of inter-domain multicast. It outlines changes to protocols and applications both at end-hosts and routers for supporting SSM, with pointers to more detailed documents where appropriate. Issues of interoperability with the multicast service model defined by [RFC 1112](#) are also discussed.

[1](#). Terminology

This section defines some terms that are used in the rest of this document :

Any-Source Multicast (ASM) : This is the IP multicast service model defined in [RFC 1112](#) [[RFC1112](#)]. An IP datagram is transmitted to a "host group", a set of zero or more end-hosts identified by a single IP destination address (224.0.0.0 through 239.255.255.255 for IPv4). End-hosts may join and leave the group any time, and there is no restriction on their location or number. Moreover, this model supports multicast groups with arbitrarily many senders - any end-host may transmit to a host group, even if it is not a member of that group.

Source-Specific Multicast (SSM) : This is the multicast service model defined in [[SSM-ARCH](#)]. An IP datagram is transmitted by a source S to an SSM destination address G, and receivers can receive this datagram by subscribing to channel (S,G). SSM provides host applications with a

"channel" abstraction, in which each channel has exactly one source and any number of receivers. SSM is derived from earlier work in EXPRESS [[EXPRESS](#)]. The address range 232/8 has been assigned by IANA [IANA-ALLOC] for SSM service in IPv4. For IPv6, the range FF3x::/96 is defined for SSM services [[SSM-IPv6](#)].

Source-Filtered Multicast (SFM) : This is a variant of the ASM service model, and uses the same address range as ASM (224.0.0.0-239.255.255.255). It extends the ASM service model as follows. Each "upper layer protocol module" can now request data sent to a host group G by only a specific set of sources, or can request data sent to host group G from all BUT a specific set of sources. Support for source filtering is provided by version 3 of the Internet Group Management Protocol (or IGMPv3) [[IGMPv3](#)] for IPv4, and version 2 of the Multicast Listener Discovery (or MLDv2) [[MLDv2](#)] protocol for IPv6. We shall henceforth refer to these two protocols as "SFM-capable". Earlier versions of these protocols - IGMPv1/IGMPv2 and MLDv1 - do not provide support for source-filtering, and are referred to as "non-SFM-capable". Note that while SFM is a different model than ASM from a receiver standpoint, there is no distinction between the two for a sender.

For the purpose of this document, we treat the scoped multicast model of [[RFC2365](#)] to be a variant of ASM since it does not explicitly restrict the number of sources, but only requires that they be located within the scope zone of the group.

[2.](#) The IGMP/PIM-SM/MSDP/MBGP Protocol Suite for ASM

As of this writing, all multicast-capable networks support the ASM service model. One of the most common multicast protocol suites for supporting ASM consists of IGMP version 2 [IGMPv2], PIM-SM [PIM-SM, PIM-SM-NEW], MSDP [[MSDP](#)] and MBGP [MBGP] protocols. IGMPv2

[[RFC2236](#)] is the most commonly used protocol for hosts to specify membership in a multicast group, and nearly all multicast routers support (at least) IGMPv2. In case of IPv6, MLDv1 [[RFC2710](#)] is the commonly used protocol.

Although a number of protocols such as PIM-DM [[PIM-DM](#)], CBT [[RFC2189](#),[RFC2201](#)], DVMRP [[IPMULTICAST](#)], etc. exist for building multicast tree among all receivers and sources in the same administrative domain, PIM-SM [[PIM-SM](#), [PIM-SM-NEW](#)] is the most widely used protocol. PIM-SM builds a spanning multicast tree rooted at a core rendezvous point or RP for all group members within a single administrative domain. A 'first-hop' router adjacent to a multicast

source sends the source's traffic to the RP for its domain. The RP forwards the data down the shared spanning tree to all interested receivers within the domain. PIM-SM also allows receivers to switch to a source-based shortest path tree.

As of this writing, multicast end-hosts with SFM capabilities are not widely available. Hence a client can only specify interest in an entire host group and receives data sent from any source to this group.

Inter-domain multicast service (i.e., where at least one source for a multicast group is located in a different domain than the receivers) requires additional protocols - MSDP [[MSDP](#)] and MBGP [[MBGP](#)] are the most commonly used ones. An RP uses the MSDP [[MSDP](#)] protocol to announce multicast sources to RPs in other domains. When an RP discovers a source in a different domain transmitting data to a multicast group for which there are interested receivers in its own domain, it joins the shortest-path source based tree rooted at that source. It then redistributes the data received to all interested receivers via the intra-domain shared tree rooted at itself.

The MBGP protocol [[MBGP](#)] defines extensions to the BGP protocol [[BGP](#)] to support the advertisement of reachability information for multicast routes. This allows an autonomous system (AS) to support incongruent unicast and multicast routing topologies, and thus implement separate routing policies for each.

[3.](#) Problems with Current Architecture

There are several deployment problems associated with current multicast architecture:

A) Address Allocation :

Address allocation is one of core deployment challenges posed by the ASM service model. The current multicast architecture does not provide a deployable solution to prevent address collisions among multiple applications. The problem is much less serious for IPv6 than for IPv4 since the size of the multicast address space is much larger. A static address allocation scheme, GLOP [GLOP00] has been proposed as an interim solution for IPv4; however, GLOP addresses are allocated per registered AS, which is inadequate in cases where the number of sources exceeds the AS numbers available for mapping. Proposed longer-term solutions such as the Multicast Address Allocation Architecture [MAAA] are generally perceived as being too complex (with respect to the dynamic nature of multicast address allocation) for widespread deployment.

B) Lack of Access control :

In the ASM service model, a receiver cannot specify which specific sources it would like to receive when it joins a given group. A receiver will be forwarded data sent to a host group by any source. Moreover, even when a source is allocated a multicast group address to transmit on, it has no way of enforcing that no other source will use the same address. This is true even in the case of IPv6, where address collisions are less likely due to the much larger size of the address space.

C) Inefficient handling of well-known sources :

In cases where the address of the source is well known in advance of the receiver joining the group, and when the shortest forwarding path is the preferred forwarding mode, then shared tree mechanisms and MSDP are not necessary.

4. Source Specific Multicast (SSM) : Benefits and Requirements

As mentioned before, the Source Specific Multicast (SSM) service

model defines a "channel" identified by an (S,G) pair, where S is a source address and G is an SSM destination address. Channel subscriptions are described using an SFM-capable group management protocol such as IGMPv3 or MLDv2. Only source-based forwarding trees are needed to implement this model.

The SSM service model alleviates all of the deployment problems described earlier :

A) Address Allocation : SSM defines channels on a per-source basis, i.e., the channel (S1,G) is distinct from the channel (S2,G), where S1 and S2 are source addresses, and G is an SSM destination address. This averts the problem of global allocation of SSM destination addresses, and makes each source independently responsible for resolving address collisions for the various channels that it creates.

B) Access Control : SSM lends itself to an elegant solution to the access control problem. When a receiver subscribes to an (S,G) channel, it receives data sent by only the source S. In contrast, any host can transmit to an ASM host group. At the same time, when a sender picks a channel (S,G) to transmit on, it is automatically ensured that no other sender will be transmitting on the same channel (except in the case of malicious acts such as address spoofing). This makes it much harder to "spam" an SSM channel than an ASM multicast group.

C) Handling of well-known sources : SSM requires only source-based forwarding trees; this eliminates the need for a shared tree infrastructure. In terms of the IGMP/PIM-SM/MSDP/MBGP protocol suite, this implies that neither the RP-based shared tree infrastructure of PIM-SM nor the MSDP protocol is required. Thus the complexity of the multicast routing infrastructure for SSM is low, making it viable for immediate deployment. Note that MBGP is still required for distribution of multicast reachability information.

D) It is widely held that point-to-multipoint applications such as Internet TV will be important in the near future. The SSM model is ideally suited for such applications.

5. SSM Framework

Figure 1 illustrates the elements in an end-to-end implementation framework for SSM :

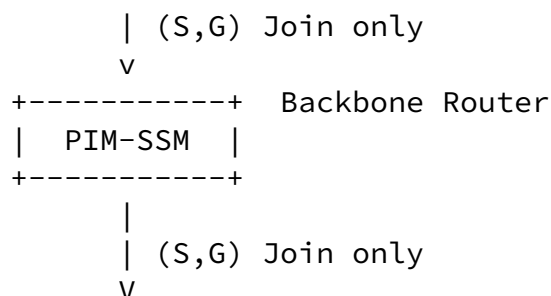
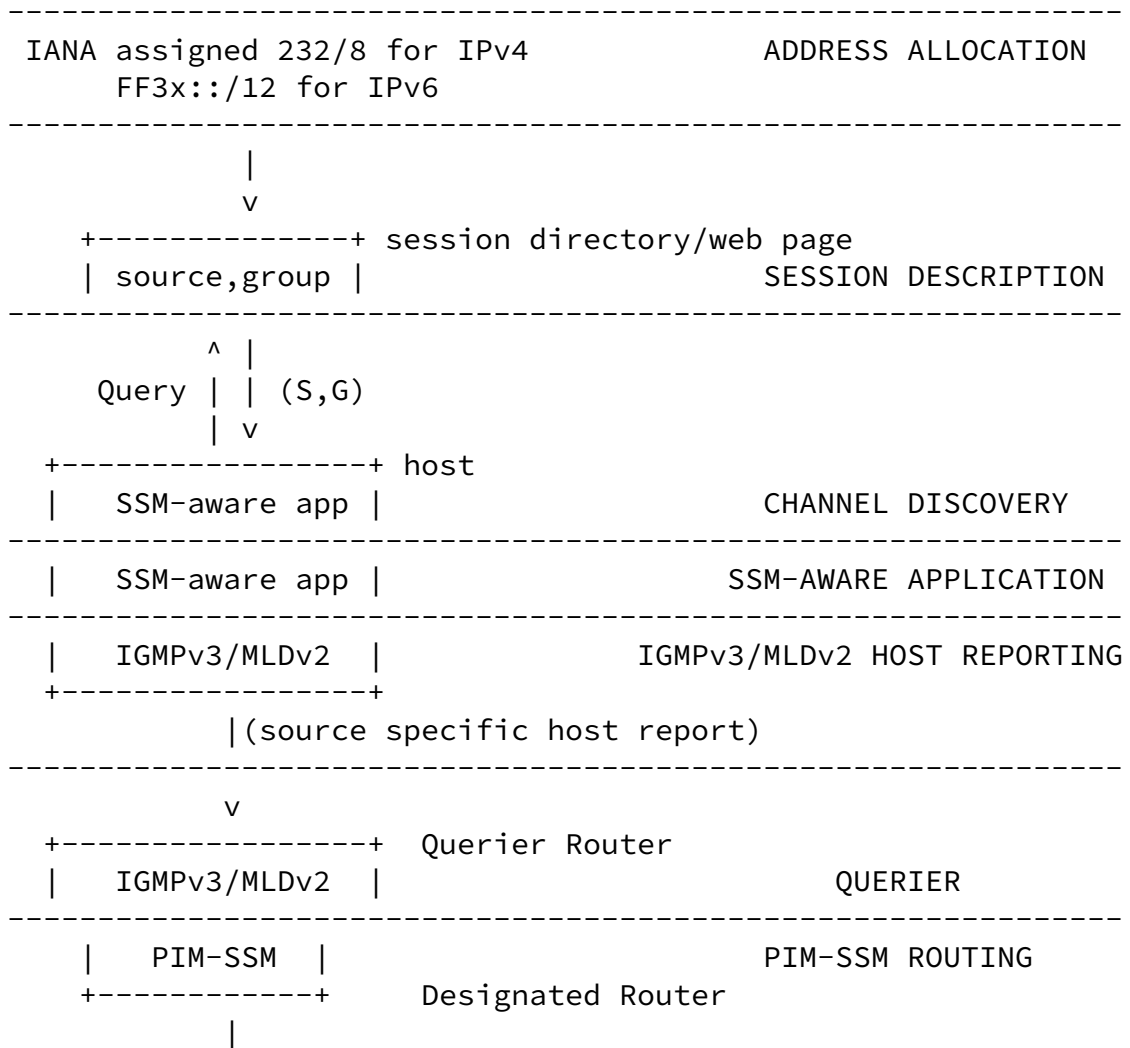


Figure 1 : SSM Framework: elements in end-to-end model

We now discuss the framework elements in detail :

5.1 Address Allocation

For IPv4, the address range of 232/8 has been assigned by IANA for SSM. To ensure global SSM functionality in 232/8, including in networks where routers run non-SFM-capable protocols, operational policies are being proposed [[SSM-BCP](#)] which recommend that routers should not send SSM traffic to parts of the network that do not have channel subscribers.

Note that IGMPv3/MLDv2 does not limit (S,G) joins to only the 232/8 range. However, SSM service, as defined in [[SSM-ARCH](#)], is available only in this address range for IPv4.

In case of IPv6, [HABE1] has defined an extension to the addressing architecture to allow for unicast prefix-based multicast addresses. Bytes 0-3 (starting from the least significant byte) of the IP address are used to specify a multicast group id, bytes 4-11 are used to specify a unicast address prefix (of up to 64 bits) that owns this multicast group id, and byte 12 is used to specify the length of the prefix. A source-specific multicast address is specified by setting both the prefix length field and the prefix field to zero.

5.2 Session Description and Channel Discovery

An SSM receiver application must know both the SSM destination address G and the source address S before subscribing to a channel. Channel discovery is the responsibility of applications. This information can be made available in a number of ways, including via web pages, sessions announcement applications, etc. This is similar to what is used for ASM applications where a multicast session needs to be announced so that potential subscribers can know of the multicast group address, encoding schemes used, etc. In fact, the only additional piece of

information that needs to be announced is the source address for

the channel being advertised. However, the exact mechanisms for doing this is outside the scope of this framework document.

5.3. SSM-Aware Applications

-- An application that wants to receive an SSM session must first discover the channel address in use. Any of the mechanisms described in [Section 5.2](#) can be used for this purpose.

-- A receiving application must be able to specify both a source address and a destination address to the network layer protocol module on the end-host. In other words, the application must be "SSM-aware".

Specific API requirements are identified in [THAL00]. [THAL00] describes a recommended application programming interface for a host operating system to support the SFM service model. Although it is intended for SFM, a subset of this interface is sufficient for supporting SSM.

5.4. IGMPv3/MLDv2 Host Reporting and Querier

In order to use SSM service, an end-host must be able to specify a channel address, consisting of a source's unicast address and an SSM destination address. IGMP version 2 [IGMPv2] and MLD version 1 [MLDv1] allows an end-host to specify only a destination multicast address. The ability to specify an SSM channel address *c* is provided by IGMP version 3 [[IGMPv3](#)] and MLD version 2 [[MLDv2](#)]. These protocols support "source filtering", i.e., the ability of an end-system to express interest in receiving data packets sent only by SPECIFIC sources, or from ALL BUT some specific sources. In fact, IGMPv3 provides a superset of the capabilities required to realize the SSM service model.

A detailed discussion of the use of IGMPv3 in the SSM destination address range is provided in [[SSM-IGMPv3](#)].

The Multicast Listener Discovery (MLD) protocol used by an IPv6 router to discover the presence of multicast listeners on its directly attached links, and to discover the multicast addresses that are of interest to those neighboring nodes. Version 1 of MLD [DEER99] is derived from IGMPv2 and does not provide the source filtering capability required for the SSM service model. Version 2 of MLD [VIDA01] is derived from, and provides the same support for source-filtering as, IGMPv3. Thus IGMPv3 (or MLDv2 for IPv6) provides a host with the ability to request the network for an SSM

channel subscription.

[5.5](#). PIM-SSM Routing

[PIM-SM-NEW] provides guideliness for how a PIM-SM implementation should handle source-specific host reports as required by SSM. Earlier versions of the PIM protocol specifications did not describe how to do this.

The router requirements for operation in the SSM range are detailed in [[SSM-ARCH](#)]. These rules are primarily concerned with preventing ASM-style behaviour in the SSM address range. In order to comply with [[SSM-ARCH](#)] several changes to the PIM-SM protocol are required, as described in [[PIM-SM-NEW](#)]. The most important changes in PIM-SM required for compliance with [[SSM-ARCH](#)] are :

- When a DR receives an (S,G) join request with the address G in the SSM address range, it must initiate a (S,G) join and NEVER a (*,G) join.
- Backbone routers (i.e. routers that do not have directly attached hosts) must not propagate (*,G) joins for group addresses in the SSM address range.
- Rendezvous Points (RPs) must not accept PIM Register messages or (*,G) Join messages in the SSM address range.

Note that only a small subset of the full PIM-SM protocol functionality is needed to support the SSM service model. This subset is explicitly documented in [[PIM-SM-NEW](#)].

[6](#). Interoperability with Existing Multicast Service Models

Interoperability with ASM is one of the most important issues in moving to SSM deployment, since both models are expected to be used at least in the foreseeable future. SSM is the ONLY service model for the SSM address range - the correct protocol behaviour for this range is specified in [[SSM-ARCH](#)]. The ASM service model will be offered for the non-SSM address range, where receivers can issue (*,G) join requests to receive multicast data. A receiver is also allowed to issue an (S,G) join request in the non-SSM address range; however, in that case there is no guarantee that it will receive service according to the SSM model.

Another interoperability issue concerns the MSDP protocol, which is used between PIM-SM rendezvous points (RPs) to discover multicast

sources across multiple domains. MSDP is not needed for SSM, but is needed if ASM is supported. [SSM-BCP] specifies operational recommendations to help ensure that MSDP does not interfere with the ability of a network to support the SSM service model. Specifically, [SSM-BCP] states that RPs must not accept, originate or forward MSDP SA messages for the SSM address range [SSM-BCP].

7. Security Considerations

SSM does not introduce new security considerations for IP multicast. It can help in preventing denial-of-service attacks resulting from unwanted sources transmitting data to a multicast channel (S, G). However no guarantee is provided.

8. Acknowledgments

We would like to thank Gene Bowen, Ed Kress, Bryan Lyles and Timothy Roscoe at Sprintlabs, Hugh Holbrook, Isidor Kouvelas, Tony Speakman and Nidhi Bhaskar at Cisco Systems for participating in lengthy discussions and design work on SSM, and providing feedback on this document. Thanks are also due to Mujahid Khan and Ted Seely at SprintLink, Tom Pusateri at Juniper Networks, Bill Fenner at AT&T Research, Kevin Almeroth at the University of California Santa Barbara, Brian Levine at the University of Massachusetts Amherst, Brad Cain at Cereva Networks and Hugh LaMaster at NASA for their valuable insights and continuing support.

9. References:

[EXPRESS] H. Holbrook and D.R. Cheriton. IP Multicast Channels : EXPRESS Support for Large-scale Single-Source Applications. In Proceedings of SIGCOMM 1999.

[IANA-ALLOCATION] Internet Assigned Numbers Authority.
<http://www.isi.edu/in-notes/iana/assignments/multicast-addresses>.

[RFC2236] W. Fenner. Internet Group Management Protocol, Version 2. Request For Comments 2236.

[IGMPv3] B. Cain and S. Deering, I. Kouvelas and A. Thyagarajan. Internet Group Management Protocol, Version 3. Work in Progress.

[SSM-IGMPv3] H. Holbrook and B. Cain. IGMPv3 for SSM. Work in Progress.

Bhattacharyya et. al.

[Page 10]

INTERNET-DRAFT

An Overview of SSM Deployment

4 December 2001

[SSM-ARCH] H. Holbrook and B. Cain. Source-Specific Multicast for IP. Work in Progress.

[IPMULTICAST] S. Deering and D. Cheriton. Multicast Routing in Datagram Networks and Extended LANs. ACM Transactions on Computer Systems, 8(2):85-110, May 1990.

[PIM-ARCH] S. Deering et al. PIM Architecture for Wide-Area Multicast Routing. IEEE/ACM Transaction on Networking, pages 153-162, April 1996.

[PIM-SM] D. Estrin et al. Protocol Independent Multicast - Sparse Mode (PIM-SM) : Protocol Specification. Request for Comments 2362.

[PIM-SM-NEW] B. Fenner, M. Handley, H. Holbrook, I. Kouvelas. Protocol Independent Multicast - Sparse Mode (PIM-SM): Protocol Specification (Revised)", Work In Progress, 2000. <[draft-ietf-pim-sm-v2-new-01.txt](#)>.

[PIM-DM] S. Deering et al. Protocol Independent Multicast Version 2 Dense Mode Specification. Work in Progress.

[RFC2189] A. Ballardie. Core-Based Trees (CBT Version 2) Multicast Routing -- Protocol Specification. Request for Comments 2189.

[RFC2201] A. Ballardie. Core-Based Trees (CBT) Multicast Routing Architecture. Request for Comments 2201.

[RFC2365] D. Meyer. Administratively Scoped IP Multicast. Request for Comments 2365.

[MSDP] Farinacci et al. Multicast Source Discovery Protocol. Work in

Progress.

[MAAA] M. Handley, D. Thaler and D. Estrin. The Internet Multicast Address Allocation Architecture. Work in Progress ([draft-ietf-malloc-arch-*.txt](#)) June 2000.

[MCAST-DEPLOY] C. Diot, B. Levine, B. Lyles, H. Kassem and D. Balensiefen. Deployment Issues for the IP Multicast Service and Architecture. In IEEE Networks Magazine's Special Issue on Multicast, January, 2000.

[SSM-RULES] H. Sandick and B. Cain. PIM-SM Rules for Support of Single-Source Multicast. Work in Progress.

[MSF-API] Dave Thaler, Bill Fenner and Bob Quinn. Socket Interface Extensions for Multicast Source Filters. Work in Progress.

Bhattacharyya et. al.

[Page 11]

INTERNET-DRAFT

An Overview of SSM Deployment

4 December 2001

[RFC2770] GLOP Addressing in 233/8. Request For Comments 2770.

[RCVR-INTEREST] B. Levine et al. Consideration of Receiver Interest for IP Multicast Delivery. In Proceedings of IEEE Infocom, March 2000.

[SSM-BCP] G. Shepherd et al. Source-Specific Protocol Independent Multicast in 232/8. Work in Progress.

[RFC2710] S. Deering, W. Fenner and B. Haberman. Multicast Listener Discovery for IPv6. Request for Comments 2710.

[MLDv2] R. Vida, et. al.
Multicast Listener Discovery Version 2 (MLDv2) for IPv6.
Work in progress.

[SSM-IPv6] B. Haberman and D. Thaler.
Unicast-Prefix-Based IPv6 Multicast Addresses. Work in Progress.

[IPSEC] S. Kent, R. Atkinson.
Security Architecture for the Internet Protocol. Request for Comments 2401.

[IPv6-ALLOC] B. Haberman.

12. Authors' Address:

Supratik Bhattacharyya
Christophe Diot
Sprint Advanced Technology Labs
One Adrian Court
Burlingame CA 94010 USA
{supratik,cdiot}@sprintlabs.com
<http://www.sprintlabs.com>

Leonard Giuliano
Greg Shepherd
Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, CA 94089 USA
{lenny,shep}@juniper.net

Robert Rockell
David Meyer

Bhattacharyya et. al.

[Page 12]

INTERNET-DRAFT

An Overview of SSM Deployment

4 December 2001

Sprint E|Solutions
Reston Virginia USA
{rrockell,dmm}@sprint.net

John Meylor
Cisco Systems
San Jose CA USA
jmeylor@cisco.com

Brian Haberman
No Affiliation
haberman@innovationslab.net

