

TEAS Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: August 23, 2018

T. Saad, Ed.  
R. Gandhi  
Cisco Systems Inc  
X. Liu  
Jabil  
V. Beeram  
Juniper Networks  
H. Shah  
Ciena  
I. Bryskin  
Huawei Technologies  
February 19, 2018

A YANG Data Model for Traffic Engineering Tunnels and Interfaces  
draft-ietf-teas-yang-te-12

## Abstract

This document defines a YANG data model for the configuration and management of Traffic Engineering (TE) interfaces, tunnels and Label Switched Paths (LSPs). The model is divided into YANG modules that classify data into generic, device-specific, technology agnostic, and technology-specific elements. The model also includes module(s) that contain reusable TE data types and data groupings.

This model covers data for configuration, operational state, remote procedural calls, and event notifications.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on August 23, 2018.

Internet-Draft

TE YANG Data Model

February 2018

## Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">3</a>
<a href="#">1.1.</a>	<a href="#">Terminology</a>	<a href="#">3</a>
<a href="#">1.2.</a>	<a href="#">Tree Diagram</a>	<a href="#">3</a>
<a href="#">1.3.</a>	<a href="#">Prefixes in Data Node Names</a>	<a href="#">4</a>
<a href="#">1.4.</a>	<a href="#">Open Issues and Next Steps</a>	<a href="#">5</a>
<a href="#">1.4.1.</a>	<a href="#">TE Technology Models</a>	<a href="#">5</a>
<a href="#">1.4.2.</a>	<a href="#">State Data Organization</a>	<a href="#">6</a>
<a href="#">2.</a>	<a href="#">Model Overview</a>	<a href="#">6</a>
<a href="#">2.1.</a>	<a href="#">Module(s) Relationship</a>	<a href="#">6</a>
<a href="#">2.2.</a>	<a href="#">Design Considerations</a>	<a href="#">8</a>
<a href="#">2.3.</a>	<a href="#">Optional Features</a>	<a href="#">9</a>
<a href="#">2.4.</a>	<a href="#">Configuration Inheritance</a>	<a href="#">9</a>
<a href="#">3.</a>	<a href="#">TE Generic Model Organization</a>	<a href="#">9</a>
<a href="#">3.1.</a>	<a href="#">Global Configuration and State Data</a>	<a href="#">10</a>
<a href="#">3.2.</a>	<a href="#">Interfaces Configuration and State Data</a>	<a href="#">11</a>
<a href="#">3.3.</a>	<a href="#">Tunnels Configuration and State Data</a>	<a href="#">12</a>
<a href="#">3.3.1.</a>	<a href="#">Tunnel Compute-Only Mode</a>	<a href="#">13</a>
<a href="#">3.3.2.</a>	<a href="#">Tunnel Hierarchical Link Endpoint</a>	<a href="#">14</a>
<a href="#">3.4.</a>	<a href="#">TE LSPs State Data</a>	<a href="#">14</a>
<a href="#">3.5.</a>	<a href="#">Global RPC Data</a>	<a href="#">14</a>
<a href="#">3.6.</a>	<a href="#">Interface RPC Data</a>	<a href="#">14</a>
<a href="#">3.7.</a>	<a href="#">Tunnel RPC Data</a>	<a href="#">14</a>
<a href="#">3.8.</a>	<a href="#">Global Notifications Data</a>	<a href="#">15</a>
<a href="#">3.9.</a>	<a href="#">Interfaces Notifications Data</a>	<a href="#">15</a>
<a href="#">3.10.</a>	<a href="#">Tunnel Notification Data</a>	<a href="#">15</a>
<a href="#">4.</a>	<a href="#">TE Generic and Helper YANG Modules</a>	<a href="#">41</a>

<a href="#">5.</a>	IANA Considerations . . . . .	<a href="#">154</a>
<a href="#">6.</a>	Security Considerations . . . . .	<a href="#">155</a>
<a href="#">7.</a>	Acknowledgement . . . . .	<a href="#">156</a>
<a href="#">8.</a>	Contributors . . . . .	<a href="#">156</a>
<a href="#">9.</a>	Normative References . . . . .	<a href="#">156</a>

Authors' Addresses . . . . .	<a href="#">158</a>
------------------------------	---------------------

## [1.](#) Introduction

YANG [[RFC6020](#)] is a data definition language that was introduced to define the contents of a conceptual data store that allows networked devices to be managed using NETCONF [[RFC6241](#)]. YANG is proving relevant beyond its initial confines, as bindings to other interfaces (e.g. RESTCONF [[RFC8040](#)]) and encoding other than XML (e.g. JSON) are being defined. Furthermore, YANG data models can be used as the basis of implementation for other interfaces, such as CLI and programmatic APIs.

This document describes the YANG data models for TE Tunnels, Label Switched Paths (LSPs) and TE interfaces that cover data applicable to generic or device-independent, device-specific, Multiprotocol Label Switching (MPLS) technology specific, and Segment Routing (SR) TE technology. It also describes helper modules that define TE grouping(s) and data types that can be imported by other modules.

The document defines the high-level relationship between the modules defined in this document, as well as other external protocol modules. It is expected other data plane technology model(s) will augment the TE generic model. Also, the TE generic model does not include any data specific to a signaling protocol. It is expected YANG models for TE signaling protocols, such as RSVP-TE ([[RFC3209](#)], [[RFC3473](#)]), or Segment-Routing TE (SR-TE) will augment the TE generic module.

### [1.1.](#) Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#), [RFC 2119](#) [[RFC2119](#)].

### [1.2.](#) Tree Diagram

A simplified graphical representation of the data model is presented in each section of the model. The following notations are used for the YANG model data tree representation.

<status> <flags> <name> <opts> <type>

<status> is one of:

- + for current
- x for deprecated
- o for obsolete

<flags> is one of:

- rw for read-write configuration data
- ro for read-only non-configuration data
- x for execution rpcs
- n for notifications

<name> is the name of the node

If the node is augmented into the tree from another module, its name is printed as <prefix>:<name>

<opts> is one of:

- ? for an optional leaf or node
- ! for a presence container
- \* for a leaf-list or list
- Brackets [<keys>] for a list's keys
- Curly braces {<condition>} for optional feature that make node conditional
- Colon : for marking case nodes
- Ellipses ("...") subtree contents not shown

Parentheses enclose choice and case nodes, and case nodes are also

marked with a colon (":").

<type> is the name of the type for leafs and leaf-lists.

### [1.3.](#) Prefixes in Data Node Names

In this document, names of data nodes and other data model objects are prefixed using the standard prefix associated with the corresponding YANG imported modules, as shown in Table 1.

Prefix	YANG module	Reference
yang	ietf-yang-types	<a href="#">[RFC6991]</a>
inet	ietf-inet-types	<a href="#">[RFC6991]</a>
te	ietf-te	this document
te-types	ietf-te-types	this document
te-mpls-types	ietf-te-mpls-types	this document
te-dev	ietf-te-device	this document
te-mpls	ietf-te-mpls	this document
te-sr-mpls	ietf-te-sr-mpls	this document

Table 1: Prefixes and corresponding YANG modules

### [1.4.](#) Open Issues and Next Steps

This section describes the number of open issues that are under consideration. As issues are resolved, this section will be updated to reflect this and be left there for reference. It is expected that all the issues in this section will be addressed before the document will be ready for final publication.

#### 1.4.1. TE Technology Models

This document describes the generic TE YANG data model that is independent of any dataplane technology. One of the design objectives is to allow specific data plane technologies models to reuse the generic TE data model and possibly augment it with technology specific data model(s). There are multiple options being considered to achieve this:

- o The generic TE model, including the lists of TE tunnels, LSPs, and interfaces can be defined and rooted at the top of the YANG tree. Specific leaf(s) under the TE tunnel, LSP, or interface, in this case, can identify the specific technology layer that it belongs to. This approach implies a single list for each of TE tunnel(s), LSP(s), and interface(s) in the model carries elements of different technology layers.
- o An instance of the generic TE YANG model can be mounted in the YANG tree once for each TE technology layer(s). This approach provides separation of elements belonging to different technology layers into separate lists per layer in the data model.
- o The generic TE data node(s) and TE list(s) for tunnels, LSPs, and interfaces are defined as grouping(s) in a separate module. The

specific technology layer imports the generic TE groupings and uses them their respective technology specific module.

This revision of the model leverages the LSP encoding type of a tunnel (and interfaces) to identify the specific technology associated with the a TE interfaces, tunnel(s) and the LSP(s). For example, for an MPLS TE LSP, the LSP encoding type is assumed to be "lsp-encoding-packet".

Finally, the TE generic model does not include any signaling protocol data. It is expected that TE signaling protocol module(s) will be defined in other document(s) that will cover the RSVP-TE ([\[RFC3209\]](#), [\[RFC3473\]](#)), and Segment-Routing TE (SR-TE) model and that augment the TE generic model.

### [1.4.2.](#) State Data Organization

Pure state data (for example, ephemeral or protocol derived state objects) can be modeled using one of the options below:

- o Contained inside a read-write container, in a "state" sub-container, as shown in Figure 3
- o Contained inside a separate read-only container, for example a `lsp-state` container

The Network Management Datastore Architecture (NMDA) addresses the "OpState" that was discussed in the IETF. As per NMDA guidelines for new models and models that are not concerned with the operational state of configuration information, this revision of the draft adopts the NMDA proposal for configuration and state data of this model.

## [2.](#) Model Overview

The data model defined in this document covers the core TE features that are commonly supported across different vendor implementations. The support of extended or vendor specific TE feature(s) are expected to be in augmentations to the data models defined in this document.

### [2.1.](#) Module(s) Relationship

The TE generic model defined in `"ietf-te.yang"` covers the building blocks that are device independent and agnostic of any specific technology or control plane instances. The TE device model defined in `"ietf-te-device.yang"` augments the TE generic model and covers data that is specific to a device - for example, attributes of TE interfaces, or TE timers that are local to a TE node.

The TE data relevant to a specific instantiations of data plane technology exists in a separate YANG module(s) that augment the TE generic model. For example, the MPLS-TE module `"ietf-te-mpls.yang"` is defined in Figure 10 and augments the TE generic model as shown in Figure 1. Similarly, the module `"ietf-te-sr-mpls.yang"` models the Segment Routing (SR) TE specific data and augments the TE generic and MPLS-TE model(s).

The TE data relevant to a TE specific signaling protocol instantiation is outside the scope and is covered in other documents. For example, the RSVP-TE [RFC3209] YANG model augmentation of the TE model is covered in [I-D.ietf-teas-yang-rsvp], and other signaling protocol model(s) (e.g. for Segment-Routing TE) are expected to also augment the TE generic model.

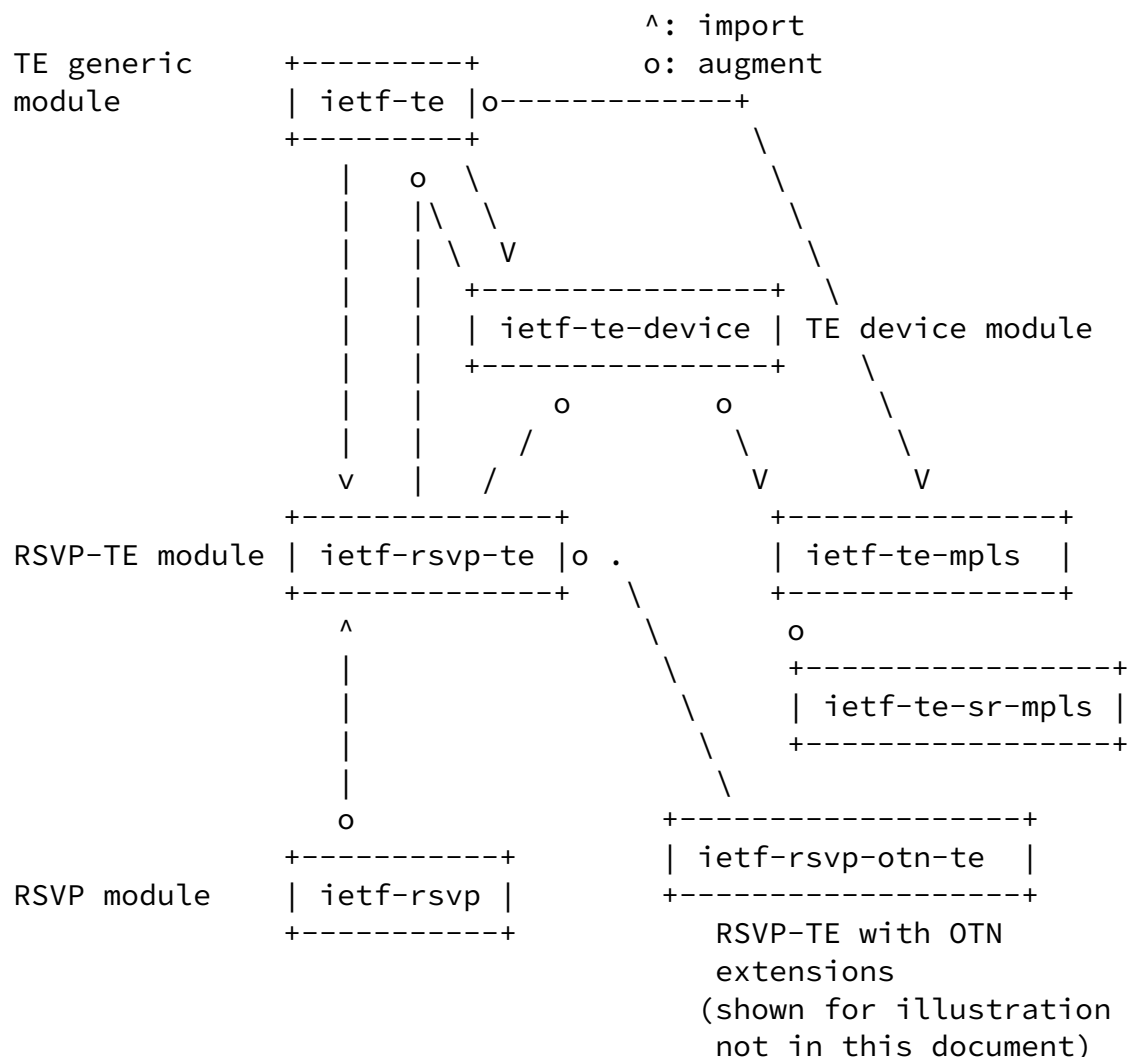


Figure 1: Relationship of TE module(s) with other signaling protocol modules



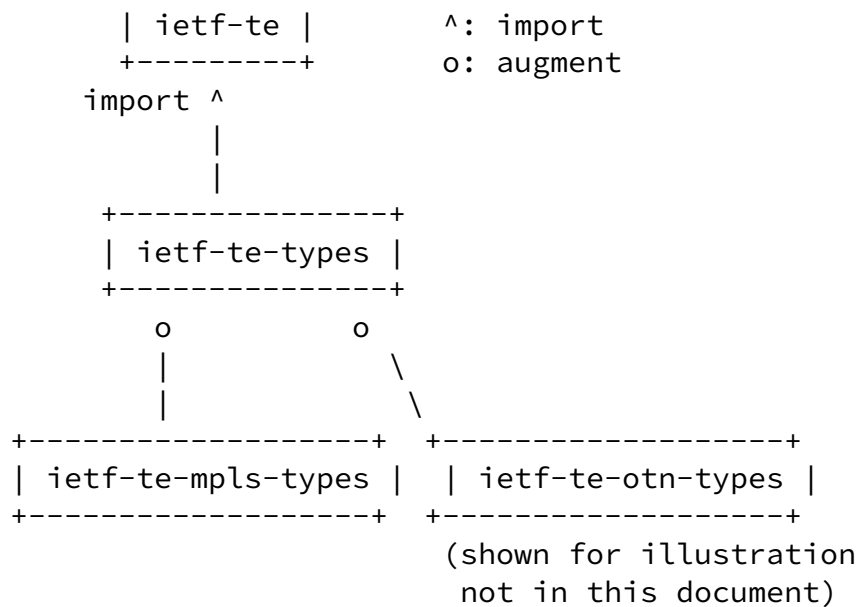


Figure 2: Relationship between generic and technology specific TE types modules

## 2.2. Design Considerations

The following considerations with respect data organization are taken into account:

- o reusable data elements are grouped into separate TE types module(s) that can be readily imported by other modules whenever needed
- o reusable TE data types that are data plane independent are grouped in the TE generic types module "ietf-te-types.yang"
- o reusable TE data elements that are data plane specific (e.g. packet MPLS or switching technologies as defined in [\[RFC3473\]](#)) are expected to be grouped in a technology- specific types module, e.g. "ietf-te-mpls-types.yang". It is expected that technology specific types will augment TE generic types as shown in Figure 2
- o The TE generic model contains device independent data and can be used to model data off a device (e.g. on a controller). The TE data that is device-specific are grouped in a separate module as shown in Figure 1.
- o In general, little information in the model is designated as "mandatory", to allow freedom to vendors to adapt the data model to their specific product implementation.

### [2.3.](#) Optional Features

Optional features that are beyond the base TE model are left to the specific vendor to decide support using vendor model augmentation and/or using feature checks.

This model declares a number of TE functions as features (such as P2MP-TE, soft-preemption etc.).

### [2.4.](#) Configuration Inheritance

The defined data model supports configuration inheritance for tunnels, paths, and interfaces. Data elements defined in the main container (e.g. that encompasses the list of tunnels, interfaces, or paths) are assumed to apply equally to all elements of the list, unless overridden explicitly for a certain element of a list (e.g. a tunnel, interface or path).

## [3.](#) TE Generic Model Organization

The TE generic model covers configuration, state, RPCs, and notifications data pertaining to TE global parameters, interfaces, tunnels and LSPs parameters that are device independent.

The container "te" is the top level container in this data model. The presence of this container is expected to enable TE function system wide.

The model follows the guidelines in for modeling the intended, applied and derived state.

```
module: ietf-te
  +--rw te!
    +--rw globals
      .
      .
    +--rw tunnels
      .
      .
    +-- lsps-state

rpcs:
  +---x globals-rpc
  +---x tunnels-rpc
notifications:
  +---n globals-notif
  +---n tunnels-notif
```

Figure 3: TE generic highlevel model view

### [3.1.](#) Global Configuration and State Data

This branch of the data model covers configurations that control TE features behavior system-wide, and its respective state. Examples of such configuration data are:

- o Table of named SRLG mappings
- o Table of named (extended) administrative groups mappings
- o Table of named explicit paths to be referenced by TE tunnels
- o Table of named path-constraints sets
- o Auto-bandwidth global parameters
- o TE diff-serve TE-class maps

- o System-wide capabilities for LSP reoptimization (included in the TE device model)
  - \* Reoptimization timers (periodic interval, LSP installation and cleanup)
- o System-wide capabilities for TE state flooding (included in the TE device model)

Saad, et al.

Expires August 23, 2018

[Page 10]

---

Internet-Draft

TE YANG Data Model

February 2018

- \* Periodic flooding interval
- o Global capabilities that affect the originating, traversing and terminating LSPs. For example:
  - \* Path selection parameters (e.g. metric to optimize, etc.)
  - \* Path or segment protection parameters

The global state data is represented under the global "state" sub-container as shown in Figure 3.

Examples of such states are:

- o Global statistics (signaling, admission, preemption, flooding)
- o Global counters (number of tunnels/LSPs/interfaces)

### [3.2.](#) Interfaces Configuration and State Data

This branch of the model covers configuration and state data items corresponding to TE interfaces that are present on a specific device. A new module is introduced that holds the TE device specific properties.

Examples of TE interface properties are:

- o Maximum reservable bandwidth, bandwidth constraints (BC)
- o Flooding parameters
  - \* Flooding intervals and threshold values

- o Fast reroute backup tunnel properties (such as static, auto-tunnel)
- o interface attributes
  - \* (Extended) administrative groups
  - \* SRLG values
  - \* TE metric value

The state corresponding to the TE interfaces applied configuration, protocol derived state, and stats and counters all fall under the interface "state" sub-container as shown in Figure 4 below:

```

module: ietf-te
  +--rw te!
    +--rw interfaces
      .
      +-- rw te-attributes
        +-- rw config
          <<intended configuration>>
        .
        +-- ro state
          <<applied configuration>>
          <<derived state associated with the TE interface>>

```

Figure 4: TE interface state

This covers state data for TE interfaces such as:

- o Bandwidth information: maximum bandwidth, available bandwidth at different priorities and for each class-type (CT)
- o List of admitted LSPs
  - \* Name, bandwidth value and pool, time, priority
- o Statistics: state counters, flooding counters, admission counters (accepted/rejected), preemption counters

- o Adjacency information
  - \* Neighbor address
  - \* Metric value

### [3.3.](#) Tunnels Configuration and State Data

This branch of the model covers intended, and corresponding applied configuration for tunnels. As well, it holds possible derived state pertaining to TE tunnels.

```

module: ietf-te
  +--rw te!
    +--rw tunnels
      .
      +-- rw config
        <<intended configuration>>
      .
      +-- ro state
        <<applied configuration>>
        <<derived state associated with the tunnel>>

```

Figure 5: TE interface state tree

Examples of tunnel configuration data for TE tunnels:

- o Name and type (e.g. P2P, P2MP) of the TE tunnel
- o Admin-state

- o Set of primary and corresponding secondary paths
- o Routing usage (auto-route announce, forwarding adjacency)
- o Policy based routing (PBR) parameters

#### 3.3.1. Tunnel Compute-Only Mode

By default, a configured TE tunnel is provisioned so it can carry traffic as soon as a valid path is computed and an LSP instantiated in the network. In other cases, a TE tunnel may be provisioned for computed path reporting purposes without the need to instantiate an LSP or commit resources in the network. In such a case, a tunnel configuration in "compute-only" mode to distinguish it from default tunnel behavior.

A "compute-only" TE tunnel is configured as a usual TE tunnel with associated path constraint(s) and properties on a device or controller. The device or controller is expected to compute the feasible path(s) subject to configured constraints for of "compute-only" tunnel and reflect the computed path(s) in the LSP(s) Record-Route Object (RRO) list. A client may query "on-demand" the "compute-only" TE tunnel computed path(s) properties by querying the state of the tunnel. Alternatively, the client can subscribe on the "compute-only" TE tunnel to be notified of computed path(s) and whenever it changes.

#### 3.3.2. Tunnel Hierarchical Link Endpoint

TE LSPs can be set up in MPLS or Generalized MPLS (GMPLS) networks to be used to form links to carry traffic in in other (client) networks [[RFC6107](#)]. In this case, the model introduces the TE tunnel hierarchical link endpoint parameters to identify the specific link in the client layer that the TE tunnel is associated with.

#### 3.4. TE LSPs State Data

TE LSPs are derived state data that is usually instantiated via

signaling protocols. TE LSPs exist on routers as ingress (starting point of LSP), transit (mid-point of LSP), or egress (termination point of the LSP). TE LSPs are distinguished by the 5 tuple, and LSP type (P2P or P2MP). In the model, the nodes holding LSPs data exist in the read-only `lsp-state` list as shown in Figure 6.

### [3.5.](#) Global RPC Data

This branch of the model covers system-wide RPC execution data to trigger actions and optionally expect responses. Examples of such TE commands are to:

- o Clear global TE statistics of various features

### [3.6.](#) Interface RPC Data

This collection of data in the model defines TE interface RPC execution commands. Examples of these are to:

- o Clear TE statistics for all or for individual TE interfaces
- o Trigger immediate flooding for one or all TE interfaces

### [3.7.](#) Tunnel RPC Data

This branch of the model covers TE tunnel RPC execution data to trigger actions and optionally expect responses. Examples of such TE commands are:

- o Clear statistics for all or for individual tunnels
- o Trigger the tear and setup of existing tunnels or LSPs.

### [3.8.](#) Global Notifications Data

This branch of the model covers system-wide notifications data. The node notifies the registered events to the server using the defined



notification messages.

### [3.9.](#) Interfaces Notifications Data

This branch of the model covers TE interfaces related notifications data. The TE interface configuration is used for specific events registration. Notifications are sent for registered events to the server. Example events for TE interfaces are:

- o Interface creation and deletion
- o Interface state transitions
- o (Soft) preemption triggers
- o Fast reroute activation

### [3.10.](#) Tunnel Notification Data

This branch of the model covers TE tunnels related notifications data. The TE tunnels configuration is used for specific events registration. Notifications are sent for registered events to the server. Example events for TE tunnels are:

- o Tunnel creation and deletion events
- o Tunnel state up/down changes
- o Tunnel state reoptimization changes

Figure Figure 6 below shows the tree diagram of the YANG model defined in modules: `ietf-te.yang`, `ietf-te-device.yang`, `ietf-te-mps.yang`, and `ietf-te-sr.yang`.

```
module: ietf-te
  +--rw te!
    +--rw globals
      |   +--rw named-admin-groups
      |   |   +--rw named-admin-group* [name]
      |   {te-types:extended-admin-groups,
      |   te-types:named-extended-admin-groups}?
      |   |   +--rw name                string
      |   |   +--rw bit-position?      uint32
      |   +--rw named-srlgs
```

```

| |   +---rw named-srlg* [name] {te-types:named-srlg-groups}?
| |   |   +---rw name      string
| |   |   +---rw group?   te-types:srlg
| |   |   +---rw cost?    uint32
| +---rw named-explicit-paths
| |   +---rw named-explicit-path* [name]
| |   |   +---rw name                      string
| |   |   +---rw explicit-route-objects
| |   |   |   +---rw explicit-route-object* [index]
| |   |   |   |   +---rw explicit-route-usage?  identityref
| |   |   |   |   +---rw index                  uint32
| |   |   |   |   +---rw (type)?
| |   |   |   |   |   +---:(numbered)
| |   |   |   |   |   |   +---rw numbered-hop
| |   |   |   |   |   |   |   +---rw address?      te-types:te-tp-id
| |   |   |   |   |   |   |   +---rw hop-type?     te-hop-type
| |   |   |   |   |   |   |   +---rw direction?    te-link-direction
| |   |   |   |   |   +---:(as-number)
| |   |   |   |   |   |   +---rw as-number-hop
| |   |   |   |   |   |   |   +---rw as-number?    binary
| |   |   |   |   |   |   |   +---rw hop-type?     te-hop-type
| |   |   |   |   |   +---:(unnumbered)
| |   |   |   |   |   |   +---rw unnumbered-hop
| |   |   |   |   |   |   |   +---rw node-id?      te-types:te-node-id
| |   |   |   |   |   |   |   +---rw link-tp-id?   te-types:te-tp-id
| |   |   |   |   |   |   |   +---rw hop-type?     te-hop-type
| |   |   |   |   |   |   |   +---rw direction?    te-link-direction
| |   |   |   |   |   +---:(label)
| |   |   |   |   |   |   +---rw label-hop
| |   |   |   |   |   |   |   +---rw te-label
| |   |   |   |   |   |   |   |   +---rw (technology)?
| |   |   |   |   |   |   |   |   |   +---:(generic)
| |   |   |   |   |   |   |   |   |   |   +---rw generic?
| |   |   |   |   |   +---rw (generalized-label)
| |   |   |   |   |   |   +---rw direction?      te-label-direction
| |   |   +---rw named-path-constraints
| |   |   |   +---rw named-path-constraint* [name]
| |   |   {te-types:named-path-constraints}?
| |   |   |   +---rw name                      string
| |   |   |   +---rw topology-id?
| |   |   te-types:te-topology-id
| |   |   |   +---rw te-bandwidth
| |   |   |   |   +---rw (technology)?
| |   |   |   |   |   +---:(generic)
| |   |   |   |   |   |   +---rw generic?      te-bandwidth
| |   |   |   +---rw disjointness?
| |   |   te-types:te-path-disjointness

```

| | +--rw setup-priority? uint8

```
| | +--rw hold-priority?          uint8
| | +--rw signaling-type?       identityref
| | +--rw path-metric-bounds
| | |   +--rw path-metric-bound* [metric-type]
| | |   |   +--rw metric-type    identityref
| | |   |   +--rw upper-bound?   uint64
| | +--rw optimizations
| | |   +--rw (algorithm)?
| | |   |   +--:(metric) {path-optimization-metric}?
| | |   |   |   +--rw optimization-metric* [metric-type]
| | |   |   |   |   +--rw metric-type    identityref
| | |   |   |   |   +--rw weight?        uint8
| | |   |   +--rw tiebreakers
| | |   |   |   +--rw tiebreaker* [tiebreaker-type]
| | |   |   |   +--rw tiebreaker-type    identityref
| | |   +--:(objective-function)
| | {path-optimization-objective-function}?
| | |   +--rw objective-function
| | |   |   +--rw objective-function-type? identityref
| | +--rw path-affinities
| | |   +--rw constraints* [usage]
| | |   +--rw usage          identityref
| | |   +--rw (style)?
| | |   |   +--:(value)
| | |   |   |   +--rw value?          te-types:admin-groups
| | |   |   +--:(named)
| | |   |   |   +--rw affinity-names* [name]
| | |   |   |   +--rw name            string
| | +--rw path-srlgs
| | |   +--rw (style)?
| | |   |   +--:(values)
| | |   |   |   +--rw usage?          identityref
| | |   |   |   +--rw values*         te-types:srlg
| | |   +--:(named)
| | |   |   +--rw constraints* [usage]
| | |   |   |   +--rw usage          identityref
| | |   |   |   +--rw constraint
| | |   |   |   |   +--rw srlg-names* [name]
| | |   |   |   |   +--rw name        string
| | +--rw explicit-route-objects
```

```

| | | | +--rw route-object-exclude-always* [index]
| | | | | +--rw index                uint32
| | | | | +--rw (type)?
| | | | |   +--:(numbered)
| | | | |   | +--rw numbered-hop
| | | | |   |   +--rw address?      te-types:te-tp-id
| | | | |   |   +--rw hop-type?    te-hop-type
| | | | |   |   +--rw direction?   te-link-direction

```

```

| | | | +--:(as-number)
| | | | | +--rw as-number-hop
| | | | |   +--rw as-number?      binary
| | | | |   +--rw hop-type?      te-hop-type
| | | | +--:(unnumbered)
| | | | | +--rw unnumbered-hop
| | | | |   +--rw node-id?        te-types:te-node-id
| | | | |   +--rw link-tp-id?     te-types:te-tp-id
| | | | |   +--rw hop-type?      te-hop-type
| | | | |   +--rw direction?     te-link-direction
| | | | +--:(label)
| | | | |   +--rw label-hop
| | | | |   | +--rw te-label
| | | | |   |   +--rw (technology)?
| | | | |   |   | +--:(generic)
| | | | |   |   |   +--rw generic?
| | | | rt-types:generalized-label
| | | | |   +--rw direction?      te-label-direction
| | | | +--rw route-object-include-exclude* [index]
| | | | | +--rw explicit-route-usage? identityref
| | | | | +--rw index                uint32
| | | | | +--rw (type)?
| | | | |   +--:(numbered)
| | | | |   | +--rw numbered-hop
| | | | |   |   +--rw address?      te-types:te-tp-id
| | | | |   |   +--rw hop-type?    te-hop-type
| | | | |   |   +--rw direction?   te-link-direction
| | | | +--:(as-number)
| | | | | +--rw as-number-hop
| | | | |   +--rw as-number?      binary
| | | | |   +--rw hop-type?      te-hop-type
| | | | +--:(unnumbered)
| | | | | +--rw unnumbered-hop

```

```

| | | | | +--rw node-id?      te-types:te-node-id
| | | | | +--rw link-tp-id?   te-types:te-tp-id
| | | | | +--rw hop-type?     te-hop-type
| | | | | +--rw direction?    te-link-direction
| | | | | +--:(label)
| | | | |   +--rw label-hop
| | | | |   +--rw te-label
| | | | |     +--rw (technology)?
| | | | |       | +--:(generic)
| | | | |       |   +--rw generic?
rt-types:generalized-label
| | | | |   +--rw direction?    te-label-direction
| | | | | +--rw shared-resources-tunnels
| | | | |   +--rw lsp-shared-resources-tunnel*  te:tunnel-ref
| | | | | +--rw path-in-segment!

```

```

| | | | | +--rw forward
| | | | | | +--rw label-set* [inclusive-exclusive label-start]
| | | | | |   +--rw inclusive-exclusive    enumeration
| | | | | |   +--rw label-start
rt-types:generalized-label
| | | | | | +--rw label-end?
rt-types:generalized-label
| | | | | | +--rw range-bitmap?          binary
| | | | | +--rw reverse
| | | | |   +--rw label-set* [inclusive-exclusive label-start]
| | | | |   +--rw inclusive-exclusive    enumeration
| | | | |   +--rw label-start
rt-types:generalized-label
| | | | |   +--rw label-end?
rt-types:generalized-label
| | | | |   +--rw range-bitmap?          binary
| | | | | +--rw path-out-segment!
| | | | |   +--rw forward
| | | | | | +--rw label-set* [inclusive-exclusive label-start]
| | | | | |   +--rw inclusive-exclusive    enumeration
| | | | | |   +--rw label-start
rt-types:generalized-label
| | | | | | +--rw label-end?
rt-types:generalized-label
| | | | | | +--rw range-bitmap?          binary
| | | | | +--rw reverse

```

```

| | | +--rw label-set* [inclusive-exclusive label-start]
| | | +--rw inclusive-exclusive enumeration
| | | +--rw label-start
rt-types:generalized-label
| | | +--rw label-end?
rt-types:generalized-label
| | | +--rw range-bitmap? binary
| | | +--ro state
| | | +--ro bandwidth-generic_state? te-types:te-bandwidth
| | | +--ro disjointness_state?
te-types:te-path-disjointness
| | | +--rw te-mpls:bandwidth
| | | +--rw te-mpls:specification-type?
te-mpls-types:te-bandwidth-type
| | | +--rw te-mpls:set-bandwidth?
te-mpls-types:bandwidth-kbps
| | | +--rw te-mpls:class-type?
te-types:te-ds-class
| | | +--ro te-mpls:state
| | | +--ro te-mpls:signaled-bandwidth?
te-mpls-types:bandwidth-kbps
| | | +--rw te-sr-mpls:sid-selection-mode?

```

```

te-sid-selection-mode
| | +--rw te-sr-mpls:sid-protection? identityref
| +--rw te-dev:lsp-install-interval? uint32
| +--rw te-dev:lsp-cleanup-interval? uint32
| +--rw te-dev:lsp-invalidation-interval? uint32
+--rw tunnels
| +--rw tunnel* [name]
| | +--rw name string
| | +--rw identifier? uint16
| | +--rw description? string
| | +--rw encoding? identityref
| | +--rw switching-type? identityref
| | +--rw provisioning-state? identityref
| | +--rw preference? uint8
| | +--rw reoptimize-timer? uint16
| | +--rw source? inet:ip-address
| | +--rw destination? inet:ip-address
| | +--rw src-tp-id? binary
| | +--rw dst-tp-id? binary

```

```

| | | +--rw ignore-overload?          boolean
| | | +--rw protection
| | | | +--rw enable?                boolean
| | | | +--rw protection-type?       identityref
| | | | +--rw protection-reversion-disable? boolean
| | | | +--rw hold-off-time?         uint32
| | | | +--rw wait-to-revert?        uint16
| | | | +--rw aps-signal-id?         uint8
| | | +--rw restoration
| | | | +--rw enable?                boolean
| | | | +--rw restoration-type?      identityref
| | | | +--rw restoration-scheme?    identityref
| | | | +--rw restoration-reversion-disable? boolean
| | | | +--rw hold-off-time?         uint32
| | | | +--rw wait-to-restore?       uint16
| | | | +--rw wait-to-revert?       uint16
| | | +--rw topology-id?
te-types:te-topology-id
| | | +--rw te-bandwidth
| | | | +--rw (technology)?
| | | | | +--:(generic)
| | | | | +--rw generic?      te-bandwidth
| | | +--rw disjointness?
te-types:te-path-disjointness
| | | +--rw setup-priority?          uint8
| | | +--rw hold-priority?          uint8
| | | +--rw signaling-type?         identityref
| | | +--rw dependency-tunnels
| | | | +--rw dependency-tunnel* [name]

```

```

| | | | +--rw name                    ->
| | | | ..../..../..../..../tunnels/tunnel/name
| | | | | +--rw encoding?            identityref
| | | | | +--rw switching-type?     identityref
| | | | +--ro state
| | | | | +--ro operational-state?   identityref
| | | | | +--ro te-dev:lsp-install-interval? uint32
| | | | | +--ro te-dev:lsp-cleanup-interval? uint32
| | | | | +--ro te-dev:lsp-invalidation-interval? uint32
| | | | +--rw bidirectional
| | | | | +--rw association
| | | | | +--rw id?                  uint16

```

```

| | |      +--rw source?          inet:ip-address
| | |      +--rw global-source?   inet:ip-address
| | |      +--rw type?            identityref
| | |      +--rw provisioning?    identityref
| | |  +--rw p2p-primary-paths
| | |    +--rw p2p-primary-path* [name]
| | |      +--rw hierarchical-link
| | |        +--rw local-te-node-id?    te-types:te-node-id
| | |        +--rw local-te-link-tp-id? te-types:te-tp-id
| | |        +--rw remote-te-node-id?   te-types:te-node-id
| | |        +--rw te-topology-id?      te-types:te-topology-id
| | |      +--rw name                string
| | |      +--rw path-setup-protocol?  identityref
| | |      +--rw path-computation-method? identityref
| | |      +--rw path-computation-server? inet:ip-address
| | |      +--rw compute-only?         empty
| | |      +--rw use-path-computation? boolean
| | |      +--rw lockdown?             empty
| | |      +--rw path-scope?           identityref
| | |      +--rw preference?           uint8
| | |      +--rw named-explicit-path?  ->
| | |  ../../../../globals/named-explicit-paths/
named-explicit-path/name
| | |      +--rw named-path-constraint? ->
| | |  ../../../../globals/named-path-constraints/
named-path-constraint/name
{te-types:named-path-constraints}?
| | |      +--ro state
| | |        +--ro path-properties
| | |          +--ro path-metric* [metric-type]
| | |            +--ro metric-type    -> ../state/metric-type
| | |            +--ro state
| | |              +--ro metric-type?    identityref
| | |              +--ro accumulative-value? uint64
| | |          +--ro path-affinities
| | |          +--ro constraints* [usage]

```

```

| | |      +--ro usage    -> ../state/usage
| | |      +--ro state
| | |        +--ro usage?    identityref
| | |        +--ro (style)?
| | |        +--:(value)

```





		+--ro node-id?
te-types:te-node-id		
		+--ro link-tp-id?
te-types:te-tp-id		
		+--ro hop-type?      te-hop-type
		+--ro direction?
te-link-direction		
	+--:(label)	
	+--ro label-hop	
	+--ro te-label	
	+--ro (technology)?	
	+--:(generic)	
	+--ro generic?	
rt-types:generalized-label		
	+--ro direction?	
te-label-direction		
	+--ro shared-resources-tunnels	
	+--ro lsp-shared-resources-tunnel*	
te:tunnel-ref		
	+--ro lsps	
	+--ro lsp* [source destination tunnel-id lsp-id	
extended-tunnel-id]		
	+--ro source	
inet:ip-address		
	+--ro destination	
inet:ip-address		
	+--ro tunnel-id	
uint16		
	+--ro lsp-id	
uint16		
	+--ro extended-tunnel-id	
inet:ip-address		
	+--ro operational-state?	
identityref		
	+--ro path-setup-protocol?	
identityref		
	+--ro origin-type?	
enumeration		
	+--ro lsp-resource-status?	
enumeration		
	+--ro lockout-of-normal?	
boolean		
	+--ro freeze?	
boolean		
	+--ro lsp-protection-role?	
enumeration		
	+--ro lsp-protection-state?	
identityref		

Internet-Draft

TE YANG Data Model

February 2018

```

| | | | | +--ro protection-group-ingress-node-id?
te-types:te-node-id
| | | | | +--ro protection-group-egress-node-id?
te-types:te-node-id
| | | | | +--ro lsp-shared-resources-tunnel?
te:tunnel-ref
| | | | | +--ro lsp-record-route-subobjects
| | | | | | +--ro record-route-subobject* [index]
| | | | | | +--ro index -> ../state/index
| | | | | | +--ro state
| | | | | | | +--ro index? uint32
| | | | | | | +--ro (type)?
| | | | | | | | +--:(numbered)
| | | | | | | | | +--ro address?
te-types:te-tp-id
| | | | | | | +--ro ip-flags? binary
| | | | | | | +--:(unnumbered)
| | | | | | | | +--ro node-id?
te-types:te-node-id
| | | | | | | | +--ro link-tp-id?
te-types:te-tp-id
| | | | | | | | +--:(label)
| | | | | | | | +--ro value?
rt-types:generalized-label
| | | | | | | | +--ro label-flags? binary
| | | | | | | +--ro path-properties
| | | | | | | | +--ro path-metric* [metric-type]
| | | | | | | | | +--ro metric-type ->
../state/metric-type
| | | | | | | | +--ro state
| | | | | | | | +--ro metric-type?
identityref
| | | | | | | | +--ro accumulative-value? uint64
| | | | | | | +--ro path-affinities
| | | | | | | | +--ro constraints* [usage]
| | | | | | | | +--ro usage -> ../state/usage
| | | | | | | | +--ro state
| | | | | | | | +--ro usage?
identityref
| | | | | | | | +--ro (style)?
| | | | | | | | +--:(value)
| | | | | | | | | +--ro value?

```





```

| | | | | +--ro te-dev:neighbor? inet:ip-address
| | | | | +--ro te-dev:label?
rt-types:generalized-label
| | | | | +--ro te-mpls:static-lsp-name?
mpls-static:static-lsp-ref
| | | | | +--rw p2p-reverse-primary-path
| | | | | +--rw name? string
| | | | | +--rw path-setup-protocol? identityref
| | | | | +--rw path-computation-method? identityref
| | | | | +--rw path-computation-server? inet:ip-address
| | | | | +--rw compute-only? empty
| | | | | +--rw use-path-computation? boolean
| | | | | +--rw lockdown? empty
| | | | | +--rw path-scope? identityref
| | | | | +--rw named-explicit-path? ->
../../../../../../../../globals/named-explicit-paths/
named-explicit-path/name
| | | | | +--rw named-path-constraint? ->
../../../../../../../../globals/named-path-constraints/
named-path-constraint/name

```

```

{te-types:named-path-constraints}?
| | | | | +--ro state
| | | | | | +--ro path-properties
| | | | | | | +--ro path-metric* [metric-type]
| | | | | | | | +--ro metric-type ->
../../../../state/metric-type
| | | | | | +--ro state
| | | | | | | +--ro metric-type? identityref
| | | | | | | +--ro accumulative-value? uint64
| | | | | | +--ro path-affinities
| | | | | | | +--ro constraints* [usage]
| | | | | | | | +--ro usage -> ../../state/usage
| | | | | | | +--ro state
| | | | | | | | +--ro usage? identityref
| | | | | | | | +--ro (style)?
| | | | | | | | | +--:(value)
| | | | | | | | | | +--ro value?
te-types:admin-groups
| | | | | | +--:(named)
| | | | | | | +--ro affinity-names* [name]
| | | | | | | | +--ro name string

```







boolean		+++ro freeze?
boolean		+++ro lsp-protection-role?
enumeration		+++ro lsp-protection-state?
identityref		+++ro protection-group-ingress-node-id?
te-types:te-node-id		+++ro protection-group-egress-node-id?
te-types:te-node-id		+++ro lsp-shared-resources-tunnel?
te:tunnel-ref		+++ro lsp-record-route-subobjects
		+++ro record-route-subobject* [index]
		+++ro index -> ../state/index
		+++ro state
		+++ro index? uint32
		+++ro (type)?
		+++:(numbered)
		+++ro address?
te-types:te-tp-id		+++ro ip-flags? binary
		+++:(unnumbered)
		+++ro node-id?
te-types:te-node-id		+++ro link-tp-id?
te-types:te-tp-id		+++:(label)
		+++ro value?
rt-types:generalized-label		+++ro label-flags? binary
		+++ro path-properties
		+++ro path-metric* [metric-type]
		+++ro metric-type ->
../state/metric-type		+++ro state
		+++ro metric-type?
identityref		+++ro accumulative-value? uint64
		+++ro path-affinities



```

te-hop-type
| | | | |
| | | | | +---ro direction?
te-link-direction
| | | | |
| | | | | +---:(as-number)
| | | | | | +---ro as-number-hop
| | | | | | +---ro as-number?
binary
| | | | |
| | | | | +---ro hop-type?
te-hop-type
| | | | |
| | | | | +---:(unnumbered)
| | | | | | +---ro unnumbered-hop
| | | | | | +---ro node-id?
te-types:te-node-id
| | | | |
| | | | | +---ro link-tp-id?
te-types:te-tp-id
| | | | |
| | | | | +---ro hop-type?
te-hop-type
| | | | |
| | | | | +---ro direction?
te-link-direction
| | | | |
| | | | | +---:(label)
| | | | | | +---ro label-hop
| | | | | | +---ro te-label
| | | | | | +---ro (technology)?
| | | | | | | +---:(generic)
| | | | | | | +---ro
generic? rt-types:generalized-label
| | | | |
| | | | | +---ro direction?
te-label-direction
| | | | |
| | | | | +---ro shared-resources-tunnels
| | | | | +---ro lsp-shared-resources-tunnel*
te:tunnel-ref
| | | | | +---rw p2p-reverse-secondary-path
| | | | | +---rw secondary-path? ->
../../../../../../p2p-secondary-paths/p2p-secondary-path/name
| | | | | +---rw path-setup-protocol? identityref
| | | | | +---rw candidate-p2p-secondary-paths
| | | | | +---rw candidate-p2p-secondary-path* [secondary-path]
| | | | | +---rw secondary-path ->
../../../../../../p2p-secondary-paths/p2p-secondary-path/name
| | | | | +---rw path-setup-protocol? identityref
| | | | | +---ro state
| | | | | +---ro active? boolean
| | | | | +---rw te-mpls:static-lsp-name?

```

```

mpls-static:static-lsp-ref
|  |  |  +--rw p2p-secondary-paths
|  |  |  |  +--rw p2p-secondary-path* [name]
|  |  |  |  |  +--rw name                string
|  |  |  |  |  +--rw path-setup-protocol?  identityref

```

```

|  |  |  +--rw path-computation-method?  identityref
|  |  |  +--rw path-computation-server?  inet:ip-address
|  |  |  +--rw compute-only?              empty
|  |  |  +--rw use-path-computation?      boolean
|  |  |  +--rw lockdown?                  empty
|  |  |  +--rw path-scope?                identityref
|  |  |  +--rw preference?                uint8
|  |  |  +--rw named-explicit-path?       ->
|  |  |  |  ../../../../globals/named-explicit-paths/
|  |  |  |  named-explicit-path/name
|  |  |  |  |  +--rw named-path-constraint?  ->
|  |  |  |  |  |  ../../../../globals/named-path-constraints/
|  |  |  |  |  |  named-path-constraint/name
|  |  |  |  |  {te-types:named-path-constraints}?
|  |  |  |  |  |  +--rw protection
|  |  |  |  |  |  |  +--rw enable?              boolean
|  |  |  |  |  |  |  +--rw protection-type?      identityref
|  |  |  |  |  |  |  +--rw protection-reversion-disable?  boolean
|  |  |  |  |  |  |  +--rw hold-off-time?         uint32
|  |  |  |  |  |  |  +--rw wait-to-revert?        uint16
|  |  |  |  |  |  |  +--rw aps-signal-id?        uint8
|  |  |  |  |  |  +--rw restoration
|  |  |  |  |  |  |  +--rw enable?              boolean
|  |  |  |  |  |  |  +--rw restoration-type?      identityref
|  |  |  |  |  |  |  +--rw restoration-scheme?    identityref
|  |  |  |  |  |  |  +--rw restoration-reversion-disable?  boolean
|  |  |  |  |  |  |  +--rw hold-off-time?         uint32
|  |  |  |  |  |  |  +--rw wait-to-restore?       uint16
|  |  |  |  |  |  |  +--rw wait-to-revert?       uint16
|  |  |  |  |  +--ro state
|  |  |  |  |  |  +--ro path-properties
|  |  |  |  |  |  |  +--ro path-metric* [metric-type]
|  |  |  |  |  |  |  |  +--ro metric-type      -> ../state/metric-type
|  |  |  |  |  |  |  |  +--ro state
|  |  |  |  |  |  |  |  |  +--ro metric-type?    identityref
|  |  |  |  |  |  |  |  |  +--ro accumulative-value?  uint64

```

```

| | | | | +---ro path-affinities
| | | | | | +---ro constraints* [usage]
| | | | | | +---ro usage      -> ../state/usage
| | | | | | +---ro state
| | | | | | | +---ro usage?          identityref
| | | | | | | +---ro (style)?
| | | | | | | | +---:(value)
| | | | | | | | | +---ro value?
te-types:admin-groups
| | | | | | +---:(named)
| | | | | | | +---ro affinity-names* [name]
| | | | | | | | +---ro name      string

```

```

| | | | | +---ro path-srlgs
| | | | | | +---ro (style)?
| | | | | | | +---:(values)
| | | | | | | | +---ro state
| | | | | | | | | +---ro usage?      identityref
| | | | | | | | | +---ro values*     te-types:srlg
| | | | | | | +---:(named)
| | | | | | | | +---ro constraints
| | | | | | | | | +---ro constraint* [usage]
| | | | | | | | | +---ro usage      ->
../state/usage
| | | | | | | +---ro state
| | | | | | | | +---ro usage?      identityref
| | | | | | | +---ro srlg-names
| | | | | | | | +---ro srlg-name* [name]
| | | | | | | | +---ro name      ->
../state/name
| | | | | | | +---ro state
| | | | | | | | +---ro name?      string
+---ro path-route-objects
| | | | | | +---ro path-computed-route-object* [index]
| | | | | | +---ro index      -> ../state/index
| | | | | | +---ro state
| | | | | | | +---ro index?          uint32
| | | | | | | +---ro (type)?
| | | | | | | | +---:(numbered)
| | | | | | | | | +---ro numbered-hop
| | | | | | | | | +---ro address?
te-types:te-tp-id

```

								+++ro hop-type?	te-hop-type
								+++ro direction?	
te-link-direction									
								+++:(as-number)	
								+++ro as-number-hop	
								+++ro as-number?	binary
								+++ro hop-type?	te-hop-type
								+++:(unnumbered)	
								+++ro unnumbered-hop	
								+++ro node-id?	
te-types:te-node-id									
								+++ro link-tp-id?	
te-types:te-tp-id									
								+++ro hop-type?	te-hop-type
								+++ro direction?	
te-link-direction									
								+++:(label)	
								+++ro label-hop	
								+++ro te-label	

								+++ro (technology)?	
								+++:(generic)	
								+++ro generic?	
rt-types:generalized-label									
								+++ro direction?	
te-label-direction									
								+++ro shared-resources-tunnels	
								+++ro lsp-shared-resources-tunnel*	
te:tunnel-ref									
								+++ro lsps	
								+++ro lsp* [source destination tunnel-id lsp-id	
extended-tunnel-id]									
								+++ro source	
inet:ip-address									
								+++ro destination	
inet:ip-address									
								+++ro tunnel-id	
uint16									
								+++ro lsp-id	
uint16									
								+++ro extended-tunnel-id	
inet:ip-address									

	+++ro operational-state?
identityref	
	+++ro path-setup-protocol?
identityref	
	+++ro origin-type?
enumeration	
	+++ro lsp-resource-status?
enumeration	
	+++ro lockout-of-normal?
boolean	
	+++ro freeze?
boolean	
	+++ro lsp-protection-role?
enumeration	
	+++ro lsp-protection-state?
identityref	
	+++ro protection-group-ingress-node-id?
te-types:te-node-id	
	+++ro protection-group-egress-node-id?
te-types:te-node-id	
	+++ro lsp-shared-resources-tunnel?
te:tunnel-ref	
	+++ro lsp-record-route-subobjects
	+++ro record-route-subobject* [index]
	+++ro index -> ../state/index
	+++ro state

	+++ro index?	uint32
	+++ro (type)?	
	+++:(numbered)	
	+++ro address?	
te-types:te-tp-id		
	+++ro ip-flags?	binary
	+++:(unnumbered)	
	+++ro node-id?	
te-types:te-node-id		
	+++ro link-tp-id?	
te-types:te-tp-id		
	+++:(label)	
	+++ro value?	
rt-types:generalized-label		
	+++ro label-flags?	binary









```

| | +--rw te-mpls:forwarding
| | | +--rw te-mpls:binding-label? rt-types:mpls-label
| | | +--rw te-mpls:load-share?    uint32
| | | +--rw te-mpls:policy-class?  uint8
| | +--rw te-mpls:bandwidth-mpls
| | +--rw te-mpls:specification-type?
te-mpls-types:te-bandwidth-type
| | +--rw te-mpls:set-bandwidth?
te-mpls-types:bandwidth-kbps
| | +--rw te-mpls:class-type?      te-types:te-ds-class
| | +--ro te-mpls:state
| | | +--ro te-mpls:signaled-bandwidth?
te-mpls-types:bandwidth-kbps
| | +--rw te-mpls:auto-bandwidth
| | +--rw te-mpls:enabled?         boolean
| | +--rw te-mpls:min-bw?
te-mpls-types:bandwidth-kbps
| | +--rw te-mpls:max-bw?
te-mpls-types:bandwidth-kbps
| | +--rw te-mpls:adjust-interval? uint32
| | +--rw te-mpls:adjust-threshold? te-types:percentage
| | +--rw te-mpls:overflow
| | | +--rw te-mpls:enabled?         boolean
| | | +--rw te-mpls:overflow-threshold?
te-types:percentage
| | | +--rw te-mpls:trigger-event-count? uint16
| | +--rw te-mpls:underflow
| | +--rw te-mpls:enabled?         boolean
| | +--rw te-mpls:underflow-threshold?
te-types:percentage
| | +--rw te-mpls:trigger-event-count? uint16
| +--rw tunnel-p2mp* [name]
| | +--rw name                string
| | +--rw identifier?         uint16
| | +--rw description?       string
| | +--ro state
| | +--ro operational-state?  identityref
+--ro lsps-state
| +--ro lsp* [source destination tunnel-id lsp-id
extended-tunnel-id]
| | +--ro source                inet:ip-address
| | +--ro destination           inet:ip-address
| | +--ro tunnel-id             uint16
| | +--ro lsp-id               uint16
| | +--ro extended-tunnel-id    inet:ip-address
| | +--ro operational-state?    identityref

```

	+++ro path-setup-protocol?	identityref
	+++ro origin-type?	enumeration

	+++ro lsp-resource-status?	enumeration
	+++ro lockout-of-normal?	boolean
	+++ro freeze?	boolean
	+++ro lsp-protection-role?	enumeration
	+++ro lsp-protection-state?	identityref
	+++ro protection-group-ingress-node-id?	te-types:te-node-id
	+++ro protection-group-egress-node-id?	te-types:te-node-id
	+++ro lsp-record-route-subobjects	
	+++ro record-route-subobject* [index]	
	+++ro index     -> ../state/index	
	+++ro state	
	+++ro index?             uint32	
	+++ro (type)?	
	+---:(numbered)	
	+++ro address?         te-types:te-tp-id	
	+++ro ip-flags?         binary	
	+---:(unnumbered)	
	+++ro node-id?         te-types:te-node-id	
	+++ro link-tp-id?         te-types:te-tp-id	
	+---:(label)	
	+++ro value?	
	rt-types:generalized-label	
	+++ro label-flags?     binary	
	+++ro te-dev:lsp-timers	
	+++ro te-dev:life-time?         uint32	
	+++ro te-dev:time-to-install?     uint32	
	+++ro te-dev:time-to-destroy?     uint32	
	+++ro te-dev:downstream-info	
	+++ro te-dev:nhop?             inet:ip-address	
	+++ro te-dev:outgoing-interface?     if:interface-ref	
	+++ro te-dev:neighbor?         inet:ip-address	
	+++ro te-dev:label?	
	rt-types:generalized-label	
	+++ro te-dev:upstream-info	
	+++ro te-dev:phop?             inet:ip-address	
	+++ro te-dev:neighbor?         inet:ip-address	
	+++ro te-dev:label?             rt-types:generalized-label	
	+++rw te-dev:interfaces	
	+++rw te-dev:threshold-type?	enumeration

```

+---rw te-dev:delta-percentage?          te-types:percentage
+---rw te-dev:threshold-specification?    enumeration
+---rw te-dev:up-thresholds*              te-types:percentage
+---rw te-dev:down-thresholds*            te-types:percentage
+---rw te-dev:up-down-thresholds*         te-types:percentage
+---rw te-dev:interface* [interface]
    +---rw te-dev:interface                if:interface-ref
    +---rw te-dev:te-metric?               te-types:te-metric
    +---rw (te-dev:admin-group-type)?

```

```

|   +---:(te-dev:value-admin-groups)
|   |   +---rw (te-dev:value-admin-group-type)?
|   |       +---:(te-dev:admin-groups)
|   |       |   +---rw te-dev:admin-group?
|   |       te-types:admin-group
|   |       +---:(te-dev:extended-admin-groups)
|   |       {te-types:extended-admin-groups}?
|   |       +---rw te-dev:extended-admin-group?
|   |       te-types:extended-admin-group
|   +---:(te-dev:named-admin-groups)
|   |   +---rw te-dev:named-admin-groups* [named-admin-group]
|   |   {te-types:extended-admin-groups,te-types:
|   |   named-extended-admin-groups}?
|   |   +---rw te-dev:named-admin-group    ->
|   |   ../../../../te:globals/named-admin-groups/
|   |   named-admin-group/name
|   +---rw (te-dev:srlg-type)?
|   |   +---:(te-dev:value-srlgs)
|   |   |   +---rw te-dev:values* [value]
|   |   |   +---rw te-dev:value      uint32
|   |   +---:(te-dev:named-srlgs)
|   |   |   +---rw te-dev:named-srlgs* [named-srlg]
|   |   |   {te-types:named-srlg-groups}?
|   |   |   +---rw te-dev:named-srlg    ->
|   |   |   ../../../../te:globals/named-srlgs/named-srlg/name
|   +---rw te-dev:threshold-type?          enumeration
|   +---rw te-dev:delta-percentage?        te-types:percentage
|   +---rw te-dev:threshold-specification?  enumeration
|   +---rw te-dev:up-thresholds*            te-types:percentage
|   +---rw te-dev:down-thresholds*          te-types:percentage
|   +---rw te-dev:up-down-thresholds*       te-types:percentage
|   +---rw te-dev:switching-capabilities* [switching-capability]

```

```

|   +---rw te-dev:switching-capability      identityref
|   +---rw te-dev:encoding?                  identityref
+---ro te-dev:state
    +---ro te-dev:te-advertisements_state
        +---ro te-dev:flood-interval?        uint32
        +---ro te-dev:last-flooded-time?     uint32
        +---ro te-dev:next-flooded-time?     uint32
        +---ro te-dev:last-flooded-trigger?  enumeration
        +---ro te-dev:advertized-level-areas* [level-area]
            +---ro te-dev:level-area         uint32

```

rpcs:

```

+---x globals-rpc
+---x interfaces-rpc
+---x tunnels-rpc
    +---w input

```

```

|   +---w tunnel-info
|       +---w (type)?
|           +---:(tunnel-p2p)
|               |   +---w p2p-id?      te:tunnel-ref
|           +---:(tunnel-p2mp)
|               +---w p2mp-id?      te:tunnel-p2mp-ref
+---ro output
    +---ro result
        +---ro result?  enumeration

```

notifications:

```

+---n globals-notif
+---n tunnels-notif

```

module: ietf-te-device

rpcs:

```

+---x interfaces-rpc

```

notifications:

```

+---n interfaces-notif

```

Figure 6: TE generic model configuration and state tree

#### 4. TE Generic and Helper YANG Modules

```

<CODE BEGINS> file "ietf-te-types@2018-02-19.yang"
module iETF-te-types {

    namespace "urn:ietf:params:xml:ns:yang:ietf-te-types";

    /* Replace with IANA when assigned */
    prefix "te-types";

    import iETF-inet-types {
        prefix inet;
    }

    import iETF-yang-types {
        prefix "yang";
    }

    import iETF-routing-types {
        prefix "rt-types";
    }

    organization
        "IETF Traffic Engineering Architecture and Signaling (TEAS)
        Working Group";

```

```

contact
    "WG Web:  <http://tools.ietf.org/wg/teas/>
    WG List:  <mailto:teas@ietf.org>

    WG Chair: Lou Berger
               <mailto:lberger@labn.net>

    WG Chair: Vishnu Pavan Beeram
               <mailto:vbeeram@juniper.net>

    Editor:   Tarek Saad
               <mailto:tsaad@cisco.com>

    Editor:   Rakesh Gandhi
               <mailto:rgandhi@cisco.com>

    Editor:   Vishnu Pavan Beeram
               <mailto:vbeeram@juniper.net>

```

```

Editor:  Himanshu Shah
        <mailto:hshah@ciena.com>

Editor:  Xufeng Liu
        <mailto:xufeng.liu@ericsson.com>

Editor:  Igor Bryskin
        <mailto:Igor.Bryskin@huawei.com>";

description
  "This module contains a collection of generally
  useful TE specific YANG data type defintions.";

revision "2018-02-19" {
  description "Latest revision of TE types";
  reference "RFC3209";
}

/*
 * Identities
 */
identity objective-function-type {
  description "Base objective function type";
}
identity of-minimize-cost-path {
  base objective-function-type;
  description
    "Mimimize cost of path objective function";
}

```

```

identity of-minimize-load-path {
  base objective-function-type;
  description
    "Minimize the load on path(s) objective
    function";
}
identity of-maximize-residual-bandwidth {
  base objective-function-type;
  description
    "Maximize the residual bandwidth objective
    function";
}

```



```

}
identity of-minimize-agg-bandwidth-consumption {
    base objective-function-type;
    description
        "minimize the aggregate bandwidth consumption
        objective function";
}
identity of-minimize-load-most-loaded-link {
    base objective-function-type;
    description
        "Minimize the load on the most loaded link
        objective function";
}
identity of-minimize-cost-path-set {
    base objective-function-type;
    description
        "Minimize the cost on a path set objective
        function";
}

identity path-computation-method {
    description
        "base identity for supported path computation
        mechanisms";
}

identity path-locally-computed {
    base path-computation-method;
    description
        "indicates a constrained-path LSP in which the
        path is computed by the local LER";
}

identity path-externally-queried {
    base path-computation-method;
    description
        "Constrained-path LSP in which the path is

```

obtained by querying an external source, such as a PCE server. In the case that an LSP is defined to be externally queried, it may also have associated explicit definitions (provided to the external source to aid computation); and the path that is

```

        returned by the external source is not required to provide a
        wholly resolved path back to the originating system - that is to
        say, some local computation may also be required";
    }

identity path-explicitly-defined {
    base path-computation-method;
    description
        "constrained-path LSP in which the path is
        explicitly specified as a collection of strict or/and loose
        hops";
}

/**
 * Typedefs
 */

typedef te-bandwidth {
    type string {
        pattern
            '0[xX](0((\.\0?)?[pP](\+)?0?|(\.\0?))|'
            + '1(\.([\da-fA-F]{0,5}[02468aAcCeE]?))?[pP](\+)?(12[0-7]|'
            + '1[01]\d|0?\d?\d)?)|0[xX][\da-fA-F]{1,8}|\d+'
            + '(',0[xX](0((\.\0?)?[pP](\+)?0?|(\.\0?))|'
            + '1(\.([\da-fA-F]{0,5}[02468aAcCeE]?))?[pP](\+)?(12[0-7]|'
            + '1[01]\d|0?\d?\d)?)|0[xX][\da-fA-F]{1,8}|\d+))*';
    }
    description
        "This is the generic bandwidth type that is a string containing
        a list of numbers separated by commas, with each of these
        number can be non-negative decimal, hex integer, or hex float:
        (dec | hex | float)[*(',(dec | hex | float))]
        For packet switching type, a float number is used, such as
        0x1p10.
        For OTN switching type, a list of integers can be used, such
        as '0,2,3,1', indicating 2 odu0's and 1 odu3.
        For DWDM, a list of pairs of slot number and width can be
        used, such as '0, 2, 3, 3', indicating a frequency slot 0 with
        slot width 2 and a frequency slot 3 with slot width 3.";
} // te-bandwidth

typedef te-ds-class {
    type uint8 {
        range "0..7";
    }
}

```

```
    }
    description
      "The Differentiated Class-Type of traffic.";
    reference "RFC4124: section-4.3.1";
  }

typedef te-link-direction {
  type enumeration {
    enum INCOMING {
      description
        "explicit route represents an incoming link on a node";
    }
    enum OUTGOING {
      description
        "explicit route represents an outgoing link on a node";
    }
  }
  description
    "enumerated type for specifying direction of link on a node";
}

typedef te-label-direction {
  type enumeration {
    enum FORWARD {
      description
        "Label allocated for the forward LSP direction";
    }
    enum REVERSE {
      description
        "Label allocated for the reverse LSP direction";
    }
  }
  description
    "enumerated type for specifying the forward or reverse
    label";
}

typedef te-hop-type {
  type enumeration {
    enum LOOSE {
      description
        "loose hop in an explicit path";
    }
    enum STRICT {
      description
        "strict hop in an explicit path";
    }
  }
}
```

```
}
```

```
    description
      "enumerated type for specifying loose or strict
      paths";
  }

  identity LSP_METRIC_TYPE {
    description
      "Base identity for types of LSP metric specification";
  }

  identity LSP_METRIC_RELATIVE {
    base LSP_METRIC_TYPE;
    description
      "The metric specified for the LSPs to which this identity refers
      is specified as a relative value to the IGP metric cost to the
      LSP's tail-end.";
  }

  identity LSP_METRIC_ABSOLUTE {
    base LSP_METRIC_TYPE;
    description
      "The metric specified for the LSPs to which this identity refers
      is specified as an absolute value";
  }

  identity LSP_METRIC_INHERITED {
    base LSP_METRIC_TYPE;
    description
      "The metric for for the LSPs to which this identity refers is
      not specified explicitly - but rather inherited from the IGP
      cost directly";
  }

  identity tunnel-type {
    description
      "Base identity from which specific tunnel types are
      derived.";
  }

  identity tunnel-p2p {
```

```
    base tunnel-type;
    description
        "TE point-to-point tunnel type.";
}
```

```
identity tunnel-p2mp {
    base tunnel-type;
    description
```

```
    "TE point-to-multipoint tunnel type.";
}

identity tunnel-action-type {
    description
        "Base identity from which specific tunnel action types
        are derived.";
}

identity tunnel-action-resetup {
    base tunnel-action-type;
    description
        "TE tunnel action resetup. Tears the
        tunnel's current LSP (if any) and
        attempts to re-establish a new LSP";
}

identity tunnel-action-reoptimize {
    base tunnel-action-type;
    description
        "TE tunnel action reoptimize.
        Reoptimizes placement of the tunnel LSP(s)";
}

identity tunnel-action-switchpath {
    base tunnel-action-type;
    description
        "TE tunnel action reoptimize
        Switches the tunnel's LSP to use the specified path";
}

identity te-action-result {
    description
```

```

        "Base identity from which specific TE action results
        are derived.";
    }

    identity te-action-success {
        base te-action-result;
        description "TE action successful.";
    }

    identity te-action-fail {
        base te-action-result;
        description "TE action failed.";
    }

    identity tunnel-action-inprogress {

```

```

        base te-action-result;
        description "TE action inprogress.";
    }

    identity tunnel-admin-state-type {
        description
            "Base identity for TE tunnel admin states";
    }

    identity tunnel-admin-state-up {
        base tunnel-admin-state-type;
        description "Tunnel administratively state up";
    }

    identity tunnel-admin-state-down {
        base tunnel-admin-state-type;
        description "Tunnel administratively state down";
    }

    identity tunnel-state-type {
        description
            "Base identity for TE tunnel states";
    }

    identity tunnel-state-up {
        base tunnel-state-type;

```

```

    description "Tunnel state up";
}

identity tunnel-state-down {
    base tunnel-state-type;
    description "Tunnel state down";
}

identity lsp-state-type {
    description
        "Base identity for TE LSP states";
}

identity lsp-path-computing {
    base lsp-state-type;
    description
        "State path compute in progress";
}

identity lsp-path-computation-ok {
    base lsp-state-type;
    description

```

```

    "State path compute successful";
}

identity lsp-path-computatione-failed {
    base lsp-state-type;
    description
        "State path compute failed";
}

identity lsp-state-setting-up {
    base lsp-state-type;
    description
        "State setting up";
}

identity lsp-state-setup-ok {
    base lsp-state-type;
    description
        "State setup successful";
}

```

```

}

identity lsp-state-setup-failed {
    base lsp-state-type;
    description
        "State setup failed";
}

identity lsp-state-up {
    base lsp-state-type;
    description "State up";
}

identity lsp-state-tearing-down {
    base lsp-state-type;
    description
        "State tearing down";
}

identity lsp-state-down {
    base lsp-state-type;
    description "State down";
}

identity path-invalidation-action-type {
    description
        "Base identity for TE path invalidation action types";
}

```

```

identity path-invalidation-action-drop-type {
    base path-invalidation-action-type;
    description
        "TE path invalidation action drop";
}

identity path-invalidation-action-drop-tear {
    base path-invalidation-action-type;
    description
        "TE path invalidation action tear";
}

```



```

identity lsp-restoration-type {
    description
        "Base identity from which LSP restoration types are
        derived.";
}

identity lsp-restoration-restore-any {
    base lsp-restoration-type;
    description
        "Restores when any of the LSPs is affected by a failure";
}

identity lsp-restoration-restore-all {
    base lsp-restoration-type;
    description
        "Restores when all the tunnel LSPs are affected by failure";
}

identity restoration-scheme-type {
    description
        "Base identity for LSP restoration schemes";
}

identity restoration-scheme-preconfigured {
    base restoration-scheme-type;
    description
        "Restoration LSP is preconfigured prior to the failure";
}

identity restoration-scheme-precomputed {
    base restoration-scheme-type;
    description
        "Restoration LSP is precomputed prior to the failure";
}

identity restoration-scheme-presignaled {

```

```

    base restoration-scheme-type;
    description
        "Restoration LSP is presignaled prior to the failure";
}

```

```

identity lsp-protection-type {
    description
        "Base identity from which LSP protection types are
        derived.";
}

identity lsp-protection-unprotected {
    base lsp-protection-type;
    description
        "LSP protection 'Unprotected'";
    reference "RFC4872";
}

identity lsp-protection-reroute-extra {
    base lsp-protection-type;
    description
        "LSP protection '(Full) Rerouting'";
    reference "RFC4872";
}

identity lsp-protection-reroute {
    base lsp-protection-type;
    description
        "LSP protection 'Rerouting without Extra-Traffic'";
    reference "RFC4872";
}

identity lsp-protection-1-for-n {
    base lsp-protection-type;
    description
        "LSP protection '1:N Protection with Extra-Traffic'";
    reference "RFC4872";
}

identity lsp-protection-unidir-1-to-1 {
    base lsp-protection-type;
    description
        "LSP protection '1+1 Unidirectional Protection'";
    reference "RFC4872";
}

identity lsp-protection-bidir-1-to-1 {
    base lsp-protection-type;

```

```
description
    "LSP protection '1+1 Bidirectional Protection'";
reference "RFC4872";
}

identity lsp-protection-extra-traffic {
    base lsp-protection-type;
    description
        "LSP protection 'Extra-Traffic'";
    reference
        "ITU-T G.808, RFC 4427.";
}

identity lsp-protection-state {
    description
        "Base identity of protection states for reporting
        purposes.";
}

identity normal {
    base lsp-protection-state;
    description "Normal state.";
}

identity signal-fail-of-protection {
    base lsp-protection-state;
    description
        "There is a SF condition on the protection transport
        entity which has higher priority than the FS command.";
    reference
        "ITU-T G.873.1, G.8031, G.8131";
}

identity lockout-of-protection {
    base lsp-protection-state;
    description
        "A Loss of Protection (LoP) command is active.";
    reference
        "ITU-T G.808, RFC 4427";
}

identity forced-switch {
    base lsp-protection-state;
    description
        "A forced switch (FS) command is active.";
    reference
        "ITU-T G.808, RFC 4427";
}
```

```
identity signal-fail {
  base lsp-protection-state;
  description
    "There is a SF condition on either the working
    or the protection path.";
  reference
    "ITU-T G.808, RFC 4427";
}

identity signal-degrade {
  base lsp-protection-state;
  description
    "There is an SD condition on either the working or the
    protection path.";
  reference
    "ITU-T G.808, RFC 4427";
}

identity manual-switch {
  base lsp-protection-state;
  description
    "A manual switch (MS) command is active.";
  reference
    "ITU-T G.808, RFC 4427";
}

identity wait-to-restore {
  base lsp-protection-state;
  description
    "A wait time to restore (WTR) is running.";
  reference
    "ITU-T G.808, RFC 4427";
}

identity do-not-revert {
  base lsp-protection-state;
  description
    "A DNR condition is active because of a non-revertive
    behavior.";
  reference
    "ITU-T G.808, RFC 4427";
}
```

```
identity failure-of-protocol {
  base lsp-protection-state;
  description
    "The protection is not working because of a failure of
    protocol condition.";
```

```
    reference
      "ITU-T G.873.1, G.8031, G.8131";
  }

identity protection-external-commands {
  description
    "Protection external commands for trouble shooting
    purposes.";
}

identity action-freeze {
  base protection-external-commands;
  description
    "A temporary configuration action initiated by an operator
    command to prevent any switch action to be taken and as such
    freezes the current state.";
  reference
    "ITU-T G.808, RFC 4427";
}

identity clear-freeze {
  base protection-external-commands;
  description
    "An action that clears the active freeze state.";
  reference
    "ITU-T G.808, RFC 4427";
}

identity action-lockout-of-normal {
  base protection-external-commands;
  description
    "A temporary configuration action initiated by an operator
    command to ensure that the normal traffic is not allowed
    to use the protection transport entity.";
  reference
```

```

    "ITU-T G.808, RFC 4427";
}

identity clear-lockout-of-normal {
    base protection-external-commands;
    description
        "An action that clears the active lockout of normal state.";
    reference
        "ITU-T G.808, RFC 4427";
}

identity action-lockout-of-protection {
    base protection-external-commands;

```

```

    description
        "A temporary configuration action initiated by an operator
        command to ensure that the protection transport entity is
        temporarily not available to transport a traffic signal
        (either normal or extra traffic).";
    reference
        "ITU-T G.808, RFC 4427";
}

identity action-forced-switch {
    base protection-external-commands;
    description
        "A switch action initiated by an operator command to switch
        the extra traffic signal, the normal traffic signal, or the
        null signal to the protection transport entity, unless an
        equal or higher priority switch command is in effect.";
    reference
        "ITU-T G.808, RFC 4427";
}

identity action-manual-switch {
    base protection-external-commands;
    description
        "A switch action initiated by an operator command to switch
        the extra traffic signal, the normal traffic signal #i, or
        the null signal to the protection transport entity, unless
        a fault condition exists on other transport entities or an
        equal or higher priority switch command is in effect.";

```

```

    reference
      "ITU-T G.808, RFC 4427";
  }

  identity action-exercise {
    base protection-external-commands;
    description
      "An action to start testing if the APS communication is
      operating correctly. It is lower priority than any other
      state or command.";
    reference
      "ITU-T G.808, RFC 4427";
  }

  identity clear {
    base protection-external-commands;
    description
      "An action that clears the active near-end lockout of
      protection, forced switch, manual switch, WTR state,
      or exercise command.";
  }

```

```

    reference
      "ITU-T G.808, RFC 4427";
  }

  identity switching-capabilities {
    description
      "Base identity for interface switching capabilities";
  }

  identity switching-psc1 {
    base switching-capabilities;
    description
      "Packet-Switch Capable-1 (PSC-1)";
  }

  identity switching-evpl {
    base switching-capabilities;
    description
      "Ethernet Virtual Private Line (EVPL)";
  }

```

```

}

identity switching-l2sc {
    base switching-capabilities;
    description
        "Layer-2 Switch Capable (L2SC)";
}

identity switching-tdm {
    base switching-capabilities;
    description
        "Time-Division-Multiplex Capable (TDM)";
}

identity switching-otn {
    base switching-capabilities;
    description
        "OTN-TDM capable";
}

identity switching-dcsc {
    base switching-capabilities;
    description
        "Data Channel Switching Capable (DCSC)";
}

identity switching-lsc {

```

```

    base switching-capabilities;
    description
        "Lambda-Switch Capable (LSC)";
}

identity switching-fsc {
    base switching-capabilities;
    description
        "Fiber-Switch Capable (FSC)";
}

identity lsp-encoding-types {
    description
        "Base identity for encoding types";

```



```

}

identity lsp-encoding-packet {
    base lsp-encoding-types;
    description
        "Packet LSP encoding";
}

identity lsp-encoding-ethernet {
    base lsp-encoding-types;
    description
        "Ethernet LSP encoding";
}

identity lsp-encoding-pdh {
    base lsp-encoding-types;
    description
        "ANSI/ETSI LSP encoding";
}

identity lsp-encoding-sdh {
    base lsp-encoding-types;
    description
        "SDH ITU-T G.707 / SONET ANSI T1.105 LSP encoding";
}

identity lsp-encoding-digital-wrapper {
    base lsp-encoding-types;
    description
        "Digital Wrapper LSP encoding";
}

identity lsp-encoding-lambda {
    base lsp-encoding-types;

```

```

    description
        "Lambda (photonic) LSP encoding";
}

identity lsp-encoding-fiber {
    base lsp-encoding-types;
    description

```

```

    "Fiber LSP encoding";
}

identity lsp-encoding-fiber-channel {
    base lsp-encoding-types;
    description
        "FiberChannel LSP encoding";
}

identity lsp-encoding-oduk {
    base lsp-encoding-types;
    description
        "G.709 ODUk (Digital Path)LSP encoding";
}

identity lsp-encoding-optical-channel {
    base lsp-encoding-types;
    description
        "Line (e.g., 8B/10B) LSP encoding";
}

identity lsp-encoding-line {
    base lsp-encoding-types;
    description
        "Line (e.g., 8B/10B) LSP encoding";
}

identity path-signaling-type {
    description
        "base identity from which specific LSPs path
        setup types are derived";
}

identity path-setup-static {
    base path-signaling-type;
    description
        "Static LSP provisioning path setup";
}

identity path-setup-rsvp {
    base path-signaling-type;

```

```

    description
        "RSVP-TE signaling path setup";
}

identity path-setup-sr {
    base path-signaling-type;
    description
        "Segment-routing path setup";
}

identity path-scope-type {
    description
        "base identity from which specific path
        scope types are derived";
}

identity path-scope-segment {
    base path-scope-type;
    description
        "Path scope segment";
}

identity path-scope-end-to-end {
    base path-scope-type;
    description
        "Path scope end to end";
}

/* TE basic features */
feature p2mp-te {
    description
        "Indicates support for P2MP-TE";
}

feature frr-te {
    description
        "Indicates support for TE FastReroute (FRR)";
}

feature extended-admin-groups {
    description
        "Indicates support for TE link extended admin
        groups.";
}

feature named-path-affinities {
    description
        "Indicates support for named path affinities";
}

```

Internet-Draft

TE YANG Data Model

February 2018

```
}

feature named-extended-admin-groups {
  description
    "Indicates support for named extended admin groups";
}

feature named-srlg-groups {
  description
    "Indicates support for named SRLG groups";
}

feature named-path-constraints {
  description
    "Indicates support for named path constraints";
}

feature path-optimization-metric {
  description
    "Indicates support for path optimization metric";
}

feature path-optimization-objective-function {
  description
    "Indicates support for path optimization objective function";
}

identity route-usage-type {
  description
    "Base identity for route usage";
}

identity route-include-ero {
  base route-usage-type;
  description
    "Include ERO from route";
}

identity route-exclude-ero {
  base route-usage-type;
  description
    "Exclude ERO from route";
}
```

```
identity route-exclude-srlg {
  base route-usage-type;
  description
    "Exclude SRLG from route";
```

```
}

identity path-metric-type {
  description
    "Base identity for path metric type";
}

identity path-metric-te {
  base path-metric-type;
  description
    "TE path metric";
}

identity path-metric-igp {
  base path-metric-type;
  description
    "IGP path metric";
}

identity path-metric-hop {
  base path-metric-type;
  description
    "Hop path metric";
}

identity path-metric-delay-average {
  base path-metric-type;
  description
    "Unidirectional average link delay";
  reference "RFC7471";
}

identity path-metric-residual-bandwidth {
  base path-metric-type;
  description
    "Unidirectional Residual Bandwidth, which is defined to be
```

```

        Maximum Bandwidth [RFC3630] minus the bandwidth currently
        allocated to LSPs.";
    reference "RFC7471";
}

identity path-tiebreaker-type {
    description
        "Base identity for path tie-breaker type";
}

identity path-tiebreaker-minfill {
    base path-tiebreaker-type;

```

```

    description
        "Min-Fill LSP path placement";
}

identity path-tiebreaker-maxfill {
    base path-tiebreaker-type;
    description
        "Max-Fill LSP path placement";
}

identity path-tiebreaker-randoom {
    base path-tiebreaker-type;
    description
        "Random LSP path placement";
}

identity bidir-provisioning-mode {
    description
        "Base identity for bidirectional provisioning
        mode.";
}

identity bidir-provisioning-single-sided {
    base bidir-provisioning-mode;
    description
        "Single-sided bidirectional provioning mode";
}

identity bidir-provisioning-double-sided {

```

```

    base bidir-provisioning-mode;
    description
        "Double-sided bidirectional provisioning mode";
}

identity bidir-association-type {
    description
        "Base identity for bidirectional association type";
}

identity bidir-assoc-corouted {
    base bidir-association-type;
    description
        "Co-routed bidirectional association type";
}

identity bidir-assoc-non-corouted {
    base bidir-association-type;
    description

```

```

    "Non co-routed bidirectional association type";
}

identity resource-affinities-type {
    description
        "Base identity for resource affinities";
}

identity resource-aff-include-all {
    base resource-affinities-type;
    description
        "The set of attribute filters associated with a
        tunnel all of which must be present for a link
        to be acceptable";
}

identity resource-aff-include-any {
    base resource-affinities-type;
    description
        "The set of attribute filters associated with a
        tunnel any of which must be present for a link
        to be acceptable";
}

```

```

}

identity resource-aff-exclude-any {
  base resource-affinities-type;
  description
    "The set of attribute filters associated with a
    tunnel any of which renders a link unacceptable";
}

typedef optimization-goal {
  type enumeration {
    enum minimize {
      description "Pick lowest path metric goal";
    }
    enum maximize {
      description "Pick highest path metric goal";
    }
    enum randomize {
      description
        "Pick a path at random from list of
        equally favorable ones";
    }
  }
  description "TE optimization goal";
}

```

```

identity te-optimization-criterion {
  description
    "Base identity for TE optimization criterion.";
  reference
    "RFC3272: Overview and Principles of Internet Traffic
    Engineering.";
}

identity not-optimized {
  base te-optimization-criterion;
  description "Optimization is not applied.";
}

identity cost {
  base te-optimization-criterion;
}

```



```

    description "Optimized on cost.";
}

identity delay {
    base te-optimization-criterion;
    description "Optimized on delay.";
}

/*
 * Typedefs
 */

typedef percentage {
    type uint8 {
        range "0..100";
    }
    description
        "Integer indicating a percentage value";
}

typedef performance-metric-normality {
    type enumeration {
        enum "unknown" {
            value 0;
            description
                "Unknown.";
        }
        enum "normal" {
            value 1;
            description
                "Normal.";
        }
        enum "abnormal" {

```

```

        value 2;
        description
            "Abnormal. The anomalous bit is set.";
    }
}
description
    "Indicates whether a performance metric is normal, abnormal, or
    unknown.";

```

```

reference
  "RFC7471: OSPF Traffic Engineering (TE) Metric Extensions.
  RFC7810: IS-IS Traffic Engineering (TE) Metric Extensions.
  RFC7823: Performance-Based Path Selection for Explicitly
  Routed Label Switched Paths (LSPs) Using TE Metric
  Extensions";
}

typedef te-admin-status {
  type enumeration {
    enum up {
      description
        "Enabled.";
    }
    enum down {
      description
        "Disabled.";
    }
    enum testing {
      description
        "In some test mode.";
    }
    enum preparing-maintenance {
      description
        "Resource is disabled in the control plane to prepare for
        graceful shutdown for maintenance purposes.";
      reference
        "RFC5817: Graceful Shutdown in MPLS and Generalized MPLS
        Traffic Engineering Networks";
    }
    enum maintenance {
      description
        "Resource is disabled in the data plane for maintenance
        purposes.";
    }
  }
  description
    "Defines a type representing the administrative status of
    a TE resource.";
}

```

```

typedef te-global-id {

```

```

type uint32;
description
    "An identifier to uniquely identify an operator, which can be
    either a provider or a client.
    The definition of this type is taken from RFC6370 and RFC5003.
    This attribute type is used solely to provide a globally
    unique context for TE topologies.";
}

typedef te-link-access-type {
    type enumeration {
        enum point-to-point {
            description
                "The link is point-to-point.";
        }
        enum multi-access {
            description
                "The link is multi-access, including broadcast and NBMA.";
        }
    }
    description
        "Defines a type representing the access type of a TE link.";
    reference
        "RFC3630: Traffic Engineering (TE) Extensions to OSPF
        Version 2.";
}

typedef te-node-id {
    type yang:dotted-quad;
    description
        "An identifier for a node in a topology.
        The identifier is represented as 32-bit unsigned integer in
        the dotted-quad notation.
        This attribute is mapped to Router ID in
        RFC3630, RFC5329, RFC5305, and RFC6119.";
}

typedef te-oper-status {
    type enumeration {
        enum up {
            description
                "Operational up.";
        }
        enum down {
            description
                "Operational down.";
        }
    }
}

```

```
enum testing {
  description
    "In some test mode.";
}
enum unknown {
  description
    "Status cannot be determined for some reason.";
}
enum preparing-maintenance {
  description
    "Resource is disabled in the control plane to prepare for
    graceful shutdown for maintenance purposes.";
  reference
    "RFC5817: Graceful Shutdown in MPLS and Generalized MPLS
    Traffic Engineering Networks";
}
enum maintenance {
  description
    "Resource is disabled in the data plane for maintenance
    purposes.";
}
}
description
  "Defines a type representing the operational status of
  a TE resource.";
}

typedef te-path-disjointness {
  type bits {
    bit node {
      position 0;
      description "Node disjoint.";
    }
    bit link {
      position 1;
      description "Link disjoint.";
    }
    bit srlg {
      position 2;
      description "SRLG (Shared Risk Link Group) disjoint.";
    }
  }
}
description
  "Type of the resource disjointness for a TE tunnel path.";
reference
  "RFC4872: RSVP-TE Extensions in Support of End-to-End
```

```
} // te-path-disjointness

typedef te-recovery-status {
  type enumeration {
    enum normal {
      description
        "Both the recovery and working spans are fully
        allocated and active, data traffic is being
        transported over (or selected from) the working
        span, and no trigger events are reported.";
    }
    enum recovery-started {
      description
        "The recovery action has been started, but not completed.";
    }
    enum recovery-succeeded {
      description
        "The recovery action has succeeded. The working span has
        reported a failure/degrade condition and the user traffic
        is being transported (or selected) on the recovery span.";
    }
    enum recovery-failed {
      description
        "The recovery action has failed.";
    }
    enum reversion-started {
      description
        "The reversion has started.";
    }
    enum reversion-failed {
      description
        "The reversion has failed.";
    }
    enum recovery-unavailable {
      description
        "The recovery is unavailable -- either as a result of an
        operator Lockout command or a failure condition detected
        on the recovery span.";
    }
  }
}
```

```

enum recovery-admin {
    description
        "The operator has issued a command switching the user
        traffic to the recovery span.";
}
enum wait-to-restore {
    description
        "The recovery domain is recovering from a failuer/degrade
        condition on the working span that is being controlled by

```

```

        the Wait-to-Restore (WTR) timer.";
    }
}
description
    "Defines the status of a recovery action.";
reference
    "RFC4427: Recovery (Protection and Restoration) Terminology
    for Generalized Multi-Protocol Label Switching (GMPLS).
    RFC6378: MPLS Transport Profile (MPLS-TP) Linear Protection";
}

typedef te-template-name {
    type string {
        pattern '/?([a-zA-Z0-9\-\_\.]+)(/[a-zA-Z0-9\-\_\.]+)*';
    }
    description
        "A type for the name of a TE node template or TE link
        template.";
}

typedef te-topology-event-type {
    type enumeration {
        enum "add" {
            value 0;
            description
                "A TE node or te-link has been added.";
        }
        enum "remove" {
            value 1;
            description
                "A TE node or te-link has been removed.";
        }
    }
}

```

```

        enum "update" {
            value 2;
            description
                "A TE node or te-link has been updated.";
        }
    }
    description "TE Event type for notifications";
} // te-topology-event-type

typedef te-topology-id {
    type string {
        pattern
            '([a-zA-Z0-9\-\_\.]+:)*'
            + '/?([a-zA-Z0-9\-\_\.]+)(/[a-zA-Z0-9\-\_\.]+)*';
    }
    description

```

```

    "An identifier for a topology.
    It is optional to have one or more prefixes at the beginning,
    separated by colons. The prefixes can be the network-types,
    defined in ietf-network.yang, to help user to understand the
    topology better before further inquiry.";
}

typedef te-tp-id {
    type union {
        type uint32;           // Unnumbered
        type inet:ip-address; // IPv4 or IPv6 address
    }
    description
        "An identifier for a TE link endpoint on a node.
        This attribute is mapped to local or remote link identifier in
        RFC3630 and RFC5305.";
}

typedef admin-group {
    type binary {
        length 4;
    }
    description
        "Administrative group/Resource class/Color.";
}

```

```

typedef extended-admin-group {
    type binary;
    description
        "Extended administrative group/Resource class/Color.";
}

typedef admin-groups {
    type union {
        type admin-group;
        type extended-admin-group;
    }
    description "TE administrative group derived type";
}

typedef srlg {
    type uint32;
    description "SRLG type";
}

identity path-computation-srlg-type {
    description
        "Base identity for SRLG path computation";
}

```

```

}

identity srlg-ignore {
    base path-computation-srlg-type;
    description
        "Ignores SRLGs in path computation";
}

identity srlg-strict {
    base path-computation-srlg-type;
    description
        "Include strict SRLG check in path computation";
}

identity srlg-preferred {
    base path-computation-srlg-type;
    description
        "Include preferred SRLG check in path computation";
}

```



```

}

identity srlg-weighted {
    base path-computation-srlg-type;
    description
        "Include weighted SRLG check in path computation";
}

typedef te-metric {
    type uint32;
    description
        "TE link metric";
}

/**
 * TE bandwidth groupings
 **/
identity otn-rate-type {
    description
        "Base type to identify OTN bit rates of various information
        structures.";
}
identity odu0 {
    base otn-rate-type;
    description
        "ODU0 bit rate.";
}
identity odu1 {
    base otn-rate-type;
    description

```

```

        "ODU1 bit rate.";
    }
    identity odu2 {
        base otn-rate-type;
        description
            "ODU2 bit rate.";
    }
    identity odu3 {
        base otn-rate-type;
        description
            "ODU3 bit rate.";
    }

```

```

}
identity odu4 {
    base otn-rate-type;
    description
        "ODU4 bit rate.";
}
identity odu2e {
    base otn-rate-type;
    description
        "ODU2e bit rate.";
}
identity oduc {
    base otn-rate-type;
    description
        "ODUCn bit rate.";
}
identity oduflex {
    base otn-rate-type;
    description
        "ODUflex bit rate.";
}

identity wdm-spectrum-type {
    description
        "Base type to identify WDM spectrum type.";
}
identity cwdm {
    base wdm-spectrum-type;
    description
        "CWDM.";
}
identity dwdm {
    base wdm-spectrum-type;
    description
        "DWDM.";
}
identity flexible-grid {

```

```

    base wdm-spectrum-type;
    description
        "Flexible grid.";
}

```

```

grouping te-bandwidth {
  description
    "This grouping defines the generic TE bandwidth.
    For some known data plane technologies, specific modeling
    structures are specified. The string encoded te-bandwidth
    type is used for un-specified technologies.
    The modeling structure can be augmented later for other
    technologies.";
  container te-bandwidth {
    description
      "Container that specifies TE bandwidth.";
    choice technology {
      default generic;
      description
        "Data plane technology type.";
      case generic {
        leaf generic {
          type te-bandwidth;
          description
            "Bandwidth specified in a generic format.";
        }
      }
    }
  }
}

/**
 * TE label groupings
 */
grouping te-label {
  description
    "This grouping defines the generic TE label.
    The modeling structure can be augmented for each technology.
    For un-specified technologies, rt-types:generalized-label
    is used.";
  container te-label {
    description
      "Container that specifies TE label.";
    choice technology {
      default generic;
      description
        "Data plane technology type.";
      case generic {

```

```
        leaf generic {
            type rt-types:generalized-label;
            description
                "TE label specified in a generic format.";
        }
    }
    leaf direction {
        type te-label-direction;
        description "Label direction";
    }
}

/**
 * TE performance metric groupings
 **/
grouping performance-metric-container {
    description
        "A container containing performance metric attributes.";
    container performance-metric {
        description
            "Link performance information in real time.";
        reference
            "RFC7471: OSPF Traffic Engineering (TE) Metric Extensions.
            RFC7810: IS-IS Traffic Engineering (TE) Metric Extensions.
            RFC7823: Performance-Based Path Selection for Explicitly
            Routed Label Switched Paths (LSPs) Using TE Metric
            Extensions";
        container measurement {
            description
                "Measured performance metric values. Static configuration
                and manual overrides of these measurements are also
                allowed.";
            uses performance-metric-attributes;
        }
        container normality
        {
            description
                "Performance metric normality values.";
            uses performance-metric-normality-attributes;
        }
        uses performance-metric-throttle-container;
    }
} // performance-metric-container

grouping performance-metric-attributes {
```

description

```
"Link performance information in real time.";
reference
  "RFC7471: OSPF Traffic Engineering (TE) Metric Extensions.
  RFC7810: IS-IS Traffic Engineering (TE) Metric Extensions.
  RFC7823: Performance-Based Path Selection for Explicitly
  Routed Label Switched Paths (LSPs) Using TE Metric
  Extensions";
leaf unidirectional-delay {
  type uint32 {
    range 0..16777215;
  }
  description "Delay or latency in micro seconds.";
}
leaf unidirectional-min-delay {
  type uint32 {
    range 0..16777215;
  }
  description "Minimum delay or latency in micro seconds.";
}
leaf unidirectional-max-delay {
  type uint32 {
    range 0..16777215;
  }
  description "Maximum delay or latency in micro seconds.";
}
leaf unidirectional-delay-variation {
  type uint32 {
    range 0..16777215;
  }
  description "Delay variation in micro seconds.";
}
leaf unidirectional-packet-loss {
  type decimal64 {
    fraction-digits 6;
    range "0 .. 50.331642";
  }
  description
    "Packet loss as a percentage of the total traffic sent
    over a configurable interval. The finest precision is
    0.000003%.";
}
```

```

}
leaf unidirectional-residual-bandwidth {
  type rt-types:bandwidth-ieee-float32;
  description
    "Residual bandwidth that subtracts tunnel
    reservations from Maximum Bandwidth (or link capacity)
    [RFC3630] and provides an aggregated remainder across QoS
    classes.";

```

```

}
leaf unidirectional-available-bandwidth {
  type rt-types:bandwidth-ieee-float32;
  description
    "Available bandwidth that is defined to be residual
    bandwidth minus the measured bandwidth used for the
    actual forwarding of non-RSVP-TE LSP packets. For a
    bundled link, available bandwidth is defined to be the
    sum of the component link available bandwidths.";
}
leaf unidirectional-utilized-bandwidth {
  type rt-types:bandwidth-ieee-float32;
  description
    "Bandwidth utilization that represents the actual
    utilization of the link (i.e. as measured in the router).
    For a bundled link, bandwidth utilization is defined to
    be the sum of the component link bandwidth
    utilizations.";
}
} // performance-metric-attributes

grouping performance-metric-normality-attributes {
  description
    "Link performance metric normality attributes.";
  reference
    "RFC7471: OSPF Traffic Engineering (TE) Metric Extensions.
    RFC7810: IS-IS Traffic Engineering (TE) Metric Extensions.
    RFC7823: Performance-Based Path Selection for Explicitly
    Routed Label Switched Paths (LSPs) Using TE Metric
    Extensions";
  leaf unidirectional-delay {
    type te-types:performance-metric-normality;
    description "Delay normality.";

```

```

}
leaf unidirectional-min-delay {
    type te-types:performance-metric-normality;
    description "Minimum delay or latency normality.";
}
leaf unidirectional-max-delay {
    type te-types:performance-metric-normality;
    description "Maximum delay or latency normality.";
}
leaf unidirectional-delay-variation {
    type te-types:performance-metric-normality;
    description "Delay variation normality.";
}
leaf unidirectional-packet-loss {
    type te-types:performance-metric-normality;

```

```

    description "Packet loss normality.";
}
leaf unidirectional-residual-bandwidth {
    type te-types:performance-metric-normality;
    description "Residual bandwidth normality.";
}
leaf unidirectional-available-bandwidth {
    type te-types:performance-metric-normality;
    description "Available bandwidth normality.";
}
leaf unidirectional-utilized-bandwidth {
    type te-types:performance-metric-normality;
    description "Bandwidth utilization normality.";
}
} // performance-metric-normality-attributes

grouping performance-metric-throttle-container {
    description
        "A container controlling performance metric throttle.";
    container throttle {
        must "suppression-interval >= measure-interval" {
            error-message
                "suppression-interval cannot be less than
                measure-interval.";
            description
                "Constraint on suppression-interval and

```

```

        measure-interval.";
    }
    description
        "Link performance information in real time.";
    reference
        "RFC7471: OSPF Traffic Engineering (TE) Metric Extensions.
        RFC7810: IS-IS Traffic Engineering (TE) Metric Extensions.
        RFC7823: Performance-Based Path Selection for Explicitly
        Routed Label Switched Paths (LSPs) Using TE Metric
        Extensions";
    leaf unidirectional-delay-offset {
        type uint32 {
            range 0..16777215;
        }
        description
            "Offset value to be added to the measured delay value.";
    }
    leaf measure-interval {
        type uint32;
        default 30;
        description
            "Interval in seconds to measure the extended metric

```

```

        values.";
    }
    leaf advertisement-interval {
        type uint32;
        description
            "Interval in seconds to advertise the extended metric
            values.";
    }
    leaf suppression-interval {
        type uint32 {
            range "1 .. max";
        }
        default 120;
        description
            "Interval in seconds to suppress advertising the extended
            metric values.";
    }
    container threshold-out {
        uses performance-metric-attributes;
    }

```



```

        description
        "If the measured parameter falls outside an upper bound
        for all but the min delay metric (or lower bound for
        min-delay metric only) and the advertised value is not
        already outside that bound, anomalous announcement will be
        triggered.";
    }
    container threshold-in {
        uses performance-metric-attributes;
        description
        "If the measured parameter falls inside an upper bound
        for all but the min delay metric (or lower bound for
        min-delay metric only) and the advertised value is not
        already inside that bound, normal (anomalous-flag cleared)
        announcement will be triggered.";
    }
    container threshold-accelerated-advertisement {
        description
        "When the difference between the last advertised value and
        current measured value exceed this threshold, anomalous
        announcement will be triggered.";
        uses performance-metric-attributes;
    }
}
} // performance-metric-throttle-container

/**
 * TE tunnel generic groupings
 **/

```

```

/* Tunnel path selection parameters */
grouping explicit-route-hop {
    description
    "The explicit route subobject grouping";
    leaf index {
        type uint32;
        description "ERO subobject index";
    }
    choice type {
        description
        "The explicit route subobject type";
        case numbered {

```

```

description
  "Numbered link explicit route subobject";
container numbered-hop {
  description "Numbered link hop type";
  leaf address {
    type te-types:te-tp-id;
    description
      "Numbered link TE termination point address.";
  }
  leaf hop-type {
    type te-hop-type;
    description "strict or loose hop";
  }
  leaf direction {
    type te-link-direction;
    default INCOMING;
    description "Link ERO direction";
  }
}
}
case as-number {
  container as-number-hop {
    leaf as-number {
      type binary {
        length 16;
      }
      description "AS number";
    }
    leaf hop-type {
      type te-hop-type;
      description
        "strict or loose hop";
    }
    description
      "Autonomous System explicit route subobject";
  }
}

```

```

}
case unnumbered {
  container unnumbered-hop {
    leaf node-id {
      type te-types:te-node-id;
    }
  }
}

```

```

        description
            "The identifier of a node in the TE topology.";
    }
    leaf link-tp-id {
        type te-types:te-tp-id;
        description
            "TE link termination point identifier, used
            together with te-node-id to identify the
            link termination point";
    }
    leaf hop-type {
        type te-hop-type;
        description "strict or loose hop";
    }
    leaf direction {
        type te-link-direction;
        description "Unnumbered Link ERO direction";
    }
    description
        "Unnumbered link explicit route subobject";
    reference
        "RFC3477: Signalling Unnumbered Links in
        RSVP-TE";
    }
}
case label {
    container label-hop {
        description "Label hop type";
        uses te-label;
    }
    description
        "The Label ERO subobject";
}
}
}

grouping record-route-subobject_state {
    description
        "The record route subobject grouping";
    leaf index {
        type uint32;
        description "RRO subobject index";
    }
}

```

```

choice type {
  description
    "The record route subobject type";
  case numbered {
    leaf address {
      type te-types:te-tp-id;
      description
        "Numbered link TE termination point address.";
    }
    leaf ip-flags {
      type binary {
        length 8;
      }
      description
        "RR0 IP address sub-object flags";
      reference "RFC3209";
    }
  }
  case unnumbered {
    leaf node-id {
      type te-types:te-node-id;
      description
        "The identifier of a node in the TE topology.";
    }
    leaf link-tp-id {
      type te-types:te-tp-id;
      description
        "TE link termination point identifier, used
        together with te-node-id to identify the
        link termination point";
    }
  }
  description
    "Unnumbered link record route subobject";
  reference
    "RFC3477: Signalling Unnumbered Links in
    RSVP-TE";
}
case label {
  leaf value {
    type rt-types:generalized-label;
    description "the label value";
  }
  leaf label-flags {
    type binary {
      length 8;
    }
    description
      "Label sub-object flags";
  }
}

```

Internet-Draft

TE YANG Data Model

February 2018

```
        reference "RFC3209";
    }
    description
        "The Label ERO subobject";
}
}
}

grouping label-set-item-info {
    description "Label set item info";
    leaf inclusive-exclusive {
        type enumeration {
            enum inclusive {
                description "The label or label range is inclusive.";
            }
            enum exclusive {
                description "The label or label range is exclusive.";
            }
        }
        description
            "Whether the list item is inclusive or exclusive.";
    }
    leaf label-start {
        type rt-types:generalized-label;
        description
            "This is the starting lable if a lable range is specified.
            This is the lable value if a single lable is specified,
            in which case, attribute 'label-end' is not set.";
    }
    leaf label-end {
        type rt-types:generalized-label;
        description
            "The ending lable if a lable range is specified;
            This attribute is not set, If a single lable is
            specified.";
    }
    leaf range-bitmap {
        type binary;
        description
            "When there are gaps between label-start and label-end,
            this attribute is used to specified the possitions
            of the used labels.";
    }
}
```

```
}  
}
```

```
grouping label-set-info {  
    description "Label set info grouping";  
    list label-set {
```

```
    key "inclusive-exclusive label-start";  
    description  
        "The absence of label-set implies that all labels are  
        acceptable; otherwise only restricted labels are  
        available."  
  
    uses label-set-item-info;  
}
```

```
/** End of TE tunnel groupings */
```

```
grouping optimizations_config {  
    description "Optimization metrics configuration grouping";  
    leaf metric-type {  
        type identityref {  
            base te-types:path-metric-type;  
        }  
        description "TE path metric type";  
    }  
    leaf weight {  
        type uint8;  
        description "TE path metric normalization weight";  
    }  
}
```

```
grouping common-constraints_config {  
    description  
        "Common constraints grouping that can be set on  
        a constraint set or directly on the tunnel";  
    leaf topology-id {  
        type te-types:te-topology-id;  
        description  
            "The tunnel path is computed using the specific  
            topology identified by this identifier";
```

```

}

uses te-types:te-bandwidth {
    description
        "A requested bandwidth to use for path computation";
}

leaf disjointness {
    type te-types:te-path-disjointness;
    description
        "The type of resource disjointness.";
}
leaf setup-priority {

```

```

    type uint8 {
        range "0..7";
    }
    description
        "TE LSP requested setup priority";
}
leaf hold-priority {
    type uint8 {
        range "0..7";
    }
    description
        "TE LSP requested hold priority";
}
leaf signaling-type {
    type identityref {
        base te-types:path-signaling-type;
    }
    description "TE tunnel path signaling type";
}
}

grouping path-metrics-bounds_config {
    description "TE path metric bounds grouping";
    leaf metric-type {
        type identityref {
            base te-types:path-metric-type;
        }
        description "TE path metric type";
    }
}

```

```

    }
    leaf upper-bound {
        type uint64;
        description "Upper bound on end-to-end TE path metric";
    }
}

grouping path-objective-function_config {
    description "Optimization metrics configuration grouping";
    leaf objective-function-type {
        type identityref {
            base te-types:objective-function-type;
        }
        description
            "Objective function entry";
    }
}

/**
 * TE interface generic groupings

```

```

**/
grouping generic-path-optimization {
    description "TE generic path optimization grouping";

    container optimizations {
        description
            "The objective function container that includes
            attributes to impose when computing a TE path";

        choice algorithm {
            description "Optimizations algorithm.";
            case metric {
                if-feature path-optimization-metric;
                /* Optimize by metric */
                list optimization-metric {
                    key "metric-type";
                    description "TE path metric type";
                    uses optimizations_config;
                }
                /* Tiebreakers */
                container tiebreakers {

```



```

description
  "The list of tiebreaker criterion to apply
  on an equally favored set of paths to pick best";
list tiebreaker {
  key "tiebreaker-type";
  description
    "The list of tiebreaker criterion to apply
    on an equally favored set of paths to pick best";
  leaf tiebreaker-type {
    type identityref {
      base te-types:path-metric-type;
    }
    description "The objective function";
  }
}
}
}
case objective-function {
  if-feature path-optimization-objective-function;
  /* Objective functions */
  container objective-function {
    description
      "The objective function container that includes
      attributes to impose when computing a TE path";
    uses path-objective-function_config;
  }
}
}

```

```

}
}
}

grouping generic-path-affinities {
  description
    "Path affinities grouping";
  container path-affinities {
    description
      "Path affinities container";
    list constraint {
      key "usage";
      description
        "List of named affinity constraints";
    }
  }
}

```

```

        leaf usage {
            type identityref {
                base resource-affinities-type;
            }
            description "Affinities usage";
        }
        leaf value {
            type admin-groups;
            description "Affinity value";
        }
    }
}

```

```

grouping generic-path-srlgs {
    description
        "Path SRLG grouping";
    container path-srlgs {
        description
            "Path SRLG properties container";
        leaf usage {
            type identityref {
                base te-types:route-exclude-srlg;
            }
            description "SRLG usage";
        }
        leaf-list values {
            type srlg;
            description "SRLG value";
        }
    }
}

```

```

grouping generic-path-constraints {

```

```

    description
        "Global named path constraints configuration
        grouping";
    container path-constraints {
        description "TE named path constraints container";
        list path-metric-bound {
            key metric-type;

```

```

        description "List of TE path metrics";
        uses path-metrics-bounds_config;
    }

    uses common-constraints_config;
    uses generic-path-affinities;
    uses generic-path-srlgs;
}

grouping generic-path-properties {
    description "TE generic path properties grouping";
    container path-properties {
        config false;
        description "The TE path properties";
        list path-metric {
            key metric-type;
            description "TE path metric type";
            leaf metric-type {
                type identityref {
                    base te-types:path-metric-type;
                }
                description "TE path metric type";
            }
            leaf accumulative-value {
                type uint64;
                description "TE path metric accumulative value";
            }
        }
        uses generic-path-affinities;
        uses generic-path-srlgs;
        container path-route-objects {
            description
                "Container for the list of route objects either returned by
                the computation engine or actually used by an LSP";
            list path-route-object {
                key index;
                description
                    "List of route objects either returned by the computation
                    engine or actually used by an LSP";
                uses explicit-route-hop;
            }
        }
    }
}

```

```

    }
  }
}
}
}
<CODE ENDS>

```

Figure 7: TE basic types YANG module

```

<CODE BEGINS> file "ietf-te@2018-02-19.yang"
module ietf-te {
  yang-version 1.1;

  namespace "urn:ietf:params:xml:ns:yang:ietf-te";

  /* Replace with IANA when assigned */
  prefix "te";

  /* Import TE generic types */
  import ietf-te-types {
    prefix te-types;
  }

  import ietf-inet-types {
    prefix inet;
  }

  organization
    "IETF Traffic Engineering Architecture and Signaling (TEAS)
    Working Group";

  contact
    "WG Web:  <http://tools.ietf.org/wg/teas/>
    WG List:  <mailto:teas@ietf.org>

    WG Chair: Lou Berger
               <mailto:lberger@labn.net>

    WG Chair: Vishnu Pavan Beeram
               <mailto:vbeeram@juniper.net>

    Editor:   Tarek Saad
               <mailto:tsaad@cisco.com>

    Editor:   Rakesh Gandhi
               <mailto:rgandhi@cisco.com>

    Editor:   Vishnu Pavan Beeram

```

Internet-Draft

TE YANG Data Model

February 2018

<mailto:vbeeram@juniper.net>

Editor: Himanshu Shah  
<mailto:hshah@ciena.com>

Editor: Xufeng Liu  
<mailto:Xufeng\_Liu@jabril.com>

Editor: Igor Bryskin  
<mailto:Igor.Bryskin@huawei.com>;

description

"YANG data module for TE configuration,  
state, RPC and notifications.";

revision "2018-02-19" {  
 description "Latest update to TE generic YANG module.";  
 reference "TBA";  
}

typedef tunnel-ref {  
 type leafref {  
 path "/te:te/te:tunnels/te:tunnel/te:name";  
 }  
 description  
 "This type is used by data models that need to reference  
 configured TE tunnel.";  
}

typedef path-ref {  
 type union {  
 type leafref {  
 path "/te:te/te:tunnels/te:tunnel/" +  
 "te:p2p-primary-paths/te:p2p-primary-path/te:name";  
 }  
 type leafref {  
 path "/te:te/te:tunnels/te:tunnel/" +  
 "te:p2p-secondary-paths/te:p2p-secondary-path/te:name";  
 }  
 }  
 description  
 "This type is used by data models that need to reference  
 configured primary or secondary path of a TE tunnel.";

```
}
```

```
typedef tunnel-p2mp-ref {  
    type leafref {  
        path "/te:te/te:tunnels/te:tunnel-p2mp/te:name";  
    }  
}
```

```
    }  
    description  
        "This type is used by data models that need to reference  
        configured P2MP TE tunnel."  
    }
```

```
/**  
 * TE tunnel generic groupings  
 */  
grouping path-route-objects {  
    description  
        "List of EROs to be included or excluded when performing  
        the path computation."  
    container explicit-route-objects {  
        description  
            "Container for the exclude route object list";  
        list route-object-exclude-always {  
            key index;  
            description  
                "List of explicit route objects to always exclude  
                from path computation";  
            uses te-types:explicit-route-hop;  
        }  
        list route-object-include-exclude {  
            key index;  
            description  
                "List of explicit route objects to include or  
                exclude in path computation";  
            leaf explicit-route-usage {  
                type identityref {  
                    base te-types:route-usage-type;  
                }  
                description "Explicit-route usage."  
            }  
            uses te-types:explicit-route-hop;  
        }  
    }
```

```

    }
}

grouping path-affinities-contents_config {
  description
    "Path affinities constraints grouping";
  leaf usage {
    type identityref {
      base te-types:resource-affinities-type;
    }
    description "Affinities usage";
  }
}

```

```

  choice style {
    description
      "Path affinities representation style";
    case value {
      leaf value {
        type te-types:admin-groups;
        description
          "Bitmap indicating what bits are of significance";
      }
    }
    case named {
      list affinity-names {
        key "name";
        leaf name {
          type string;
          description "Affinity name";
        }
        description "List of named affinities";
      }
    }
  }
}

grouping path-affinities_state {
  description "Path affinities grouping";
  container path-affinities {
    description "Path affinities container";
    list constraints {
      key "usage";
    }
  }
}

```

```

description "List of named affinity constraints";
leaf usage {
  type leafref {
    path "../state/usage";
  }
  description "Affinities usage";
}
container state {
  config false;
  description
    "Configuration applied parameters and state";
  uses path-affinities-contents_config;
}
}
}
}

```

```

grouping path-srlgs_state {
  description "Path SRLG properties grouping";
}

```

```

container path-srlgs {
  description "Path SRLG properties container";
  choice style {
    description "Type of SRLG representation";
    case values {
      container state {
        config false;
        description
          "Configuration applied parameters and state";
        uses path-affinities-values_config;
      }
    }
  }
  case named {
    container constraints {
      description "SRLG named constraints";
      list constraint {
        key "usage";
        leaf usage {
          type leafref {
            path "../state/usage";
          }
          description "Affinity resource usage";
        }
      }
    }
  }
}

```





```

}

grouping path-affinities {
  description "Path affinities grouping";
  container path-affinities {
    description "Path affinities container";
    list constraints {
      key "usage";
      description "List of named affinity constraints";
      uses path-affinities-contents_config;
    }
  }
}

grouping path-affinities-values_config {
  description "Path affinities values configuration grouping";
  leaf usage {
    type identityref {
      base te-types:route-exclude-srlg;
    }
    description "SRLG usage";
  }
  leaf-list values {
    type te-types:srlg;
    description "SRLG value";
  }
}

grouping path-srlgs {
  description "Path SRLG properties grouping";
  container path-srlgs {
    description "Path SRLG properties container";
    choice style {

```

```

  description "Type of SRLG representation";
  case values {
    uses path-affinities-values_config;
  }
  case named {
    list constraints {
      key "usage";
      leaf usage {

```

```

        type identityref {
            base te-types:route-exclude-srlg;
        }
        description "SRLG usage";
    }
    container constraint {
        description "Container for named SRLG list";
        list srlg-names {
            key "name";
            leaf name {
                type string;
                description "The SRLG name";
            }
            description "List named SRLGs";
        }
    }
    description "List of named SRLG constraints";
}
}
}
}
}

grouping bidirectional-association_config {
    description
        "TE tunnel associated bidirectional leaves
        grouping";
    leaf id {
        type uint16;
        description
            "The TE tunnel association identifier.";
    }
    leaf source {
        type inet:ip-address;
        description "The TE tunnel association source.";
    }
    leaf global-source {
        type inet:ip-address;
        description "The TE tunnel association global source.";
    }
}

```

```

leaf type {

```

```

    type identityref {
      base te-types:bidir-association-type;
    }
    default te-types:bidir-assoc-non-corouted;
    description "The TE tunnel association type.";
  }
  leaf provisioning {
    type identityref {
      base te-types:bidir-provisioning-mode;
    }
    description
      "Describes the provisioning model of the
       associated bidirectional LSP";
    reference
      "draft-ietf-teas-mpls-tp-rsvp-te-ext-associated-lsp, section-3.2";
  }
}

grouping bidir-assoc-properties {
  description
    "TE tunnel associated bidirectional properties
    grouping";
  container bidirectional {
    description
      "TE tunnel associated bidirectional attributes.";
    container association {
      description
        "Tunnel bidirectional association properties";
      uses bidirectional-association_config;
    }
  }
}

grouping p2p-reverse-primary-path-properties {
  description "tunnel path properties.";
  container p2p-reverse-primary-path {
    description "Tunnel reverse primary path properties";
    uses p2p-path-reverse-properties_config;
    container state {
      config false;
      description
        "Configuration applied parameters and state";
      uses p2p-path-properties_state;
    }
  }
  container p2p-reverse-secondary-path {
    description "Tunnel reverse secondary path properties";
  }
}

```

```
        uses p2p-reverse-path-candidate-secondary-path-config;
    }
}
```

```
grouping p2p-secondary-path-properties {
    description "tunnel path properties.";
    uses p2p-path-properties_config;
    uses protection-restoration-params_config;
    container state {
        config false;
        description
            "Configuration applied parameters and state";
        uses p2p-path-properties_state;
    }
}
```

```
grouping p2p-primary-path-properties {
    description
        "TE tunnel primary path properties grouping";
    uses hierarchical-link;
    uses p2p-path-properties_config;
    container state {
        config false;
        description
            "Configuration applied parameters and state";
        uses p2p-path-properties_state;
    }
}
```

```
grouping path-properties_state {
    description "Computed path properties grouping";
    leaf metric-type {
        type identityref {
            base te-types:path-metric-type;
        }
        description "TE path metric type";
    }
    leaf accumulative-value {
        type uint64;
        description "TE path metric accumulative value";
    }
}
```

```
grouping path-properties {
    description "TE computed path properties grouping";
```

```
container path-properties {
  description "The TE path computed properties";
```

```
list path-metric {
  key metric-type;
  description "TE path metric type";
  leaf metric-type {
    type leafref {
      path "../state/metric-type";
    }
    description "TE path metric type";
  }
  container state {
    config false;
    description
      "Configuration applied parameters and state";
    uses path-properties_state;
  }
}
uses path-affinities_state;
uses path-srlgs_state;
container path-route-objects {
  description
    "Container for the list of computed route objects
    as returned by the computation engine";
  list path-computed-route-object {
    key index;
    description
      "List of computed route objects returned by the
      computation engine";
    leaf index {
      type leafref {
        path "../state/index";
      }
      description "Index of computed route object";
    }
    container state {
      config false;
      description
        "Configuration applied parameters and state";
      uses te-types:explicit-route-hop;
    }
  }
}
```

```

    }
  }
  uses shared-resources-tunnels;
}
}

grouping p2p-path-properties_state {
  description "TE per path state parameters";
  uses path-properties {

```

```

    description "The TE path computed properties";
  }
  container lsps {
    description "TE LSPs container";
    list lsp {
      key
        "source destination tunnel-id lsp-id "+
        "extended-tunnel-id";
      description "List of LSPs associated with the tunnel.";
      uses lsp-properties_state;
      uses shared-resources-tunnels_state;
      uses lsp-record-route-information_state;
      uses path-properties {
        description "The TE path actual properties";
      }
    }
  }
}

grouping p2p-path-properties-common_config {
  description
    "TE tunnel common path properties configuration grouping";
  leaf name {
    type string;
    description "TE path name";
  }
  leaf path-setup-protocol {
    type identityref {
      base te-types:path-signaling-type;
    }
    description
      "Signaling protocol used to set up this tunnel";

```

```

}
leaf path-computation-method {
  type identityref {
    base te-types:path-computation-method;
  }
  default te-types:path-locally-computed;
  description
    "The method used for computing the path, either
    locally computed, queried from a server or not
    computed at all (explicitly configured).";
}
leaf path-computation-server {
  when "../path-computation-method = "+
  "'te-types:path-externally-queried'" {
    description
      "The path-computation server when the path is

```

```

    externally queried";
  }
  type inet:ip-address;
  description
    "Address of the external path computation
    server";
}
leaf compute-only {
  type empty;
  description
    "When set, the path is computed and updated whenever
    the topology is updated. No resources are committed
    or reserved in the network.";
}
leaf use-path-computation {
  when "../path-computation-method =" +
  "'te-types:path-locally-computed'";
  type boolean;
  description "A CSPF dynamically computed path";
}
leaf lockdown {
  type empty;
  description
    "Indicates no reoptimization to be attempted for
    this path.";
}

```



```

    }
    leaf path-scope {
      type identityref {
        base te-types:path-scope-type;
      }
      description "Path scope";
    }
  }

  grouping p2p-path-reverse-properties_config {
    description
      "TE tunnel reverse path properties configuration
      grouping";
    uses p2p-path-properties-common_config;
    leaf named-explicit-path {
      when "../path-computation-method =" +
        "'te-types:path-explicitly-defined'";
      type leafref {
        path "../../../../../../../../../globals/named-explicit-paths/"
          + "named-explicit-path/name";
      }
      description "The explicit-path name";
    }
  }

```

```

  leaf named-path-constraint {
    if-feature te-types:named-path-constraints;
    type leafref {
      path "../../../../../../../../../globals/"
        + "named-path-constraints/named-path-constraint/"
        + "name";
    }
    description
      "Reference to a globally defined named path
      constraint set";
  }
}

grouping p2p-path-properties_config {
  description
    "TE tunnel path properties configuration grouping";
  uses p2p-path-properties-common_config;
  leaf preference {

```

```

    type uint8 {
        range "1..255";
    }
    description
        "Specifies a preference for this path. The lower the
        number higher the preference";
}
leaf named-explicit-path {
    when "../path-computation-method =" +
    " 'te-types:path-explicitly-defined'";
    type leafref {
        path "../../../../../globals/named-explicit-paths/"
        + "named-explicit-path/name";
    }
    description "The explicit-path name";
}
leaf named-path-constraint {
    if-feature te-types:named-path-constraints;
    type leafref {
        path "../../../../../globals/"
        + "named-path-constraints/named-path-constraint/"
        + "name";
    }
    description
        "Reference to a globally defined named path
        constraint set";
}
}
}

/* TE tunnel configuration data */

```

```

grouping tunnel-p2mp-params_config {
    description
        "Configuration parameters relating to TE tunnel";
    leaf name {
        type string;
        description "TE tunnel name.";
    }
    leaf identifier {
        type uint16;
        description
            "TE tunnel Identifier.";
    }
}

```

```

    }
    leaf description {
        type string;
        description
            "Textual description for this TE tunnel";
    }
}

grouping hierarchical-link_config {
    description
        "Hierarchical link configuration grouping";
    leaf local-te-node-id {
        type te-types:te-node-id;
        description
            "Local TE node identifier";
    }
    leaf local-te-link-tp-id {
        type te-types:te-tp-id;
        description
            "Local TE link termination point identifier";
    }
    leaf remote-te-node-id {
        type te-types:te-node-id;
        description
            "Remote TE node identifier";
    }
    leaf te-topology-id {
        type te-types:te-topology-id;
        description
            "It is presumed that a datastore will contain many
            topologies. To distinguish between topologies it is
            vital to have UNIQUE topology identifiers.";
    }
}

grouping hierarchical-link {
    description

```

```

    "Hierarchical link grouping";
    container hierarchical-link {
        description
            "Identifies a hierarchical link (in client layer)

```

```

        that this tunnel is associated with.";
    uses hierarchical-link_config;
}
}

grouping protection-restoration-params_state {
    description
        "Protection parameters grouping";
    leaf lockout-of-normal {
        type boolean;
        description
            "
                When set to 'True', it represents a lockout of normal
                traffic external command. When set to 'False', it
                represents a clear lockout of normal traffic external
                command. The lockout of normal traffic command applies
                to this Tunnel.
            ";
        reference
            "ITU-T G.808, RFC 4427";
    }
    leaf freeze {
        type boolean;
        description
            "
                When set to 'True', it represents a freeze external
                command. When set to 'False', it represents a clear
                freeze external command. The freeze command command
                applies to all the Tunnels which are sharing the
                protection resources with this Tunnel.
            ";
        reference
            "ITU-T G.808, RFC 4427";
    }
    leaf lsp-protection-role {
        type enumeration {
            enum working {
                description
                    "A working LSP must be a primary LSP whilst a protecting
                    LSP can be either a primary or a secondary LSP. Also,
                    known as protected LSPs when working LSPs are associated
                    with protecting LSPs.";
            }
            enum protecting {

```

```
        description
          "A secondary LSP is an LSP that has been provisioned
           in the control plane only; e.g. resource allocation
           has not been committed at the data plane";
      }
    }
    description "LSP role type";
    reference "rfc4872, section 4.2.1";
  }

  leaf lsp-protection-state {
    type identityref {
      base te-types:lsp-protection-state;
    }
    description
      "The state of the APS state machine controlling which
       tunnels is using the resources of the protecting LSP.";
  }

  leaf protection-group-ingress-node-id {
    type te-types:te-node-id;
    description
      "Indicates the te-node-id of the protection group
       ingress node when the APS state represents an external
       command (LoP, SF, MS) applied to it or a WTR timer
       running on it. If the external command is not applied to
       the ingress node or the WTR timer is not running on it,
       this attribute is not specified. If value 0.0.0.0 is used
       when the te-node-id of the protection group ingress node is
       unknown (e.g., because the ingress node is outside the scope
       of control of the server)";
  }

  leaf protection-group-egress-node-id {
    type te-types:te-node-id;
    description
      "Indicates the te-node-id of the protection group egress node
       when the APS state represents an external command (LoP, SF,
       MS) applied to it or a WTR timer running on it. If the
       external command is not applied to the ingress node or
       the WTR timer is not running on it, this attribute is not
       specified. If value 0.0.0.0 is used when the te-node-id of
       the protection group ingress node is unknown (e.g., because
       the ingress node is outside the scope of control of the
       server)";
  }
}

grouping protection-restoration-params_config {
```

description "Protection and restoration parameters";

```
container protection {
  description "Protection parameters";
  leaf enable {
    type boolean;
    default 'false';
    description
      "A flag to specify if LSP protection is enabled";
    reference "rfc4427";
  }
  leaf protection-type {
    type identityref {
      base te-types:lsp-protection-type;
    }
    description "LSP protection type.";
  }
  leaf protection-reversion-disable {
    type boolean;
    description "Disable protection reversion to working path";
  }
  leaf hold-off-time {
    type uint32;
    units "milli-seconds";
    default 0;
    description
      "The time between the declaration of an SF or SD condition
       and the initialization of the protection switching
       algorithm.";
  }
  leaf wait-to-revert {
    type uint16;
    units seconds;
    description
      "Time to wait before attempting LSP reversion";
  }
  leaf aps-signal-id {
    type uint8 {
      range "1..255";
    }
    description
      "The APS signal number used to reference the traffic of this
```

```

        tunnel. The default value for normal traffic is 1.
        The default value for extra-traffic is 255. If not specified,
        non-default values can be assigned by the server,
        if and only if, the server controls both endpoints.";
    reference
        "ITU-T G.808.1";
}
}

```

```

container restoration {
    description "Restoration parameters";
    leaf enable {
        type boolean;
        default 'false';
        description
            "A flag to specify if LSP restoration is enabled";
        reference "rfc4427";
    }
    leaf restoration-type {
        type identityref {
            base te-types:lsp-restoration-type;
        }
        description "LSP restoration type.";
    }
    leaf restoration-scheme {
        type identityref {
            base te-types:restoration-scheme-type;
        }
        description "LSP restoration scheme.";
    }
    leaf restoration-reversion-disable {
        type boolean;
        description "Disable restoration reversion to working path";
    }
    leaf hold-off-time {
        type uint32;
        units "milli-seconds";
        description
            "The time between the declaration of an SF or SD condition
            and the initialization of the protection switching
            algorithm.";
    }
}

```

```

leaf wait-to-restore {
    type uint16;
    units seconds;
    description
        "Time to wait before attempting LSP restoration";
}
leaf wait-to-revert {
    type uint16;
    units seconds;
    description
        "Time to wait before attempting LSP reversion";
}
}
}

```

```

grouping tunnel-p2p-dependency-tunnels_config {
    description
        "Grouping for tunnel dependency list of tunnels";
    container dependency-tunnels {
        description "Dependency tunnels list";
        list dependency-tunnel {
            key "name";
            description "Dependency tunnel entry";
            leaf name {
                type leafref {
                    path "../.../.../.../tunnels/tunnel/name";
                    require-instance false;
                }
                description "Dependency tunnel name";
            }
            leaf encoding {
                type identityref {
                    base te-types:lsp-encoding-types;
                }
                description "LSP encoding type";
            }
            leaf switching-type {
                type identityref {
                    base te-types:switching-capabilities;
                }
                description "LSP switching type";
            }
        }
    }
}

```



```

        reference "RFC3945";
    }
}
}
}

grouping tunnel-p2p-params_config {
    description
        "Configuration parameters relating to TE tunnel";
    leaf name {
        type string;
        description "TE tunnel name.";
    }
    leaf identifier {
        type uint16;
        description
            "TE tunnel Identifier.";
    }
    leaf description {
        type string;
        description
            "Textual description for this TE tunnel";
    }
}

```

```

}
leaf encoding {
    type identityref {
        base te-types:lsp-encoding-types;
    }
    description "LSP encoding type";
}
leaf switching-type {
    type identityref {
        base te-types:switching-capabilities;
    }
    description "LSP switching type";
    reference "RFC3945";
}
leaf provisioning-state {
    type identityref {
        base te-types:tunnel-state-type;
    }
    default te-types:tunnel-state-up;
}

```

```

    description "TE tunnel administrative state.";
}
leaf preference {
    type uint8 {
        range "1..255";
    }
    description
        "Specifies a preference for this tunnel.
        A lower number signifies a better preference";
}
leaf reoptimize-timer {
    type uint16;
    units seconds;
    description
        "frequency of reoptimization of
        a traffic engineered LSP";
}
leaf source {
    type inet:ip-address;
    description
        "TE tunnel source address.";
}
leaf destination {
    type inet:ip-address;
    description
        "P2P tunnel destination address";
}
leaf src-tp-id {
    type binary;

```

```

    description
        "TE tunnel source termination point identifier.";
}
leaf dst-tp-id {
    type binary;
    description
        "TE tunnel destination termination point identifier.";
}
leaf ignore-overload {
    type boolean;
    description
        "The tunnel path can traverse overloaded node.";
}

```

```

    }
    uses protection-restoration-params_config;
    uses te-types:common-constraints_config;
    uses tunnel-p2p-dependency-tunnels_config;
}

grouping tunnel-p2p-params_state {
    description
        "State parameters relating to TE tunnel";
    leaf operational-state {
        type identityref {
            base te-types:tunnel-state-type;
        }
        default te-types:tunnel-state-up;
        description "TE tunnel administrative state.";
    }
}

grouping access-segment-info {
    description
        "info related to a segment";
    container forward {
        description
            "for the forward direction of this tunnel";
        uses te-types:label-set-info;
    }
    container reverse {
        description
            "for the reverse direction of this tunnel";
        uses te-types:label-set-info;
    }
}

grouping path-access-segment-info {
    description
        "If an end-to-end tunnel crosses multiple domains using

```

```

    the same technology, some additional constraints have to be
    taken in consideration in each domain";
    container path-in-segment {
        presence
            "The end-to-end tunnel starts in a previous domain;

```

```

        this tunnel is a segment in the current domain.";
    description
        "This tunnel is a segment that needs to be coordinated
        with previous segment stitched on head-end side.";
    uses access-segment-info;
}
container path-out-segment {
    presence
        "The end-to-end tunnel is not terminated in this domain;
        this tunnel is a segment in the current domain.";
    description
        "This tunnel is a segment that needs to be coordinated
        with previous segment stitched on head-end side.";
    uses access-segment-info;
}
}

/* TE tunnel configuration/state grouping */
grouping tunnel-p2mp-properties {
    description
        "Top level grouping for P2MP tunnel properties.";
    uses tunnel-p2mp-params_config;
    container state {
        config false;
        description
            "Configuration applied parameters and state";
        leaf operational-state {
            type identityref {
                base te-types:tunnel-state-type;
            }
            default te-types:tunnel-state-up;
            description "TE tunnel administrative state.";
        }
    }
}

grouping p2p-path-candidate-secondary-path-config {
    description
        "Configuration parameters relating to a secondary path which
        is a candidate for a particular primary path";

    leaf secondary-path {
        type leafref {

```

```

        path "../../../../../p2p-secondary-paths/" +
            "p2p-secondary-path/name";
    }
    description
        "A reference to the secondary path that should be utilised
        when the containing primary path option is in use";
}

leaf path-setup-protocol {
    type identityref {
        base te-types:path-signaling-type;
    }
    description
        "Signaling protocol used to set up this tunnel";
}

grouping p2p-reverse-path-candidate-secondary-path-config {
    description
        "Configuration parameters relating to a secondary path which
        is a candidate for a particular primary path";

    leaf secondary-path {
        type leafref {
            path "../../../../../p2p-secondary-paths/" +
                "p2p-secondary-path/name";
        }
        description
            "A reference to the secondary path that should be utilised
            when the containing primary path option is in use";
    }

    leaf path-setup-protocol {
        type identityref {
            base te-types:path-signaling-type;
        }
        description
            "Signaling protocol used to set up this tunnel";
    }
}

grouping p2p-path-candidate-secondary-path-state {
    description
        "Operational state parameters relating to a secondary path
        which is a candidate for a particular primary path";

    leaf active {
        type boolean;
    }

```

Internet-Draft

TE YANG Data Model

February 2018

```
    description
      "Indicates the current active path option that has
      been selected of the candidate secondary paths";
  }
}

grouping tunnel-p2p-properties {
  description
    "Top level grouping for tunnel properties.";
  uses tunnel-p2p-params_config;
  container state {
    config false;
    description
      "Configuration applied parameters and state";
    uses tunnel-p2p-params_state;
  }
  uses bidir-assoc-properties;
  container p2p-primary-paths {
    description "Set of P2P primary aths container";
    list p2p-primary-path {
      key "name";
      description
        "List of primary paths for this tunnel.";
      uses p2p-primary-path-properties;
      uses p2p-reverse-primary-path-properties;
      container candidate-p2p-secondary-paths {
        description
          "The set of candidate secondary paths which may be used
          for this primary path. When secondary paths are specified
          in the list the path of the secondary LSP in use must be
          restricted to those path options referenced. The
          priority of the secondary paths is specified within the
          list. Higher priority values are less preferred - that is
          to say that a path with priority 0 is the most preferred
          path. In the case that the list is empty, any secondary
          path option may be utilised when the current primary path
          is in use.";
        list candidate-p2p-secondary-path {
          key "secondary-path";
          description
            "List of secondary paths for this tunnel.";
          uses p2p-path-candidate-secondary-path-config;
        }
      }
    }
  }
}
```

```

    container state {
        config false;
        description
            "Configuration applied parameters and state";
        uses p2p-path-candidate-secondary-path-state;
    }
}
}
}
}

```

```

}
}
}
}
}
container p2p-secondary-paths {
    description "Set of P2P secondary paths container";
    list p2p-secondary-path {
        key "name";
        description
            "List of secondary paths for this tunnel.";
        uses p2p-secondary-path-properties;
    }
}
}
}

grouping shared-resources-tunnels_state {
    description
        "The specific tunnel that is using the shared secondary path
        resources";
    leaf lsp-shared-resources-tunnel {
        type te:tunnel-ref;
        description
            "Reference to the tunnel that sharing secondary path
            resources with this tunnel";
    }
}

grouping shared-resources-tunnels {
    description
        "Set of tunnels that share secondary path resources with
        this tunnel";
    container shared-resources-tunnels {
        description
            "Set of tunnels that share secondary path resources with
            this tunnel";
    }
}

```

```

    leaf-list lsp-shared-resources-tunnel {
        type te:tunnel-ref;
        description
            "Reference to the tunnel that sharing secondary path
            resources with this tunnel";
    }
}

grouping tunnel-actions {
    description "Tunnel actions";
    action tunnel-action {
        description "Tunnel action";
    }
}

```

```

    input {
        leaf action-type {
            type identityref {
                base te-types:tunnel-action-type;
            }
            description "Tunnel action type";
        }
    }
    output {
        leaf action-result {
            type identityref {
                base te-types:te-action-result;
            }
            description "The result of the RPC operation";
        }
    }
}

grouping tunnel-protection-actions {
    description
        "Protection external command actions";
    action protection-external-commands {
        input {
            leaf protection-external-command {
                type identityref {
                    base te-types:protection-external-commands;
                }
            }
            description

```



```

        "Protection external command";
    }
    leaf protection-group-ingress-node-id {
        type te-types:te-node-id;
        description
            "Indicates the te-node-id of the protection group
            ingress node when the external command has to be
            applied to it. If the external command is not applied
            to the ingress node, this attribute is not specified.";
    }
    leaf protection-group-egress-node-id {
        type te-types:te-node-id;
        description
            "Indicates the te-node-id of the protection group egress
            node when the external command has to be applied to it.
            If the external command is not applied to the egress node,
            This attribute is not specified.";
    }
    leaf path-ref {
        type path-ref;
    }

```

```

        description
            "Indicates to which path the external command applies to.";
    }
    leaf traffic-type {
        type enumeration {
            enum normal-traffic {
                description
                    "The manual-switch or forced-switch command applies to
                    the normal traffic (this Tunnel).";
            }
            enum null-traffic {
                description
                    "The manual-switch or forced-switch command applies to
                    the null traffic.";
            }
            enum extra-traffic {
                description
                    "The manual-switch or forced-switch command applies to
                    the extra traffic (the extra-traffic Tunnel sharing
                    protection bandwidth with this Tunnel).";
            }
        }
    }

```

```

    }
    description
        "Indicates whether the manual-switch or forced-switch
        commands applies to the normal traffic, the null traffic
        or the extra-traffic.";
    reference
        "ITU-T G.808, RFC 4427";
}
leaf extra-traffic-tunnel-ref {
    type te:tunnel-ref;
    description
        "In case there are multiple extra-traffic tunnels sharing
        protection bandwidth with this Tunnel (m:n protection),
        represents which extra-traffic Tunnel the manual-switch or
        forced-switch to extra-traffic command applies to.";
}
}
}
}

/*** End of TE tunnel groupings ***/

/**
 * LSP related generic groupings
 */
grouping lsp-record-route-information_state {
    description "recorded route information grouping";
}

```

```

container lsp-record-route-subobjects {
    description "RSVP recorded route object information";
    list record-route-subobject {
        when "../../origin-type = 'ingress'" {
            description "Applicable on non-ingress LSPs only";
        }
        key "index";
        description "Record route sub-object list";
        leaf index {
            type leafref {
                path "../state/index";
            }
            description "Index of record-route object";
        }
    }
}

```

```

        container state {
            config false;
            description
                "Configuration applied parameters and state";
            uses te-types:record-route-subobject_state;
        }
    }
}

grouping lsps-state-grouping {
    description
        "LSPs state operational data grouping";
    container lsps-state {
        config false;
        description "TE LSPs state container";
        list lsp {
            key
                "source destination tunnel-id lsp-id "+
                "extended-tunnel-id";
            description "List of LSPs associated with the tunnel.";
            uses lsp-properties_state;
            uses lsp-record-route-information_state;
        }
    }
}

/*** End of TE LSP groupings ***/

/**
 * TE global generic groupings
 */

/* Global named admin-groups configuration data */

```

```

grouping named-admin-groups_config {
    description
        "Global named administrative groups configuration
        grouping";
    leaf name {
        type string;
        description

```

```

        "A string name that uniquely identifies a TE
        interface named admin-group";
    }
    leaf bit-position {
        type uint32;
        description
            "Bit position representing the administrative group";
    }
}
grouping named-admin-groups {
    description
        "Global named administrative groups configuration
        grouping";
    container named-admin-groups {
        description "TE named admin groups container";
        list named-admin-group {
            if-feature te-types:extended-admin-groups;
            if-feature te-types:named-extended-admin-groups;
            key "name";
            description
                "List of named TE admin-groups";
            uses named-admin-groups_config;
        }
    }
}

/* Global named admin-srlgs configuration data */
grouping named-srlgs_config {
    description
        "Global named SRLGs configuration grouping";
    leaf name {
        type string;
        description
            "A string name that uniquely identifies a TE
            interface named srlg";
    }
    leaf group {
        type te-types:srlg;
        description "An SRLG value";
    }
    leaf cost {

```

```

    type uint32;
    description
        "SRLG associated cost. Used during path to append
        the path cost when traversing a link with this SRLG";
}
}

```

```

grouping named-srlgs {
    description
        "Global named SRLGs configuration grouping";
    container named-srlgs {
        description "TE named SRLGs container";
        list named-srlg {
            if-feature te-types:named-srlg-groups;
            key "name";
            description
                "A list of named SRLG groups";
            uses named-srlgs_config;
        }
    }
}

```

```

/* Global named explicit-paths configuration data */
grouping named-explicit-paths_config {
    description
        "Global explicit path configuration
        grouping";
    leaf name {
        type string;
        description
            "A string name that uniquely identifies an
            explicit path";
    }
}

```

```

grouping named-explicit-paths {
    description
        "Global explicit path configuration
        grouping";
    container named-explicit-paths {
        description "TE named explicit path container";
        list named-explicit-path {
            key "name";
            description
                "A list of explicit paths";
            uses named-explicit-paths_config;
            container explicit-route-objects {
                description "Explicit route objects container";
            }
        }
    }
}

```

Internet-Draft

TE YANG Data Model

February 2018

```
    list explicit-route-object {
      key "index";
      description
        "List of explicit route objects";
      leaf explicit-route-usage {
        type identityref {
          base te-types:route-usage-type;
        }
        description "An explicit-route hop action.";
      }
      uses te-types:explicit-route-hop;
    }
  }
}

/* Global named paths constraints configuration data */
grouping path-metrics-bounds_config {
  description "TE path metric bounds grouping";
  leaf metric-type {
    type identityref {
      base te-types:path-metric-type;
    }
    description "TE path metric type";
  }
  leaf upper-bound {
    type uint64;
    description "Upper bound on end-to-end TE path metric";
  }
}

grouping path-objective-function_config {
  description "Optimization metrics configuration grouping";
  leaf objective-function-type {
    type identityref {
      base te-types:objective-function-type;
    }
    description
      "Objective function entry";
  }
}
```

```

grouping path-metric-bounds {
  description "TE path metric bounds grouping";
  container path-metric-bounds {
    description "TE path metric bounds container";
    list path-metric-bound {

```

```

    key metric-type;
    description "List of TE path metrics";
    uses path-metrics-bounds_config;
  }
}

grouping path-constraints_state {
  description
    "TE path constraints state";
  leaf bandwidth-generic_state {
    type te-types:te-bandwidth;
    description
      "A technology agnostic requested bandwidth to use
      for path computation";
  }
  leaf disjointness_state {
    type te-types:te-path-disjointness;
    description
      "The type of resource disjointness.";
  }
}

grouping path-constraints_config {
  description
    "Global named path constraints configuration
    grouping";
  leaf name {
    type string;
    description
      "A string name that uniquely identifies a
      path constraint set";
  }
  uses te-types:common-constraints_config;
  uses path-metric-bounds;
  uses te-types:generic-path-optimization;

```

```

uses path-affinities;
uses path-srlgs;
uses path-route-objects;
uses shared-resources-tunnels {
    description
        "Set of tunnels that are allowed to share secondary path
        resources of this tunnel";
}
uses path-access-segment-info {
    description
        "Tunnel constraints induced by other segments.";
}

```

```

}

grouping named-path-constraints {
    description
        "Global named path constraints configuration
        grouping";
    container named-path-constraints {
        description "TE named path constraints container";
        list named-path-constraint {
            if-feature te-types:named-path-constraints;
            key "name";
            description
                "A list of named path constraints";
            uses path-constraints_config;
            container state {
                config false;
                description
                    "Configuration applied parameters and state";
                uses path-constraints_state;
            }
        }
    }
}

/* TE globals container data */
grouping globals-grouping {
    description
        "Globals TE system-wide configuration data grouping";
    container globals {

```



```

    description
      "Globals TE system-wide configuration data container";
    uses named-admin-groups;
    uses named-srlgs;
    uses named-explicit-paths;
    uses named-path-constraints;
  }
}

/* TE tunnels container data */
grouping tunnels-grouping {
  description
    "Tunnels TE configuration data grouping";
  container tunnels {
    description
      "Tunnels TE configuration data container";

    list tunnel {
      key "name";

```

```

    description "P2P TE tunnels list.";
    uses tunnel-p2p-properties;
    uses tunnel-actions;
    uses tunnel-protection-actions;
  }
  list tunnel-p2mp {
    key "name";
    unique "identifier";
    description "P2MP TE tunnels list.";
    uses tunnel-p2mp-properties;
  }
}

/* TE LSPs ephemeral state container data */
grouping lsp-properties_state {
  description
    "LSPs state operational data grouping";
  leaf source {
    type inet:ip-address;
    description
      "Tunnel sender address extracted from

```

```

        SENDER_TEMPLATE object";
    reference "RFC3209";
}
leaf destination {
    type inet:ip-address;
    description
        "Tunnel endpoint address extracted from
        SESSION object";
    reference "RFC3209";
}
leaf tunnel-id {
    type uint16;
    description
        "Tunnel identifier used in the SESSION
        that remains constant over the life
        of the tunnel.";
    reference "RFC3209";
}
leaf lsp-id {
    type uint16;
    description
        "Identifier used in the SENDER_TEMPLATE
        and the FILTER_SPEC that can be changed
        to allow a sender to share resources with
        itself.";
    reference "RFC3209";
}

```

```

}
leaf extended-tunnel-id {
    type inet:ip-address;
    description
        "Extended Tunnel ID of the LSP.";
    reference "RFC3209";
}
leaf operational-state {
    type identityref {
        base te-types:lsp-state-type;
    }
    description "LSP operational state.";
}
leaf path-setup-protocol {
    type identityref {

```

```

    base te-types:path-signaling-type;
  }
  description
    "Signaling protocol used to set up this tunnel";
}
leaf origin-type {
  type enumeration {
    enum ingress {
      description
        "Origin ingress";
    }
    enum egress {
      description
        "Origin egress";
    }
    enum transit {
      description
        "transit";
    }
  }
}
description
  "Origin type of LSP relative to the location
  of the local switch in the path.";
}

leaf lsp-resource-status {
  type enumeration {
    enum primary {
      description
        "A primary LSP is a fully established LSP for
        which the resource allocation has been committed
        at the data plane";
    }
  }
}

```

```

    enum secondary {
      description
        "A secondary LSP is an LSP that has been provisioned
        in the control plane only; e.g. resource allocation
        has not been committed at the data plane";
    }
  }
  description "LSP resource allocation type";
}

```

```

        reference "rfc4872, section 4.2.1";
    }

    uses protection-restoration-params_state;
}
/*** End of TE global groupings ***/

/**
 * TE configurations container
 */
container te {
    presence "Enable TE feature.";
    description
        "TE global container.";

    /* TE Global Configuration Data */
    uses globals-grouping;

    /* TE Tunnel Configuration Data */
    uses tunnels-grouping;

    /* TE LSPs State Data */
    uses lsp-state-grouping;
}

/* TE Global RPCs/execution Data */
rpc globals-rpc {
    description
        "Execution data for TE global.";
}

/* TE interfaces RPCs/execution Data */
rpc interfaces-rpc {
    description
        "Execution data for TE interfaces.";
}

/* TE Tunnel RPCs/execution Data */
rpc tunnels-rpc {

```

```

        description "TE tunnels RPC nodes";
    }
}

```

```

input {
  container tunnel-info {
    description "Tunnel Identification";
    choice type {
      description "Tunnel information type";
      case tunnel-p2p {
        leaf p2p-id {
          type te:tunnel-ref;
          description "P2P TE tunnel";
        }
      }
      case tunnel-p2mp {
        leaf p2mp-id {
          type te:tunnel-p2mp-ref;
          description "P2MP TE tunnel";
        }
      }
    }
  }
}

output {
  container result {
    description
      "The container result of the RPC operation";
    leaf result {
      type enumeration {
        enum success {
          description "Origin ingress";
        }
        enum in-progress {
          description "Origin egress";
        }
        enum fail {
          description "transit";
        }
      }
      description "The result of the RPC operation";
    }
  }
}

/* TE Global Notification Data */
notification globals-notif {
  description
    "Notification messages for Global TE.";
}

```

```
/* TE Tunnel Notification Data */
notification tunnels-notif {
  description
    "Notification messages for TE tunnels.";
}
}
<CODE ENDS>
```

Figure 8: TE generic YANG module

```
<CODE BEGINS> file "ietf-te-device@2018-02-15.yang"
module ietf-te-device {

  namespace "urn:ietf:params:xml:ns:yang:ietf-te-device";

  /* Replace with IANA when assigned */
  prefix "te-dev";

  /* Import TE generic types */
  import ietf-te {
    prefix te;
  }

  /* Import TE generic types */
  import ietf-te-types {
    prefix te-types;
  }

  import ietf-interfaces {
    prefix if;
  }

  import ietf-inet-types {
    prefix inet;
  }

  import ietf-routing-types {
    prefix "rt-types";
  }

  organization
    "IETF Traffic Engineering Architecture and Signaling (TEAS)
    Working Group";

  contact
    "WG Web:  <http://tools.ietf.org/wg/teas/>
```

WG List: <mailto:teas@ietf.org>

Saad, et al.

Expires August 23, 2018

[Page 125]

---

Internet-Draft

TE YANG Data Model

February 2018

WG Chair: Lou Berger  
<mailto:lberger@labn.net>

WG Chair: Vishnu Pavan Beeram  
<mailto:vbeeram@juniper.net>

Editor: Tarek Saad  
<mailto:tsaad@cisco.com>

Editor: Rakesh Gandhi  
<mailto:rgandhi@cisco.com>

Editor: Vishnu Pavan Beeram  
<mailto:vbeeram@juniper.net>

Editor: Himanshu Shah  
<mailto:hshah@ciena.com>

Editor: Xufeng Liu  
<mailto:xufeng.liu@ericsson.com>

Editor: Xia Chen  
<mailto:jescia.chenxia@huawei.com>

Editor: Raqib Jones  
<mailto:raqib@Brocade.com>

Editor: Bin Wen  
<mailto:Bin\_Wen@cable.comcast.com>;

description

"YANG data module for TE device configurations,  
state, RPC and notifications.";

revision "2018-02-15" {  
 description "Latest update to TE device YANG module.";  
 reference "TBA";  
}

```

/**
 * TE LSP device state grouping
 */
grouping lsp-device_state {
  description "TE LSP device state grouping";
  container lsp-timers {
    when "../te:origin-type = 'ingress'" {
      description "Applicable to ingress LSPs only";
    }
  }
}

```

```

    }
    description "Ingress LSP timers";
    leaf life-time {
      type uint32;
      units seconds;
      description
        "lsp life time";
    }

    leaf time-to-install {
      type uint32;
      units seconds;
      description
        "lsp installation delay time";
    }

    leaf time-to-destroy {
      type uint32;
      units seconds;
      description
        "lsp expiration delay time";
    }
  }

  container downstream-info {
    when "../te:origin-type != 'egress'" {
      description "Applicable to ingress LSPs only";
    }
    description
      "downstream information";

    leaf nhop {

```



```

    type inet:ip-address;
    description
        "downstream nexthop.";
}

leaf outgoing-interface {
    type if:interface-ref;
    description
        "downstream interface.";
}

leaf neighbor {
    type inet:ip-address;
    description
        "downstream neighbor.";
}

```

```

    leaf label {
        type rt-types:generalized-label;
        description
            "downstream label.";
    }
}

container upstream-info {
    when "../te:origin-type != 'ingress'" {
        description "Applicable to non-ingress LSPs only";
    }
    description
        "upstream information";

    leaf phop {
        type inet:ip-address;
        description
            "upstream nexthop or previous-hop.";
    }

    leaf neighbor {
        type inet:ip-address;
        description
            "upstream neighbor.";
    }
}

```

```

        leaf label {
            type rt-types:generalized-label;
            description
                "upstream label.";
        }
    }
}

/**
 * Device general groupings.
 */
grouping tunnel-device_config {
    description "Device TE tunnel configs";
    leaf path-invalidation-action {
        type identityref {
            base te-types:path-invalidation-action-type;
        }
        description "Tunnel path invalidtion action";
    }
}

grouping lsp-device-timers_config {

```

```

    description "Device TE LSP timers configs";
    leaf lsp-install-interval {
        type uint32;
        units seconds;
        description
            "lsp installation delay time";
    }
    leaf lsp-cleanup-interval {
        type uint32;
        units seconds;
        description
            "lsp cleanup delay time";
    }
    leaf lsp-invalidation-interval {
        type uint32;
        units seconds;
        description
            "lsp path invalidation before taking action delay time";
    }

```

```

    }
}
grouping lsp-device-timers {
    description "TE LSP timers configuration";
    uses lsp-device-timers_config;
}

/**
 * TE global device generic groupings
 */

/* TE interface container data */
grouping interfaces-grouping {
    description
        "Interface TE configuration data grouping";
    container interfaces {
        description
            "Configuration data model for TE interfaces.";
        uses te-all-attributes;
        list interface {
            key "interface";
            description "TE interfaces.";
            leaf interface {
                type if:interface-ref;
                description
                    "TE interface name.";
            }
        }
        /* TE interface parameters */
        uses te-attributes;
    }
}

```

```

    }
}

/**
 * TE interface device generic groupings
 */
grouping te-admin-groups_config {
    description
        "TE interface affinities grouping";
    choice admin-group-type {
        description

```

```

    "TE interface administrative groups
    representation type";
case value-admin-groups {
    choice value-admin-group-type {
        description "choice of admin-groups";
        case admin-groups {
            description
                "Administrative group/Resource
                class/Color.";
            leaf admin-group {
                type te-types:admin-group;
                description
                    "TE interface administrative group";
            }
        }
    }
case extended-admin-groups {
    if-feature te-types:extended-admin-groups;
    description
        "Extended administrative group/Resource
        class/Color.";
    leaf extended-admin-group {
        type te-types:extended-admin-group;
        description
            "TE interface extended administrativei
            group";
    }
}
}
}
case named-admin-groups {
    list named-admin-groups {
        if-feature te-types:extended-admin-groups;
        if-feature te-types:named-extended-admin-groups;
        key named-admin-group;
        description
            "A list of named admin-group entries";
        leaf named-admin-group {

```

```

type leafref {
    path "../..../te:globals/" +
        "te:named-admin-groups/te:named-admin-group/" +
        "te:name";

```

```

    }
    description "A named admin-group entry";
  }
}
}
}
}

/* TE interface SRLGs */
grouping te-srlgs_config {
  description "TE interface SRLG grouping";
  choice srlg-type {
    description "Choice of SRLG configuration";
    case value-srlgs {
      list values {
        key "value";
        description "List of SRLG values that
          this link is part of.";
        leaf value {
          type uint32 {
            range "0..4294967295";
          }
          description
            "Value of the SRLG";
        }
      }
    }
  }
  case named-srlgs {
    list named-srlgs {
      if-feature te-types:named-srlg-groups;
      key named-srlg;
      description
        "A list of named SRLG entries";
      leaf named-srlg {
        type leafref {
          path "../..../te:globals/" +
            "te:named-srlgs/te:named-srlg/te:name";
        }
        description
          "A named SRLG entry";
      }
    }
  }
}
}

```

```
}

grouping te-igp-flooding-bandwidth-config {
  description
    "Configurable items for igp flooding bandwidth
    threshold configuration.";
  leaf threshold-type {
    type enumeration {
      enum DELTA {
        description
          "DELTA indicates that the local
          system should flood IGP updates when a
          change in reserved bandwidth >= the specified
          delta occurs on the interface.";
      }
      enum THRESHOLD_CROSSED {
        description
          "THRESHOLD-CROSSED indicates that
          the local system should trigger an update (and
          hence flood) the reserved bandwidth when the
          reserved bandwidth changes such that it crosses,
          or becomes equal to one of the threshold values.";
      }
    }
  }
  description
    "The type of threshold that should be used to specify the
    values at which bandwidth is flooded. DELTA indicates that
    the local system should flood IGP updates when a change in
    reserved bandwidth >= the specified delta occurs on the
    interface. Where THRESHOLD_CROSSED is specified, the local
    system should trigger an update (and hence flood) the
    reserved bandwidth when the reserved bandwidth changes such
    that it crosses, or becomes equal to one of the threshold
    values";
}

leaf delta-percentage {
  when "../threshold-type = 'DELTA'" {
    description
      "The percentage delta can only be specified when the
      threshold type is specified to be a percentage delta of
      the reserved bandwidth";
  }
  type te-types:percentage;
  description
    "The percentage of the maximum-reservable-bandwidth
    considered as the delta that results in an IGP update
```

being flooded";

```
}
leaf threshold-specification {
  when "../threshold-type = 'THRESHOLD_CROSSED'" {
    description
      "The selection of whether mirrored or separate threshold
      values are to be used requires user specified thresholds to
      be set";
  }
  type enumeration {
    enum MIRRORED_UP_DOWN {
      description
        "MIRRORED_UP_DOWN indicates that a single set of
        threshold values should be used for both increasing
        and decreasing bandwidth when determining whether
        to trigger updated bandwidth values to be flooded
        in the IGP TE extensions.";
    }
    enum SEPARATE_UP_DOWN {
      description
        "SEPARATE_UP_DOWN indicates that a separate
        threshold values should be used for the increasing
        and decreasing bandwidth when determining whether
        to trigger updated bandwidth values to be flooded
        in the IGP TE extensions.";
    }
  }
  description
    "This value specifies whether a single set of threshold
    values should be used for both increasing and decreasing
    bandwidth when determining whether to trigger updated
    bandwidth values to be flooded in the IGP TE extensions.
    MIRRORED-UP-DOWN indicates that a single value (or set of
    values) should be used for both increasing and decreasing
    values, where SEPARATE-UP-DOWN specifies that the increasing
    and decreasing values will be separately specified";
}

leaf-list up-thresholds {
  when "../threshold-type = 'THRESHOLD_CROSSED'" +
    "and ../threshold-specification = 'SEPARATE_UP_DOWN'" {
```

```

        description
            "A list of up-thresholds can only be specified when the
            bandwidth update is triggered based on crossing a
            threshold and separate up and down thresholds are
            required";
    }
    type te-types:percentage;
    description

```

```

        "The thresholds (expressed as a percentage of the maximum
        reservable bandwidth) at which bandwidth updates are to be
        triggered when the bandwidth is increasing.";
    }

    leaf-list down-thresholds {
        when "../threshold-type = 'THRESHOLD_CROSSED'" +
            "and ../threshold-specification = 'SEPARATE_UP_DOWN'" {
            description
                "A list of down-thresholds can only be specified when the
                bandwidth update is triggered based on crossing a
                threshold and separate up and down thresholds are
                required";
        }
        type te-types:percentage;
        description
            "The thresholds (expressed as a percentage of the maximum
            reservable bandwidth) at which bandwidth updates are to be
            triggered when the bandwidth is decreasing.";
    }

    leaf-list up-down-thresholds {
        when "../threshold-type = 'THRESHOLD_CROSSED'" +
            "and ../threshold-specification = 'MIRRORED_UP_DOWN'" {
            description
                "A list of thresholds corresponding to both increasing
                and decreasing bandwidths can be specified only when an
                update is triggered based on crossing a threshold, and
                the same up and down thresholds are required.";
        }
        type te-types:percentage;
        description
            "The thresholds (expressed as a percentage of the maximum

```



```

        reservable bandwidth of the interface) at which bandwidth
        updates are flooded - used both when the bandwidth is
        increasing and decreasing";
    }
}

/* TE interface metric */
grouping te-metric_config {
    description "Interface TE metric grouping";
    leaf te-metric {
        type te-types:te-metric;
        description "Interface TE metric.";
    }
}

```

```

/* TE interface switching capabilities */
grouping te-switching-cap_config {
    description
        "TE interface switching capabilities";
    list switching-capabilities {
        key "switching-capability";
        description
            "List of interface capabilities for this interface";
        leaf switching-capability {
            type identityref {
                base te-types:switching-capabilities;
            }
            description
                "Switching Capability for this interface";
        }
        leaf encoding {
            type identityref {
                base te-types:lsp-encoding-types;
            }
            description
                "Encoding supported by this interface";
        }
    }
}

grouping te-advertisements_state {

```

```

description
  "TE interface advertisements state grouping";
container te-advertisements_state {
  description
    "TE interface advertisements state container";
  leaf flood-interval {
    type uint32;
    description
      "The periodic flooding interval";
  }
  leaf last-flooded-time {
    type uint32;
    units seconds;
    description
      "Time elapsed since last flooding in seconds";
  }
  leaf next-flooded-time {
    type uint32;
    units seconds;
    description
      "Time remained for next flooding in seconds";
  }
}

```

```

leaf last-flooded-trigger {
  type enumeration {
    enum link-up {
      description "Link-up flooding trigger";
    }
    enum link-down {
      description "Link-up flooding trigger";
    }
    enum threshold-up {
      description
        "Bandwidth reservation up threshold";
    }
    enum threshold-down {
      description
        "Bandwidth reservation down threshold";
    }
    enum bandwidth-change {
      description "Banwidth capacity change";
    }
  }
}

```

```

        enum user-initiated {
            description "Initiated by user";
        }
        enum srlg-change {
            description "SRLG property change";
        }
        enum periodic-timer {
            description "Periodic timer expired";
        }
    }
    description "Trigger for the last flood";
}
list advertized-level-areas {
    key level-area;
    description
        "List of areas the TE interface is advertised
        in";
    leaf level-area {
        type uint32;
        description
            "The IGP area or level where the TE
            interface state is advertised in";
    }
}
}
}

/* TE interface attributes grouping */
grouping te-attributes {

```

```

    description "TE attributes configuration grouping";
    uses te-metric_config;
    uses te-admin-groups_config;
    uses te-srlgs_config;
    uses te-igp-flooding-bandwidth_config;
    uses te-switching-cap_config;
    container state {
        config false;
        description
            "State parameters for interface TE metric";
        uses te-advertisements_state;
    }
}

```

```

}

grouping te-all-attributes {
  description
    "TE attributes configuration grouping for all
    interfaces";
  uses te-igmp-flooding-bandwidth_config;
}
/*** End of TE interfaces device groupings ***/

/**
 * TE device augmentations
 */
augment "/te:te" {
  description "TE global container.";
  /* TE Interface Configuration Data */
  uses interfaces-grouping;
}

/* TE globals device augmentation */
augment "/te:te/te:globals" {
  description
    "Global TE device specific configuration parameters";
  uses lsp-device-timers;
}

/* TE tunnels device configuration augmentation */
augment "/te:te/te:tunnels/te:tunnel" {
  description
    "Tunnel device dependent augmentation";
  uses lsp-device-timers_config;
}
augment "/te:te/te:tunnels/te:tunnel/te:state" {
  description
    "Tunnel device dependent augmentation";

```

```

  uses lsp-device-timers_config;
}

/* TE LSPs device state augmentation */
augment "/te:te/te:lsp-state/te:lsp" {

```

```

        description
            "LSP device dependent augmentation";
        uses lsp-device_state;
    }

    augment "/te:te/te:tunnels/te:tunnel/te:p2p-secondary-paths" +
        "/te:p2p-secondary-path/te:state/te:lsp/te:lsp" {
        description
            "LSP device dependent augmentation";
        uses lsp-device_state;
    }

    augment "/te:te/te:tunnels/te:tunnel/te:p2p-primary-paths" +
        "/te:p2p-primary-path/te:state/te:lsp/te:lsp" {
        description
            "LSP device dependent augmentation";
        uses lsp-device_state;
    }

    /* TE interfaces RPCs/execution Data */
    rpc interfaces-rpc {
        description
            "Execution data for TE interfaces.";
    }

    /* TE Interfaces Notification Data */
    notification interfaces-notif {
        description
            "Notification messages for TE interfaces.";
    }
}
<CODE ENDS>

```

Figure 9: TE MPLS specific types YANG module

```

<CODE BEGINS> file "ietf-te-mpls@2018-02-15.yang"
module ietf-te-mpls {

    namespace "urn:ietf:params:xml:ns:yang:ietf-te-mpls";

    /* Replace with IANA when assigned */
    prefix "te-mpls";

```

```
/* Import TE base model */
import ietf-te {
    prefix te;
}

/* Import TE MPLS types */
import ietf-te-mpls-types {
    prefix "te-mpls-types";
}

/* Import TE generic types */
import ietf-te-types {
    prefix te-types;
}

/* Import routing types */
import ietf-routing-types {
    prefix "rt-types";
}

import ietf-mpls-static {
    prefix mpls-static;
}

import ietf-inet-types {
    prefix inet;
}

organization
    "IETF Traffic Engineering Architecture and Signaling (TEAS)
    Working Group";

contact
    "WG Web:  <http://tools.ietf.org/wg/teas/>
    WG List:  <mailto:teas@ietf.org>

    WG Chair: Lou Berger
               <mailto:lberger@labn.net>

    WG Chair: Vishnu Pavan Beeram
               <mailto:vbeeram@juniper.net>

    Editor:   Tarek Saad
               <mailto:tsaad@cisco.com>

    Editor:   Rakesh Gandhi
               <mailto:rgandhi@cisco.com>
```

Internet-Draft

TE YANG Data Model

February 2018

Editor: Vishnu Pavan Beeram  
<mailto:vbeeram@juniper.net>

Editor: Himanshu Shah  
<mailto:hshah@ciena.com>

Editor: Xufeng Liu  
<mailto:xufeng.liu@ericsson.com>

Editor: Xia Chen  
<mailto:jescia.chenxia@huawei.com>

Editor: Raqib Jones  
<mailto:raqib@Brocade.com>

Editor: Bin Wen  
<mailto:Bin\_Wen@cable.comcast.com>;

description

"YANG data module for MPLS TE configurations,  
state, RPC and notifications.";

```
revision "2018-02-15" {  
  description "Latest update to MPLS TE YANG module.";   
  reference "TBD";  
}
```

```
/* MPLS TE tunnel properties*/
```

```
grouping tunnel-igp-shortcut_config {  
  description "TE tunnel IGP shortcut configs";  
  leaf shortcut-eligible {  
    type boolean;  
    default "true";  
    description  
      "Whether this LSP is considered to be eligible for us as a  
      shortcut in the IGP. In the case that this leaf is set to  
      true, the IGP SPF calculation uses the metric specified to  
      determine whether traffic should be carried over this LSP";  
  }  
  leaf metric-type {  
    type identityref {
```

```

    base te-types:LSP_METRIC_TYPE;
}
default te-types:LSP_METRIC_INHERITED;
description
    "The type of metric specification that should be used to set
    the LSP(s) metric";

```

```

}
leaf metric {
    type int32;
    description
        "The value of the metric that should be specified. The value
        supplied in this leaf is used in conjunction with the metric
        type to determine the value of the metric used by the system.
        Where the metric-type is set to LSP_METRIC_ABSOLUTE - the
        value of this leaf is used directly; where it is set to
        LSP_METRIC_RELATIVE, the relevant (positive or negative)
        offset is used to formulate the metric; where metric-type
        is LSP_METRIC_INHERITED, the value of this leaf is not
        utilised";
}
leaf-list routing-afs {
    type inet:ip-version;
    description
        "Address families";
}
}

grouping tunnel-igp-shortcuts {
    description
        "TE tunnel IGP shortcut grouping";
    container tunnel-igp-shortcut {
        description
            "Tunnel IGP shortcut properties";
        uses tunnel-igp-shortcut_config;
    }
}

grouping tunnel-forwarding-adjacency_configs {
    description "Tunnel forwarding adjacency grouping";
    leaf binding-label {
        type rt-types:mpls-label;
    }
}

```



```

        description "MPLS tunnel binding label";
    }
    leaf load-share {
        type uint32 {
            range "1..4294967295";
        }
        description "ECMP tunnel forwarding
            load-share factor.";
    }
    leaf policy-class {
        type uint8 {
            range "1..7";
        }
    }

```

```

        description
            "The class associated with this tunnel";
    }
}

grouping tunnel-forwarding-adjacency {
    description "Properties for using tunnel in forwarding.";
    container forwarding {
        description
            "Tunnel forwarding properties container";
        uses tunnel-forwarding-adjacency_configs;
    }
}

/** End of MPLS TE tunnel configuration/state */
grouping te-lsp-auto-bandwidth_config {
    description
        "Configuration parameters related to autobandwidth";

    leaf enabled {
        type boolean;
        default false;
        description
            "enables mpls auto-bandwidth on the
            lsp";
    }

    leaf min-bw {

```

```

    type te-mpls-types:bandwidth-kbps;
    description
        "set the minimum bandwidth in Kbps for an
        auto-bandwidth LSP";
}

leaf max-bw {
    type te-mpls-types:bandwidth-kbps;
    description
        "set the maximum bandwidth in Kbps for an
        auto-bandwidth LSP";
}

leaf adjust-interval {
    type uint32;
    description
        "time in seconds between adjustments to
        LSP bandwidth";
}

```

```

leaf adjust-threshold {
    type te-types:percentage;
    description
        "percentage difference between the LSP's
        specified bandwidth and its current bandwidth
        allocation -- if the difference is greater than the
        specified percentage, auto-bandwidth adjustment is
        triggered";
}

grouping te-lsp-overflow_config {
    description
        "configuration for mpls lsp bandwidth
        overflow adjustment";

    leaf enabled {
        type boolean;
        default false;
        description
            "enables mpls lsp bandwidth overflow

```

```

        adjustment on the lsp";
    }

    leaf overflow-threshold {
        type te-types:percentage;
        description
            "bandwidth percentage change to trigger
            an overflow event";

    }

    leaf trigger-event-count {
        type uint16;
        description
            "number of consecutive overflow sample
            events needed to trigger an overflow adjustment";
    }
}

grouping te-lsp-underflow_config {
    description
        "configuration for mpls lsp bandwidth
        underflow adjustment";

    leaf enabled {
        type boolean;
        default false;
    }
}

```

```

        description
            "enables bandwidth underflow
            adjustment on the lsp";
    }

    leaf underflow-threshold {
        type te-types:percentage;
        description
            "bandwidth percentage change to trigger
            and underflow event";
    }

    leaf trigger-event-count {
        type uint16;
    }
}

```

```

        description
            "number of consecutive underflow sample
            events needed to trigger an underflow adjustment";
    }
}
grouping te-tunnel-bandwidth_config {
    description
        "Configuration parameters related to bandwidth for a tunnel";

    leaf specification-type {
        type te-mpls-types:te-bandwidth-type;
        default SPECIFIED;
        description
            "The method used for settign the bandwidth, either explicitly
            specified or configured";
    }

    leaf set-bandwidth {
        when "../specification-type = 'SPECIFIED'" {
            description
                "The bandwidth value when bandwidth is explicitly
                specified";
        }
        type te-mpls-types:bandwidth-kbps;
        description
            "set bandwidth explicitly, e.g., using
            offline calculation";
    }
    leaf class-type {
        type te-types:te-ds-class;
        description
            "The Class-Type of traffic transported by the LSP.";
        reference "RFC4124: section-4.3.1";
    }
}

```

```

}

grouping te-tunnel-bandwidth_state {
    description
        "Operational state parameters relating to bandwidth for a tunnel";

    leaf signaled-bandwidth {

```

```

    type te-mpls-types:bandwidth-kbps;
    description
        "The currently signaled bandwidth of the LSP. In the case where
        the bandwidth is specified explicitly, then this will match the
        value of the set-bandwidth leaf; in cases where the bandwidth is
        dynamically computed by the system, the current value of the
        bandwidth should be reflected.";
    }
}

grouping tunnel-bandwidth_top {
    description
        "Top level grouping for specifying bandwidth for a tunnel";

    container bandwidth-mpls {
        description
            "Bandwidth configuration for TE LSPs";

        uses te-tunnel-bandwidth_config;

        container state {
            config false;
            description
                "State parameters related to bandwidth
                configuration of TE tunnels";
            uses te-tunnel-bandwidth_state;
        }

        container auto-bandwidth {
            when "../specification-type = 'AUTO'" {
                description
                    "Include this container for auto bandwidth
                    specific configuration";
            }
            description
                "Parameters related to auto-bandwidth";

            uses te-lsp-auto-bandwidth_config;

            container overflow {
                description

```

```

        "configuration of MPLS overflow bandwidth
        adjustment for the LSP";

    uses te-lsp-overflow_config;
}

container underflow {
    description
        "configuration of MPLS underflow bandwidth
        adjustment for the LSP";

    uses te-lsp-underflow_config;
}
}
}

grouping te-path-bandwidth_top {
    description
        "Top level grouping for specifying bandwidth for a TE path";

    container bandwidth {
        description
            "Bandwidth configuration for TE LSPs";

        uses te-tunnel-bandwidth_config;
        container state {
            config false;
            description
                "State parameters related to bandwidth
                configuration of TE tunnels";
            uses te-tunnel-bandwidth_state;
        }
    }
}

/**
 * MPLS TE augmentations
 */

/* MPLS TE tunnel augmentations */
augment "/te:te/te:tunnels/te:tunnel" {
    description "MPLS TE tunnel config augmentations";
    uses tunnel-igp-shortcuts;
    uses tunnel-forwarding-adjacency;
    uses tunnel-bandwidth_top;

```

Internet-Draft

TE YANG Data Model

February 2018

```
}

/* MPLS TE LSPs augmentations */
augment "/te:te/te:tunnels/te:tunnel/" +
    "te:p2p-primary-paths/te:p2p-primary-path" {
    when "/te:te/te:tunnels/te:tunnel" +
        "/te:p2p-primary-paths/te:p2p-primary-path" +
        "/te:path-setup-protocol = 'te-types:path-setup-static'" {
        description
            "When the path is statically provisioned";
    }
    description "MPLS TE LSP augmentation";
    leaf static-lsp-name {
        type mpls-static:static-lsp-ref;
        description "Static LSP name";
    }
}

augment "/te:te/te:tunnels/te:tunnel/" +
    "te:p2p-primary-paths/te:p2p-primary-path/" +
    "te:state" {
    description "MPLS TE LSP augmentation";
    leaf static-lsp-name {
        type mpls-static:static-lsp-ref;
        description "Static LSP name";
    }
}

augment "/te:te/te:tunnels/te:tunnel/" +
    "te:p2p-secondary-paths/te:p2p-secondary-path" {
    when "/te:te/te:tunnels/te:tunnel" +
        "/te:p2p-secondary-paths/te:p2p-secondary-path/" +
        "te:path-setup-protocol = 'te-types:path-setup-static'" {
        description
            "When the path is statically provisioned";
    }
    description "MPLS TE LSP augmentation";
    leaf static-lsp-name {
        type mpls-static:static-lsp-ref;
        description "Static LSP name";
    }
}

augment "/te:te/te:tunnels/te:tunnel/" +
    "te:p2p-secondary-paths/te:p2p-secondary-path/" +
```

```

    "te:state" {
description "MPLS TE LSP augmentation";
leaf static-lsp-name {
    type mpls-static:static-lsp-ref;
description "Static LSP name";

```

```

    }
}

augment "/te:te/te:globals/te:named-path-constraints/" +
    "te:named-path-constraint" {
    description "foo";
    uses te-path-bandwidth_top;
}
}
<CODE ENDS>

```

Figure 10: TE MPLS YANG module

```

<CODE BEGINS> file "ietf-te-mpls-types@2018-02-15.yang"
module ietf-te-mpls-types {

    namespace "urn:ietf:params:xml:ns:yang:ietf-te-mpls-types";

    /* Replace with IANA when assigned */
    prefix "te-mpls-types";

    organization
        "IETF TEAS Working Group";

    contact "Fill me";

    description
        "This module contains a collection of generally
        useful TE specific YANG data type defintions.";

    revision "2018-02-15" {
        description "Latest revision of TE MPLS types";
        reference "RFC3209";
    }

    identity backup-protection-type {

```



```

    description
        "Base identity for backup protection type";
}

identity backup-protection-link {
    base backup-protection-type;
    description
        "backup provides link protection only";
}

identity backup-protection-node-link {
    base backup-protection-type;

```

```

    description
        "backup offers node (preferred) or link protection";
}

identity bc-model-type {
    description
        "Base identity for Diffserv-TE bandwidth constraint
        model type";
}

identity bc-model-rdm {
    base bc-model-type;
    description
        "Russian Doll bandwidth constraint model type.";
}

identity bc-model-mam {
    base bc-model-type;
    description
        "Maximum Allocation bandwidth constraint
        model type.";
}

identity bc-model-mar {
    base bc-model-type;
    description
        "Maximum Allocation with Reservation
        bandwidth constraint model type.";
}

```

```
typedef bandwidth-kbps {
    type uint64;
    units "Kbps";
    description
        "Bandwidth values expressed in kilobits per second";
}
```

```
typedef bandwidth-mbps {
    type uint64;
    units "Mbps";
    description
        "Bandwidth values expressed in megabits per second";
}
```

```
typedef bandwidth-gbps {
    type uint64;
    units "Gbps";
    description
```

```
        "Bandwidth values expressed in gigabits per second";
}
```

```
typedef te-bandwidth-type {
    type enumeration {
        enum SPECIFIED {
            description
                "Bandwidth is explicitly specified";
        }
        enum AUTO {
            description
                "Bandwidth is automatically computed";
        }
    }
    description
        "enumerated type for specifying whether bandwidth is
        explicitly specified or automatically computed";
}
```

```
typedef bfd-type {
    type enumeration {
        enum classical {
```

```

        description "BFD classical session type.";
    }
    enum seamless {
        description "BFD seamless session type.";
    }
}
default "classical";
description
    "Type of BFD session";
}

typedef bfd-encap-mode-type {
    type enumeration {
        enum gal {
            description
                "BFD with GAL mode";
        }
        enum ip {
            description
                "BFD with IP mode";
        }
    }
}
default ip;
description
    "Possible BFD transport modes when running over TE
    LSPs.";

```

```

    }
}
<CODE ENDS>

```

Figure 11: TE MPLS types YANG module

```

<CODE BEGINS> file "ietf-te-sr-mpls@2018-02-15.yang"
module ietf-te-sr-mpls {

    namespace "urn:ietf:params:xml:ns:yang:ietf-te-sr-mpls";

    /* Replace with IANA when assigned */
    prefix "te-sr-mpls";

    /* Import TE generic types */

```

```

import ietf-te {
    prefix te;
}

/* Import TE generic types */
import ietf-te-types {
    prefix te-types;
}

organization
    "IETF Traffic Engineering Architecture and Signaling (TEAS)
    Working Group";

contact
    "WG Web:    <http://tools.ietf.org/wg/teas/>
    WG List:    <mailto:teas@ietf.org>

    WG Chair:   Lou Berger
                <mailto:lberger@labn.net>

    WG Chair:   Vishnu Pavan Beeram
                <mailto:vbeeram@juniper.net>

    Editor:     Tarek Saad
                <mailto:tsaad@cisco.com>

    Editor:     Rakesh Gandhi
                <mailto:rgandhi@cisco.com>

    Editor:     Vishnu Pavan Beeram
                <mailto:vbeeram@juniper.net>

    Editor:     Himanshu Shah

```

<mailto:hshah@ciena.com>

Editor: Xufeng Liu  
 <mailto:xufeng.liu@ericsson.com>

Editor: Xia Chen  
 <mailto:jescia.chenxia@huawei.com>

```

Editor:   Raqib Jones
          <mailto:raqib@Brocade.com>

Editor:   Bin Wen
          <mailto:Bin_Wen@cable.comcast.com>;

description
  "YANG data module for MPLS TE configurations,
  state, RPC and notifications.";

revision "2018-02-15" {
  description "Latest update to MPLS TE YANG module.";
  reference "TBD";
}

identity sr-protection-type {
  description
    "The Adj-SID base protection types";
}

identity sr-protection-type-protected {
  base sr-protection-type;
  description
    "The Adj-SID is eligible if protected";
}

identity sr-protection-type-unprotected {
  base sr-protection-type;
  description
    "The Adj-SID is eligible if unprotected";
}

identity sr-protection-type-any {
  base sr-protection-type;
  description
    "The Adj-SID is eligible if protected or unprotected";
}

typedef te-sid-selection-mode {
  type enumeration {

```

```
enum ADJ_SID_ONLY {
```

```

        description
            "The SR-TE tunnel should only use adjacency SIDs
            to build the SID stack to be pushed for the LSP";
    }
    enum MIXED_MODE {
        description
            "The SR-TE tunnel can use a mix of adjacency
            and prefix SIDs to build the SID stack to be pushed
            to the LSP";
    }
}
description "SID selection mode type";
}

/* MPLS SR-TE tunnel properties*/
grouping tunnel-sr-mpls-properties_config {
    description "MPLS TE SR tunnel properties";
    leaf path-signaling-type {
        type identityref {
            base te-types:path-signaling-type;
        }
        description "TE tunnel path signaling type";
    }
}

grouping te-sr-named-path-constraints_config {
    description
        "Configuration parameters relating to SR-TE LSPs";

    leaf sid-selection-mode {
        type te-sid-selection-mode;
        default MIXED_MODE;
        description
            "The restrictions placed on the SIDs to be selected by the
            calculation method for the explicit path when it is
            instantiated for a SR-TE LSP";
    }

    leaf sid-protection {
        type identityref {
            base sr-protection-type;
        }
        default sr-protection-type-any;
        description
            "When set to protected only SIDs that are
            protected are to be selected by the calculating method
            when the explicit path is instantiated by a SR-TE LSP.";
    }
}

```

```
    }  
  }  
  
  grouping te-sr-named-path-constraints {  
    description "Named TE SR path constraints grouping";  
    uses te-sr-named-path-constraints_config;  
  }  
  
  /** End of MPLS SR-TE tunnel configuration/state */  
  
  /**  
   * MPLS TE augmentations  
   */  
  augment "/te:te/te:globals/te:named-path-constraints" +  
    "/te:named-path-constraint" {  
    description  
      "Augmentations for MPLS SR-TE config named constraints";  
    uses te-sr-named-path-constraints;  
  }  
  
  /* MPLS TE tunnel augmentations */  
  
  /* MPLS TE LSPs augmentations */  
}  
<CODE ENDS>
```

Figure 12: SR TE MPLS YANG module

## 5. IANA Considerations

This document registers the following URIs in the IETF XML registry [[RFC3688](#)]. Following the format in [[RFC3688](#)], the following registration is requested to be made.

URI: urn:ietf:params:xml:ns:yang:ietf-te XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-te-device XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-te-mpls XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-te-sr-mpls XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-te-types XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-te-mpls-types XML: N/A, the requested URI is an XML namespace.

This document registers a YANG module in the YANG Module Names registry [[RFC6020](#)].

name: ietf-te namespace: urn:ietf:params:xml:ns:yang:ietf-te prefix: ietf-te reference: [RFC3209](#)

name: ietf-te-device namespace: urn:ietf:params:xml:ns:yang:ietf-te prefix: ietf-te-device reference: [RFC3209](#)

name: ietf-te-mpls namespace: urn:ietf:params:xml:ns:yang:ietf-te-mpls prefix: ietf-te-mpls reference: [RFC3209](#)

name: ietf-te-sr-mpls namespace: urn:ietf:params:xml:ns:yang:ietf-te-sr-mpls prefix: ietf-te-sr-mpls

name: ietf-te-types namespace: urn:ietf:params:xml:ns:yang:ietf-te-types prefix: ietf-te-types reference: [RFC3209](#)

name: ietf-te-mpls-types namespace: urn:ietf:params:xml:ns:yang:ietf-te-mpls-types prefix: ietf-te-mpls-types reference: [RFC3209](#)

## [6.](#) Security Considerations

The YANG module defined in this memo is designed to be accessed via the NETCONF protocol [[RFC6241](#)]. The lowest NETCONF layer is the secure transport layer and the mandatory-to-implement secure transport is SSH [[RFC6242](#)]. The NETCONF access control model [[RFC6536](#)] provides means to restrict access for particular NETCONF

users to a pre-configured subset of all available NETCONF protocol operations and content.

There are a number of data nodes defined in the YANG module which are writable/creatable/deletable (i.e., config true, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., <edit-config>)



to these data nodes without proper protection can have a negative effect on network operations. Following are the subtrees and data nodes and their sensitivity/vulnerability:

`"/te/globals"`: This module specifies the global TE configurations on a device. Unauthorized access to this container could cause the device to ignore packets it should receive and process.

`"/te/tunnels"`: This list specifies the configured TE tunnels on a device. Unauthorized access to this list could cause the device to ignore packets it should receive and process.

`"/te/lsp-state"`: This list specifies the state derived LSPs. Unauthorized access to this list could cause the device to ignore packets it should receive and process.

`"/te/interfaces"`: This list specifies the configured TE interfaces on a device. Unauthorized access to this list could cause the device to ignore packets it should receive and process.

## [7.](#) Acknowledgement

The authors would like to thank the members of the multi-vendor YANG design team who are involved in the definition of this model.

The authors would also like to thank Loa Andersson, Lou Berger, Sergio Belotti, Italo Busi, Aihua Guo, Dhruv Dhody, Anurag Sharma, and Xian Zhang for their comments and providing valuable feedback on this document.

## [8.](#) Contributors

Xia Chen  
Huawei Technologies

Email: [jescia.chenxia@huawei.com](mailto:jescia.chenxia@huawei.com)

Raqib Jones  
Brocade

Email: raqib@Brocade.com

Bin Wen  
Comcast

Email: Bin\_Wen@cable.comcast.com

## 9. Normative References

Saad, et al. Expires August 23, 2018 [Page 156]

---

Internet-Draft TE YANG Data Model February 2018

[I-D.ietf-teas-yang-rsvp]

Beeram, V., Saad, T., Gandhi, R., Liu, X., Bryskin, I., and H. Shah, "A YANG Data Model for Resource Reservation Protocol (RSVP)", [draft-ietf-teas-yang-rsvp-08](#) (work in progress), October 2017.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC3209] Awduche, D., Berger, L., Gan, D., Li, T., Srinivasan, V., and G. Swallow, "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), DOI 10.17487/RFC3209, December 2001, <<https://www.rfc-editor.org/info/rfc3209>>.

[RFC3473] Berger, L., Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Resource ReserVation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), DOI 10.17487/RFC3473, January 2003, <<https://www.rfc-editor.org/info/rfc3473>>.

[RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/info/rfc3688>>.

- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), DOI 10.17487/RFC6020, October 2010, <<https://www.rfc-editor.org/info/rfc6020>>.
- [RFC6107] Shiomoto, K., Ed. and A. Farrel, Ed., "Procedures for Dynamically Signaled Hierarchical Label Switched Paths", [RFC 6107](#), DOI 10.17487/RFC6107, February 2011, <<https://www.rfc-editor.org/info/rfc6107>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", [RFC 6242](#), DOI 10.17487/RFC6242, June 2011, <<https://www.rfc-editor.org/info/rfc6242>>.

Saad, et al.

Expires August 23, 2018

[Page 157]

---

Internet-Draft

TE YANG Data Model

February 2018

- [RFC6536] Bierman, A. and M. Bjorklund, "Network Configuration Protocol (NETCONF) Access Control Model", [RFC 6536](#), DOI 10.17487/RFC6536, March 2012, <<https://www.rfc-editor.org/info/rfc6536>>.
- [RFC6991] Schoenwaelder, J., Ed., "Common YANG Data Types", [RFC 6991](#), DOI 10.17487/RFC6991, July 2013, <<https://www.rfc-editor.org/info/rfc6991>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", [RFC 8040](#), DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/info/rfc8040>>.

#### Authors' Addresses

Tarek Saad (editor)  
Cisco Systems Inc

Email: tsaad@cisco.com

Rakesh Gandhi  
Cisco Systems Inc

Email: rgandhi@cisco.com

Xufeng Liu  
Jabil

Email: Xufeng\_Liu@jabil.com

Vishnu Pavan Beeram  
Juniper Networks

Email: vbeeram@juniper.net

Himanshu Shah  
Ciena

Email: hshah@ciena.com

Igor Bryskin  
Huawei Technologies

Email: Igor.Bryskin@huawei.com

