

TEAS Working Group
Internet-Draft
Intended status: Standards Track
Expires: September 10, 2020

T. Saad
Juniper Networks
R. Gandhi
Cisco Systems Inc
X. Liu
Volta Networks
V. Beeram
Juniper Networks
I. Bryskin
Individual
March 09, 2020

**A YANG Data Model for MPLS Traffic Engineering Tunnels
draft-ietf-teas-yang-te-mpls-03**

Abstract

This document defines a YANG data model for the configuration and management of Multiprotocol Label Switching (MPLS) Traffic Engineering (TE) tunnels, Label Switched Paths (LSPs) and interfaces. The model augments the TE generic YANG model for MPLS packet dataplane technology.

This model covers data for configuration, operational state, remote procedural calls, and event notifications.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 10, 2020.

Copyright Notice

Copyright (c) 2020 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
1.1.	Terminology	3
1.2.	Prefixes in Data Node Names	3
1.3.	Acronyms and Abbreviations	3
2.	MPLS TE YANG Model	3
2.1.	Module(s) Relationship	4
2.2.	Model Tree Diagram	4
2.3.	MPLS TE YANG Module	8
3.	IANA Considerations	18
4.	Security Considerations	18
5.	Contributors	19
6.	Normative References	19
	Authors' Addresses	21

[1.](#) Introduction

YANG [[RFC6020](#)] and [[RFC7950](#)] is a data modeling language used to define the contents of a conceptual data store that allows networked devices to be managed using NETCONF [[RFC6241](#)]. YANG has proved relevant beyond its initial confines, as bindings to other interfaces (e.g. RESTCONF [[RFC8040](#)]) and encoding other than XML (e.g. JSON) are being defined. Furthermore, YANG data models can be used as the basis of implementation for other interfaces, such as CLI and programmatic APIs.

This document describes the YANG data model for configuration and management of MPLS TE tunnels, LSPs, and interfaces. Other YANG module(s) that model the establishment of MPLS LSP(s) via signaling protocols such as RSVP-TE ([[RFC3209](#)], [[RFC3473](#)]) are described in separate document(s).

1.1. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

The terminology for describing YANG data models is found in [[RFC7950](#)].

1.2. Prefixes in Data Node Names

In this document, names of data nodes and other data model objects are prefixed using the standard prefix associated with the corresponding YANG imported modules, as shown in Table 1.

Prefix	YANG module	Reference
yang	ietf-yang-types	[RFC6991]
inet	ietf-inet-types	[RFC6991]
rt-types	ietf-routing-types	[RFC8294]
te	ietf-te	[I-D.ietf-teas-yang-te]
te-dev	ietf-te-device	[I-D.ietf-teas-yang-te]
te-mpls	ietf-te-mpls	This document
te-types	ietf-te-types	[I-D.ietf-teas-yang-te-types]
te-mpls-types	ietf-te-mpls-types	[I-D.ietf-teas-yang-te-types]

Table 1: Prefixes and corresponding YANG modules

1.3. Acronyms and Abbreviations

MPLS: Multiprotocol Label Switching LSP: Label Switched Path LSR: Label Switching Router LER: Label Edge Router TE: Traffic Engineering

2. MPLS TE YANG Model

The MPLS TE YANG model covers the configuration, state, RPC and notifications data pertaining to MPLS TE interfaces, tunnels and LSPs parameters. The data specific to the signaling protocol used to establish MPLS LSP(s) is outside the scope of this document and is covered in other documents, e.g. in [[I-D.ietf-teas-yang-rsvp](#)] and [[I-D.ietf-teas-yang-rsvp-te](#)].

2.1. Module(s) Relationship

The MPLS TE YANG module "ietf-te-mpls" imports the following modules:

- o ietf-te and ietf-te-device defined in [[I-D.ietf-teas-yang-te](#)]
- o ietf-te-types and ietf-te-packet-types defined in [[I-D.ietf-teas-yang-te-types](#)]
- o ietf-routing-types defined in [[RFC8294](#)]
- o ietf-mpls-static defined in [[I-D.ietf-mpls-static-yang](#)]

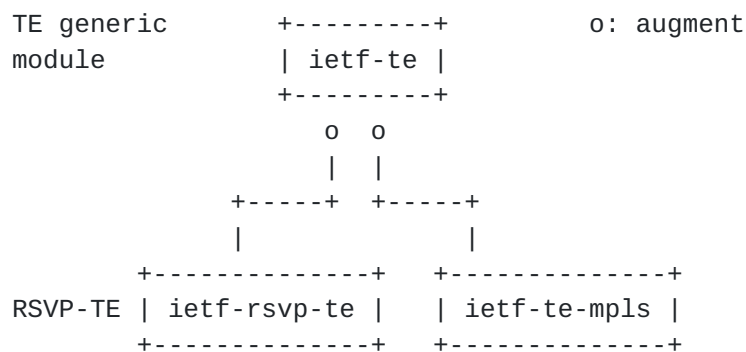


Figure 1: Relationship of MPLS TE module with TE generic and RSVP-TE YANG modules

The MPLS TE YANG module "ietf-te-mpls" augments the "ietf-te" TE generic YANG module as shown in Figure 1.

2.2. Model Tree Diagram

Figure 2 shows the tree diagram of the MPLS TE YANG model that is defined in ietf-te-mpls.yang.

```

module: ietf-te-mpls
  augment /te:te/te-dev:performance-thresholds:
    +--rw throttle
      +--rw one-way-delay-offset?          uint32
      +--rw measure-interval?             uint32
      +--rw advertisement-interval?       uint32
      +--rw suppression-interval?         uint32
      +--rw threshold-out
        | +--rw one-way-delay?            uint32
        | +--rw one-way-residual-bandwidth?
        | | rt-types:bandwidth-ieee-float32
        | +--rw one-way-available-bandwidth?

```



```
| | rt-types:bandwidth-ieee-float32
| +--rw one-way-utilized-bandwidth?
| | rt-types:bandwidth-ieee-float32
| +--rw two-way-delay? uint32
| +--rw one-way-min-delay? uint32
| +--rw one-way-max-delay? uint32
| +--rw one-way-delay-variation? uint32
| +--rw one-way-packet-loss? decimal64
| +--rw two-way-min-delay? uint32
| +--rw two-way-max-delay? uint32
| +--rw two-way-delay-variation? uint32
| +--rw two-way-packet-loss? decimal64
+--rw threshold-in
| +--rw one-way-delay? uint32
| +--rw one-way-residual-bandwidth?
| | rt-types:bandwidth-ieee-float32
| +--rw one-way-available-bandwidth?
| | rt-types:bandwidth-ieee-float32
| +--rw one-way-utilized-bandwidth?
| | rt-types:bandwidth-ieee-float32
| +--rw two-way-delay? uint32
| +--rw one-way-min-delay? uint32
| +--rw one-way-max-delay? uint32
| +--rw one-way-delay-variation? uint32
| +--rw one-way-packet-loss? decimal64
| +--rw two-way-min-delay? uint32
| +--rw two-way-max-delay? uint32
| +--rw two-way-delay-variation? uint32
| +--rw two-way-packet-loss? decimal64
+--rw threshold-accelerated-advertisement
+--rw one-way-delay? uint32
+--rw one-way-residual-bandwidth?
| rt-types:bandwidth-ieee-float32
+--rw one-way-available-bandwidth?
| rt-types:bandwidth-ieee-float32
+--rw one-way-utilized-bandwidth?
| rt-types:bandwidth-ieee-float32
+--rw two-way-delay? uint32
+--rw one-way-min-delay? uint32
+--rw one-way-max-delay? uint32
+--rw one-way-delay-variation? uint32
+--rw one-way-packet-loss? decimal64
+--rw two-way-min-delay? uint32
+--rw two-way-max-delay? uint32
+--rw two-way-delay-variation? uint32
+--rw two-way-packet-loss? decimal64
augment /te:te/te:tunnels/te:tunnel:
+--rw tunnel-igp-shortcut
```



```

| +--rw shortcut-eligible?    boolean
| +--rw metric-type?          identityref
| +--rw metric?               int32
| +--rw routing-afs*          inet:ip-version
+--rw forwarding
| +--rw binding-label?        rt-types:mpls-label
| +--rw load-share?           uint32
| +--rw policy-class?         uint8
+--rw bandwidth-mpls
  +--rw specification-type?
  |   te-packet-types:te-bandwidth-requested-type
  +--rw set-bandwidth?         te-packet-types:bandwidth-kbps
  +--rw class-type?           te-types:te-ds-class
  +--ro state
  | +--ro signaled-bandwidth?  te-packet-types:bandwidth-kbps
  +--rw auto-bandwidth
    +--rw enabled?             boolean
    +--rw min-bw?              te-packet-types:bandwidth-kbps
    +--rw max-bw?              te-packet-types:bandwidth-kbps
    +--rw adjust-interval?     uint32
    +--rw adjust-threshold?    rt-types:percentage
    +--rw overflow
    | +--rw enabled?            boolean
    | +--rw overflow-threshold? rt-types:percentage
    | +--rw trigger-event-count? uint16
    +--rw underflow
    | +--rw enabled?            boolean
    | +--rw underflow-threshold? rt-types:percentage
    | +--rw trigger-event-count? uint16
augment /te:te/te:tunnels/te:tunnel/te:primary-paths/te:primary-path:
  +--rw static-lsp-name?      mpls-static:static-lsp-ref
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
  /te:secondary-path:
  +--rw static-lsp-name?      mpls-static:static-lsp-ref
augment /te:te/te:globals/te:named-path-constraints
  /te:named-path-constraint:
  +--rw bandwidth
    +--rw specification-type?
    |   te-packet-types:te-bandwidth-requested-type
    +--rw set-bandwidth?         te-packet-types:bandwidth-kbps
    +--rw class-type?           te-types:te-ds-class
    +--ro state
    | +--ro signaled-bandwidth?  te-packet-types:bandwidth-kbps
augment /te:te/te:tunnels/te:tunnel/te:primary-paths/te:primary-path
  /te:lsps/te:lsp:
  +--ro performance-metrics-one-way
  | +--ro one-way-delay?          uint32
  | +--ro one-way-delay-normality?

```



```

| |      te-types:performance-metrics-normality
| +--ro one-way-residual-bandwidth?
| |      rt-types:bandwidth-ieee-float32
| +--ro one-way-residual-bandwidth-normality?
| |      te-types:performance-metrics-normality
| +--ro one-way-available-bandwidth?
| |      rt-types:bandwidth-ieee-float32
| +--ro one-way-available-bandwidth-normality?
| |      te-types:performance-metrics-normality
| +--ro one-way-utilized-bandwidth?
| |      rt-types:bandwidth-ieee-float32
| +--ro one-way-utilized-bandwidth-normality?
| |      te-types:performance-metrics-normality
| +--ro one-way-min-delay?                               uint32
| +--ro one-way-min-delay-normality?
| |      te-types:performance-metrics-normality
| +--ro one-way-max-delay?                               uint32
| +--ro one-way-max-delay-normality?
| |      te-types:performance-metrics-normality
| +--ro one-way-delay-variation?                         uint32
| +--ro one-way-delay-variation-normality?
| |      te-types:performance-metrics-normality
| +--ro one-way-packet-loss?                             decimal64
| +--ro one-way-packet-loss-normality?
| |      te-types:performance-metrics-normality
+--ro performance-metrics-two-way
  +--ro two-way-delay?                                   uint32
  +--ro two-way-delay-normality?
  |      te-types:performance-metrics-normality
  +--ro two-way-min-delay?                               uint32
  +--ro two-way-min-delay-normality?
  |      te-types:performance-metrics-normality
  +--ro two-way-max-delay?                               uint32
  +--ro two-way-max-delay-normality?
  |      te-types:performance-metrics-normality
  +--ro two-way-delay-variation?                         uint32
  +--ro two-way-delay-variation-normality?
  |      te-types:performance-metrics-normality
  +--ro two-way-packet-loss?                             decimal64
  +--ro two-way-packet-loss-normality?
  |      te-types:performance-metrics-normality

```

Figure 2: MPLS TE model configuration and state tree

2.3. MPLS TE YANG Module

```
<CODE BEGINS> file "ietf-te-mpls@2020-03-09.yang"
module ietf-te-mpls {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:ietf-te-mpls";

  /* Replace with IANA when assigned */
  prefix "te-mpls";

  /* Import TE base model */
  import ietf-te {
    prefix te;
    reference "draft-ietf-teas-yang-te: A YANG Data Model for Traffic
      Engineering Tunnels and Interfaces";
  }

  import ietf-te-device {
    prefix te-dev;
    reference "draft-ietf-teas-yang-te: A YANG Data Model for Traffic
      Engineering Tunnels and Interfaces";
  }

  /* Import TE MPLS types */
  import ietf-te-packet-types {
    prefix "te-packet-types";
    reference "draft-ietf-teas-yang-te-types: A YANG Data Model for
      Common Traffic Engineering Types";
  }

  /* Import TE generic types */
  import ietf-te-types {
    prefix te-types;
    reference "draft-ietf-teas-yang-te-types: A YANG Data Model for
      Common Traffic Engineering Types";
  }

  /* Import routing types */
  import ietf-routing-types {
    prefix rt-types;
    reference "RFC8294: Common YANG Data Types for the Routing Area";
  }

  import ietf-mpls-static {
    prefix mpls-static;
    reference "draft-ietf-mpls-static-yang: A YANG Data Model
      for MPLS Static LSPs";
  }
}
```



```
import ietf-inet-types {  
  prefix inet;  
  reference "RFC6991: Common YANG Data Types";  
}
```

organization

"IETF Traffic Engineering Architecture and Signaling (TEAS)
Working Group";

contact

"WG Web: <<http://tools.ietf.org/wg/teas/>>
WG List: <<mailto:teas@ietf.org>>

Editor: Tarek Saad
<<mailto:tsaad@cisco.com>>

Editor: Rakesh Gandhi
<<mailto:rgandhi@cisco.com>>

Editor: Vishnu Pavan Beeram
<<mailto:vbeeram@juniper.net>>

Editor: Xufeng Liu
<<mailto:xufeng.liu.ietf@gmail.com>>

Editor: Igor Bryskin
<mailto:i_bryskin@yahoo.com>";

description

"YANG data module for MPLS TE configurations,
state, RPC and notifications. The model fully conforms to
the Network Management Datastore Architecture (NMDA).

Copyright (c) 2018 IETF Trust and the persons
identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or
without modification, is permitted pursuant to, and subject
to the license terms contained in, the Simplified BSD License
set forth in [Section 4.c](#) of the IETF Trust's Legal Provisions
Relating to IETF Documents
(<https://trustee.ietf.org/license-info>).
This version of this YANG module is part of RFC XXXX; see
the RFC itself for full legal notices.";

// RFC Ed.: replace XXXX with actual RFC number and remove this
// note.


```
// RFC Ed.: update the date below with the date of RFC publication
// and remove this note.

revision "2020-03-09" {
  description "Latest update to MPLS TE YANG module.";
  reference
    "RFCXXXX: A YANG Data Model for MPLS-TE Tunnels and LSP(s)";
}

/* MPLS TE Identities */
identity tunnel-action-resetup {
  base te:tunnel-actions-type;
  description "Resetup tunnel action type";
}

/* MPLS TE tunnel properties*/
grouping tunnel-igp-shortcut-config {
  description "TE tunnel IGP shortcut configs";
  leaf shortcut-eligible {
    type boolean;
    default "true";
    description
      "Whether this LSP is considered to be eligible for us as a
      shortcut in the IGP. In the case that this leaf is set to
      true, the IGP SPF calculation uses the metric specified to
      determine whether traffic should be carried over this LSP";
  }
  leaf metric-type {
    type identityref {
      base te-types:lsp-metric-type;
    }
    default te-types:lsp-metric-inherited;
    description
      "The type of metric specification that should be used to set
      the LSP(s) metric";
  }
  leaf metric {
    type int32;
    description
      "The value of the metric that should be specified. The value
      supplied in this leaf is used in conjunction with the metric
      type to determine the value of the metric used by the system.
      Where the metric-type is set to lsp-metric-absolute - the
      value of this leaf is used directly; where it is set to
      lsp-metric-relative, the relevant (positive or negative)
      offset is used to formulate the metric; where metric-type
      is lsp-metric-inherited, the value of this leaf is not
      utilized";
  }
}
```



```
    }
    leaf-list routing-afs {
      type inet:ip-version;
      description
        "Address families";
    }
  }

  grouping tunnel-igp-shortcuts {
    description
      "TE tunnel IGP shortcut grouping";
    container tunnel-igp-shortcut {
      description
        "Tunnel IGP shortcut properties";
      uses tunnel-igp-shortcut-config;
    }
  }

  grouping tunnel-forwarding-adjacency-configs {
    description "Tunnel forwarding adjacency grouping";
    leaf binding-label {
      type rt-types:mpls-label;
      description "MPLS tunnel binding label";
    }
    leaf load-share {
      type uint32 {
        range "1..4294967295";
      }
      description "ECMP tunnel forwarding
        load-share factor.";
    }
    leaf policy-class {
      type uint8 {
        range "1..7";
      }
      description
        "The class associated with this tunnel";
    }
  }

  grouping tunnel-forwarding-adjacency {
    description "Properties for using tunnel in forwarding.";
    container forwarding {
      description
        "Tunnel forwarding properties container";
      uses tunnel-forwarding-adjacency-configs;
    }
  }
```



```
/** End of MPLS TE tunnel configuration/state */
grouping te-lsp-auto-bandwidth-config {
  description
    "Configuration parameters related to autobandwidth";

  leaf enabled {
    type boolean;
    default false;
    description
      "Enables MPLS auto-bandwidth on the
       LSP";
  }

  leaf min-bw {
    type te-packet-types:bandwidth-kbps;
    description
      "set the minimum bandwidth in Kbps for an
       auto-bandwidth LSP";
  }

  leaf max-bw {
    type te-packet-types:bandwidth-kbps;
    description
      "set the maximum bandwidth in Kbps for an
       auto-bandwidth LSP";
  }

  leaf adjust-interval {
    type uint32;
    description
      "time in seconds between adjustments to
       LSP bandwidth";
  }

  leaf adjust-threshold {
    type rt-types:percentage;
    description
      "percentage difference between the LSP's
       specified bandwidth and its current bandwidth
       allocation -- if the difference is greater than the
       specified percentage, auto-bandwidth adjustment is
       triggered";
  }
}

grouping te-lsp-overflow-config {
  description
    "configuration for MPLS LSP bandwidth
```



```
    overflow adjustment";

    leaf enabled {
        type boolean;
        default false;
        description
            "Enables MPLS LSP bandwidth overflow
             adjustment on the LSP";
    }

    leaf overflow-threshold {
        type rt-types:percentage;
        description
            "bandwidth percentage change to trigger
             an overflow event";
    }

    leaf trigger-event-count {
        type uint16;
        description
            "number of consecutive overflow sample
             events needed to trigger an overflow adjustment";
    }
}

grouping te-lsp-underflow-config {
    description
        "configuration for MPLS LSP bandwidth
         underflow adjustment";

    leaf enabled {
        type boolean;
        default false;
        description
            "enables bandwidth underflow
             adjustment on the LSP";
    }

    leaf underflow-threshold {
        type rt-types:percentage;
        description
            "bandwidth percentage change to trigger
             and underflow event";
    }

    leaf trigger-event-count {
        type uint16;
```



```
    description
      "number of consecutive underflow sample
      events needed to trigger an underflow adjustment";
  }
}
grouping te-tunnel-bandwidth-config {
  description
    "Configuration parameters related to bandwidth for a tunnel";

  leaf specification-type {
    type te-packet-types:te-bandwidth-requested-type;
    default specified;
    description
      "The method used for setting the bandwidth, either explicitly
      specified or configured";
  }

  leaf set-bandwidth {
    when "../specification-type = 'specified'" {
      description
        "The bandwidth value when bandwidth is explicitly
        specified";
    }
    type te-packet-types:bandwidth-kbps;
    description
      "set bandwidth explicitly, e.g., using
      offline calculation";
  }

  leaf class-type {
    type te-types:te-ds-class;
    description
      "The Class-Type of traffic transported by the LSP.";
    reference "RFC4124: section-4.3.1";
  }
}

grouping te-tunnel-bandwidth-state {
  description
    "Operational state parameters relating to bandwidth for a tunnel";

  leaf signaled-bandwidth {
    type te-packet-types:bandwidth-kbps;
    description
      "The currently signaled bandwidth of the LSP. In the case where
      the bandwidth is specified explicitly, then this will match the
      value of the set-bandwidth leaf; in cases where the bandwidth is
      dynamically computed by the system, the current value of the
      bandwidth should be reflected.";
```



```
    }  
  }  
  
  grouping tunnel-bandwidth_top {  
    description  
      "Top level grouping for specifying bandwidth for a tunnel";  
  
    container bandwidth-mpls {  
      description  
        "Bandwidth configuration for TE LSPs";  
  
      uses te-tunnel-bandwidth-config;  
  
      container state {  
        config false;  
        description  
          "State parameters related to bandwidth  
          configuration of TE tunnels";  
        uses te-tunnel-bandwidth-state;  
      }  
  
      container auto-bandwidth {  
        when "../specification-type = 'auto'" {  
          description  
            "Include this container for auto bandwidth  
            specific configuration";  
        }  
        description  
          "Parameters related to auto-bandwidth";  
  
        uses te-lsp-auto-bandwidth-config;  
  
        container overflow {  
          description  
            "configuration of MPLS overflow bandwidth  
            adjustment for the LSP";  
  
          uses te-lsp-overflow-config;  
        }  
  
        container underflow {  
          description  
            "configuration of MPLS underflow bandwidth  
            adjustment for the LSP";  
  
          uses te-lsp-underflow-config;  
        }  
      }  
    }  
  }
```



```
    }
  }

  grouping te-path-bandwidth_top {
    description
      "Top level grouping for specifying bandwidth for a TE path";

    container bandwidth {
      description
        "Bandwidth configuration for TE LSPs";

      uses te-tunnel-bandwidth-config;
      container state {
        config false;
        description
          "State parameters related to bandwidth
            configuration of TE tunnels";
        uses te-tunnel-bandwidth-state;
      }
    }
  }
}

/**
 * MPLS TE augmentations
 */
augment "/te:te/te-dev:performance-thresholds" {
  uses te-packet-types:performance-metrics-throttle-container-packet;
  description
    "Performance parameters configurable thresholds";
}

/* MPLS TE interface augmentations */

/* MPLS TE tunnel augmentations */
augment "/te:te/te:tunnels/te:tunnel" {
  description "MPLS TE tunnel config augmentations";
  uses tunnel-igp-shortcuts;
  uses tunnel-forwarding-adjacency;
  uses tunnel-bandwidth_top;
}

/* MPLS TE LSPs augmentations */
augment "/te:te/te:tunnels/te:tunnel/" +
  "te:primary-paths/te:primary-path" {
  when "/te:te/te:tunnels/te:tunnel" +
```



```
    "/te:primary-paths/te:primary-path" +
    "/te:signaling-type = 'te-types:path-setup-static'" {
    description
    "When the path is statically provisioned";
  }
  description "MPLS TE LSP augmentation";
  leaf static-lsp-name {
    type mpls-static:static-lsp-ref;
    description "Static LSP name";
  }
}

augment "/te:te/te:tunnels/te:tunnel/" +
    "te:secondary-paths/te:secondary-path" {
  when "/te:te/te:tunnels/te:tunnel" +
    "te:secondary-paths/te:secondary-path/" +
    "te:signaling-type = 'te-types:path-setup-static'" {
    description
    "When the path is statically provisioned";
  }
  description "MPLS TE LSP augmentation";
  leaf static-lsp-name {
    type mpls-static:static-lsp-ref;
    description "Static LSP name";
  }
}

augment "/te:te/te:globals/te:named-path-constraints/" +
    "te:named-path-constraint" {
  description "foo";
  uses te-path-bandwidth_top;
}

augment "/te:te/te:tunnels/te:tunnel/te:primary-paths" +
    "/te:primary-path/te:lsps/te:lsp" {
  description
    "MPLS TE generic data augmentation pertaining to specific TE
    LSP";
  uses te-packet-types:performance-metrics-attributes-packet;
}
}
<CODE ENDS>
```

Figure 3: TE generic YANG module

3. IANA Considerations

This document registers the following URIs in the IETF XML registry [[RFC3688](#)]. Following the format in [[RFC3688](#)], the following registration is requested to be made.

URI: urn:ietf:params:xml:ns:yang:ietf-te-mpls
XML: N/A, the requested URI is an XML namespace.

This document registers a YANG module in the YANG Module Names registry [[RFC6020](#)].

name: ietf-te-mpls
namespace: urn:ietf:params:xml:ns:yang:ietf-te-mpls
prefix: ietf-te-mpls
reference: [RFC3209](#)

4. Security Considerations

The YANG module defined in this memo is designed to be accessed via the NETCONF protocol [[RFC6241](#)]. The lowest NETCONF layer is the secure transport layer and the mandatory-to-implement secure transport is SSH [[RFC6242](#)]. The NETCONF access control model [[RFC8341](#)] provides means to restrict access for particular NETCONF users to a pre-configured subset of all available NETCONF protocol operations and content.

A number of data nodes defined in this YANG module are writable/creatable/deletable (i.e., config true, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., <edit-config>) to these data nodes without proper protection can have a negative effect on MPLS network operations. Following are the subtrees and data nodes and their sensitivity/vulnerability:

"/te/tunnels": The augmentation to this list specifies configuration to TE tunnels on a device. Unauthorized access to this list could cause the device to ignore packets it should receive and process.

"/te/globals": The augmentation to this target specifies configuration applicable to the to all or one TE device. Unauthorized access to this list could cause the device to ignore packets it should receive and process.

5. Contributors

Himanshu Shah
Ciena
Email: hshah@ciena.com

6. Normative References

- [I-D.ietf-mpls-static-yang]
Saad, T., Gandhi, R., Liu, X., Beeram, V., and I. Bryskin,
"A YANG Data Model for MPLS Static LSPs", [draft-ietf-mpls-static-yang-10](#) (work in progress), September 2019.
- [I-D.ietf-teas-yang-rsvp]
Beeram, V., Saad, T., Gandhi, R., Liu, X., and I. Bryskin,
"A YANG Data Model for Resource Reservation Protocol
(RSVP)", [draft-ietf-teas-yang-rsvp-12](#) (work in progress),
January 2020.
- [I-D.ietf-teas-yang-rsvp-te]
Beeram, V., Saad, T., Gandhi, R., Liu, X., Bryskin, I.,
and H. Shah, "A YANG Data Model for RSVP-TE Protocol",
[draft-ietf-teas-yang-rsvp-te-07](#) (work in progress), July
2019.
- [I-D.ietf-teas-yang-te]
Saad, T., Gandhi, R., Liu, X., Beeram, V., and I. Bryskin,
"A YANG Data Model for Traffic Engineering Tunnels and
Interfaces", [draft-ietf-teas-yang-te-22](#) (work in
progress), November 2019.
- [I-D.ietf-teas-yang-te-types]
Saad, T., Gandhi, R., Liu, X., Beeram, V., and I. Bryskin,
"Traffic Engineering Common YANG Types", [draft-ietf-teas-yang-te-types-13](#) (work in progress), November 2019.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate
Requirement Levels", [BCP 14](#), [RFC 2119](#),
DOI 10.17487/RFC2119, March 1997,
<<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3209] Awduche, D., Berger, L., Gan, D., Li, T., Srinivasan, V.,
and G. Swallow, "RSVP-TE: Extensions to RSVP for LSP
Tunnels", [RFC 3209](#), DOI 10.17487/RFC3209, December 2001,
<<https://www.rfc-editor.org/info/rfc3209>>.

- [RFC3473] Berger, L., Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Resource ReserVation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), DOI 10.17487/RFC3473, January 2003, <<https://www.rfc-editor.org/info/rfc3473>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/info/rfc3688>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), DOI 10.17487/RFC6020, October 2010, <<https://www.rfc-editor.org/info/rfc6020>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", [RFC 6242](#), DOI 10.17487/RFC6242, June 2011, <<https://www.rfc-editor.org/info/rfc6242>>.
- [RFC6991] Schoenwaelder, J., Ed., "Common YANG Data Types", [RFC 6991](#), DOI 10.17487/RFC6991, July 2013, <<https://www.rfc-editor.org/info/rfc6991>>.
- [RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", [RFC 7950](#), DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/info/rfc7950>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", [RFC 8040](#), DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/info/rfc8040>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8294] Liu, X., Qu, Y., Lindem, A., Hopps, C., and L. Berger, "Common YANG Data Types for the Routing Area", [RFC 8294](#), DOI 10.17487/RFC8294, December 2017, <<https://www.rfc-editor.org/info/rfc8294>>.

[RFC8341] Bierman, A. and M. Bjorklund, "Network Configuration Access Control Model", STD 91, [RFC 8341](https://www.rfc-editor.org/info/rfc8341), DOI 10.17487/RFC8341, March 2018, <<https://www.rfc-editor.org/info/rfc8341>>.

Authors' Addresses

Tarek Saad
Juniper Networks

Email: tsaad@juniper.net

Rakesh Gandhi
Cisco Systems Inc

Email: rgandhi@cisco.com

Xufeng Liu
Volta Networks

Email: xufeng.liu.ietf@gmail.com

Vishnu Pavan Beeram
Juniper Networks

Email: vbeeram@juniper.net

Igor Bryskin
Individual

Email: i_bryskin@yahoo.com

