

Transport Working Group  
Internet-Draft  
Updates: [4542](#), 4594  
(if approved)  
Intended status: Standards Track  
Expires: Sept 8, 2010

F. Baker  
J. Polk  
Cisco Systems  
M. Dolly  
AT&T Labs  
March 8, 2010

**DSCP for Capacity-Admitted Traffic**  
**draft-ietf-tsvwg-admitted-realtime-dscp-07**

**Abstract**

This document requests one Differentiated Services Code Point (DSCP) from the Internet Assigned Numbers Authority (IANA) for a class of real-time traffic. This class conforms to the Expedited Forwarding Per Hop Behavior. It is also admitted using a CAC procedure involving authentication, authorization, and capacity admission. This differs from a real-time traffic class conforming to the Expedited Forwarding Per Hop Behavior but not subject to capacity admission or subject to very coarse capacity admission.

**Legal**

This documents and the information contained therein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION THEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

**Status of this Memo**

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at



<http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on September 8, 2010.

## Copyright Notice

Copyright (c) 2010 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

## Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">1.1.</a>	Definitions . . . . .	<a href="#">4</a>
<a href="#">1.2.</a>	Problem . . . . .	<a href="#">6</a>
2.	Candidate Implementations of the Admitted Telephony Service Class . . . . .	<a href="#">7</a>
<a href="#">2.1.</a>	Potential implementations of EF in this model . . . . .	<a href="#">7</a>
<a href="#">2.2.</a>	Capacity admission control . . . . .	<a href="#">8</a>
2.3.	Recommendations on implementation of an Admitted Telephony Service Class . . . . .	<a href="#">10</a>
<a href="#">3.</a>	Summary: changes from <a href="#">RFC 4594</a> . . . . .	<a href="#">10</a>

<a href="#">4.</a>	IANA Considerations . . . . .	<a href="#">11</a>
<a href="#">5.</a>	Security Considerations . . . . .	<a href="#">11</a>

<a href="#">6.</a>	Acknowledgements	<a href="#">12</a>
<a href="#">7.</a>	References	<a href="#">12</a>
<a href="#">7.1.</a>	Normative References	<a href="#">12</a>
<a href="#">7.2.</a>	Informative References	<a href="#">12</a>
	Authors' Addresses	<a href="#">13</a>

## [1.](#) Introduction

This document requests one Differentiated Services Code Point (DSCP) from the Internet Assigned Numbers Authority (IANA) for a class of real-time traffic. This class conforms to the Expedited Forwarding [[RFC3246](#)] [[RFC3247](#)] Per Hop Behavior. It is also admitted using a CAC procedure involving authentication, authorization, and capacity admission. This differs from a real-time traffic class conforming to the Expedited Forwarding Per Hop Behavior but not subject to capacity admission or subject to very coarse capacity admission.

It also recommends that certain classes of video described in [[RFC4594](#)] be treated as requiring capacity admission as well.

Real-time traffic flows have one or more potential congestion points between the endpoints. Reserving capacity for these flows is important to application performance. All of these applications have low tolerance to jitter (aka delay variation) and loss, as summarized in [Section 2](#), and most (except for multimedia conferencing) have inelastic flow behavior from Figure 1 of [[RFC4594](#)]. Inelastic flow behavior and low jitter/loss tolerance are the service characteristics that define the need for admission control behavior.

One of the reasons behind this is the need for classes of traffic that are handled under special policies. Service providers need to distinguish between special-policy traffic and other classes, particularly the existing VoIP services that perform no capacity admission or only very coarse capacity admission and can exceed their allocated resources.

The requested DSCP applies to the Telephony Service Class described in [[RFC4594](#)].

Since video classes have not had the history of mixing admitted and non-admitted traffic in the same Per-Hop Behavior (PHB) as has occurred for EF, an additional DSCP code point is not recommended within this document for video. Instead, the recommended "best practice" is to perform admission control for all traffic in three of [[RFC4594](#)]'s video classes: the

- o Interactive Real-Time Traffic (CS4, used for Video conferencing and Interactive gaming),

- o Broadcast TV (CS3) for use in a video on demand context, and

Baker, et al.

Expires Sept 8, 2010

[Page 3]

- o AF4 Multimedia Conferencing (video conferencing).

Other video classes are believed to not have the current problem of confusion with unadmitted traffic and therefore would not benefit from the notion of a separate DSCP for admitted traffic. Within an ISP and on inter-ISP links (i.e. within networks whose internal paths are uniform at hundreds of megabits per second or faster), one would expect all of this traffic to be carried in the Real-Time Traffic (RTP) Class described in [[RFC5127](#)].

### **1.1. Definitions**

The following terms and acronyms are used in this document.

**PHB:** A Per-Hop-Behavior (PHB) is the externally observable forwarding behavior applied at a Differentiated Services compliant node to a DS behavior aggregate [[RFC2475](#)]. It may be thought of as a program configured on the interface of an Internet host or router, specified in terms of drop probabilities, queuing priorities or rates, and other handling characteristics for the traffic class.

**DSCP:** The Differentiated Services Code Point (DSCP), as defined in [[RFC2474](#)], is a value which is encoded in the DS field, and which each DS Node MUST use to select the PHB which is to be experienced by each packet it forwards [[RFC3260](#)]. It is a 6-bit number embedded into the 8-bit TOS field of an IPv4 datagram or the Traffic Class field of an IPv6 datagram.

**CAC:** Call Admission Control includes concepts of authorization and capacity admission. "Authorization" refers to any procedure that identifies a user, verifies the authenticity of the identification, and determines whether the user is authorized to use the service under the relevant policy. "Capacity Admission" refers to any procedure that determines whether capacity exists supporting a session's requirements under some policy.

In the Internet, these are separate functions, while in the PSTN they and call routing are carried out together.

**UNI:** A User/Network Interface (UNI) is the interface (often a physical link or its virtual equivalent) that connects two entities that do not trust each other, and in which one (the user) purchases connectivity services from the other (the network).

Figure 1 shows two user networks connected by what appears to each of them to be a single network ("The Internet", access to which is provided by their service provider) that provides

connectivity services to other users.

Baker, et al.

Expires Sept 8, 2010

[Page 4]



UNIs tend to be the bottlenecks in the Internet, where users purchase relatively low amounts of bandwidth for cost or service reasons, and as a result are most subject to congestion issues and therefore issues requiring traffic conditioning and service prioritization.

NNI: A Network/Network Interface (NNI) is the interface (often a physical link or its virtual equivalent) that connects two entities that trust each other within limits, and in which the two are seen as trading services for value. Figure 1 shows three service networks that together provide the connectivity services that we call "the Internet". They are different administrations and are very probably in competition, but exchange contracts for connectivity and capacity that enable them to offer specific services to their customers.

NNIs may not be bottlenecks in the Internet if service providers contractually agree to provision excess capacity at them, as they commonly do. However, NNI performance may differ by ISP, and the performance guarantee interval may range from a month to a much shorter period. Furthermore, a peering point NNI may not have contractual performance guarantees or may become overloaded under certain conditions. They are also policy-controlled interfaces, especially in BGP. As a result, they may require traffic prioritization policy.

Queue: There are multiple ways to build a multi-queue scheduler. Weighted Round Robin (WRR) literally builds multiple lists and visits them in a specified order, while a calendar queue (often used to implement Weighted Fair Queuing, or WFQ) builds a list for each time interval and queues at most a stated amount of data in each such list for transmission during that time interval. While these differ dramatically in implementation, the external difference in behavior is generally negligible when they are properly configured. Consistent with the definitions used in the Differentiated Services Architecture [[RFC2475](#)], these are treated as equivalent in this document, and the lists of WRR and the classes of a calendar queue will be referred to uniformly as "queues".



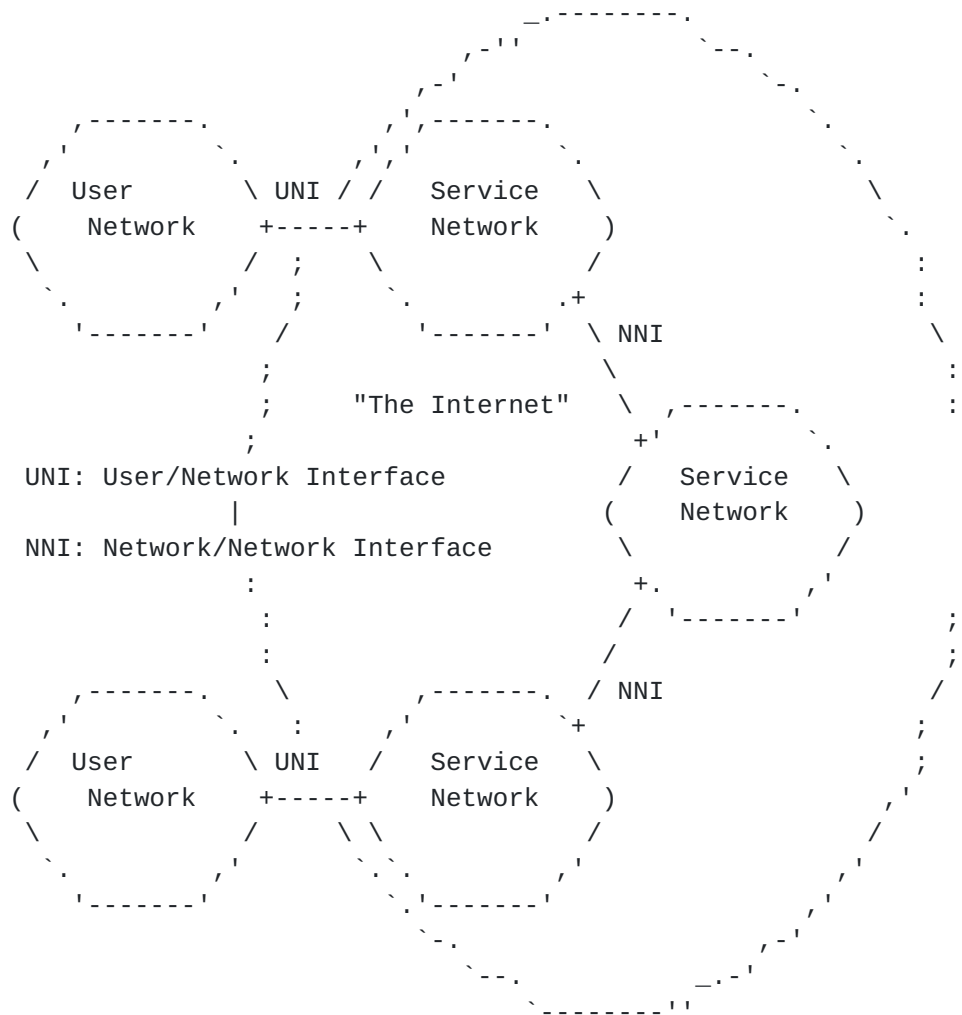


Figure 1: UNI and NNI interfaces

### 1.2. Problem

In short, the Telephony Service Class described in [[RFC4594](#)] permits the use of capacity admission in implementing the service, but present implementations either provide no capacity admission services or do so in a manner that depends on specific traffic engineering. In the context of the Internet backbone, the two are essentially equivalent; the edge network depends on specific engineering by the service provider that might not be present, especially in a mobile environment.

However, services are being requested of the network that would specifically make use of capacity admission, and would distinguish among users or the uses of available Voice-over-IP or Video-over-IP capacity in various ways. Various agencies would like to provide

services as described in [section 2.6 of \[RFC4504\]](#) or in [\[RFC4190\]](#).

This requires the use of capacity admission to differentiate among

users to provide services to them that are not afforded to non-capacity admitted customer-to-customer IP telephony sessions.

## 2. Candidate Implementations of the Admitted Telephony Service Class


### 2.1. Potential implementations of EF in this model

There are at least two possible ways to implement isolation between the Capacity Admitted PHB and the Expedited Forwarding PHB in this model. They are to implement separate classes as a set of

- o Multiple data plane traffic classes, each consisting of a policer and a queue, and the queues enjoying different priorities, or
- o Multiple data plane traffic classes, each consisting of a policer but feeding into a common queue or multiple queues at the same priority.

We will explain the difference, and describe in what way they differ in operation. The reason this is necessary is that there is current confusion in the industry.

The multi-priority model is shown in Figure 2. In this model, traffic from each service class is placed into a separate priority queue. If data is present in more than one queue, traffic from one of them will always be selected for transmission. This has the effect of transferring jitter from the higher priority queue to the lower priority queues, and reordering traffic in a way that gives the higher priority traffic a smaller average queuing delay. Each queue must have its own policer, however, to protect the network from errors and attacks; if a traffic class thinks it is carrying a certain data rate but an abuse sends significantly more, the effect of simple prioritization would not preserve the lower priorities of traffic, which could cause routing to fail or otherwise impact an SLA.

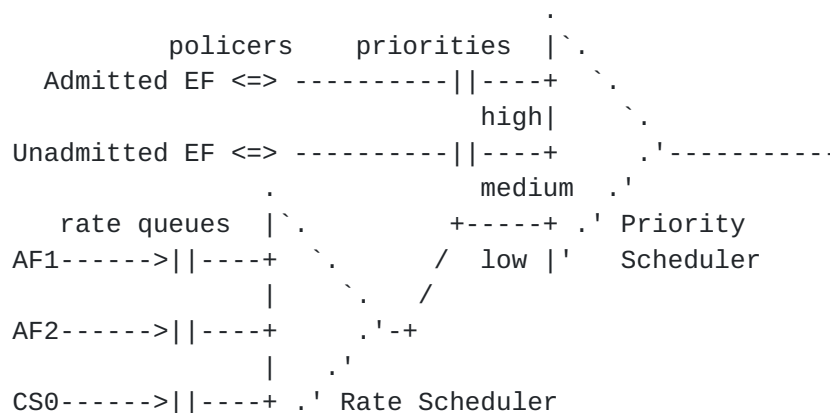

|' (WFQ, WRR, etc)

Baker, et al.

Expires Sept 8, 2010

[Page 7]

Figure 2: Implementation as a data plane priority

The multi-policer model is shown in Figure 3. In this model, traffic from each service class is policed according to its SLA requirements, and then placed into a common priority queue. Unlike the multi-priority model, the jitter experienced by the traffic classes in this case is the same, as there is only one queue, but the sum of the traffic in this higher priority queue experiences less average jitter than the elastic traffic in the lower priority.

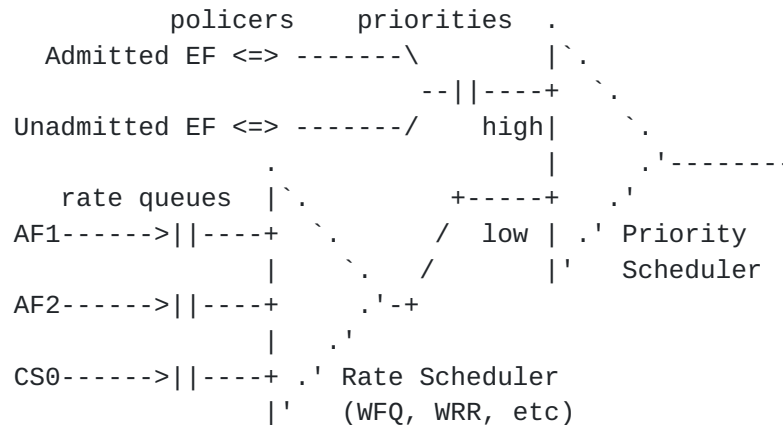


Figure 3: Implementation as a data plane policer

The difference between the two operationally is, as stated, the issues of loss due to policing and distribution of jitter.

If the two traffic classes are, for example, voice and video, datagrams containing video data can be relatively large (often of variable sizes up to the path MTU) while datagrams containing voice are relatively small, on the order of only 40 to 200 bytes, depending on the codec. On lower speed links (less than 10 MBPS), the jitter introduced by video to voice can be disruptive, while at higher speeds the jitter is nominal compared to the jitter requirements of voice. At access network speeds, therefore, [\[RFC4594\]](#) recommends separation of video and voice into separate queues, while at optical speeds [\[RFC5127\]](#) recommends that they use a common queue.

If, on the other hand, the two traffic classes are carrying the same type of application with the same jitter requirements, then giving one preference in this sense does not benefit the higher priority traffic and may harm the lower priority traffic. In such a case, using separate policers and a common queue is a superior approach.

## 2.2. Capacity admission control

There are at least six major ways that capacity admission is done or

has been proposed to be done for real-time applications. Each will be described below, then [Section 3](#) will judge which ones are likely



to meet the requirements of the Admitted Telephony service class. These include:

- o Drop Precedence used to force sessions to voluntarily exit,
- o Capacity admission control by assumption or engineering,
- o Capacity admission control by call counting,
- o End-point capacity admission performed by probing the network,
- o Centralized capacity admission control via bandwidth broker, and
- o Distributed capacity admission control using protocols such as RSVP or NSIS.

The problem with dropping traffic to force users to hang up is that it affects a broad class of users - if there is capacity for N calls and the N+1 calls are active, data is dropped randomly from all sessions to ensure that offered load doesn't exceed capacity. On very fast links, that is acceptable, but on lower speed links it can seriously affect call quality. There is also a behavioral issue involved here, in which users who experience poor quality calls tend to hang up and call again, making the problem better - then worse.

The problem with capacity admission by assumption, which is widely deployed in today's VoIP environment, is that it depends on the assumptions made. One can do careful traffic engineering to ensure needed bandwidth, but this can also be painful, and has to be revisited when the network is changed or network usage changes.

The problem with call counting based admission control is it gets exponentially worse the farther you get from the control point (e.g., it lacks sufficient scalability out into the network).

There are two fundamental problems with depending on the endpoint to perform capacity admission; it may not be able to accurately measure the impact of the traffic it generates on the network, and it tends to be greedy (e.g., it doesn't care). If the network operator is providing a service, he must be able to guarantee the service, which means that he cannot trust systems that are not controlled by his network.

The problem with capacity controls via a bandwidth broker is centralized servers lack far away awareness, and also lack effective real-time reaction to dynamic changes in all part of the network at all instances of time.

The problem with mechanisms that do not enable the association of a policy with the request is that they do not allow for multi-policy

services, which are becoming important.

Baker, et al.

Expires Sept 8, 2010

[Page 9]

The operator's choice of admission procedure **MUST**, for this DSCP, ensure the following:

- o The actual links that a session uses have enough bandwidth to support it.
- o New sessions are refused admission if there is inadequate bandwidth under the relevant policy.
- o If multiple policies are in use in a network, that the user is identified and the correct policy applied.
- o Under periods of network stress, the process of admission of new sessions does not disrupt existing sessions, unless the service explicitly allows for disruption of calls.

### **2.3. Recommendations on implementation of an Admitted Telephony Service Class**

When coupled with adequate AAA and capacity admission procedures as described in [Section 2.2](#), either of the two PHB implementations described in [Section 2.1](#) is sufficient to provide the services required for an Admitted Telephony service class. If preemption is required, as described in [section 2.3.5.2 of \[RFC4542\]](#), this provides the tools for carrying out the preemption. If preemption is not in view, or if used in addition to preemptive services, the application of different thresholds depending on call precedence has the effect of improving the probability of call completion by admitting preferred calls at a time that other calls are being refused. Routine and priority traffic can be admitted using the same DSCP value, as the choice of which calls are admitted is handled in the admission procedure executed in the control plane, not the policing of the data plane.

On the point of what protocols and procedures are required for authentication, authorization, and capacity admission, we note that clear standards do not exist at this time for bandwidth brokers, NSIS has not been finalized at this time and in any event is limited to unicast sessions, and that RSVP has been standardized and has the relevant services. We therefore **RECOMMEND** the use of a protocol, such as RSVP, at the UNI. Procedures at the NNI are business matters to be discussed between the relevant networks, and are **I RECOMMENDED** but **NOT REQUIRED**.

## **3. Summary: changes from [RFC 4594](#)**

To summarize, there are two changes to [\[RFC4594\]](#) discussed in this document:

Telephony class: The Telephony Service Class in [RFC 4594](#) does not

Baker, et al.

Expires Sept 8, 2010

[Page 10]

involve capacity admission, but depends on application layer admission that only estimates capacity, and that through static engineering. In addition to that class, a separate Admitted Telephony Class is added which performs capacity admission dynamically.

Video classes: Capacity admission is added to three video classes. These are the Interactive Real-Time Traffic class, Broadcast TV class when used for video on demand, and the Multimedia Conferencing class.

#### **4. IANA Considerations**

This note requests that IANA assign a DSCP value to a second EF traffic class consistent with [\[RFC3246\]](#) and [\[RFC3247\]](#) in the "Differentiated Services Field Codepoints" registry. It implements the Telephony Service Class described in [\[RFC4594\]](#) at lower speeds and is included in the Real Time Treatment Aggregate [\[RFC5127\]](#) at higher speeds. The recommended code point value should be from pool 1 within the dscp-registry. This document RECOMMENDS retaining a parallel with the existing EF code point (101110) by assigning a value for the code point of 101100 -- keeping the (left to right) first 4 binary values the same in both. The code point described within this document should be referred to as VOICE-ADMIT. Here is the recommended addition to the Pool 1 Codepoint registry:

Sub-registry: Pool 1 Codepoints

Reference: [\[RFC2474\]](#)

Registration Procedures: Standards Action

Registry:

Name	Space	Reference
-----	-----	-----
VOICE-ADMIT	101100	[this document]

This traffic class REQUIRES the use of capacity admission, such as RSVP services together with AAA services, at the User/Network Interface (UNI); the use of such services at the NNI is at the option of the interconnected networks.

#### **5. Security Considerations**

A major requirement of this service is effective use of a signaling Protocol, such as RSVP, with the capabilities to identify its user either as an individual or as a member of some corporate entity, and assert a policy such as "normal", "routine" or some level of "priority".

This capability, one has to believe, will be abused by script kiddies and others if the proof of identity is not adequately strong

or if policies are written or implemented improperly by the carriers. This goes without saying, but this section is here for it to be said...

Much of the security considerations from [RFC 3246](#) [[RFC3246](#)] applies to this document, as well as the security considerations in [RFC 2474](#) and [RFC 4542](#). [RFC 4230](#) [[RFC4230](#)] analyzes RSVP, providing some gap analysis to the NSIS WG as they started their work. Keep in mind that this document is advocating RSVP at the UNI only, while [RFC 4230](#) discusses (mostly) RSVP from a more complete point of view (i.e., e2e and edge2edge). When considering the RSVP aspect of this document, understanding [Section 6 of RFC 4230](#) is a good source of information.

## **6. Acknowledgements**

Kwok Ho Chan, Georgios Karagiannis, Dan Voce, and Bob Briscoe commented and offered text. The impetus for including Video in the discussion, which initially only targeted voice, is from Dave McDysan.

## **7. References**

### **7.1. Normative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2474] Nichols, K., Blake, S., Baker, F., and D. Black, "Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers", [RFC 2474](#), December 1998.
- [RFC3246] Davie, B., Charny, A., Bennet, J., Benson, K., Le Boudec, J., Courtney, W., Davari, S., Firoiu, V., and D. Stiliadis, "An Expedited Forwarding PHB (Per-Hop Behavior)", [RFC 3246](#), March 2002.

### **7.2. Informative References**

- [RFC2475] Blake, S., Black, D., Carlson, M., Davies, E., Wang, Z., and W. Weiss, "An Architecture for Differentiated Services", [RFC 2475](#), December 1998.
- [RFC3247] Charny, A., Bennet, J., Benson, K., Boudec, J., Chiu, A., Courtney, W., Davari, S., Firoiu, V., Kalmanek, C., and K. Ramakrishnan, "Supplemental Information for the New Definition of the EF PHB (Expedited Forwarding Per-Hop

Behavior)", [RFC 3247](#), March 2002.

Baker, et al.

Expires Sept 8, 2010

[Page 12]



- [RFC3260] Grossman, D., "New Terminology and Clarifications for Diffserv", [RFC 3260](#), April 2002.
- [RFC4190] Carlberg, K., Brown, I., and C. Beard, "Framework for Supporting Emergency Telecommunications Service (ETS) in IP Telephony", [RFC 4190](#), November 2005.
- [RFC4504] Sinnreich, H., Lass, S., and C. Stredicke, "SIP Telephony Device Requirements and Configuration", [RFC 4504](#), May 2006.
- [RFC4542] Baker, F. and J. Polk, "Implementing an Emergency Telecommunications Service (ETS) for Real-Time Services in the Internet Protocol Suite", [RFC 4542](#), May 2006.
- [RFC4594] Babiarz, J., Chan, K., and F. Baker, "Configuration Guidelines for DiffServ Service Classes", [RFC 4594](#), August 2006.
- [RFC5127] Chan, K., Babiarz, J., and F. Baker, "Aggregation of DiffServ Service Classes", [RFC 5127](#), February 2008.
- [RFC4230] H. Tschofenig, R. Graveman, "RSVP Security Properties", [RFC4230](#), December 2005

#### Authors' Addresses

Fred Baker  
Cisco Systems  
Santa Barbara, California 93117  
USA

Phone: +1-408-526-4257  
Email: fred@cisco.com

James Polk  
Cisco Systems  
Richardson, Texas 75082  
USA

Phone: +1-817-271-3552  
Email: jmpolk@cisco.com

Martin Dolly  
AT&T Labs  
Middletown Township, New Jersey 07748  
USA

Phone: +1-732-420-4574

Email: mdolly@att.com

Baker, et al.

Expires Sept 8, 2010

[Page 13]