

Workgroup: Internet Engineering Task Force

Internet-Draft:

draft-ietf-tsvwg-datagram-plpmtud-11

Updates: [4821](#) (if approved)

Published: 20 November 2019

Intended Status: Standards Track

Expires: 23 May 2020

Authors: G. Fairhurst                      T. Jones  
          University of Aberdeen      University of Aberdeen  
          M. Tuexen  
          Muenster University of Applied Sciences  
          I. Ruengeler  
          Muenster University of Applied Sciences  
          T. Voelker  
          Muenster University of Applied Sciences

## **Packetization Layer Path MTU Discovery for Datagram Transports**

### **Abstract**

This document describes a robust method for Path MTU Discovery (PMTUD) for datagram Packetization Layers (PLs). It describes an extension to RFC 1191 and RFC 8201, which specifies ICMP-based Path MTU Discovery for IPv4 and IPv6. The method allows a PL, or a datagram application that uses a PL, to discover whether a network path can support the current size of datagram. This can be used to detect and reduce the message size when a sender encounters a network black hole (where packets are discarded). The method can probe a network path with progressively larger packets to discover whether the maximum packet size can be increased. This allows a sender to determine an appropriate packet size, providing functionally for datagram transports that is equivalent to the Packetization Layer PMTUD specification for TCP, specified in RFC 4821.

The document also provides implementation notes for incorporating Datagram PMTUD into IETF datagram transports or applications that use datagram transports.

When published, this specification updates RFC 4821.

### **Status of This Memo**

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 23 May 2020.

## Copyright Notice

Copyright (c) 2019 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

- [1. Introduction](#)
  - [1.1. Classical Path MTU Discovery](#)
  - [1.2. Packetization Layer Path MTU Discovery](#)
  - [1.3. Path MTU Discovery for Datagram Services](#)
- [2. Terminology](#)
- [3. Features Required to Provide Datagram PLPMTUD](#)
- [4. DPLPMTUD Mechanisms](#)
  - [4.1. PLPMTU Probe Packets](#)
  - [4.2. Confirmation of Probed Packet Size](#)
  - [4.3. Detection of Unsupported PLPMTU Size, aka Black Hole Detection](#)
  - [4.4. Disabling the Effect of PMTUD](#)
  - [4.5. Response to PTB Messages](#)
    - [4.5.1. Validation of PTB Messages](#)

[4.5.2. Use of PTB Messages](#)

[5. Datagram Packetization Layer PMTUD](#)

[5.1. DPLPMTUD Components](#)

[5.1.1. Timers](#)

[5.1.2. Constants](#)

[5.1.3. Variables](#)

[5.1.4. Overview of DPLPMTUD Phases](#)

[5.2. State Machine](#)

[5.3. Search to Increase the PLPMTU](#)

[5.3.1. Probing for a larger PLPMTU](#)

[5.3.2. Selection of Probe Sizes](#)

[5.3.3. Resilience to Inconsistent Path Information](#)

[5.4. Robustness to Inconsistent Paths](#)

[6. Specification of Protocol-Specific Methods](#)

[6.1. Application support for DPLPMTUD with UDP or UDP-Lite](#)

[6.1.1. Application Request](#)

[6.1.2. Application Response](#)

[6.1.3. Sending Application Probe Packets](#)

[6.1.4. Initial Connectivity](#)

[6.1.5. Validating the Path](#)

[6.1.6. Handling of PTB Messages](#)

[6.2. DPLPMTUD for SCTP](#)

[6.2.1. SCTP/IPv4 and SCTP/IPv6](#)

[6.2.2. DPLPMTUD for SCTP/UDP](#)

[6.2.3. DPLPMTUD for SCTP/DTLS](#)

### [6.3. DPLPMTUD for QUIC](#)

#### [6.3.1. Initial Connectivity](#)

#### [6.3.2. Sending QUIC Probe Packets](#)

#### [6.3.3. Validating the Path with QUIC](#)

#### [6.3.4. Handling of PTB Messages by QUIC](#)

### [7. Acknowledgements](#)

### [8. IANA Considerations](#)

### [9. Security Considerations](#)

### [10. References](#)

#### [10.1. Normative References](#)

#### [10.2. Informative References](#)

### [Appendix A. Revision Notes](#)

### [Authors' Addresses](#)

## **1. Introduction**

The IETF has specified datagram transport using UDP, SCTP, and DCCP, as well as protocols layered on top of these transports (e.g., SCTP/UDP, DCCP/UDP, QUIC/UDP), and direct datagram transport over the IP network layer. This document describes a robust method for Path MTU Discovery (PMTUD) that may be used with these transport protocols (or the applications that use their transport service) to discover an appropriate size of packet to use across an Internet path.

### **1.1. Classical Path MTU Discovery**

Classical Path Maximum Transmission Unit Discovery (PMTUD) can be used with any transport that is able to process ICMP Packet Too Big (PTB) messages (e.g., [RFC1191] and [RFC8201]). In this document, the term PTB message is applied to both IPv4 ICMP Unreachable messages (type 3) that carry the error Fragmentation Needed (Type 3, Code 4) [RFC0792] and ICMPv6 Packet Too Big messages (Type 2) [RFC4443]. When a sender receives a PTB message, it reduces the effective MTU to the value reported as the Link MTU in the PTB message, and a method that from time-to-time increases the packet size in attempt to discover an increase in the supported PMTU. The packets sent with a size larger than the current effective PMTU are known as probe packets.

Packets not intended as probe packets are either fragmented to the current effective PMTU, or the attempt to send fails with an error code. Applications are sometimes provided with a primitive to let them read the Maximum Packet Size (MPS), derived from the current effective PMTU.

Classical PMTUD is subject to protocol failures. One failure arises when traffic using a packet size larger than the actual PMTU is black-holed (all datagrams sent with this size, or larger, are discarded). This could arise when the PTB messages are not delivered back to the sender for some reason (see for example [[RFC2923](#)]).

Examples where PTB messages are not delivered include:

- \*The generation of ICMP messages is usually rate limited. This could result in no PTB messages being generated to the sender (see section 2.4 of [[RFC4443](#)])
- \*ICMP messages can be filtered by middleboxes (including firewalls) [[RFC4890](#)]. A stateful firewall could be configured with a policy to block incoming ICMP messages, which would prevent reception of PTB messages to a sending endpoint behind this firewall.
- \*When the router issuing the ICMP message drops a tunneled packet, the resulting ICMP message will be directed to the tunnel ingress. This tunnel endpoint is responsible for forwarding the ICMP message and also processing the quoted packet within the payload field to remove the effect of the tunnel, and return a correctly formatted ICMP message to the sender [[I-D.ietf-intarea-tunnels](#)]. Failure to do this prevents the PTB message reaching the original sender.
- \*Asymmetry in forwarding can result in there being no return route to the original sender, which would prevent an ICMP message being delivered to the sender. This issue can also arise when policy-based routing is used, Equal Cost Multipath (ECMP) routing is used, or a middlebox acts as an application load balancer. An example is where the path towards the server is chosen by ECMP routing depending on bytes in the IP payload. In this case, when a packet sent by the server encounters a problem after the ECMP router, then any resulting ICMP message needs to also be directed by the ECMP router towards the original sender.
- \*There are additional cases where the next hop destination fails to receive a packet because of its size. This could be due to misconfiguration of the layer 2 path between nodes, for instance the MTU configured in a layer 2 switch, or misconfiguration of the Maximum Receive Unit (MRU). If the packet is dropped by the

link, this will not cause a PTB message to be sent to the original sender.

Another failure could result if a node that is not on the network path sends a PTB message that attempts to force a sender to change the effective PMTU [[RFC8201](#)]. A sender can protect itself from reacting to such messages by utilising the quoted packet within a PTB message payload to validate that the received PTB message was generated in response to a packet that had actually originated from the sender. However, there are situations where a sender would be unable to provide this validation. Examples where validation of the PTB message is not possible include:

- \*When a router issuing the ICMP message implements RFC792 [[RFC0792](#)], it is only required to include the first 64 bits of the IP payload of the packet within the quoted payload. There could be insufficient bytes remaining for the sender to interpret the quoted transport information.

Note: The recommendation in RFC1812 [[RFC1812](#)] is that IPv4 routers return a quoted packet with as much of the original datagram as possible without the length of the ICMP datagram exceeding 576 bytes. IPv6 routers include as much of the invoking packet as possible without the ICMPv6 packet exceeding 1280 bytes [[RFC4443](#)].

- \*The use of tunnels/encryption can reduce the size of the quoted packet returned to the original source address, increasing the risk that there could be insufficient bytes remaining for the sender to interpret the quoted transport information.

- \*Even when the PTB message includes sufficient bytes of the quoted packet, the network layer could lack sufficient context to validate the message, because validation depends on information about the active transport flows at an endpoint node (e.g., the socket/address pairs being used, and other protocol header information).

- \*When a packet is encapsulated/tunneled over an encrypted transport, the tunnel/encapsulation ingress might have insufficient context, or computational power, to reconstruct the transport header that would be needed to perform validation.

## **1.2. Packetization Layer Path MTU Discovery**

The term Packetization Layer (PL) has been introduced to describe the layer that is responsible for placing data blocks into the payload of IP packets and selecting an appropriate MPS. This function is often performed by a transport protocol, but can also be

performed by other encapsulation methods working above the transport layer.

In contrast to PMTUD, Packetization Layer Path MTU Discovery (PLPMTUD) [[RFC4821](#)] does not rely upon reception and validation of PTB messages. It is therefore more robust than Classical PMTUD. This has become the recommended approach for implementing PMTU discovery.

It uses a general strategy where the PL sends probe packets to search for the largest size of unfragmented datagram that can be sent over a network path. Probe packets are sent with a progressively larger packet size. If a probe packet is successfully delivered (as determined by the PL), then the PLPMTU is raised to the size of the successful probe. If no response is received to a probe packet, the method reduces the probe size. The result of probing with the PLPMTU is used to set the application MPS.

PLPMTUD introduces flexibility in the implementation of PMTU discovery. At one extreme, it can be configured to only perform ICMP Black Hole Detection and recovery to increase the robustness of Classical PMTUD, or at the other extreme, all PTB processing can be disabled and PLPMTUD can completely replace Classical PMTUD (see [Section 4.5](#)).

PLPMTUD can also include additional consistency checks without increasing the risk that data is lost when probing to discover the path MTU. For example, information available at the PL, or higher layers, enables received PTB messages to be validated before being utilized.

### **1.3. Path MTU Discovery for Datagram Services**

[Section 5](#) of this document presents a set of algorithms for datagram protocols to discover the largest size of unfragmented datagram that can be sent over a network path. The method described relies on features of the PL described in [Section 3](#) and applies to transport protocols operating over IPv4 and IPv6. It does not require cooperation from the lower layers, although it can utilize PTB messages when these received messages are made available to the PL.

The UDP Usage Guidelines [[RFC8085](#)] state "an application SHOULD either use the Path MTU information provided by the IP layer or implement Path MTU Discovery (PMTUD)", but does not provide a mechanism for discovering the largest size of unfragmented datagram that can be used on a network path. Prior to this document, PLPMTUD had not been specified for UDP.

Section 10.2 of [[RFC4821](#)] recommends a PLPMTUD probing method for the Stream Control Transport Protocol (SCTP). SCTP utilizes probe packets consisting of a minimal sized HEARTBEAT chunk bundled with a

PAD chunk as defined in [\[RFC4820\]](#), but RFC4821 does not provide a complete specification. The present document provides the details to complete that specification.

The Datagram Congestion Control Protocol (DCCP) [\[RFC4340\]](#) requires implementations to support Classical PMTUD and states that a DCCP sender "MUST maintain the MPS allowed for each active DCCP session". It also defines the current congestion control MPS (CCMPS) supported by a network path. This recommends use of PMTUD, and suggests use of control packets (DCCP-Sync) as path probe packets, because they do not risk application data loss. The method defined in this specification could be used with DCCP.

[Section 6](#) specifies the method for a set of transports, and provides information to enable the implementation of PLPMTUD with other datagram transports and applications that use datagram transports.

## 2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [\[RFC2119\]](#) [\[RFC8174\]](#) when, and only when, they appear in all capitals, as shown here.

Other terminology is directly copied from [\[RFC4821\]](#), and the definitions in [\[RFC1122\]](#).

**Actual PMTU:** The Actual PMTU is the PMTU of a network path between a sender PL and a destination PL, which the DPLPMTUD algorithm seeks to determine.

**Black Hole:** A Black Hole is encountered when a sender is unaware that packets are not being delivered to the destination end point. Two types of Black Hole are relevant to DPLPMTUD:

**Packet Black Hole:** Packets encounter a Packet Black Hole when packets are not delivered to the destination endpoint (e.g., when the sender transmits packets of a particular size with a previously known effective PMTU and they are discarded by the network).

**ICMP Black Hole** An ICMP Black Hole is encountered when the sender is unaware that packets are not delivered to the destination endpoint because PTB messages are not received by the originating PL sender.

**Black holed :** Traffic is black-holed when the sender is unaware that packets are not being delivered. This could be due to a Packet Black Hole or an ICMP Black Hole.



**Classical Path MTU Discovery:**

Classical PMTUD is a process described in [[RFC1191](#)] and [[RFC8201](#)], in which nodes rely on PTB messages to learn the largest size of unfragmented datagram that can be used across a network path.

**Datagram:** A datagram is a transport-layer protocol data unit, transmitted in the payload of an IP packet.

**Effective PMTU:** The Effective PMTU is the current estimated value for PMTU that is used by a PMTUD. This is equivalent to the PLPMTU derived by PLPMTUD.

**EMTU\_S:** The Effective MTU for sending (EMTU\_S) is defined in [[RFC1122](#)] as "the maximum IP datagram size that may be sent, for a particular combination of IP source and destination addresses...".

**EMTU\_R:** The Effective MTU for receiving (EMTU\_R) is designated in [[RFC1122](#)] as the largest datagram size that can be reassembled by EMTU\_R (Effective MTU to receive).

**Link:** A Link is a communication facility or medium over which nodes can communicate at the link layer, i.e., a layer below the IP layer. Examples are Ethernet LANs and Internet (or higher) layer and tunnels.

**Link MTU:** The Link Maximum Transmission Unit (MTU) is the size in bytes of the largest IP packet, including the IP header and payload, that can be transmitted over a link. Note that this could more properly be called the IP MTU, to be consistent with how other standards organizations use the acronym. This includes the IP header, but excludes link layer headers and other framing that is not part of IP or the IP payload. Other standards organizations generally define the link MTU to include the link layer headers.

**MAX\_PMTU:** The MAX\_PMTU is the largest size of PLPMTU that DPLPMTUD will attempt to use.

**MPS:** The Maximum Packet Size (MPS) is the largest size of application data block that can be sent across a network path by a PL. In DPLPMTUD this quantity is derived from the PLPMTU by taking into consideration the size of the lower protocol layer headers. Probe packets generated by DPLPMTUD can have a size larger than the MPS.

**MIN\_PMTU:** The MIN\_PMTU is the smallest size of PLPMTU that DPLPMTUD will attempt to use.

**Packet:**

A Packet is the IP header plus the IP payload.

**Packetization Layer (PL):** The Packetization Layer (PL) is the layer of the network stack that places data into packets and performs transport protocol functions.

**Path:** The Path is the set of links and routers traversed by a packet between a source node and a destination node by a particular flow.

**Path MTU (PMTU):** The Path MTU (PMTU) is the minimum of the Link MTU of all the links forming a network path between a source node and a destination node.

**PTB\_SIZE:** The PTB\_SIZE is a value reported in a validated PTB message that indicates next hop link MTU of a router along the path.

**PLPMTU:** The Packetization Layer PMTU is an estimate of the actual PMTU provided by the DPLPMTUD algorithm.

**PLPMTUD:** Packetization Layer Path MTU Discovery (PLPMTUD), the method described in this document for datagram PLs, which is an extension to Classical PMTU Discovery.

**Probe packet:** A probe packet is a datagram sent with a purposely chosen size (typically the current PLPMTU or larger) to detect if packets of this size can be successfully sent end-to-end across the network path.

### 3. Features Required to Provide Datagram PLPMTUD

TCP PLPMTUD has been defined using standard TCP protocol mechanisms. All of the requirements in [[RFC4821](#)] also apply to the use of the technique with a datagram PL. Unlike TCP, some datagram PLs require additional mechanisms to implement PLPMTUD.

There are eight requirements for performing the datagram PLPMTUD method described in this specification:

1. **PMTU parameters:** A DPLPMTUD sender is RECOMMENDED to provide information about the maximum size of packet that can be transmitted by the sender on the local link (the local Link MTU). It MAY utilize similar information about the receiver when this is supplied (note this could be less than EMTU\_R). This avoids implementations trying to send probe packets that can not be transmitted by the local link. Too high of a value could reduce the efficiency of the search algorithm. Some applications also have a maximum transport protocol data unit

(PDU) size, in which case there is no benefit from probing for a size larger than this (unless a transport allows multiplexing multiple applications PDUs into the same datagram).

2. PLPMTU: A datagram application using a PL not supporting fragmentation is REQUIRED to be able to choose the size of datagrams sent to the network, up to the PLPMTU, or a smaller value (such as the MPS) derived from this. This value is managed by the DPLPMTUD method. The PLPMTU (specified as the effective PMTU in Section 1 of [[RFC1191](#)]) is equivalent to the EMTU\_S (specified in [[RFC1122](#)]).
3. Probe packets: On request, a DPLPMTUD sender is REQUIRED to be able to transmit a packet larger than the PLPMTU. This is used to send a probe packet. In IPv4, a probe packet MUST be sent with the Don't Fragment (DF) bit set in the IP header, and without network layer endpoint fragmentation. In IPv6, a probe packet is always sent without source fragmentation (as specified in section 5.4 of [[RFC8201](#)]).
4. Processing PTB messages: A DPLPMTUD sender MAY optionally utilize PTB messages received from the network layer to help identify when a network path does not support the current size of probe packet. Any received PTB message MUST be validated before it is used to update the PLPMTU discovery information [[RFC8201](#)]. This validation confirms that the PTB message was sent in response to a packet originating by the sender, and needs to be performed before the PLPMTU discovery method reacts to the PTB message. A PTB message MUST NOT be used to increase the PLPMTU [[RFC8201](#)].
5. Reception feedback: The destination PL endpoint is REQUIRED to provide a feedback method that indicates to the DPLPMTUD sender when a probe packet has been received by the destination PL endpoint. The mechanism needs to be robust to the possibility that packets could be significantly delayed along a network path. The local PL endpoint at the sending node is REQUIRED to pass this feedback to the sender DPLPMTUD method.
6. Probe loss recovery: It is RECOMMENDED to use probe packets that do not carry any user data that would require retransmission if lost. Most datagram transports permit this. If a probe packet contains user data requiring retransmission in case of loss, the PL (or layers above) are REQUIRED to arrange any retransmission/repair of any resulting loss. DPLPMTUD is REQUIRED to be robust in the case where probe packets are lost due to other reasons (including link transmission error, congestion).

7. Probing and congestion control: The DPLPMTUD sender treats isolated loss of a probe packet (with or without a corresponding PTB message) as a potential indication of a PMTU limit for the path. Loss of a probe packet SHOULD NOT be treated as an indication of congestion. The loss of a probe packet SHOULD NOT directly trigger a congestion control reaction [[RFC4821](#)] because this could result in unnecessary reduction of the sending rate. The interval between probe packets MUST be at least one RTT.
8. Shared PLPMTU state: The PLPMTU value MAY also be stored with the corresponding entry in the destination cache and used by other PL instances. The specification of PLPMTUD [[RFC4821](#)] states: "If PLPMTUD updates the MTU for a particular path, all Packetization Layer sessions that share the path representation (as described in Section 5.2 of [[RFC4821](#)]) SHOULD be notified to make use of the new MTU". Such methods MUST be robust to the wide variety of underlying network forwarding behaviors. Section 5.2 of [[RFC8201](#)] provides guidance on the caching of PMTU information and also the relation to IPv6 flow labels.

In addition, the following principles are stated for design of a DPLPMTUD method:

- \*MPS: A method is REQUIRED to signal an appropriate MPS to the higher layer using the PL. The value of the MPS can change following a change to the path. It is RECOMMENDED that methods avoid forcing an application to use an arbitrary small MPS (PLPMTU) for transmission while the method is searching for the currently supported PLPMTU. Datagram PLs do not necessarily support fragmentation of PDUs larger than the PLPMTU. A reduced MPS can adversely impact the performance of a datagram application.
- \*Path validation: It is RECOMMENDED that methods are robust to path changes that could have occurred since the path characteristics were last confirmed, and to the possibility of inconsistent path information being received.
- \*Datagram reordering: A method is REQUIRED to be robust to the possibility that a flow encounters reordering, or the traffic (including probe packets) is divided over more than one network path.
- \*When to probe: It is RECOMMENDED that methods determine whether the path has changed since it last measured the path. This can help determine when to probe the path again.

## 4. DPLPMTUD Mechanisms

This section lists the protocol mechanisms used in this specification.

### 4.1. PLPMTU Probe Packets

The DPLPMTUD method relies upon the PL sender being able to generate probe packets with a specific size. TCP is able to generate these probe packets by choosing to appropriately segment data being sent [[RFC4821](#)]. In contrast, a datagram PL that needs to construct a probe packet has to either request an application to send a data block that is larger than that generated by an application, or to utilize padding functions to extend a datagram beyond the size of the application data block. Protocols that permit exchange of control messages (without an application data block) MAY prefer to generate a probe packet by extending a control message with padding data.

A receiver is REQUIRED to be able to distinguish an in-band data block from any added padding. This is needed to ensure that any added padding is not passed on to an application at the receiver.

This results in three possible ways that a sender can create a probe packet:

**Probing using padding data:** A probe packet that contains only control information together with any padding, which is needed to be inflated to the size required for the probe packet. Since these probe packets do not carry an application-supplied data block, they do not typically require retransmission, although they do still consume network capacity and incur endpoint processing.

**Probing using application data and padding data:** A probe packet that contains a data block supplied by an application that is combined with padding to inflate the length of the datagram to the size required for the probe packet. If the application/transport needs protection from the loss of this probe packet, the application/transport could perform transport-layer retransmission/repair of the data block (e.g., by retransmission after loss is detected or by duplicating the data block in a datagram without the padding data).

**Probing using application data:** A probe packet that contains a data block supplied by an application that matches the size required for the probe packet. This method requests the application to issue a data block of the desired probe size. If the application/transport needs protection from the loss of an unsuccessful probe packet, the application/transport needs then to perform

transport-layer retransmission/repair of the data block (e.g., by retransmission after loss is detected).

A PL that uses a probe packet carrying an application data block, could need to retransmit this application data block if the probe fails. This could need the PL to re-fragment the data block to a smaller packet size that is expected to traverse the end-to-end path (which could utilize endpoint network-layer or PL fragmentation when these are available).

DPLPMTUD MAY choose to use only one of these methods to simplify the implementation.

Probe messages sent by a PL MUST contain enough information to uniquely identify the probe within Maximum Segment Lifetime, while being robust to reordering and replay of probe response and PTB messages.

#### **4.2. Confirmation of Probed Packet Size**

The PL needs a method to determine (confirm) when probe packets have been successfully received end-to-end across a network path.

Transport protocols can include end-to-end methods that detect and report reception of specific datagrams that they send (e.g., DCCP and SCTP provide keep-alive/heartbeat features). When supported, this mechanism SHOULD also be used by DPLPMTUD to acknowledge reception of a probe packet.

A PL that does not acknowledge data reception (e.g., UDP and UDP-Lite) is unable itself to detect when the packets that it sends are discarded because their size is greater than the actual PMTU. These PLs need to either rely on an application protocol to detect this loss.

[Section 6](#) specifies this function for a set of IETF-specified protocols.

#### **4.3. Detection of Unsupported PLPMTU Size, aka Black Hole Detection**

A PL sender needs to reduce the PLPMTU when it discovers the actual PMTU supported by a network path is less than the PLPMTU. This can be triggered when a validated PTB message is received, or by another event that indicates the network path no longer sustains the current packet size, such as a loss report from the PL, or repeated lack of response to probe packets sent to confirm the PLPMTU. Detection is followed by a reduction of the PLPMTU.

This is performed by sending packet probes of size PLPMTU to verify that a network path still supports the last acknowledged PLPMTU size. There are two alternative mechanism:

- \*A PL can rely upon a mechanism implemented within the PL to detect excessive loss of data sent with a specific packet size and then conclude that this excessive loss could be a result of an invalid PMTU (as in PLPMTUD for TCP [[RFC4821](#)]).

- \*A PL can use the DPLPMTUD probing mechanism to periodically generate probe packets of the size of the current PLPMTU (e.g., using the confirmation timer [Section 5.1.1](#)). A timer tracks whether acknowledgments are received. Successive loss of probes is an indication that the current path no longer supports the PLPMTU (e.g., when the number of probe packets sent without receiving an acknowledgement, PROBE\_COUNT, becomes greater than MAX\_PROBES).

A PL MAY inhibit sending probe packets when no application data has been sent since the previous probe packet. A PL preferring to use an up-to-date PLPMTU once user data is sent again, MAY choose to continue PLPMTU discovery for each path. However, this may result in additional packets being sent.

When the method detects the current PLPMTU is not supported, DPLPMTUD sets a lower MPS. The PL then confirms that the updated PLPMTU can be successfully used across the path. The PL could need to send a probe packet with a size less than the size of the data block generated by an application. In this case, the PL could provide a way to fragment a datagram at the PL, or use a control packet as the packet probe.

#### **4.4. Disabling the Effect of PMTUD**

A PL implementing this specification MUST suspend network layer processing of outgoing packets that enforces a PMTU [[RFC1191](#)] [[RFC8201](#)] for each flow utilising DPLPMTUD, and instead use DPLPMTUD to control the size of packets that are sent by a flow. This removes the need for the network layer to drop or fragment sent packets that have a size greater than the PMTU.

#### **4.5. Response to PTB Messages**

This method requires the DPLPMTUD sender to validate any received PTB message before using the PTB information. The response to a PTB message depends on the PTB\_SIZE indicated in the PTB message, the state of the PLPMTUD state machine, and the IP protocol being used.

[Section 4.5.1](#) first describes validation for both IPv4 ICMP Unreachable messages (type 3) and ICMPv6 Packet Too Big messages, both of which are referred to as PTB messages in this document.

#### **4.5.1. Validation of PTB Messages**

This section specifies utilization of PTB messages.

\*A simple implementation MAY ignore received PTB messages and in this case the PLPMTU is not updated when a PTB message is received.

\*An implementation that supports PTB messages MUST validate messages before they are further processed.

A PL that receives a PTB message from a router or middlebox, performs ICMP validation as specified in Section 5.2 of [[RFC8085](#)] [[RFC8201](#)]. Because DPLPMTUD operates at the PL, the PL needs to check that each received PTB message is received in response to a packet transmitted by the endpoint PL performing DPLPMTUD.

The PL MUST check the protocol information in the quoted packet carried in an ICMP PTB message payload to validate the message originated from the sending node. This validation includes determining that the combination of the IP addresses, the protocol, the source port and destination port match those returned in the quoted packet - this is also necessary for the PTB message to be passed to the corresponding PL.

The validation SHOULD utilize information that it is not simple for an off-path attacker to determine [[RFC8085](#)]. For example, by checking the value of a protocol header field known only to the two PL endpoints. A datagram application that uses well-known source and destination ports ought to also rely on other information to complete this validation.

These checks are intended to provide protection from packets that originate from a node that is not on the network path. A PTB message that does not complete the validation MUST NOT be further utilized by the DPLPMTUD method.

PTB messages that have been validated MAY be utilized by the DPLPMTUD algorithm, but MUST NOT be used directly to set the PLPMTU. A method that utilizes these PTB messages can improve the speed at which the algorithm detects an appropriate PLPMTU, compared to one that relies solely on probing. [Section 4.5.2](#) describes this processing.



#### 4.5.2. Use of PTB Messages

A set of checks are intended to provide protection from a router that reports an unexpected PTB\_SIZE. The PL also needs to check that the indicated PTB\_SIZE is less than the size used by probe packets and larger than minimum size accepted.

This section provides a summary of how PTB messages can be utilized. This processing depends on the PTB\_SIZE and the current value of a set of variables:

##### **PTB\_SIZE < MIN\_MTU**

- \*Invalid PTB\_SIZE see [Section 4.5.1](#).

- \*PTB message ought to be discarded without further processing (e. g. PLPMTU not modified).

- \*The information could be utilized as an input to trigger enabling a resilience mode.

##### **MIN\_PMTU < PTB\_SIZE < BASE\_PMTU**

- \*A robust PL MAY enter an error state (see [Section 5.2](#)) for an IPv4 path when the PTB\_SIZE reported in the PTB message is larger than or equal to 68 bytes and when this is less than the BASE\_PMTU.

- \*A robust PL MAY enter an error state (see [Section 5.2](#)) for an IPv6 path when the PTB\_SIZE reported in the PTB message is larger than or equal to 1280 bytes and when this is less than the BASE\_PMTU.

##### **PTB\_SIZE = PLPMTU**

- \*Completes the search for a larger PLPMTU.

##### **PTB\_SIZE > PROBED\_SIZE**

- \*Inconsistent network signal.

- \*PTB message ought to be discarded without further processing (e. g. PLPMTU not modified).

- \*The information could be utilized as an input to trigger enabling a resilience mode.

##### **BASE\_PMTU <= PTB\_SIZE < PLPMTU**

- \*Black Hole Detection is triggered and the PLPMTU ought to be set to BASE\_PMTU.

- \*The PL could use the PTB\_SIZE reported in the PTB message to initialize a search algorithm.

#### **PLPMTU < PTB\_SIZE < PROBED\_SIZE**

\*The PLPMTU continues to be valid, but the last PROBED\_SIZE searched was larger than the actual PMTU.

\*The PLPMTU is not updated.

\*The PL can use the reported PTB\_SIZE from the PTB message as the next search point when it resumes the search algorithm.

### **5. Datagram Packetization Layer PMTUD**

This section specifies Datagram PLPMTUD (DPLPMTUD). The method can be introduced at various points (as indicated with \* in the figure below) in the IP protocol stack to discover the PLPMTU so that an application can utilize an appropriate MPS for the current network path. DPLPMTUD SHOULD NOT be used by an application if it is already used in a lower layer.

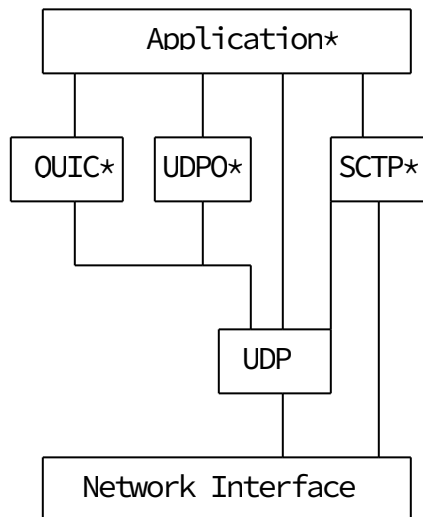


Figure 1: Examples where DPLPMTUD can be implemented

The central idea of DPLPMTUD is probing by a sender. Probe packets are sent to find the maximum size of a user message that can be completely transferred across the network path from the sender to the destination.

The following sections identify the components needed for implementation, provides an overview of the phases of operation, and specifies the state machine and search algorithm.

## 5.1. DPLPMTUD Components

This section describes the timers, constants, and variables of DPLPMTUD.

### 5.1.1. Timers

The method utilizes up to three timers:

**PROBE\_TIMER:** The PROBE\_TIMER is configured to expire after a period longer than the maximum time to receive an acknowledgment to a probe packet. This value MUST NOT be smaller than 1 second, and SHOULD be larger than 15 seconds. Guidance on selection of the timer value are provided in section 3.1.1 of the UDP Usage Guidelines [[RFC8085](#)].

If the PL has a path Round Trip Time (RTT) estimate and timely acknowledgements the PROBE\_TIMER can be derived from the PL RTT estimate.

**PMTU\_RAISE\_TIMER:** The PMTU\_RAISE\_TIMER is configured to the period a sender will continue to use the current PLPMTU, after which it re-enters the Search phase. This timer has a period of 600 seconds, as recommended by PLPMTUD [[RFC4821](#)].

DPLPMTUD MAY inhibit sending probe packets when no application data has been sent since the previous probe packet. A PL preferring to use an up-to-date PMTU once user data is sent again, can choose to continue PMTU discovery for each path. However, this may result in sending additional packets.

**CONFIRMATION\_TIMER:** When an acknowledged PL is used, this timer MUST NOT be used. For other PLs, the CONFIRMATION\_TIMER is configured to the period a PL sender waits before confirming the current PLPMTU is still supported. This is less than the PMTU\_RAISE\_TIMER and used to decrease the PLPMTU (e.g., when a black hole is encountered). Confirmation needs to be frequent enough when data is flowing that the sending PL does not black hole extensive amounts of traffic. Guidance on selection of the timer value are provided in section 3.1.1 of the UDP Usage Guidelines [[RFC8085](#)].

DPLPMTUD MAY inhibit sending probe packets when no application data has been sent since the previous probe packet. A PL preferring to use an up-to-date PMTU once user data is sent again, can choose to continue PMTU discovery for each path. However, this may result in sending additional packets.

An implementation could implement the various timers using a single timer.

### 5.1.2. Constants

The following constants are defined:

**MAX\_PROBES:** The MAX\_PROBES is the maximum value of the PROBE\_COUNT counter (see [Section 5.1.3](#)). MAX\_PROBES represents the limit for the number of consecutive probe attempts of any size. The default value of MAX\_PROBES is 3. This value is greater than 1 to provide robustness to isolated packet loss.

**MIN\_PMTU:** The MIN\_PMTU is the smallest allowed probe packet size. For IPv6, this value is 1280 bytes, as specified in [\[RFC2460\]](#). For IPv4, the minimum value is 68 bytes.

Note: An IPv4 router is required to be able to forward a datagram of 68 bytes without further fragmentation. This is the combined size of an IPv4 header and the minimum fragment size of 8 bytes. In addition, receivers are required to be able to reassemble fragmented datagrams at least up to 576 bytes, as stated in section 3.3.3 of [\[RFC1122\]](#).

**MAX\_PMTU:** The MAX\_PMTU is the largest size of PLPMTU. This has to be less than or equal to the minimum of the local MTU of the outgoing interface and the destination PMTU for receiving. An application, or PL, MAY choose a smaller MAX\_PMTU when there is no need to send packets larger than a specific size.

**BASE\_PMTU:** The BASE\_PMTU is a configured size expected to work for most paths. The size is equal to or larger than the MIN\_PMTU and smaller than the MAX\_PMTU. In the case of IPv6, this value is 1280 bytes [\[RFC2460\]](#). When using IPv4, a size of 1200 bytes is RECOMMENDED.

### 5.1.3. Variables

This method utilizes a set of variables:

**PROBED\_SIZE:** The PROBED\_SIZE is the size of the current probe packet. This is a tentative value for the PLPMTU, which is awaiting confirmation by an acknowledgment.

**PROBE\_COUNT:** The PROBE\_COUNT is a count of the number of successive unsuccessful probe packets that have been sent. Each time a probe packet is acknowledged, the value is set to zero.

The figure below illustrates the relationship between the packet size constants and variables at a point of time when the DPLPMTUD algorithm performs path probing to increase the size of the PLPMTU. A probe packet has been sent of size PROBED\_SIZE. Once this is acknowledged, the PLPMTU will raise to PROBED\_SIZE allowing the

DPLPMTUD algorithm to further increase PROBED\_SIZE towards the actual PMTU.

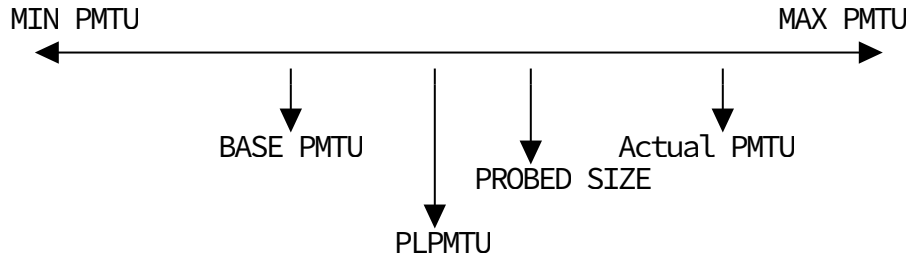


Figure 2: Relationships between packet size constants and variables

#### 5.1.4. Overview of DPLPMTUD Phases

This section provides a high-level informative view of the DPLPMTUD method, by describing the movement of the method through several phases of operation. More detail is available in the state machine [Section 5.2](#).

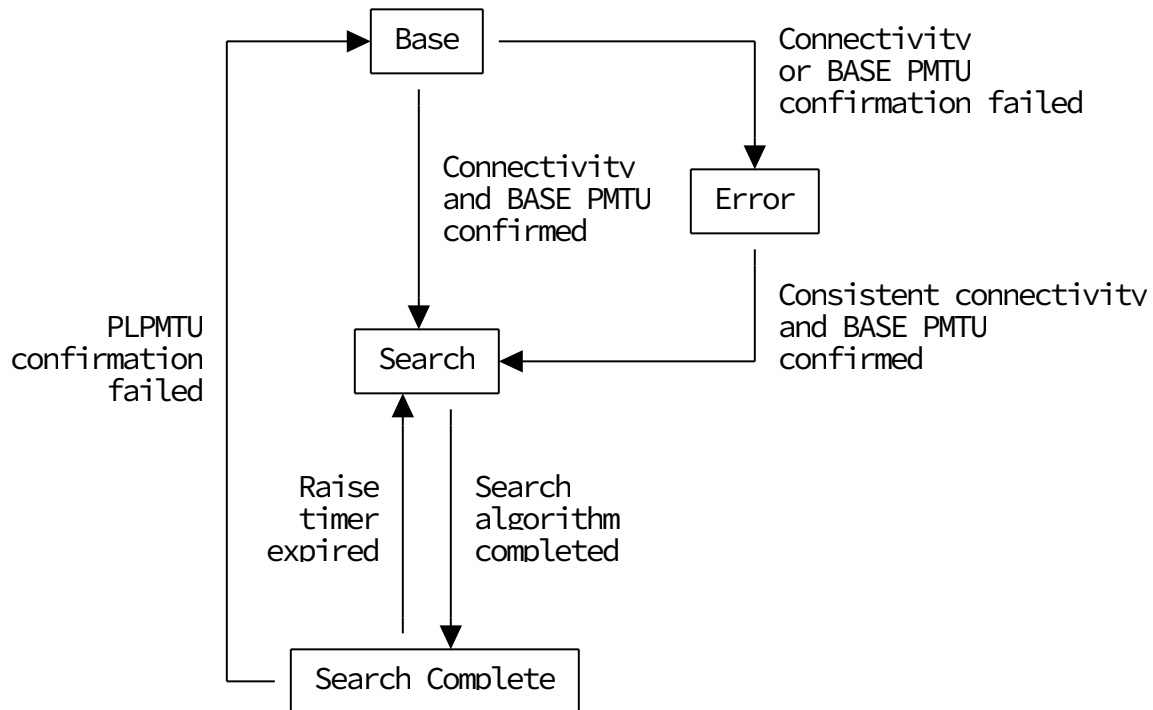


Figure 3: DPLPMTUD Phases

**Base:** The Base Phase confirms connectivity to the remote peer. This phase is implicit for a connection-oriented PL (where it can be performed in a PL connection handshake). A connectionless PL needs to send an acknowledged probe packet to confirm that the

remote peer is reachable. The sender also confirms that BASE\_PMTU is supported across the network path.

A PL that does not wish to support a path with a PLPMTU less than BASE\_PMTU can simplify the phase into a single step by performing the connectivity checks with a probe of the BASE\_PMTU size.

Once confirmed, DPLPMTUD enters the Search Phase. If this phase fails to confirm, DPLPMTUD enters the Error Phase.

**Search:** The Search Phase utilizes a search algorithm to send probe packets to seek to increase the PLPMTU. The algorithm concludes when it has found a suitable PLPMTU, by entering the Search Complete Phase.

A PL could respond to PTB messages using the PTB to advance or terminate the search, see [Section 4.5](#).

**Search Complete:** The Search Complete Phase is entered when the PLPMTU is supported across the network path. A PL can use a CONFIRMATION\_TIMER to periodically repeat a probe packet for the current PLPMTU size. If the sender is unable to confirm reachability (e.g., if the CONFIRMATION\_TIMER expires) or the PL signals a lack of reachability, DPLPMTUD enters the Base phase.

The PMTU\_RAISE\_TIMER is used to periodically resume the search phase to discover if the PLPMTU can be raised. Black Hole Detection or receipt of a validated PTB message (see [Section 4.5.1](#)) can cause the sender to enter the Base Phase.

**Error:** The Error Phase is entered when there is conflicting or invalid PLPMTU information for the path (e.g. a failure to support the BASE\_PMTU) that cause DPLPMTUD to be unable to progress and the PLPMTU is lowered.

DPLPMTUD remains in the Error Phase until a consistent view of the path can be discovered and it has also been confirmed that the path supports the BASE\_PMTU (or DPLPMTUD is suspended).

An implementation that only reduces the PLPMTU to a suitable size would be sufficient to ensure reliable operation, but can be very inefficient when the actual PMTU changes or when the method (for whatever reason) makes a suboptimal choice for the PLPMTU.

A full implementation of DPLPMTUD provides an algorithm enabling the DPLPMTUD sender to increase the PLPMTU following a change in the characteristics of the path, such as when a link is reconfigured with a larger MTU, or when there is a change in the set of links traversed by an end-to-end flow (e.g., after a routing or path fail-over decision).

## 5.2. State Machine

A state machine for DPLPMTUD is depicted in [Figure 4](#). If multipath or multihoming is supported, a state machine is needed for each path.

Note: Not all changes are not shown to simplify the diagram.

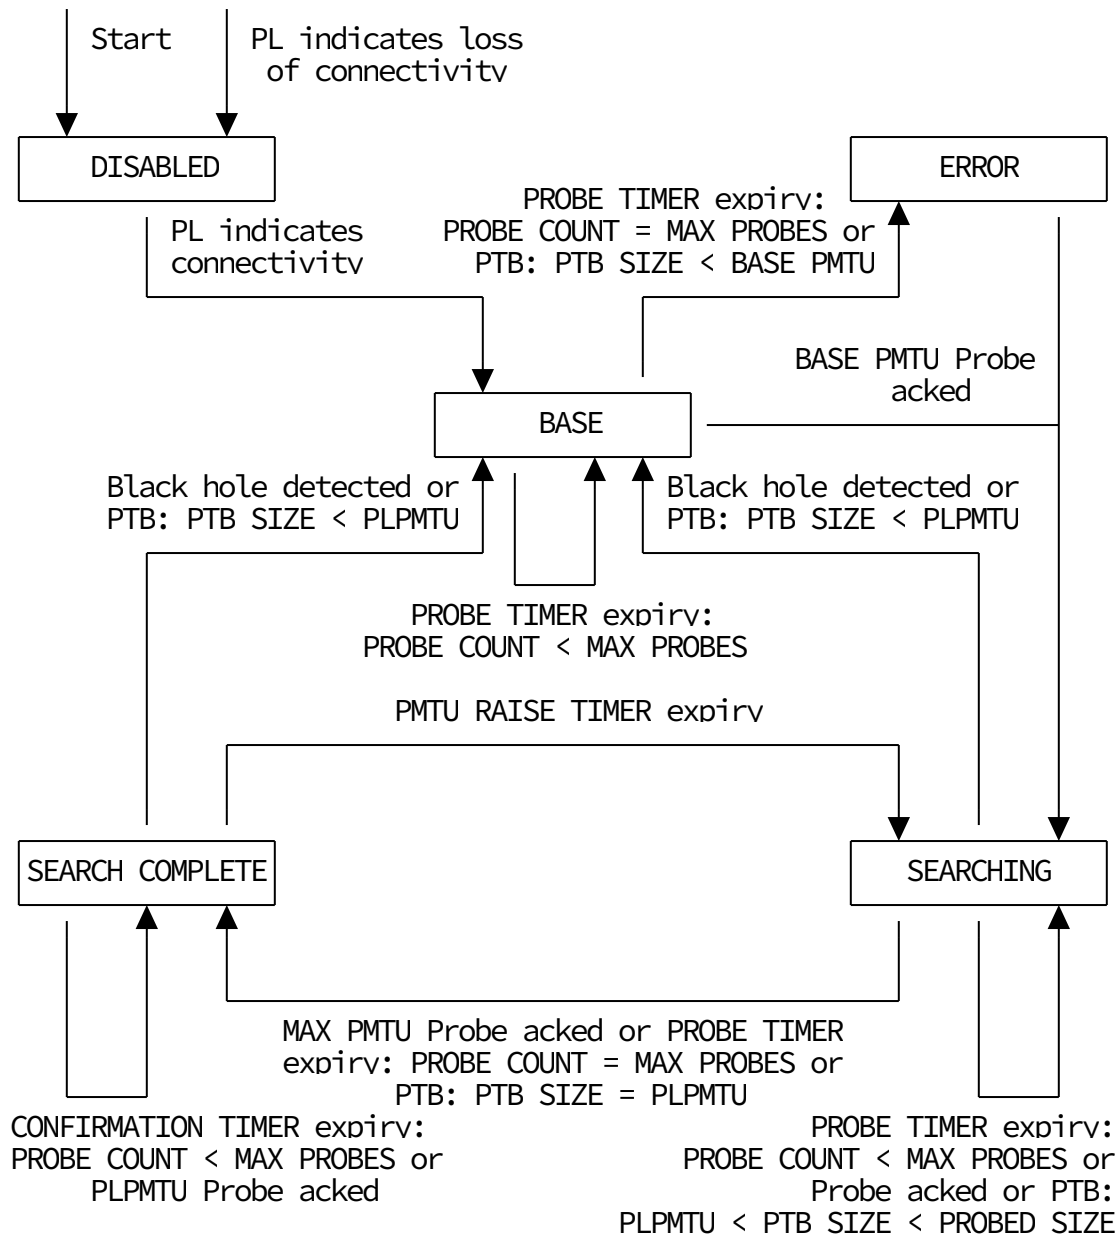


Figure 4: State machine for Datagram PLPMTUD

The following states are defined:

**DISABLED:**

The DISABLED state is the initial state before probing has started. It is also entered from any other state, when the PL indicates loss of connectivity. This state is left, once the PL indicates connectivity to the remote PL.

**BASE:** The BASE state is used to confirm that the BASE\_PMTU size is supported by the network path and is designed to allow an application to continue working when there are transient reductions in the actual PMTU. It also seeks to avoid long periods where traffic is black holed while searching for a larger PLPMTU.

On entry, the PROBED\_SIZE is set to the BASE\_PMTU size and the PROBE\_COUNT is set to zero.

Each time a probe packet is sent, the PROBE\_TIMER is started. The state is exited when the probe packet is acknowledged, and the PL sender enters the SEARCHING state.

The state is also left when the PROBE\_COUNT reaches MAX\_PROBES or a received PTB message is validated. This causes the PL sender to enter the ERROR state.

**SEARCHING:** The SEARCHING state is the main probing state. This state is entered when probing for the BASE\_PMTU was successful.

Each time a probe packet is acknowledged, the PROBE\_COUNT is set to zero, the PLPMTU is set to the PROBED\_SIZE and then the PROBED\_SIZE is increased using the search algorithm.

When a probe packet is sent and not acknowledged within the period of the PROBE\_TIMER, the PROBE\_COUNT is incremented and a new probe packet is transmitted. The state is exited when the PROBE\_COUNT reaches MAX\_PROBES, a received PTB message is validated, a probe of size MAX\_PMTU is acknowledged, or a black hole is detected.

**SEARCH\_COMPLETE:** The SEARCH\_COMPLETE state indicates a successful end to the SEARCHING state. DPLPMTUD remains in this state until either the PMTU\_RAISE\_TIMER expires, a received PTB message is validated, or a black hole is detected.

When DPLPMTUD uses an unacknowledged PL and is in the SEARCH\_COMPLETE state, a CONFIRMATION\_TIMER periodically resets the PROBE\_COUNT and schedules a probe packet with the size of the PLPMTU. If MAX\_PROBES successive PLPMTUD sized probes fail to be acknowledged the method enters the BASE state. When used with an acknowledged PL (e.g., SCTP), DPLPMTUD SHOULD NOT continue to generate PLPMTU probes in this state.



**ERROR:**

The ERROR state represents the case where either the network path is not known to support a PLPMTU of at least the BASE\_PMTU size or when there is contradictory information about the network path that would otherwise result in excessive variation in the MPS signalled to the higher layer. The state implements a method to mitigate oscillation in the state-event engine. It signals a conservative value of the MPS to the higher layer by the PL. The state is exited when packet probes no longer detect the error or when the PL indicates that connectivity has been lost.

Implementations are permitted to enable endpoint fragmentation if the DPLPMTUD is unable to validate MIN\_PMTU within PROBE\_COUNT probes. If DPLPMTUD is unable to validate MIN\_PMTU the implementation should transition to the DISABLED state.

Note: MIN\_PMTU may be identical to BASE\_PMTU, simplifying the actions in this state.

**5.3. Search to Increase the PLPMTU**

This section describes the algorithms used by DPLPMTUD to search for a larger PLPMTU.

**5.3.1. Probing for a larger PLPMTU**

Implementations use a search algorithm across the search range to determine whether a larger PLPMTU can be supported across a network path.

The method discovers the search range by confirming the minimum PLPMTU and then using the probe method to select a PROBED\_SIZE less than or equal to MAX\_PMTU. MAX\_PMTU is the minimum of the local MTU and EMTU\_R (learned from the remote endpoint). The MAX\_PMTU MAY be reduced by an application that sets a maximum to the size of datagrams it will send.

The PROBE\_COUNT is initialized to zero when the first probe with a size greater than or equal to PLPMTUD is sent. A timer is used by the search algorithm to trigger the sending of probe packets of size PROBED\_SIZE, larger than the PLPMTU. Each probe packet successfully sent to the remote peer is confirmed by acknowledgement at the PL, see [Section 4.1](#).

Each time a probe packet is sent to the destination, the PROBE\_TIMER is started. The timer is canceled when the PL receives acknowledgment that the probe packet has been successfully sent across the path [Section 4.1](#). This confirms that the PROBED\_SIZE is supported, and the PROBED\_SIZE value is then assigned to the PLPMTU.

The search algorithm can continue to send subsequent probe packets of an increasing size.

If the timer expires before a probe packet is acknowledged, the probe has failed to confirm the `PROBED_SIZE`. Each time the `PROBE_TIMER` expires, the `PROBE_COUNT` is incremented, the `PROBE_TIMER` is reinitialized, and a new probe of the same size or any other size (determined by the search algorithm) can be sent. The maximum number of consecutive failed probes is configured (`MAX_PROBES`). If the value of the `PROBE_COUNT` reaches `MAX_PROBES`, probing will stop, and the PL sender enters the `SEARCH_COMPLETE` state.

### **5.3.2. Selection of Probe Sizes**

The search algorithm needs to determine a minimum useful gain in PLPMTU. It would not be constructive for a PL sender to attempt to probe for all sizes. This would incur unnecessary load on the path and has the undesirable effect of slowing the time to reach a more optimal MPS. Implementations **SHOULD** select the set of probe packet sizes to maximize the gain in PLPMTU from each search step.

Implementations could optimize the search procedure by selecting step sizes from a table of common PMTU sizes. When selecting the appropriate next size to search, an implementer ought to also consider that there can be common sizes of MPS that applications seek to use, and their could be common sizes of MTU used within the network.

### **5.3.3. Resilience to Inconsistent Path Information**

A decision to increase the PLPMTU needs to be resilient to the possibility that information learned about the network path is inconsistent. A path is inconsistent, when, for example, probe packets are lost due to other reasons (i.e. not packet size) or due to frequent path changes. Frequent path changes could occur by unexpected "flapping" - where some packets from a flow pass along one path, but other packets follow a different path with different properties.

A PL sender is able to detect inconsistency from the sequence of PLPMTU probes that it sends or the sequence of PTB messages that it receives. When inconsistent path information is detected, a PL sender could use an alternate search mode that clamps the offered MPS to a smaller value for a period of time. This avoids unnecessary loss of packets due to MTU limitation.

### **5.4. Robustness to Inconsistent Paths**

Some paths could be unable to sustain packets of the `BASE_PMTU` size. To be robust to these paths an implementation could implement the

Error State. This allows fallback to a smaller than desired PLPMTU, rather than suffer connectivity failure. This could utilize methods such as endpoint IP fragmentation to enable the PL sender to communicate using packets smaller than the BASE\_PMTU.

## **6. Specification of Protocol-Specific Methods**

DPLPMTUD requires protocol-specific details to be specified for each PL that is used.

The first subsection provides guidance on how to implement the DPLPMTUD method as a part of an application using UDP or UDP-Lite. The guidance also applies to other datagram services that do not include a specific transport protocol (such as a tunnel encapsulation). The following subsections describe how DPLPMTUD can be implemented as a part of the transport service, allowing applications using the service to benefit from discovery of the PLPMTU without themselves needing to implement this method.

### **6.1. Application support for DPLPMTUD with UDP or UDP-Lite**

The current specifications of UDP [[RFC0768](#)] and UDP-Lite [[RFC3828](#)] do not define a method in the RFC-series that supports PLPMTUD. In particular, the UDP transport does not provide the transport layer features needed to implement datagram PLPMTUD.

The DPLPMTUD method can be implemented as a part of an application built directly or indirectly on UDP or UDP-Lite, but relies on higher-layer protocol features to implement the method [[RFC8085](#)].

Some primitives used by DPLPMTUD might not be available via the Datagram API (e.g., the ability to access the PLPMTU cache, or interpret received PTB messages).

In addition, it is desirable that PMTU discovery is not performed by multiple protocol layers. An application SHOULD avoid using DPLPMTUD when the underlying transport system provides this capability. To use common method for managing the PLPMTU has benefits, both in the ability to share state between different processes and opportunities to coordinate probing.

#### **6.1.1. Application Request**

An application needs an application-layer protocol mechanism (such as a message acknowledgement method) that solicits a response from a destination endpoint. The method SHOULD allow the sender to check the value returned in the response to provide additional protection from off-path insertion of data [[RFC8085](#)], suitable methods include a parameter known only to the two endpoints, such as a session ID or initialized sequence number.

### **6.1.2. Application Response**

An application needs an application-layer protocol mechanism to communicate the response from the destination endpoint. This response may indicate successful reception of the probe across the path, but could also indicate that some (or all packets) have failed to reach the destination.

### **6.1.3. Sending Application Probe Packets**

A probe packet that may carry an application data block, but the successful transmission of this data is at risk when used for probing. Some applications may prefer to use a probe packet that does not carry an application data block to avoid disruption to data transfer.

### **6.1.4. Initial Connectivity**

An application that does not have other higher-layer information confirming connectivity with the remote peer SHOULD implement a connectivity mechanism using acknowledged probe packets before entering the BASE state.

### **6.1.5. Validating the Path**

An application that does not have other higher-layer information confirming correct delivery of datagrams SHOULD implement the CONFIRMATION\_TIMER to periodically send probe packets while in the SEARCH\_COMPLETE state.

### **6.1.6. Handling of PTB Messages**

An application that is able and wishes to receive PTB messages MUST perform ICMP validation as specified in Section 5.2 of [[RFC8085](#)]. This requires that the application to check each received PTB messages to validate it is received in response to transmitted traffic and that the reported PTB\_SIZE is less than the current probed size (see [Section 4.5.2](#)). A validated PTB message MAY be used as input to the DPLPMTUD algorithm, but MUST NOT be used directly to set the PLPMTU.

## **6.2. DPLPMTUD for SCTP**

Section 10.2 of [[RFC4821](#)] specifies a recommended PLPMTUD probing method for SCTP. It recommends the use of the PAD chunk, defined in [[RFC4820](#)] to be attached to a minimum length HEARTBEAT chunk to build a probe packet. This enables probing without affecting the transfer of user messages and without interfering with congestion control. This is preferred to using DATA chunks (with padding as required) as path probes.

### **6.2.1. Sctp/IPv4 and Sctp/IPv6**

#### **6.2.1.1. Initial Connectivity**

The base protocol is specified in [\[RFC4960\]](#). This provides an acknowledged PL. A sender can therefore enter the BASE state as soon as connectivity has been confirmed.

#### **6.2.1.2. Sending Sctp Probe Packets**

Probe packets consist of an Sctp common header followed by a HEARTBEAT chunk and a PAD chunk. The PAD chunk is used to control the length of the probe packet. The HEARTBEAT chunk is used to trigger the sending of a HEARTBEAT ACK chunk. The reception of the HEARTBEAT ACK chunk acknowledges reception of a successful probe.

The HEARTBEAT chunk carries a Heartbeat Information parameter which should include, besides the information suggested in [\[RFC4960\]](#), the probe size, which is the size of the complete datagram. The size of the PAD chunk is therefore computed by reducing the probing size by the IPv4 or IPv6 header size, the Sctp common header, the HEARTBEAT request and the PAD chunk header. The payload of the PAD chunk contains arbitrary data.

To avoid fragmentation of retransmitted data, probing starts right after the PL handshake, before data is sent. Assuming this behavior (i.e., the PMTU is smaller than or equal to the interface MTU), this process will take a few round trip time periods depending on the number of PMTU sizes probed. The Heartbeat timer can be used to implement the PROBE\_TIMER.

#### **6.2.1.3. Validating the Path with Sctp**

Since Sctp provides an acknowledged PL, a sender MUST NOT implement the CONFIRMATION\_TIMER while in the SEARCH\_COMPLETE state.

#### **6.2.1.4. PTB Message Handling by Sctp**

Normal ICMP validation MUST be performed as specified in Appendix C of [\[RFC4960\]](#). This requires that the first 8 bytes of the Sctp common header are quoted in the payload of the PTB message, which can be the case for ICMPv4 and is normally the case for ICMPv6.

When a PTB message has been validated, the PTB\_SIZE reported in the PTB message SHOULD be used with the DPLPMTUD algorithm, providing that the reported PTB\_SIZE is less than the current probe size (see [Section 4.5](#)).

### **6.2.2. DPLPMTUD for SCTP/UDP**

The UDP encapsulation of SCTP is specified in [[RFC6951](#)].

#### **6.2.2.1. Initial Connectivity**

A sender can enter the BASE state as soon as SCTP connectivity has been confirmed.

#### **6.2.2.2. Sending SCTP/UDP Probe Packets**

Packet probing can be performed as specified in [Section 6.2.1.2](#). The maximum payload is reduced by 8 bytes, which has to be considered when filling the PAD chunk.

#### **6.2.2.3. Validating the Path with SCTP/UDP**

Since SCTP provides an acknowledged PL, a sender MUST NOT implement the CONFIRMATION\_TIMER while in the SEARCH\_COMPLETE state.

#### **6.2.2.4. Handling of PTB Messages by SCTP/UDP**

ICMP validation MUST be performed for PTB messages as specified in Appendix C of [[RFC4960](#)]. This requires that the first 8 bytes of the SCTP common header are contained in the PTB message, which can be the case for ICMPv4 (but note the UDP header also consumes a part of the quoted packet header) and is normally the case for ICMPv6. When the validation is completed, the PTB\_SIZE indicated in the PTB message SHOULD be used with the DPLPMTUD providing that the reported PTB\_SIZE is less than the current probe size.

### **6.2.3. DPLPMTUD for SCTP/DTLS**

The Datagram Transport Layer Security (DTLS) encapsulation of SCTP is specified in [[RFC8261](#)]. It is used for data channels in WebRTC implementations.

#### **6.2.3.1. Initial Connectivity**

A sender can enter the BASE state as soon as SCTP connectivity has been confirmed.

#### **6.2.3.2. Sending SCTP/DTLS Probe Packets**

Packet probing can be done as specified in [Section 6.2.1.2](#).

#### **6.2.3.3. Validating the Path with SCTP/DTLS**

Since SCTP provides an acknowledged PL, a sender MUST NOT implement the CONFIRMATION\_TIMER while in the SEARCH\_COMPLETE state.

#### 6.2.3.4. Handling of PTB Messages by SCTP/DTLS

It is not possible to perform ICMP validation as specified in [RFC4960], since even if the ICMP message payload contains sufficient information, the reflected SCTP common header would be encrypted. Therefore it is not possible to process PTB messages at the PL.

### 6.3. DPLPMTUD for QUIC

QUIC [I-D.ietf-quic-transport] is a UDP-based transport that provides reception feedback. The UDP payload includes the QUIC packet header, protected payload, and any authentication fields. QUIC depends on a PMTU of at least 1280 bytes.

Section 14.1 of [I-D.ietf-quic-transport] describes the path considerations when sending QUIC packets. It recommends the use of PADDING frames to build the probe packet. Pure probe-only packets are constructed with PADDING frames and PING frames to create a padding only packet that will elicit an acknowledgement. Such padding only packets enable probing without affecting the transfer of other QUIC frames.

The recommendation for QUIC endpoints implementing DPLPMTUD is that a MPS is maintained for each combination of local and remote IP addresses [I-D.ietf-quic-transport]. If a QUIC endpoint determines that the PMTU between any pair of local and remote IP addresses has fallen below an acceptable MPS, it needs to immediately cease sending QUIC packets on the affected path. This could result in termination of the connection if an alternative path cannot be found [I-D.ietf-quic-transport].

#### 6.3.1. Initial Connectivity

The base protocol is specified in [I-D.ietf-quic-transport]. This provides an acknowledged PL. A sender can therefore enter the BASE state as soon as connectivity has been confirmed.

#### 6.3.2. Sending QUIC Probe Packets

A probe packet consists of a QUIC Header and a payload containing PADDING Frames and a PING Frame. PADDING Frames are a single octet (0x00) and several of these can be used to create a probe packet of size PROBED\_SIZE. QUIC provides an acknowledged PL, a sender can therefore enter the BASE state as soon as connectivity has been confirmed.

The current specification of QUIC sets the following:

\*BASE\_PMTU: 1200. A QUIC sender needs to pad initial packets to 1200 bytes to confirm the path can support packets of a useful size.

\*MIN\_PMTU: 1200 bytes. A QUIC sender that determines the PMTU has fallen below 1200 bytes MUST immediately stop sending on the affected path.

### **6.3.3. Validating the Path with QUIC**

QUIC provides an acknowledged PL. A sender therefore MUST NOT implement the CONFIRMATION\_TIMER while in the SEARCH\_COMPLETE state.

### **6.3.4. Handling of PTB Messages by QUIC**

QUIC operates over the UDP transport, and the guidelines on ICMP validation as specified in Section 5.2 of [[RFC8085](#)] therefore apply. In addition to UDP Port validation QUIC can validate an ICMP message by looking for valid Connection IDs in the quoted packet.

## **7. Acknowledgements**

This work was partially funded by the European Union's Horizon 2020 research and innovation programme under grant agreement No. 644334 (NEAT). The views expressed are solely those of the author(s).

## **8. IANA Considerations**

This memo includes no request to IANA.

If there are no requirements for IANA, the section will be removed during conversion into an RFC by the RFC Editor.

## **9. Security Considerations**

The security considerations for the use of UDP and SCTP are provided in the references RFCs. The interval between individual probe packets MUST be at least one RTT, and the interval between rounds of probing is determined by the PMTU\_RAISE\_TIMER.

A PL sender needs to ensure that the method used to confirm reception of probe packets offers protection from off-path attackers injecting packets into the path. This protection is provided in IETF-defined protocols (e.g., TCP, SCTP) using a randomly-initialized sequence number. A description of one way to do this when using UDP is provided in section 5.1 of [[RFC8085](#)]).



There are cases where ICMP Packet Too Big (PTB) messages are not delivered due to policy, configuration or equipment design (see [Section 1.1](#)), this method therefore does not rely upon PTB messages being received, but is able to utilize these when they are received by the sender. PTB messages could potentially be used to cause a node to inappropriately reduce the PLPMTU. A node supporting DPLPMTUD MUST therefore appropriately validate the payload of PTB messages to ensure these are received in response to transmitted traffic (i.e., a reported error condition that corresponds to a datagram actually sent by the path layer, see [Section 4.5.1](#)).

An on-path attacker, able to create a PTB message could forge PTB messages that include a valid quoted IP packet. Such an attack could be used to drive down the PLPMTU. There are two ways this method can be mitigated against such attacks: First, by ensuring that a PL sender never reduces the PLPMTU below the base size, solely in response to receiving a PTB message. This is achieved by first entering the BASE state when such a message is received. Second, the design does not require processing of PTB messages, a PL sender could therefore suspend processing of PTB messages (e.g., in a robustness mode after detecting that subsequent probes actually confirm that a size larger than the PTB\_SIZE is supported by a path).

Parallel forwarding paths SHOULD be considered. [Section 5.4](#) identifies the need for robustness in the method when the path information may be inconsistent.

A node performing DPLPMTUD could experience conflicting information about the size of supported probe packets. This could occur when there are multiple paths are concurrently in use and these exhibit a different PMTU. If not considered, this could result in data being black holed when the PLPMTU is larger than the smallest PMTU across the current paths.

## 10. References

### 10.1. Normative References

#### [I-D.ietf-quic-transport]

Iyengar, J. and M. Thomson, "QUIC: A UDP-Based Multiplexed and Secure Transport", Work in Progress, Internet-Draft, draft-ietf-quic-transport-20, 23 April 2019, <<http://www.ietf.org/internet-drafts/draft-ietf-quic-transport-20.txt>>.

[RFC0768] Postel, J., "User Datagram Protocol", STD 6, RFC 768, DOI 10.17487/RFC0768, August 1980, <<https://www.rfc-editor.org/info/rfc768>>.

- [RFC1191] Mogul, J.C. and S.E. Deering, "Path MTU discovery", RFC 1191, DOI 10.17487/RFC1191, November 1990, <<https://www.rfc-editor.org/info/rfc1191>>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC2460] Deering, S. and R. Hinden, "Internet Protocol, Version 6 (IPv6) Specification", RFC 2460, DOI 10.17487/RFC2460, December 1998, <<https://www.rfc-editor.org/info/rfc2460>>.
- [RFC3828] Larzon, L-A., Degermark, M., Pink, S., Jonsson, L-E., Ed., and G. Fairhurst, Ed., "The Lightweight User Datagram Protocol (UDP-Lite)", RFC 3828, DOI 10.17487/RFC3828, July 2004, <<https://www.rfc-editor.org/info/rfc3828>>.
- [RFC4820] Tuexen, M., Stewart, R., and P. Lei, "Padding Chunk and Parameter for the Stream Control Transmission Protocol (SCTP)", RFC 4820, DOI 10.17487/RFC4820, March 2007, <<https://www.rfc-editor.org/info/rfc4820>>.
- [RFC4960] Stewart, R., Ed., "Stream Control Transmission Protocol", RFC 4960, DOI 10.17487/RFC4960, September 2007, <<https://www.rfc-editor.org/info/rfc4960>>.
- [RFC6951] Tuexen, M. and R. Stewart, "UDP Encapsulation of Stream Control Transmission Protocol (SCTP) Packets for End-Host to End-Host Communication", RFC 6951, DOI 10.17487/RFC6951, May 2013, <<https://www.rfc-editor.org/info/rfc6951>>.
- [RFC8085] Eggert, L., Fairhurst, G., and G. Shepherd, "UDP Usage Guidelines", BCP 145, RFC 8085, DOI 10.17487/RFC8085, March 2017, <<https://www.rfc-editor.org/info/rfc8085>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8201] McCann, J., Deering, S., Mogul, J., and R. Hinden, Ed., "Path MTU Discovery for IP version 6", STD 87, RFC 8201, DOI 10.17487/RFC8201, July 2017, <<https://www.rfc-editor.org/info/rfc8201>>.
- [RFC8261] Tuexen, M., Stewart, R., Jesup, R., and S. Loreto, "Datagram Transport Layer Security (DTLS) Encapsulation

of SCTP Packets", RFC 8261, DOI 10.17487/RFC8261,  
November 2017, <<https://www.rfc-editor.org/info/rfc8261>>.

## 10.2. Informative References

- [I-D.ietf-intarea-tunnels] Touch, J. and M. Townsley, "IP Tunnels in the Internet Architecture", Work in Progress, Internet-Draft, draft-ietf-intarea-tunnels-10, 12 September 2019, <<http://www.ietf.org/internet-drafts/draft-ietf-intarea-tunnels-10.txt>>.
- [RFC0792] Postel, J., "Internet Control Message Protocol", STD 5, RFC 792, DOI 10.17487/RFC0792, September 1981, <<https://www.rfc-editor.org/info/rfc792>>.
- [RFC1122] Braden, R., Ed., "Requirements for Internet Hosts - Communication Layers", STD 3, RFC 1122, DOI 10.17487/RFC1122, October 1989, <<https://www.rfc-editor.org/info/rfc1122>>.
- [RFC1812] Baker, F., Ed., "Requirements for IP Version 4 Routers", RFC 1812, DOI 10.17487/RFC1812, June 1995, <<https://www.rfc-editor.org/info/rfc1812>>.
- [RFC2923] Lahey, K., "TCP Problems with Path MTU Discovery", RFC 2923, DOI 10.17487/RFC2923, September 2000, <<https://www.rfc-editor.org/info/rfc2923>>.
- [RFC4340] Kohler, E., Handley, M., and S. Floyd, "Datagram Congestion Control Protocol (DCCP)", RFC 4340, DOI 10.17487/RFC4340, March 2006, <<https://www.rfc-editor.org/info/rfc4340>>.
- [RFC4443] Conta, A., Deering, S., and M. Gupta, Ed., "Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification", STD 89, RFC 4443, DOI 10.17487/RFC4443, March 2006, <<https://www.rfc-editor.org/info/rfc4443>>.
- [RFC4821] Mathis, M. and J. Heffner, "Packetization Layer Path MTU Discovery", RFC 4821, DOI 10.17487/RFC4821, March 2007, <<https://www.rfc-editor.org/info/rfc4821>>.
- [RFC4890] Davies, E. and J. Mohacsi, "Recommendations for Filtering ICMPv6 Messages in Firewalls", RFC 4890, DOI 10.17487/RFC4890, May 2007, <<https://www.rfc-editor.org/info/rfc4890>>.

## Appendix A. Revision Notes

Note to RFC-Editor: please remove this entire section prior to publication.

Individual draft -00:

- \*Comments and corrections are welcome directly to the authors or via the IETF TSVWG working group mailing list.

- \*This update is proposed for WG comments.

Individual draft -01:

- \*Contains the first representation of the algorithm, showing the states and timers

- \*This update is proposed for WG comments.

Individual draft -02:

- \*Contains updated representation of the algorithm, and textual corrections.

- \*The text describing when to set the effective PMTU has not yet been validated by the authors

- \*To determine security to off-path-attacks: We need to decide whether a received PTB message SHOULD/MUST be validated? The text on how to handle a PTB message indicating a link MTU larger than the probe has yet not been validated by the authors

- \*No text currently describes how to handle inconsistent results from arbitrary re-routing along different parallel paths

- \*This update is proposed for WG comments.

Working Group draft -00:

- \*This draft follows a successful adoption call for TSVWG

- \*There is still work to complete, please comment on this draft.

Working Group draft -01:

- \*This draft includes improved introduction.

- \*The draft is updated to require ICMP validation prior to accepting PTB messages - this to be confirmed by WG

- \*Section added to discuss Selection of Probe Size - methods to be evaluated and recommendations to be considered

- \*Section added to align with work proposed in the QUIC WG.

#### Working Group draft -02:

- \*The draft was updated based on feedback from the WG, and a detailed review by Magnus Westerlund.

- \*The document updates RFC 4821.

- \*Requirements list updated.

- \*Added more explicit discussion of a simpler black-hole detection mode.

- \*This draft includes reorganisation of the section on IETF protocols.

- \*Added more discussion of implementation within an application.

- \*Added text on flapping paths.

- \*Replaced 'effective MTU' with new term PLPMTU.

#### Working Group draft -03:

- \*Updated figures

- \*Added more discussion on blackhole detection

- \*Added figure describing just blackhole detection

- \*Added figure relating MPS sizes

#### Working Group draft -04:

- \*Described phases and named these consistently.

- \*Corrected transition from confirmation directly to the search phase (Base has been checked).

- \*Redrawn state diagrams.

- \*Renamed BASE\_MTU to BASE\_PMTU (because it is a base for the PMTU).

- \*Clarified Error state.

- \*Clarified suspending DPLPMTUD.

- \*Verified normative text in requirements section.

- \*Removed duplicate text.

- \*Changed all text to refer to /packet probe/probe packet/ / validation/verification/ added term /Probe Confirmation/ and clarified BlackHole detection.

Working Group draft -05:

- \*Updated security considerations.

- \*Feedback after speaking with Joe Touch helped improve UDP-Options description.

Working Group draft -06:

- \*Updated description of ICMP issues in section 1.1

- \*Update to description of QUIC.

Working group draft -07:

- \*Moved description of the PTB processing method from the PTB requirements section.

- \*Clarified what is performed in the PTB validation check.

- \*Updated security consideration to explain PTB security without needing to read the rest of the document.

- \*Reformatted state machine diagram

Working group draft -08:

- \*Moved to rfcxml v3+

- \*Rendered diagrams to svg in html version.

- \*Removed Appendix A. Event-driven state changes.

- \*Removed section on DPLPMTUD with UDP Options.

- \*Shortened the description of phases.

Working group draft -09:

- \*Remove final mention of UDP Options

- \*Add Initial Connectivity sections to each PL

\*Add to disable outgoing pmtu enforcement of packets

Working group draft -10:

\*Address comments from Lars Eggert

\*Reinforce that PROBE\_COUNT is successive attempts to probe for any size

\*Redefine MAX\_PROBES to 3

\*Address PTB\_SIZE of 0 or less than MIN\_PMTU

### **Authors' Addresses**

Godred Fairhurst  
University of Aberdeen  
School of Engineering, Fraser Noble Building  
Aberdeen  
AB24 3UE  
United Kingdom

Email: [gorry@erg.abdn.ac.uk](mailto:gorry@erg.abdn.ac.uk)

Tom Jones  
University of Aberdeen  
School of Engineering, Fraser Noble Building  
Aberdeen  
AB24 3UE  
United Kingdom

Email: [tom@erg.abdn.ac.uk](mailto:tom@erg.abdn.ac.uk)

Michael Tuexen  
Muenster University of Applied Sciences  
Stegerwaldstrasse 39  
48565 Steinfurt  
Germany

Email: [tuexen@fh-muenster.de](mailto:tuexen@fh-muenster.de)

Irene Ruengeler  
Muenster University of Applied Sciences  
Stegerwaldstrasse 39  
48565 Steinfurt  
Germany

Email: [i.ruengeler@fh-muenster.de](mailto:i.ruengeler@fh-muenster.de)

Timo Voelker

Muenster University of Applied Sciences  
Stegerwaldstrasse 39  
48565 Steinfurt  
Germany

Email: [timo.voelker@fh-muenster.de](mailto:timo.voelker@fh-muenster.de)