

Audio/Video Transport Working Group
Internet-Draft
Intended status: Standards Track
Expires: June 22, 2013

A. Clark
Telchemy
G. Zorn
Network Zen
Q. Wu
Huawei
December 19, 2012

RTP Control Protocol (RTCP) Extended Report (XR) Block for Discard Count
metric Reporting
[draft-ietf-xrblock-rtcp-xr-discard-11.txt](#)

Abstract

This document defines an RTP Control Protocol(RTCP) Extended Report (XR) Block that allows the reporting of a simple discard count metric for use in a range of RTP applications.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on June 22, 2013.

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in [Section 4](#).e of

the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

| | | |
|-----------------------------|-------------------------------------------------------------------------------------|--------------------|
| 1. | Introduction | 3 |
| 1.1. | Discard Count Report Block | 3 |
| 1.2. | RTCP and RTCP XR Reports | 3 |
| 1.3. | Performance Metrics Framework | 3 |
| 1.4. | Applicability | 4 |
| 2. | Terminology | 5 |
| 2.1. | Standards Language | 5 |
| 3. | Discard Count Metric Report Block | 6 |
| 3.1. | Report Block Structure | 6 |
| 3.2. | Definition of Fields in Discard Count Metric Report Block | 6 |
| 4. | SDP Signaling | 9 |
| 4.1. | SDP rtcp-xr-attrib Attribute Extension | 9 |
| 4.2. | Offer/Answer Usage | 9 |
| 5. | IANA Considerations | 10 |
| 5.1. | New RTCP XR Block Type value | 10 |
| 5.2. | New RTCP XR SDP Parameter | 10 |
| 5.3. | Contact information for registrations | 10 |
| 6. | Security Considerations | 11 |
| 7. | Contributors | 12 |
| 8. | Acknowledgments | 13 |
| 9. | References | 14 |
| 9.1. | Normative References | 14 |
| 9.2. | Informative References | 14 |
| Appendix A. | Change Log | 15 |
| A.1. | draft-ietf-xrblock-rtcp-xr-discard-11 | 15 |
| A.2. | draft-ietf-xrblock-rtcp-xr-discard-10 | 15 |
| A.3. | draft-ietf-xrblock-rtcp-xr-discard-09 | 15 |
| A.4. | draft-ietf-xrblock-rtcp-xr-discard-08 | 15 |
| | Authors' Addresses | 16 |

1. Introduction

1.1. Discard Count Report Block

This document defines a new block type to augment those defined in [\[RFC3611\]](#) for use in a range of RTP applications. The new block type supports the reporting of the number of packets which are received correctly but are never played out, typically because they arrive too late to be played out (buffer underflow) or too early (buffer overflow). The metric is applicable both to systems which use packet loss repair techniques (such as forward error correction [\[RFC5109\]](#) or retransmission [\[RFC4588\]](#)) and to those which do not.

This metric is useful for identifying the existence, and characterizing the severity, of a packet transport problem which may affect users' perception of a service delivered over RTP.

This block may be used in conjunction with [\[BGDISCARD\]](#) which provides additional information on the pattern of discarded packets. However the metric in [\[BGDISCARD\]](#) may be used independently of the metrics in this block.

In case of Discard count Metrics Block sent together with Burst gap discard Metrics Block defined in [\[BGDISCARD\]](#) to the media sender or RTP based network management system, information carried in the discard count Metrics Block and Burst gap discard Metrics Block allows them calculate the some bust gap summary statistics, e.g., gap discard rate.

The metric belongs to the class of transport-related end system metrics defined in [\[RFC6792\]](#).

1.2. RTCP and RTCP XR Reports

The use of RTCP for reporting is defined in [\[RFC3550\]](#). [\[RFC3611\]](#) defined an extensible structure for reporting using an RTCP Extended Report (XR). This document defines a new Extended Report block for use with [\[RFC3550\]](#) and [\[RFC3611\]](#).

1.3. Performance Metrics Framework

The Performance Metrics Framework [\[RFC6390\]](#) provides guidance on the definition and specification of performance metrics. The RTP Monitoring Architectures [\[RFC6792\]](#) provides guideline for reporting block format using RTCP XR. The Metrics Block described in this document are in accordance with the guidelines in [\[RFC6390\]](#) and [\[RFC6792\]](#).

1.4. Applicability

This metric is believed to be applicable to a large class of RTP applications which use a jitter buffer.

Discards due to late or early arriving packets affects user experience. The reporting of discards alerts senders and other receivers to the need to adjust their transmission or reception strategies. The reports allow network managers to diagnose these user experience problems.

The ability to detect duplicate packets can be used by managers to detect network layer or sender behavior which may indicate network or device issues. Based on the reports, these issues may be addressed prior to any impact on user experience.

2. Terminology

2.1. Standards Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

In addition, the following terms are defined:

Received, Lost and Discarded

A packet shall be regarded as lost if it fails to arrive within an implementation-specific time window. A packet that arrives within this time window but is too early or late to be played out or thrown away before playout due to packet duplication or redundancy shall be regarded as discarded. A packet shall be classified as one of received (or OK), discarded or lost. The Discard Count Metric counts only discarded packets. The metric "cumulative number of packets lost" defined in [[RFC3550](#)] reports a count of packets lost from the media stream (single SSRC within single RTP session). Similarly the metric "number of packets discarded" reports a count of packets discarded from the media stream (single SSRC within single RTP session) arriving at the receiver. Another metric defined in [[RFC5725](#)] is available to report on packets which are not recovered by any repair techniques which may be in use.

3. Discard Count Metric Report Block

Metrics in this block report on the number of packets discarded in the stream arriving at the RTP end system. The measurement of these metrics is made at the receiving end of the RTP stream. Instances of this Metrics Block refer by SSRC to the separate auxiliary Measurement Information block [[RFC6776](#)] which describes measurement Intervals in use. This Metrics Block relies on the measurement interval in the Measurement Information block indicating the span of the report and should be sent in the same compound RTCP packet as the measurement information block. If the measurement interval is not received in the same compound RTCP packet as this Metrics Block, this Metrics Block should be discarded.

3.1. Report Block Structure

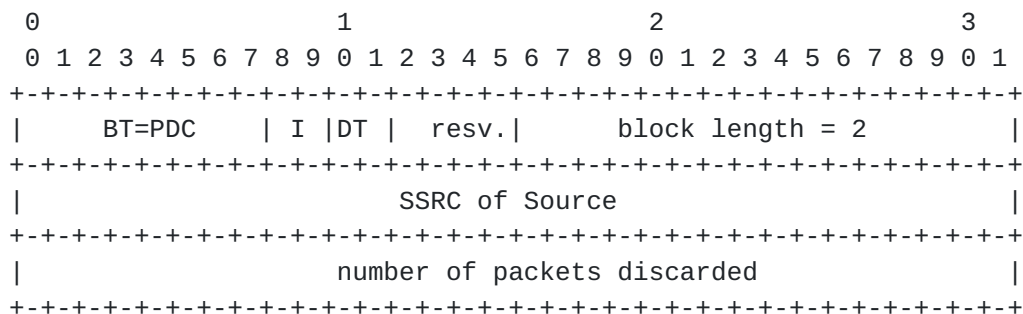


Figure 1: Report Block Structure

3.2. Definition of Fields in Discard Count Metric Report Block

Block type (BT): 8 bits

A Discard Count Metric Report Block is identified by the constant PDC.

[Note to RFC Editor: please replace PDC with the IANA provided RTCP XR block type for this block.]

Interval Metric Flag (I): 2 bits

This field indicates whether the reported metric is an interval, cumulative, or sampled metric [[RFC6792](#)]. The Discard Count Metric can only be measured over definite intervals, and cannot be sampled. Accordingly, the value I=01, indicating a sampled value, MUST NOT be used. The value I=00 is reserved for future definition, and MUST NOT be used.

Discard Type (DT): 2bits

This field is used to identify the discard type used in this report block. The discard type is defined as follows:

- 00: Report packet discarded or being thrown away before playout due to packets duplication.
- 01: Report packet discarded due to too early to be played out.
- 10: Report packet discarded due to too late to be played out.

The value DT=11 is reserved for future definition and MUST NOT be used.

An endpoint MAY report any combination of discard types in each reporting interval by including several Discard Count Metric Report Blocks in a single RTCP XR packet.

Some systems send duplicate RTP packets for robustness or error resilience. This is NOT RECOMMENDED since it breaks RTCP packet statistics. If duplication is desired for error resilience, the mechanism described in [[RTPDUP](#)] can be used, since this will not cause breakage of RTP streams or RTCP statistics.

Reserved (resv): 4 bits

These bits are reserved. They MUST be set to zero by senders and ignored by receivers (See [RFC6709 section 4.2](#)).

block length: 16 bits

The length of this report block in 32-bit words, minus one, in accordance with the definition in[RFC3611] . This field MUST be set to 2 to match the fixed length of the report block. The block MUST be discarded if the block length is set to a different value.

SSRC of source: 32 bits

As defined in [Section 4.1 of \[RFC3611\]](#).

number of packets discarded: 32 bits

Number of packets discarded over the period (Interval or Cumulative) covered by this report.

If the measured value exceeds 0xFFFFFFFF, the value 0xFFFFFFFF MUST be reported to indicate an over-range measurement. If the measurement is unavailable, the value 0xFFFFFFFF MUST be reported.

Note that the number of packets expected in the period associated with this metric (whether interval or cumulative) is available from the difference between a pair of extended sequence numbers in the Measurement Information block [[RFC6776](#)], so need not be repeated in this block.

4. SDP Signaling

[RFC3611] defines the use of SDP (Session Description Protocol) [RFC4566] for signaling the use of XR blocks. However XR blocks MAY be used without prior signaling (see [section 5 of RFC3611](#)).

4.1. SDP rtcp-xr-attrib Attribute Extension

This section augments the SDP [RFC4566] attribute "rtcp-xr" defined in [RFC3611] by providing an additional value of "xr-format" to signal the use of the report block defined in this document.

xr-format =/ xr-pdc-block

xr-pdc-block = "pkt-dscrd-count"

4.2. Offer/Answer Usage

When SDP is used in offer-answer context, the SDP Offer/Answer usage defined in [RFC3611] for unilateral "rtcp-xr" attribute parameters applies. For detailed usage of Offer/Answer for unilateral parameter, refer to [section 5.2 of \[RFC3611\]](#).

5. IANA Considerations

New block types for RTCP XR are subject to IANA registration. For general guidelines on IANA considerations for RTCP XR, refer to [\[RFC3611\]](#).

5.1. New RTCP XR Block Type value

This document assigns the block type value PDC in the IANA " RTP Control Protocol Extended Reports (RTCP XR) Block Type Registry " to the "Discard Count Metrics Block".

[Note to RFC Editor: please replace PDC with the IANA provided RTCP XR block type for this block.]

5.2. New RTCP XR SDP Parameter

This document also registers a new parameter "pkt-dscrd-count" in the " RTP Control Protocol Extended Reports (RTCP XR) Session Description Protocol (SDP) Parameters Registry ".

5.3. Contact information for registrations

The following contact information is provided for all registrations in this document:

Qin Wu (sunseawq@huawei.com)

101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

6. Security Considerations

It is believed that this proposed RTCP XR report block introduces no new security considerations beyond those described in [[RFC3611](#)]. This block does not provide per-packet statistics so the risk to confidentiality documented in [Section 7](#), paragraph 3 of [[RFC3611](#)] does not apply.

[7.](#) Contributors

Geoff Hunt wrote the initial draft of this document.

8. Acknowledgments

The authors gratefully acknowledge reviews and feedback provided by Bruce Adams, Philip Arden, Amit Arora, Bob Biskner, Kevin Connor, Claus Dahm, Randy Ethier, Roni Even, Jim Frauenthal, Albert Higashi, Tom Hock, Shane Holthaus, Paul Jones, Rajesh Kumar, Keith Lantz, Mohamed Mostafa, Amy Pendleton, Colin Perkins, Mike Ramalho, Ravi Raviraj, Albrecht Schwarz, Tom Taylor, and Hideaki Yamada, Kevin Gross, Varun Singh, Claire Bi, Roni Even, Dan Romascanu and Jonathan Lennox.

9. References

9.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", March 1997.
- [RFC3550] Schulzrinne, H., "RTP: A Transport Protocol for Real-Time Applications", [RFC 3550](#), July 2003.
- [RFC3611] Friedman, T., Caceres, R., and A. Clark, "RTP Control Protocol Extended Reports (RTCP XR)", November 2003.
- [RFC4566] Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol", July 2006.
- [RFC6709] Carpenter, B., Aboba, B., and S. Cheshire, "Design Considerations for Protocol Extensions", [RFC 6709](#), September 2012.
- [RFC6776] Hunt, G., "Measurement Identity and information Reporting using SDES item and XR Block", [RFC 6776](#), October 2012.

9.2. Informative References

- [BGDISCARD] Hunt, G., "RTCP XR Report Block for Burst Gap Discard metric Reporting", ID [draft-ietf-xrblock-rtcp-xr-burst-gap-discard-06](#), October 2012.
- [RFC4588] Rey, J., "RTP Retransmission Payload Format", [RFC 4588](#), July 2006.
- [RFC5109] Li, A., "RTP Payload Format for Generic Forward Error Correction", [RFC 5109](#), July 2006.
- [RFC5725] Begen, A., "RTCP XR Report Block for Post-Repair Loss metric Reporting", [RFC 5725](#), February 2010.
- [RFC6390] Clark, A. and B. Claise, "Framework for Performance Metric Development", [RFC 6390](#), October 2011.
- [RFC6792] Wu, Q., "Monitoring Architectures for RTP", [RFC 6792](#), November 2012.
- [RTPDUP] Begen, A. and C. Perkins, "Duplicating RTP Streams", ID [draft-ietf-avtext-rtp-duplication-00](#), July 2012.

Appendix A. Change Log

Note to the RFC-Editor: please remove this section prior to publication as an RFC.

A.1. [draft-ietf-xrblock-rtcp-xr-discard-11](#)

The following are the major changes compared to previous version:

- o Editorial change t based on SDP Directorate and Colin's Review.

A.2. [draft-ietf-xrblock-rtcp-xr-discard-10](#)

The following are the major changes compared to previous version:

- o Editorial change to get in line with recently discussed drafts.
- o Remove DT=3 based on the discussion to summary statistics draft.

A.3. [draft-ietf-xrblock-rtcp-xr-discard-09](#)

The following are the major changes compared to previous version:

- o SDP Duplicated Parameter Deleting.

A.4. [draft-ietf-xrblock-rtcp-xr-discard-08](#)

The following are the major changes compared to previous version:

- o Outdated reference update.
- o Editorial changes based on comments that applied to PDV and Delay drafts.

Authors' Addresses

Alan Clark
Telchemy Incorporated
2905 Premiere Parkway, Suite 280
Duluth, GA 30097
USA

Email: alan.d.clark@telchemy.com

Glen Zorn
Network Zen
77/440 Soi Phoomjit, Rama IV Road
Phra Khanong, Khlong Toie
Bangkok 10110
Thailand

Phone: +66 (0) 87 502 4274

Email: gwz@net-zen.net

Qin Wu
Huawei
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

Email: sunseawq@huawei.com

