

Audio/Video Transport Working Group
Internet-Draft
Intended status: Standards Track
Expires: October 15, 2012

G. Hunt
Unaffiliated
A. Clark
Telchemy
Q. Wu
Huawei
April 13, 2012

**Measurement Identity and information Reporting using SDDES item and XR
Block
draft-ietf-xrblock-rtcp-xr-meas-identity-05.txt**

Abstract

This document defines an RTP Control Protocol (RTCP) Source Description (SDDES) item and an RTCP Extended Report (XR) Block carrying parameters that identify and describe a measurement period, to which one or more other RTCP XR Report Blocks may refer.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on October 15, 2012.

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must

include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
1.1.	RTCP and RTCP XR Reports	4
1.2.	Performance Metrics Framework	4
1.3.	Applicability	4
2.	Terminology	5
2.1.	Standards Language	5
3.	Measurement Identity SDES Item	6
3.1.	APSI: Application Specific Identifier SDES Item	6
4.	Measurement Information XR Block	7
4.1.	Report Block Structure	7
4.2.	Definition of Fields in Measurement Information Report Block	7
5.	IANA Considerations	10
5.1.	New RTCP SDES Type value	10
5.2.	New RTCP XR Block Type value	10
5.3.	Contact information for registrations	10
6.	Security Considerations	11
7.	References	12
7.1.	Normative References	12
7.2.	Informative References	12
Appendix A.	Change Log	13
A.1.	draft-ietf-xrblock-xr-rtcp-meas-identity-00	13
A.2.	draft-ietf-xrblock-xr-rtcp-meas-identity-01	13
A.3.	draft-ietf-xrblock-xr-rtcp-meas-identity-02	13
A.4.	draft-ietf-xrblock-xr-rtcp-meas-identity-03	14
A.5.	draft-ietf-xrblock-xr-rtcp-meas-identity-04	14
A.6.	draft-ietf-xrblock-xr-rtcp-meas-identity-05	14
	Authors' Addresses	15

1. Introduction

This document defines one new RTP Control Protocol (RTCP) Source Description (SDES) [[RFC3550](#)] item, and one new Extended Report (XR) Report Block carrying parameters that identify and describe a measurement period, to which one or more other RTCP XR Report Blocks may refer.

The SDES item provides a field for an application specific auxiliary identifier. This identifier may be used to correlate data in XR Blocks within an RTP session with data from a non-RTP session.

A RTCP Measurement Identity SDES packet may be associated with a set of RTCP XR metrics blocks which share the same application specific measurement identifier.

The XR Report Block does not contain any measurement results (metrics). Instead, it provides information relevant to a measurement reported in one or more other block types, including:

- o the sequence number of the first packet of the RTP session,
- o the extended sequence numbers of the first packet of the current measurement interval, and the last packet included in the measurement,
- o the duration of the most recent measurement interval and
- o the duration of the interval applicable to cumulative measurements (which may be the duration of the RTP session to date).

The method for calculation of the extended RTP sequence number is provide in Real-time Transport Protocol (RTP) [[RFC3550](#)].

The RTCP XR Report Block containing the measurement information is intended to provide a single copy of the information necessary to relate measurement data in the RTCP XR blocks to the stream, and measurement period, to which they refer. Commonly, multiple other small metric blocks contain measurement data for the same stream and period, and it would be a large overhead if all of these metric blocks carried duplicated data for measurement identification.

The RTCP XR Report Block may be associated with a set of RTCP XR metrics blocks which share the same information relevant to a reported measurement. There may be several such sets in an RTCP packet, in which each set share the same information relevant to a reported measurement. There may also be RTCP XR blocks in the packet which are not associated with a Measurement Information block, for

example blocks which were defined before the Measurement Identity and information mechanism was introduced by this document.

1.1. RTCP and RTCP XR Reports

The use of RTCP for reporting is defined in [[RFC3550](#)]. [[RFC3611](#)] defines an extensible structure for reporting using an RTCP Extended Report (XR). This document defines a new Extended Report block that must be used as defined in [[RFC3550](#)] and [[RFC3611](#)].

1.2. Performance Metrics Framework

The Performance Metrics Framework [[RFC6390](#)] provides guidance on the definition and specification of performance metrics. The RTP Monitoring Architectures[MONARCH] provides guideline for reporting block format using RTCP XR. The SDES item and XR Block described in this document are in accordance with [[RFC6390](#)] and [[MONARCH](#)].

1.3. Applicability

The RTCP SDES item and the RTCP XR block defined in this document provides information relevant to the measurements for members of a family of RTCP XR metrics blocks which are designed to use it. To use the mechanism defined here, the RTCP XR block containing measurement information is not required to be in the same RTCP packet as the SDES item containing measurement identity.

2. Terminology

2.1. Standards Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

3. Measurement Identity SDES Item

This section defines the format of the Measurement Identity SDES item. The SDES item is carried in the RTCP SDES packet. The packet format for the RTCP SDES is defined in [Section 6.5 of \[RFC3550\]](#). Each SDES packet is composed of a header with fixed-length fields for version, source count, packet type (PT), and length, followed by zero or more SDES items. In the SDES packet, the PT field is set to SDES (202).

3.1. APSI: Application Specific Identifier SDES Item

```


      0               1               2               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|   APSI=TBD   |   length   |application specific identifier
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|   ....
+--+--+--+--+--+--+--+

```

Application specific identifier is an additional identifier which is useful in the context of a specific application, e.g. an MPEG-2 transport identifier [[MPEG2](#)]. This item **MUST** be ignored by applications that are not configured to make use of it. The identifier is variable length. Its length is described by the length field. The value of the length field does not include the two octet SDES item header. If no identifier is provided, the length field **MUST** be set to zero.

4. Measurement Information XR Block

4.1. Report Block Structure

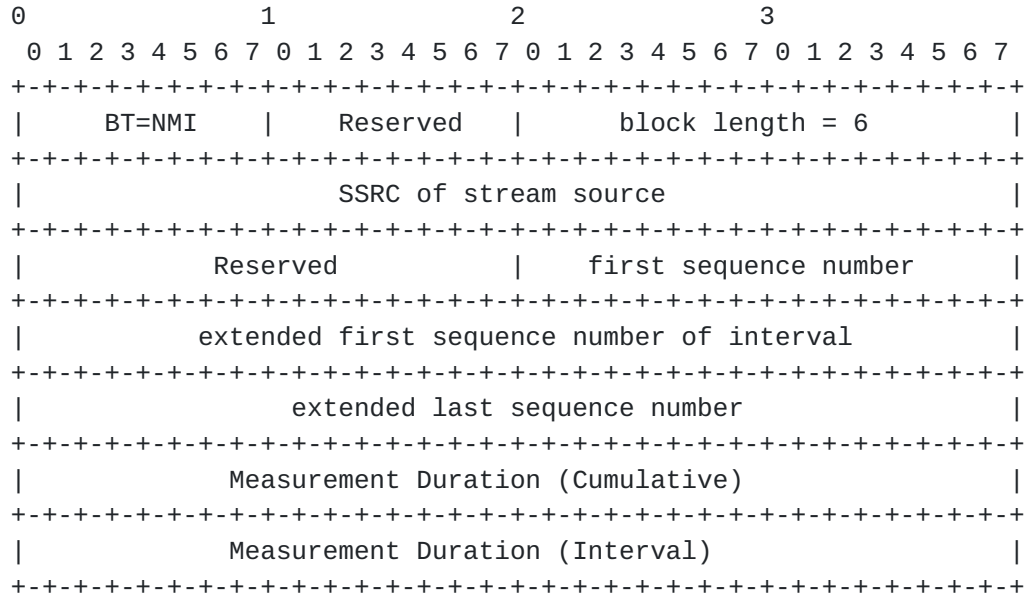

Report Block Structure

4.2. Definition of Fields in Measurement Information Report Block

Block type (BT): 8 bits

A Measurement Information Report Block is identified by the constant NMI.

[Note to RFC Editor: please replace NMI with the IANA provided RTCP XR block type for this block.]

Reserved.: 8 bits

These bits are reserved. They MUST be set to zero by senders and ignored by receivers.

Block Length: 16 bits

The length of this report block in 32-bit words minus one. For the Measurement Information block, the block length is equal to 6.

SSRC of source: 32 bits

As defined in [Section 4.1 of \[RFC3611\]](#).

Reserved: 16 bits

These bits are reserved. They MUST be set to zero by senders and ignored by receivers.

First sequence number: 16 bits

The RTP sequence number of the first received RTP packet of the session, used to determine the number of packets contributing to cumulative measurements.

Extended first sequence number of interval: 32 bits

The extended RTP sequence number of the first received RTP packet of the current measurement interval. In accordance with [\[RFC3550\]](#), the extended sequence number is expressed as the low 16 bits value containing the sequence number received in an RTP data packet and the most significant 16 bits value containing the corresponding count of sequence number cycles.

Extended last sequence number: 32 bits

The extended RTP sequence number of the last received RTP packet which contributed to this measurement. In accordance with [\[RFC3550\]](#), the extended sequence number is expressed as the low 16 bits value containing the sequence number received in an RTP data packet and the most significant 16 bits value containing the corresponding count of sequence number cycles.

Measurement Duration (Cumulative) : 32 bits

The duration, expressed in units of 1/65536 seconds, of the reporting interval applicable to Cumulative reports which use this Measurement Information block. The value of this field can be calculated by the receiver of the RTP media stream, for example, based on received RTP media packets or using RTCP method described in [\[RFC3550\]](#).

Measurement Duration (Interval) : 32 bits

The duration, expressed in units of $1/65536$ seconds, of the reporting interval applicable to Interval reports which use this Measurement Information block . The value of this field can be calculated by the receiver of the RTP media stream, for example, based on received RTP media packets or using RTCP method described in [[RFC3550](#)].

5. IANA Considerations

New SDES types for RTCP SDES are subject to IANA registration. For general guidelines on IANA considerations for RTCP SDES, refer to [\[RFC3550\]](#).

5.1. New RTCP SDES Type value

This document assigns one additional SDES type in the IANA "RTCP XR Block Type Registry" to the Measurement Identity SDES items as follow:

abbrev.	name	value
APSI:	Application Specific Identifier	TBD

[Note to RFC Editor: please replace APSI with the IANA provided RTCP SDES type for the SDES item.]

5.2. New RTCP XR Block Type value

This document assigns the block type value NMI in the IANA "RTCP XR Block Type Registry" to the "Measurement Information Block".

[Note to RFC Editor: please replace NMI with the IANA provided RTCP XR block type for this block.]

5.3. Contact information for registrations

The contact information for the registrations is:

Qin Wu (sunseawq@huawei.com)

101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

6. Security Considerations

RTCP reports can contain sensitive information, including information about the nature and duration of a session established between two or more endpoints. Therefore, the use of security mechanisms with RTP, as documented in [Section 9 of \[RFC3550\]](#) SHOULD apply.

7. References

7.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", March 1997.
- [RFC3550] Schulzrinne, H., "RTP: A Transport Protocol for Real-Time Applications", [RFC 3550](#), July 2003.
- [RFC3611] Friedman, T., Caceres, R., and A. Clark, "RTP Control Protocol Extended Reports (RTCP XR)", November 2003.

7.2. Informative References

- [MONARCH] Wu, Q., Hunt, G., and P. , "Monitoring Architectures for RTP", ID [draft-ietf-avtcore-monarch-11](#), March 2012.
- [MPEG2] "ISO/IEC, "Standard 13818-1"", December 2000.
- [RFC6390] Clark, A. and B. Claise, "Framework for Performance Metric Development", [RFC 6390](#), October 2011.

Appendix A. Change Log

Note to the RFC-Editor: please remove this section prior to publication as an RFC.

A.1. draft-ietf-xrblock-xr-rtcp-meas-identity-00

The following are the major changes to [draft-ietf-avt-rtcp-xr-meas-identity-02](#):

- o Change the use of SDES item to convey measurement identity instead of XR Block in [section 2](#).
- o Update references.
- o Update security section and remove SDP signaling section.

A.2. draft-ietf-xrblock-xr-rtcp-meas-identity-01

The following are the major changes to [draft-ietf-xrblock-xr-rtcp-meas-identity-00](#):

- o Replace SDES item containing additional measurement information with XR Block.
- o Add [section 2](#) to describe following [RFC2119](#) language.
- o Add [Section 1.2](#) to make SDES item and XR Report be compliant with [RFC3550](#) and [RFC3611](#)
- o Add [Section 1.3](#) to make SDES item and XR Report follow Performance Metrics Framework and RTP Monitoring Architecture.
- o Add section5.2 to register the new RTCP XR Block Type value.
- o Remove RTCP SDES Type values that are needed.

A.3. draft-ietf-xrblock-xr-rtcp-meas-identity-02

The following are the major changes to [draft-ietf-xrblock-xr-rtcp-meas-identity-01](#):

- o Relocating information that belong to SDES item and XR Block respectively in the [section 1](#).
- o Rephrasing the text that describes SDES packet composition.

- o Rephrasing identifier description.
- o Other Editorial changes.

A.4. [draft-ietf-xrblock-xr-rtcp-meas-identity-03](#)

The following are the major changes to [draft-ietf-xrblock-xr-rtcp-meas-identity-02](#):

- o The Editorial changes.

A.5. [draft-ietf-xrblock-xr-rtcp-meas-identity-04](#)

The following are the major changes to [draft-ietf-xrblock-xr-rtcp-meas-identity-03](#):

- o Change unit of measurement duration from ms to 1/65536 seconds.

A.6. [draft-ietf-xrblock-xr-rtcp-meas-identity-05](#)

The following are the major changes to [draft-ietf-xrblock-xr-rtcp-meas-identity-04](#):

- o Clarify the definition of extended sequence number.

Authors' Addresses

Geoff Hunt
Unaffiliated

Email: r.geoff.hunt@gmail.com

Alan Clark
Telchemy Incorporated
2905 Premiere Parkway, Suite 280
Duluth, GA 30097
USA

Email: alan.d.clark@telchemy.com

Qin Wu
Huawei
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

Email: sunseawq@huawei.com

