

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: August 17, 2014

A. Clark
Telchemy
Q. Wu
Huawei
R. Schott
Deutsche Telekom
G. Zorn
Network Zen
February 13, 2014

**RTP Control Protocol (RTCP) Extended Report (XR) Blocks for MOS Metric
Reporting
draft-ietf-xrblock-rtcp-xr-qoe-14**

Abstract

This document defines an RTP Control Protocol (RTCP) Extended Report (XR) Block including two new segment types and associated SDP parameters that allow the reporting of mean opinion score (MOS) Metrics for use in a range of RTP applications.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on August 17, 2014.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	4
1.1.	MOS Metrics Report Block	4
1.2.	RTCP and RTCP XR Reports	4
1.3.	Performance Metrics Framework	4
1.4.	Applicability	4
2.	Terminology	5
2.1.	Standards Language	5
3.	MoS Metrics Block	5
3.1.	Metric Block Structure	6
3.2.	Definition of Fields in MoS Metrics Block	7
3.2.1.	Single Channel audio/video per SSRC Segment	8
3.2.2.	Multi-Channel audio per SSRC Segment	9
4.	SDP Signaling	10
4.1.	SDP rtcp-xr-attrib Attribute Extension	11
4.2.	Offer/Answer Usage	12
5.	IANA Considerations	14
5.1.	New RTCP XR Block Type value	14
5.2.	New RTCP XR SDP Parameter	14
5.3.	The SDP calgextmap Attribute	15
5.4.	New registry of calculation algorithms	15
6.	Security Considerations	16
7.	Authors	16
8.	Acknowledgements	17
9.	References	17
9.1.	Normative References	17
9.2.	Informative References	18
Appendix A.	Metrics represented using RFC6390 Template	19
Appendix B.	Change Log	22
B.1.	draft-ietf-xrblock-rtcp-xr-qoe-14	22
B.2.	draft-ietf-xrblock-rtcp-xr-qoe-10	22
B.3.	draft-ietf-xrblock-rtcp-xr-qoe-09	22
B.4.	draft-ietf-xrblock-rtcp-xr-qoe-08	23
B.5.	draft-ietf-xrblock-rtcp-xr-qoe-07	23
B.6.	draft-ietf-xrblock-rtcp-xr-qoe-06	23
B.7.	draft-ietf-xrblock-rtcp-xr-qoe-04	23
B.8.	draft-ietf-xrblock-rtcp-xr-qoe-03	23
B.9.	draft-ietf-xrblock-rtcp-xr-qoe-02	23
B.10.	draft-ietf-xrblock-rtcp-xr-qoe-01	24
B.11.	draft-ietf-xrblock-rtcp-xr-qoe-00	24

Authors' Addresses	24
------------------------------	--------------------

1. Introduction

1.1. MOS Metrics Report Block

This document defines a new block type to augment those defined in [\[RFC3611\]](#), for use in a range of RTP applications.

The new block type provides information on media quality using one of several standard metrics (i.e. Mean Opinion Score(MOS)).

The metrics belong to the class of application level metrics defined in [\[RFC6792\]](#).

1.2. RTCP and RTCP XR Reports

The use of RTCP for reporting is defined in [\[RFC3550\]](#). [RFC3611](#) defined an extensible structure for reporting using an RTCP Extended Report (XR). This document defines a new Extended Report block for use with [\[RFC3550\]](#) and [\[RFC3611\]](#).

1.3. Performance Metrics Framework

The Performance Metrics Framework [\[RFC6390\]](#) provides guidance on the definition and specification of performance metrics. The RTP Monitoring Architectures [\[RFC6792\]](#) provides guidelines for reporting block format using RTCP XR. The XR block type described in this document are in accordance with the guidelines in [\[RFC6390\]](#) and [\[RFC6792\]](#).

1.4. Applicability

The MOS Metrics Report Block can be used in any application of RTP for which QoE (Quality of Experience) measurement algorithms are defined.

The factors that affect real-time audio/video application quality can be split into two categories. The first category consists of transport-specific factors such as packet loss, delay and jitter (which also translates into losses in the playback buffer). The factors in the second category consists of content and codec related factors such as codec type and loss recovery technique, coding bit rate, packetization scheme, and content characteristics

Transport-specific factors may be insufficient to infer real time media quality as codec related parameters and the interaction between transport problems and application layer protocols can have a substantial effect on observed media quality. Media quality may be measured using algorithm that directly compare input and output media

streams, or may be estimated using algorithms that model the interaction between media quality, protocol and encoded content. Media quality is commonly expressed in terms of Mean Opinion Scores (MOS) however is also represented by a range of indexes and other scores.

The measurement of media quality has a number of applications:

- o Detecting problems with media delivery or encoding that is impacting user perceived quality.
- o Tuning the content encoder algorithm to satisfy real time data quality requirements.
- o Determining which system techniques to use in a given situation and when to switch from one technique to another as system parameters change (for example as discussed in [P.1082]).
- o Pre-qualifying a network to assess its ability to deliver an acceptable end-user perceived quality level.

2. Terminology

2.1. Standards Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

The terminology used is

Numeric formats X:Y

where X the number of bits prior to the decimal place and Y the number of bits after the decimal place.

Hence 8:8 represents an unsigned number in the range 0.0 to 255.996 with a granularity of 0.0039. 0:16 represents a proper binary fraction with range

0.0 to 1 - 1/65536 = 0.9999847

though note that use of flag values at the top of the numeric range slightly reduces this upper limit. For example, if the 16-bit values 0xffffe and 0xfffff are used as flags for "over-range" and "unavailable" conditions, a 0:16 quantity has range 0.0 to 1 - 3/65536 = 0.9999542

3. MoS Metrics Block

Multimedia application MOS Metric is commonly expressed as a MOS ("Mean Opinion Score"), MOS is usually on a scale from 1 to 5, in which 5 represents excellent and 1 represents unacceptable however

can use other ranges (for example 1 to 11). The term "MOS score" originates from subjective testing, and is used to refer to the Mean of a number of individual Opinion Scores. There is therefore a well understood relationship between MOS and user experience, hence the industry commonly uses MOS as the scale for objective test results. Subjective tests can be used for measuring live network traffic however the use of objective or algorithmic measurement techniques allows much larger scale measurements to be made. Within the scope of this document, MOS scores are obtained using objective or estimation algorithms. ITU-T or ITU-R recommendations (e.g., [BS.1387-1][G.107][G.107.1][P.862][P.862.1][P.862.2][P.863][P.564][G.1082][P.1201.1][P.1201.2][P.1202.1][P.1202.2]) define methodologies for assessment of the performance of audio and video streams. Other international and national standards organizations such as EBU, ETSI, IEC and IEEE also define QoE algorithms and methodologies, and the intent of this document is not to restrict its use to ITU recommendations but to suggest that ITU recommendations be used where they are defined.


This block reports media quality in the form of a 1-5 MOS range however does not report QoE scores that include parameters outside the scope of the RTP stream, for example signaling performance, MTTR or other factors that may affect the overall user experience.

The MOS Metric reported in this block gives a numerical indication of the perceived quality of the received media stream, which is typically measured at the receiving end of the RTP stream. Instances of this Metrics Block refer by Synchronization source (SSRC) to the separate auxiliary Measurement Information block [RFC6776] which describes measurement periods in use (see [RFC6776 section 4.2](#)).

This Metrics Block relies on the measurement period in the Measurement Information block indicating the span of the report. Senders MUST send this block in the same compound RTCP packet as the measurement information block. Receivers MUST verify that the measurement period is received in the same compound RTCP packet as this Metrics Block. If not, this Metrics Block MUST be discarded.

[3.1.](#) Metric Block Structure

The MOS Metrics Block has the following format:

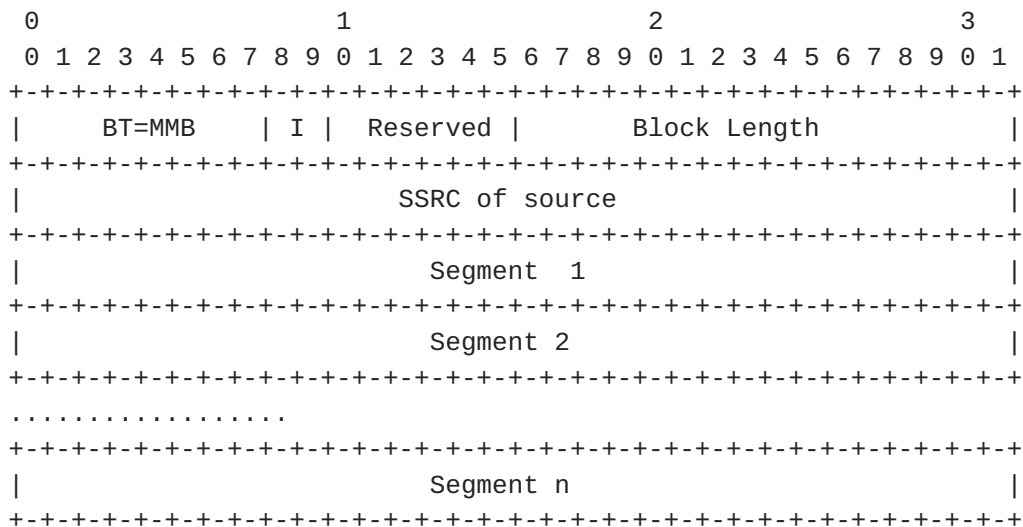

3.2. Definition of Fields in MoS Metrics Block

Block type (BT): 8 bits

The MOS Metrics Block is identified by the constant <MMB>.

Interval Metric flag (I): 2 bits

This field is used to indicate whether the MOS Metrics are Sampled, Interval or Cumulative [[RFC6792](#)]:

I=10: Interval Duration - the reported value applies to the most recent measurement interval duration between successive metrics reports.

I=11: Cumulative Duration - the reported value applies to the accumulation period characteristic of cumulative measurements.

I=01: Sampled Value - the reported value is a sampled instantaneous value.

I=00: Reserved

In this document, MOS Metrics MAY be reported for intervals or for the duration of the media stream (cumulative). The value I=01, indicating a sampled value, MUST NOT be sent, and MUST be discarded when received.

Reserved: 6 bits

This field is reserved for future definition. In the absence of such a definition, the bits in this field MUST be set to zero and ignored by the receiver (See [RFC6709 section 4.2](#)).

Block Length: 16 bits

The length of this report block in 32-bit words, minus one. For the MOS Metrics Block, the block length is variable length.

SSRC of source: 32 bits

As defined in [Section 4.1 of \[RFC3611\]](#).

Segment i: 32 bits

There are two segment types defined in this document: single stream Audio/Video per SSRC segment, multi-channel audio per SSRC segment. Multi-channel audio per SSRC segment is used to deal with the case where Multi-channel audios are carried in one RTP stream while single channel Audio/Video per SSRC segment is used to deal with the case where each media stream is identified by SSRC and sent in separate RTP stream. The leftmost bit of the segment determines its type. If the leftmost bit of the segment is zero, then it is single channel segment. If the leftmost bit is one, then it is multi-channel audio segment. Note that two segment types can not be present in the same metric block.

3.2.1. Single Channel audio/video per SSRC Segment

```

+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|S|      CAID      |      PT      |      MOS Value      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Segment Type (S): 1 bit

This field is used to identify the segment type used in this report block. A zero identifies this as a single channel Audio/Video per SSRC segment. Single channel means there is only one media stream carried in one RTP stream. The single channel Audio/Video per SSRC segment can be used to report the MOS value associated with the media stream identified by SSRC. If there are multiple media streams and they want to use the single channel Audio/Video per SSRC segment to report the MOS value, they should be carried in the separate RTP streams with each identified by different SSRC. In this case, multiple MOS Metrics Blocks are required to report the MOS value corresponding to each media stream using single channel Audio/Video per SSRC segment in the same RTCP XR packet.

Calculation Algorithm ID (CAID) : 8 bits

The 8-bit CAID is the session specific reference to the calculation algorithm and associated qualifiers indicated in SDP (see [Section 4.1](#)) and used to compute QoE scores for this segment.

Payload Type (PT): 7 bits

MOS Metrics reporting depends on the payload format in use. This field identifies the RTP payload type in use during the reporting interval. The binding between RTP payload types and RTP payload formats is configured via a signalling protocol, for example an SDP offer/answer exchange. If the RTP payload type used is changed during an RTP session, separate reports SHOULD be sent for each RTP payload type, with corresponding measurement information blocks indicating the time period to which they relate.

Note that the use of this Report Block with MPEG Transport streams carried over RTP is undefined as each MPEG Transport stream may use distinct audio or video codecs and the indication of the encoding of these is within the MPEG Transport stream and does not use RTP payloads.

MOS Value: 16 bits

The estimated Mean Opinion Score for multimedia application performance is defined as including the effects of delay, loss, discard, jitter and other effects that would affect media quality. A 1-5 MOS score is multiplied by 10 and then represented in the 7:9 format. A value of 0xFFFE is a flag indicating that the measured value is out of range. A value of 0xFFFF is a flag indicating that the measurement is unavailable. Values other than 0xFFFE, 0xFFFF and the valid range defined above MUST NOT be sent and MUST be ignored by the receiving system.

3.2.2. Multi-Channel audio per SSRC Segment

```

+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|S|    CAID    |    PT    |CHID |    MOS Value    |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Segment Type (S): 1 bit

This field is used to identify the segment type used in this report block. A one identifies this as a multi-channel audio segment.

Calculation Algorithm ID (CAID) : 8 bits

The 8-bit CAID is the session specific reference to the calculation algorithm and associated qualifiers indicated in SDP (see [Section 4.1](#)) and used to compute QoE scores for this segment.

Payload Type (PT): 7 bits

As defined in [Section 3.2.1](#) of this document

Channel Identifier (CHID): 3 bits

If multiple channels of audio are carried in one RTP stream, each channel of audio will be viewed as a independent channel(e.g., left channel audio, right channel audio). This field is used to identify each channel carried in the same media stream. The default Channel mapping follows static ordering rule described in the [section 4.1 of \[RFC3551\]](#). However there are some payload formats that use different channel mappings, e.g., AC-3 audio over RTP [[RFC4184](#)] only follow AC-3 channel order scheme defined in [[ATSC](#)]. Enhanced AC-3 Audio over RTP [[RFC4598](#)] uses dynamic channel transform mechanism. In order that the appropriate channel mapping can be determined, MOS metrics reports need to be tied to an RTP payload format, i.e., including the payload type of the reported media according to [[RFC6792](#)] and using Payload Type to determine the appropriate channel mapping.

MOS Value: 13 bits

The estimated Mean Opinion Score for multimedia application performance includes the effects of delay,loss, discard, jitter and other effects that would affect multimedia quality. The estimated MOS value is multiplied by 10 and expressed in 7:6 format. A value of 0x1FFE is a flag indicating that the measured value is out of range. A value of 0x1FFF is a flag indicating that the measurement is unavailable. Values other than 0x1FFE, 0x1FFF and the valid range defined above MUST NOT be sent and MUST be ignored by the receiving system.

4. SDP Signaling

[[RFC3611](#)] defines the use of SDP (Session Description Protocol) [[RFC4566](#)] for signaling the use of XR blocks. However XR blocks MAY be used without prior signaling (see [section 5 of RFC3611](#)).

4.1. SDP rtcp-xr-attr Attribute Extension

This section augments the SDP [RFC4566] attribute "rtcp-xr" defined in [RFC3611] by providing an additional value of "xr-format" to signal the use of the report block defined in this document. Within the "xr-format", the syntax element "calgextmap" is an attribute as defined in [RFC4566] and used to signal the mapping of the local identifier (CAID) in the segment extension defined in [section 3.2](#) to the calculation algorithm. Specific extensionattributes are defined by the specification that defines a specific extension name; there might be several.

```
xr-format =/ xr-mos-block
xr-mos-block = "mos-metrics" ["=" calgextmap *(", " calgextmap)]
calgextmap = mapentry "=" extensionname [SP extentionattributes]
direction = "sendonly" / "recvonly" / "sendrecv" / "inactive"
mapentry = "calg:" 1*3 DIGIT ["/" direction]
                ; Values in the range 1-255 are valid
                ; if needed, 0 can be used to indicate that
                ; an algorithm is rejected
extensionname = "P564";ITU-T P.564 Compliant Algorithm [P.564]
                / "G107";ITU-T G.107 [G.107]
                / "G107_1";ITU-T G.107.1 [G.107.1]
                / "TS101_329";ETSI TS 101 329-5 Annex E [ETSI]
                / "JJ201_1 ";TTC JJ201.1 [TTC]
                / "P1201_1";ITU-T P.1201.2 [P.1201.1]
                / "P1201_2";ITU-T P.1201.2 [P.1201.2]
                / "P1202_1";ITU-T P.1202.1 [P.1202.1]
                / "P1202_2";ITU-T P.1202.2 [P.1202.2]
                / "P.862.2";ITU-T P.862.2 [P.862.2]
                / "P.863"; ITU-T P.863 [P.863]
                / non-ws-string
extensionattributes = mosref
                    /attributes-ext
mosref = "mosref=" ("l"; lower resolution
                    /"m"; middle resolution
                    / "h";higher resolution
                    / non-ws-string)
attributes-ext = non-ws-string
SP = <Define in RFC5234>
non-ws-string = 1*(%x21-FF)
```

Each local identifier (CAID)of calculation algorithm used in the segment defined in the [section 3.2](#) is mapped to a string using an attribute of the form:

```
a=calg:<value> ["/"<direction>] <name> [<extensionattributes>]
```


where <name> is a calculation algorithm name, as above, <value> is the local identifier (CAID) of the calculation algorithm associated with the segment defined in this document and is an integer in the valid range inclusive.

Example:

```
a=rtcp-xr:mos-metrics=calg:1=G107,calg:2=P1202_1
```

A usable mapping MUST use IDs in the valid range, and each ID in this range MUST be unique and used only once for each stream or each channel in the stream.

The mapping MUST be provided per media stream (in the media-level section(s) of SDP, i.e., after an "m=" line).

The syntax element "mosref" is referred to the media resolution relative reference and has three values 'l', 'm', 'h'. (e.g., Narrowband (3.4kHz) Speech and Standard Definition (SD) or lower Resolution Video have 'l' resolution, Super Wideband (>14kHz) Speech or higher and High Definition (HD) or higher Resolution Video have 'h' Resolution, Wideband speech(7kHz) and Video with resolution between SD and HD has 'm' resolution). MOS scores reported in the mos metrics block might vary with the MOS reference; For example, MOS values for narrowband, wideband, super wideband codecs occupy the same range but SHOULD be reported in different value. For video application, MOS scores for SD resolution, HD resolution video also occupy the same ranges and SHOULD be reported in different value.

4.2. Offer/Answer Usage

When SDP is used in offer-answer context, the SDP Offer/Answer usage defined in [\[RFC3611\]](#) applies. In the offer answer context, the signaling described above might be used in three ways:

- o asymmetric behavior (segment extensions sent in only one direction),
- o the offer of mutually exclusive alternatives, or
- o the offer of more segments than can be sent in a single session.

A direction attribute MAY be included in a calgextmap; without it, the direction implicitly inherits, of course, from the RTCP stream direction.

Segment extensions, with their directions, MAY be signaled for an "inactive" stream. An extension direction SHOULD be compatible with the stream direction. If a segment extension in the SDP offer is marked as "sendonly" and the answerer desires to receive it, the extension MUST be marked as "recvonly" in the SDP answer. An

answerer that has no desire to receive the extension or does not understand the extension SHOULD remove it from the SDP answer.

If a segment extension is marked as "recvonly" in the SDP offer and the answerer desires to send it, the extension MUST be marked as "sendonly" in the SDP answer. An answerer that has no desire to, or is unable to, send the extension SHOULD remove it from the SDP answer.

If a segment extension is offered as "sendrecv", explicitly or implicitly, and asymmetric behavior is desired, the SDP MAY be modified to modify or add direction qualifiers for that segment extension.

A mosref attribute and mos type attribute MAY be included in an calgextmap; without it, the mosref and most type attribute implicitly inherits, of course, from the name attribute (e.g., P.1201.1 [P.1201.1] indicates lower resolution used while P.1201.2 [P.1201.2] indicates higher resolution used) or payload type carried in the segment extension (e.g., EVRC-WB [RFC5188] indicates using Wideband Codec). However not all payload types or MOS algorithm names indicate resolution to be used and mos type to be used. If an answerer receives an offer with an mosref attribute value it doesn't support (e.g., the answerer only supports "l" and receives "h" from offerer), the answer SHOULD reject the mosref attribute value offered by the offerer.

If the answerer wishes to reject a mosref attribute offered by the offerer, it sets identifiers associated with segment extensions in the answer to the value in the range 4096-4351. The rejected answer MUST contain 'mosref ' attribute whose value is the value of the SDP offer.

Local identifiers in the valid range inclusive in an offer or answer must not be used more than once per media section. A session update MAY change the direction qualifiers of segment extensions under use. A session update MAY add or remove segment extension(s). Identifiers values in the valid range MUST NOT be altered (remapped).

If a party wishes to offer mutually exclusive alternatives, then multiple segment extensions with the same identifier in the (unusable) range 4096-4351 MAY be offered; the answerer SHOULD select at most one of the offered extensions with the same identifier, and remap it to a free identifier in the valid range, for that extension to be usable. Note that two segment types defined in [section 3](#) are also two exclusive alternatives.

If more segment extensions are offered in the valid range, the

answerer SHOULD choose those that are desired, and place the offered identifier value "as is" in the SDP answer.

Similarly, if more segment extensions are offered than can be fit in the valid range, identifiers in the range 4096-4351 MAY be offered; the answerer SHOULD choose those that are desired, and remap them to a free identifier in the valid range.

Note that the range 4096-4351 for these negotiation identifiers is deliberately restricted to allow expansion of the range of valid identifiers in future. Segment extensions with an identifier outside the valid range cannot, of course, be used.

Example (port numbers, RTP profiles, payload IDs and rtpmaps, etc. all omitted for brevity):

The offer:

```
a=rtcp-xr:mos-metrics=calg:4906=P1201_1,calg:4906=P1202_1, calg:4907=G107
```

The answerer is interested in transmission P.1202.1 on lower resolution application, but doesn't support P.1201.1 on lower resolution application at all. It is interested in transmission G.107. It therefore adjusts the declarations:

```
a=rtcp-xr:mos-metrics=calg:1=P1202_1,calg:2=G107
```

5. IANA Considerations

New block types for RTCP XR are subject to IANA registration. For general guidelines on IANA considerations for RTCP XR, refer to [\[RFC3611\]](#).

5.1. New RTCP XR Block Type value

This document assigns the block type value MMB in the IANA " RTP Control Protocol Extended Reports (RTCP XR) Block Type Registry" to the "MOS Metrics Block".

[Note to RFC Editor: please replace MMB with the IANA provided RTCP XR block type for this block.]

5.2. New RTCP XR SDP Parameter

This document also registers a new parameter "mos-metrics" in the " RTP Control Protocol Extended Reports (RTCP XR) Session Description

Protocol (SDP) Parameters Registry".

5.3. The SDP calgextmap Attribute

This section contains the information required by [[RFC4566](#)] for an SDP attribute.

o contact name, email address:

Qin Wu
sunseawq@huawei.com

- o attribute name (as it will appear in SDP): calgextmap
- o long-form attribute name in English: calculation algorithm map definition
- o type of attribute (session level, media level, or both): both
- o whether the attribute value is subject to the charset attribute: not subject to the charset attribute
- o a one-paragraph explanation of the purpose of the attribute: This attribute defines the mapping from the local identifier (CAID) in the segment extension defined in [section 3.2](#) into the calculation algorithm name as documented in specifications and appropriately registered.
- o a specification of appropriate attribute values for this attribute: see RFC xxxx.

5.4. New registry of calculation algorithms

This document creates a new registry to be called "RTCP XR MOS Metric block - multimedia application Calculation Algorithm" as a sub-registry of the "RTP Control Protocol Extended Reports (RTCP XR) Block Type Registry". This registry applies to the multimedia session where each type of media are sent in a separate RTP stream and also applies to the session where Multi-channel audios are carried in one RTP stream. Policies for this new registry are as follows:

- o The information required to support this assignment is an unambiguous definition of the new metric, covering the base measurements and how they are processed to generate the reported metric.
- o The review process for the registry is "Specification Required" as described in [Section 4.1 of \[RFC5226\]](#).
- o Entries in the registry are identified by entry name and mapped to the local identifier (CAID) in the segment extension defined in [section 3.2](#).

o Registration Template

The following information must be provided with each registration:

- * Name: A string uniquely and unambiguously identifying the Calculation algorithm for use in protocols.
- * Name Description: A valid Description of the Calculation algorithm name.
- * Reference: The reference which defines the calculation algorithm corresponding to the Name and Name Description.
- * Type: The media type to which the calculation algorithm is applied

o Initial assignments are as follows:

Name	Name Description	Reference	Type
=====	=====	=====	=====
P564	ITU-T P.564 Compliant Algorithm	[P.564]	Voice
G107	ITU-T G.107	[G.107]	Voice
TS101_329	ETSI TS 101 329-5 Annex E	[ETSI]	Voice
JJ201_1	TTC JJ201.1	[TTC]	Voice
G107_1	ITU-T G.107.1	[G.107.1]	Voice
P862	ITU-T P.862	[P.862]	Voice
P862_2	ITU-T P.862.2	[P.862.2]	Voice
P863	ITU-T P.863	[P.863]	Voice
P1201_1	ITU-T P.1201.1	[P.1201.1]	Multimedia
P1201_2	ITU-T P.1201.2	[P.1201.2]	Multimedia
P1202_1	ITU-T P.1202.1	[P.1202.1]	Video
P1202_2	ITU-T P.1202.2	[P.1202.2]	Video

6. Security Considerations

The new RTCP XR report blocks proposed in this document introduces no new security considerations beyond those described in [[RFC3611](#)].

7. Authors

This draft merges ideas from two drafts addressing the MOS Metric Reporting issue. The authors of these drafts are listed below (in alphabetical order):

Alan Clark <alan.d.clark@telchemy.com>
 Geoff Hunt <r.geoff.hunt@gmail.com>
 Martin Kastner <martin.kastner@telchemy.com>
 Qin Wu <sunseawq@huawei.com>

Roland Schott <roland.schott@telekom.de >
Glen Zorn <gwz@net-zen.net >
Kai Lee <leekai@ctbri.com.cn >

8. Acknowledgements

The authors gratefully acknowledge the comments and contributions made by Bruce Adams, Philip Arden, Amit Arora, Bob Biskner, Kevin Connor, Claus Dahm, Randy Ethier, Roni Even, Jim Frauenthal, Albert Higashi, Tom Hock, Shane Holthaus, Paul Jones, Rajesh Kumar, Keith Lantz, Mohamed Mostafa, Amy Pendleton, Colin Perkins, Mike Ramalho, Ravi Raviraj, Albrecht Schwarz, Tom Taylor, Bill Ver Steeg, David R Oran, Ted Lemon, Benoit Claise, Pete Resnick, Ali Begen and Hideaki Yamada.

9. References

9.1. Normative References

- [ATSC] U.S. Advanced Television Systems Committee (ATSC), "ATSC Standard: Digital Audio Compression (AC-3), Revision B", ATSC Doc A/52B, June 2005.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC3550] Schulzrinne, H., "RTP: A Transport Protocol for Real-Time Applications", [RFC 3550](#), July 2003.
- [RFC3551] Schulzrinne, H. and S. Casner, "RTP Profile for Audio and Video Conferences with Minimal Control", [RFC 3551](#), July 2003.
- [RFC3611] Friedman, T., Caceres, R., and A. Clark, "RTP Control Protocol Extended Reports (RTCP XR)", [RFC 3611](#), November 2003.
- [RFC4566] Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol", [RFC 4566](#), July 2006.
- [RFC5226] Narten, T., "Guidelines for Writing an IANA Considerations Section in RFCs", [RFC 5226](#), May 2008.
- [RFC5234] Crocker, D. and P. Overell, "Augmented BNF for Syntax Specifications: ABNF", STD 68, [RFC 5234](#), January 2008.

- [RFC6776] Wu, Q., "Measurement Identity and information Reporting using SDES item and XR Block", [RFC 6776](#), October 2012.

9.2. Informative References

- [BS.1387-1]
ITU-R, "Method for objective measurements of perceived audio quality", ITU-R Recommendation BS.1387-1, 2001.
- [ETSI] ETSI, "Quality of Service (QoS) measurement methodologies", ETSI TS 101 329-5 V1.1.1, November 2000.
- [G.107] ITU-T, "The E Model, a computational model for use in transmission planning", ITU-T Recommendation G.107, April 2009.
- [G.107.1] ITU-T, "Wideband E-model", ITU-T Recommendation G.107.1, December 2011.
- [G.1082] ITU-T, "Measurement-based methods for improving the robustness of IPTV performance", ITU-T Recommendation G.1082, April 2009.
- [P.1201.1]
ITU-T, "Parametric non-intrusive assessment of audiovisual media streaming quality - lower resolution application area", ITU-T Recommendation P.1201.1, October 2012.
- [P.1201.2]
ITU-T, "Parametric non-intrusive assessment of audiovisual media streaming quality - higher resolution application area", ITU-T Recommendation P.1201.2, October 2012.
- [P.1202.1]
ITU-T, "Parametric non-intrusive bitstream assessment of video media streaming quality - lower resolution application area", ITU-T Recommendation P.1202.1, October 2012.
- [P.1202.2]
ITU-T, "Parametric non-intrusive bitstream assessment of video media streaming quality - higher resolution application area", ITU-T Recommendation P.1202.2, May 2013.
- [P.564] ITU-T, "Conformance testing for narrowband Voice over IP transmission quality assessment models", ITU-T Recommendation P.564, July 2006.

- [P.862] ITU-T, "Perceptual evaluation of speech quality (PESQ): An objective method for end-to-end speech quality assessment of narrow-band telephone networks and speech codecs", ITU-T Recommendation P.862, February 2001.
- [P.862.1] ITU-T, "Mapping function for transforming P.862 raw result scores to MOS-LQ0", ITU-T Recommendation P.862.1, November 2003.
- [P.862.2] ITU-T, "Wideband extension to Recommendation P.862 for the assessment of wideband telephone networks and speech codecs", ITU-T Recommendation P.862.2, November 2007.
- [P.863] ITU-T, "Perceptual objective listening quality assessment", ITU-T Recommendation P.863, January 2011.
- [RFC4184] Link, B., Hager, T., and J. Flaks, "RTP Payload Format for AC-3 Audio", [RFC 4184](#), October 2005.
- [RFC4598] Link, B., "Real-time Transport Protocol (RTP) Payload Format for Enhanced AC-3 (E-AC-3) Audio", [RFC 4598](#), July 2006.
- [RFC5188] Desineni, H. and Q. Xie, "RTP Payload Format for the Enhanced Variable Rate Wideband Codec (EVRB-WB) and the Media Subtype Updates for EVRB-B Codec", [RFC 5188](#), February 2008.
- [RFC6390] Clark, A. and B. Claise, "Framework for Performance Metric Development", [RFC 6390](#), October 2011.
- [RFC6792] Wu, Q., "Monitoring Architectures for RTP", [RFC 6792](#), November 2012.
- [TTC] TTC 201.01 (Japan), "A method for speech quality assessment for Voice over IP".

[Appendix A](#). Metrics represented using [RFC6390](#) Template

RFC EDITOR NOTE: please change XXXX in [RFCXXXX] by the new RFC number, when assigned.

a. MOS Value Metric

* Metric Name: MOS in RTP

- * Metric Description: The estimated Mean Opinion Score for multimedia application performance of RTP stream is defined as including the effects of delay, loss, discard, jitter and other effects that would affect audio or video quality.
- * Method of Measurement or Calculation: See [section 3.2.1](#), MOS value definition [RFCXXXX].
- * Units of Measurement: See [section 3.2.1](#), MOS value definition [RFCXXXX].
- * Measurement Point(s) with Potential Measurement Domain: See [section 3](#), 2nd paragraph [RFCXXXX].
- * Measurement Timing: See [section 3](#), 3rd paragraph [RFCXXXX] for measurement timing and [section 3.1](#) [RFCXXXX] for Interval Metric flag.
- * Use and applications: See [section 1.4](#) [RFCXXXX].
- * Reporting model: See [RFC3611](#).

b. Segment Type Metric

- * Metric Name: Segment Type in RTP
- * Metric Description: It is used to identify the segment type of RTP stream used in this report block. For more details, see [section 3.2.1](#), Segment type definition.
- * Method of Measurement or Calculation: See [section 3.2.1](#), Segment Type definition [RFCXXXX].
- * Units of Measurement: See [section 3.2.1](#), Segment Type definition [RFCXXXX].
- * Measurement Point(s) with Potential Measurement Domain: See [section 3](#), 2nd paragraph [RFCXXXX].
- * Measurement Timing: See [section 3](#), 3rd paragraph [RFCXXXX] for measurement timing and [section 3.1](#) [RFCXXXX] for Interval Metric flag.
- * Use and applications: See [section 1.4](#) [RFCXXXX].
- * Reporting model: See [RFC3611](#).

c. Calculation Algorithm Identifier Metric

- * Metric Name: RTP Stream Calculation Algorithm Identifier
- * Metric Description: It is the local identifier of RTP Stream calculation Algorithm associated with this segment in the range 1-255 inclusive.
- * Method of Measurement or Calculation: See [section 3.2.1](#), Calculation Algorithm ID definition [RFCXXXX].
- * Units of Measurement: See [section 3.2.1](#), Calg Algorithm ID definition [RFCXXXX].
- * Measurement Point(s) with Potential Measurement Domain: See [section 3](#), 2nd paragraph [RFCXXXX].
- * Measurement Timing: See [section 3](#), 3rd paragraph [RFCXXXX] for measurement timing and [section 3.1](#) [RFCXXXX] for Interval Metric flag.
- * Use and applications: See [section 1.4](#) [RFCXXXX].
- * Reporting model: See [RFC3611](#).

d. Payload Type Metric

- * Metric Name: RTP Payload Type
- * Metric Description: It is used to identify the format of the RTP payload. For more details, see [section 3.2.1](#), payload type definition.
- * Method of Measurement or Calculation: See [section 3.2.1](#), Payload type definition [RFCXXXX].
- * Units of Measurement: See [section 3.2.1](#), payload type definition [RFCXXXX].
- * Measurement Point(s) with Potential Measurement Domain: See [section 3](#), 2nd paragraph [RFCXXXX].
- * Measurement Timing: See [section 3](#), 3rd paragraph [RFCXXXX] for measurement timing and [section 3.1](#) [RFCXXXX] for Interval Metric flag.

- * Use and applications: See [section 1.4](#) [RFCXXXX].

- * Reporting model: See [RFC3611](#).

e. Channel Identifier Metric

- * Metric Name: Audio Channel Identifier in RTP

- * Metric Description: It is used to identify each audio channel carried in the same RTP stream. For more details, see [section 3.2.2](#), channel identifier definition.

- * Method of Measurement or Calculation: See [section 3.2.2](#), Channel Identifier definition [RFCXXXX].

- * Units of Measurement: See [section 3.2.2](#), channel identifier definition [RFCXXXX].

- * Measurement Point(s) with Potential Measurement Domain: See [section 3](#), 2nd paragraph [RFCXXXX].

- * Measurement Timing: See [section 3](#), 3rd paragraph [RFCXXXX] for measurement timing and [section 3.1](#) [RFCXXXX] for Interval Metric flag.

- * Use and applications: See [section 1.4](#) [RFCXXXX].

- * Reporting model: See [RFC3611](#).

[Appendix B](#). Change Log

[B.1](#). [draft-ietf-xrblock-rtcp-xr-qoe-14](#)

The following are the major changes compared to previous version:

- o Add some texts to address IESG review comments.

[B.2](#). [draft-ietf-xrblock-rtcp-xr-qoe-10](#)

The following are the major changes compared to previous version:

- o Replace QoE metrics with MoS metrics.

[B.3](#). [draft-ietf-xrblock-rtcp-xr-qoe-09](#)

The following are the major changes compared to previous version:

- o Address comments recieved from WGLC, PM-DIR Review and SDP review.
- o Change an existing SDP attribute 'extmap' to new SDP attribute 'calgextmap' and add new SDP attribute registry.
- o Add Reference to G.107.1, P.862.1, P.862.2 and P.863 for new calculation algorithms.
- o Add MoS type attribute to distinguish different MoS type.
- o Other Editorial changes.

B.4. [draft-ietf-xrblock-rtcp-xr-qoe-08](#)

The following are the major changes compared to previous version:

- o Remove mostype attribute from SDP extension since it can inferred from payload type.
- o Clarify mosref attribute usage in the O/A.

B.5. [draft-ietf-xrblock-rtcp-xr-qoe-07](#)

The following are the major changes compared to previous version:

- o Some editorial changes to get in line with burst gap related draft.
- o Add an appendix to apply [RFC6390](#) template.

B.6. [draft-ietf-xrblock-rtcp-xr-qoe-06](#)

The following are the major changes compared to previous two versions:

- o A few Contact information update.
- o A few Acknowledgement section update.

B.7. [draft-ietf-xrblock-rtcp-xr-qoe-04](#)

The following are the major changes compared to previous version:

- o Split two references P.NAMS and P.NBAMS into four references.
- o SDP signaling update.
- o Add one example to explain User QoE evaluation for video stream

B.8. [draft-ietf-xrblock-rtcp-xr-qoe-03](#)

The following are the major changes compared to previous version:

- o Add one new reference to support TTC JJ201.01.
- o Update two references P.NAMS and P.NBAMS.
- o Other Editorial changes based on comments applied to PDV and Delay drafts.

B.9. [draft-ietf-xrblock-rtcp-xr-qoe-02](#)

The following are the major changes compared to previous version:

- o Remove leftmost second bit since it is useless.
- o Change 13bits MoS value field into 14 bits to increase MoS precision.
- o Fix some typo and make some editorial changes.

B.10. draft-ietf-xrblock-rtcp-xr-qoe-01

The following are the major changes compared to previous version:

- o Remove layered support from the QoE Metric draft.
- o Allocate 7 bits in the block header for payload type to indicate what type of payload format is in use and add associated definition of payload type.
- o Clarify using Payload Type to determine the appropriate channel mapping in the definition of Channel Identifier.

B.11. draft-ietf-xrblock-rtcp-xr-qoe-00

The following are the major changes compared to previous version:

- o Allocate one more bit in the single channel per SSC segment to get alignment with the other two segment type.

Authors' Addresses

Alan Clark
Telchemy Incorporated
2905 Premiere Parkway, Suite 280
Duluth, GA 30097
USA

Email: alan.d.clark@telchemy.com

Qin Wu
Huawei
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

Email: sunseawq@huawei.com

Roland Schott
Deutsche Telekom
Heinrich-Hertz-Strasse 3-7
Darmstadt 64295
Germany

Email: Roland.Schott@telekom.de

Glen Zorn
Network Zen
77/440 Soi Phoomjit, Rama IV Road
Phra Khanong, Khlong Toie
Bangkok 10110
Thailand

Phone: +66 (0) 87 502 4274
Email: gwz@net-zen.net

