

Network Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: October 25, 2013

J. Abley  
TekSavvy Solutions, Inc.  
April 23, 2013

Resource Records for EUI-48 and EUI-64 Addresses in the DNS  
draft-jabley-dnsexst-eui48-eui64-rrtypes-03

## Abstract

48-bit Extended Unique Identifiers (EUI-48) and 64-bit Extended Unique Identifiers (EUI-64) are address formats specified by the IEEE for use in various layer-2 networks, e.g. ethernet.

This document defines two new DNS resource record types, EUI48 and EUI64, for encoding ethernet addresses in the DNS.

## Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on October 25, 2013.

## Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as

described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction . . . . .</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Terminology . . . . .</a>	<a href="#">4</a>
<a href="#">3.</a>	<a href="#">The EUI48 Resource Record . . . . .</a>	<a href="#">5</a>
<a href="#">3.1.</a>	<a href="#">EUI48 RDATA Wire Format . . . . .</a>	<a href="#">5</a>
<a href="#">3.2.</a>	<a href="#">EUI48 RR Presentation Format . . . . .</a>	<a href="#">5</a>
<a href="#">4.</a>	<a href="#">The EUI64 Resource Record . . . . .</a>	<a href="#">6</a>
<a href="#">4.1.</a>	<a href="#">EUI64 RDATA Wire Format . . . . .</a>	<a href="#">6</a>
<a href="#">4.2.</a>	<a href="#">EUI64 RR Presentation Format . . . . .</a>	<a href="#">6</a>
<a href="#">5.</a>	<a href="#">Examples . . . . .</a>	<a href="#">7</a>
<a href="#">6.</a>	<a href="#">Example Use-Case: IP Address Tracking in DOCSIS Networks . . .</a>	<a href="#">8</a>
<a href="#">7.</a>	<a href="#">DNS Protocol Considerations . . . . .</a>	<a href="#">9</a>
<a href="#">8.</a>	<a href="#">IANA Considerations . . . . .</a>	<a href="#">10</a>
<a href="#">9.</a>	<a href="#">Security Considerations . . . . .</a>	<a href="#">11</a>
<a href="#">10.</a>	<a href="#">Acknowledgements . . . . .</a>	<a href="#">12</a>
<a href="#">11.</a>	<a href="#">References . . . . .</a>	<a href="#">13</a>
<a href="#">11.1.</a>	<a href="#">Normative References . . . . .</a>	<a href="#">13</a>
<a href="#">11.2.</a>	<a href="#">Informative References . . . . .</a>	<a href="#">13</a>
<a href="#">Appendix A.</a>	<a href="#">Editorial Notes . . . . .</a>	<a href="#">14</a>
<a href="#">A.1.</a>	<a href="#">RRType Parameter Allocation Template . . . . .</a>	<a href="#">14</a>
<a href="#">A.2.</a>	<a href="#">Change History . . . . .</a>	<a href="#">15</a>
	<a href="#">Author's Address . . . . .</a>	<a href="#">16</a>

## 1. Introduction

The Domain Name System (DNS) is described in [[RFC1034](#)] and [[RFC1035](#)]. This base specification defines many Resource Record (RR) Types, and subsequent specifications have defined others. Each defined RRType provides a means of encoding particular data in the DNS.

48-bit Extended Unique Identifiers (EUI-48) [[EUI48](#)] and 64-bit Extended Unique Identifiers (EUI-64) [[EUI64](#)] are address formats specified by the IEEE for use in various layer-2 networks, e.g. ethernet.

This document defines two new RR Types, EUI48 and EUI64 for encoding EUI-48 and EUI-64 addresses in the DNS.

## 2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

### [3.](#) The EUI48 Resource Record

The EUI48 RR is used to store a single EUI-48 address in the DNS.


The Type value for the EUI48 RRTYPE is 108 (decimal).

The EUI48 RR is class-independent.

The EUI48 RR has no special Time-to-Live (TTL) requirements.

#### [3.1.](#) EUI48 RDATA Wire Format

The RDATA for an EUI48 RR consists of a single, 6-octet EUI48-Address field, encoded in network (big-endian) order.

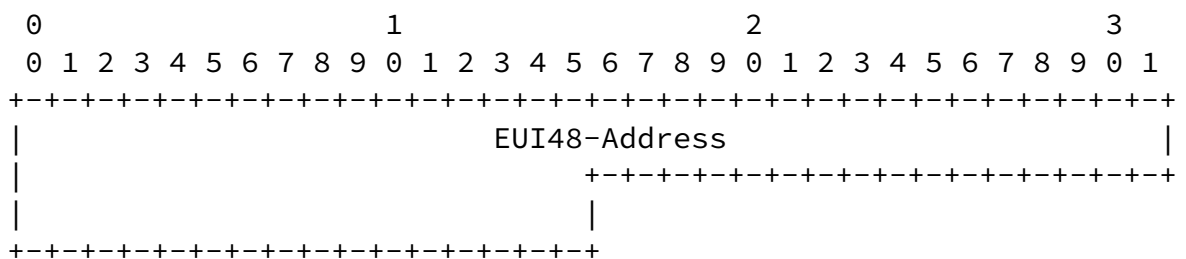

### [3.2.](#) EUI48 RR Presentation Format

The Address field MUST be represented as six two-digit hexadecimal numbers separated by hyphens. The hexadecimal digits "A" through "F" MAY be represented in either upper or lower case.

## [4.](#) The EUI64 Resource Record

The EUI64 RR is used to store a single EUI-64 address in the DNS.

The Type value for the EUI64 RR is 109 (decimal).

The EUI64 RR is class-independent.

The EUI64 RR has no special TTL requirements.

### [4.1.](#) EUI64 RDATA Wire Format

The RDATA for an EUI64 RR consists of a single, 8-octet Address field, encoded in network (big-endian) order.



00-2a.

host.example. 86400 IN EUI64 00-00-5e-ef-10-00-00-2a

Canadian cable Internet subscribers are assigned IP addresses using DHCP, using a DHCP server operated by a cable company. In the case where a cable company provides last-mile connectivity to a subscriber on behalf of a third party company (reseller), the DHCP server assigns addresses from a pool supplied by the reseller. The reseller retains knowledge of the EUI-48 address of the DOCSIS modem supplied to the subscriber, but has no direct knowledge of the IP addresses assigned. In order for the reseller to be able to map the IP address assigned to a subscriber to that EUI-48 address (and hence to the subscriber identity), the cable company can make available information from the DHCP server which provides that (EUI-48, IP) address mapping.

Cable companies in Canada are required [[NTRE038D](#)] to make this address mapping available using the DNS. Zones containing the relevant information are published on DNS servers, access to which is restricted to the resellers corresponding to particular sets of subscribers.

Existing DNS schemas for the representation of (EUI-48, IP) mapping used by Canadian cable companies are varied and inefficient; in the absence of a RRType for direct encoding of EUI-48 addresses, addresses are variously encoded into owner names or are published in TXT records.

The specification in this document facilitates a more efficient, consistent and reliable representation of (EUI-48, IP) mapping than was previously available.

## [7.](#) DNS Protocol Considerations

The specification of the new RRTYPES in this document has no effect on the address resolution behavior of any previously existing network processes or protocols. Proposals or specifications to modify or augment address resolution processes or protocols by making use of these RRTYPES should specify how any address conflicts or use of multiple EUI48/EUI64 RRs are handled.

## [8.](#) IANA Considerations

IANA has assigned the RRType value 108 (decimal) for EUI48 and 109 (decimal) for EUI64. This document directs the IANA to confirm that the corresponding entries in the "Resource Record (RR) TYPEs" subregistry match the following data:

Type	Value	Meaning	Reference
EUI48	108	an EUI-48 address	this document
EUI64	109	an EUI-64 address	this document

## 9. Security Considerations

There may be privacy concerns with publishing EUI addresses in the global DNS. EUI-48 and EUI-64 addresses with the Global bit zero [[RFC5342](#)] are intended to represent unique identifiers for network connected equipment notwithstanding many observed cases of duplication due to manufacturing errors, unauthorized use of OUIs, and address spoofing through configuration of network interfaces. Publication of EUI-48 or EUI-64 addresses in the global DNS may result in privacy issues in the form of unique trackable identities.

IP addresses and DNS names for network devices typically change over time but EUI-48 and EUI-64 addresses normally provide a unique identity for a network device. As an example of this, consider a wireless provider that publishes the EUI-48 addresses of its subscribers in the global DNS under the same name as their IP host name. An entity that wants to relate web queries, for example, to a specific customer might, if that customer is using a globally-unique IP address, be able to do a reverse query from the IP address to a DNS name, and then a forward query for the EUI information. If possible, this would enable a tracking entity to relate queries to specific identity regardless of changes in IP addresses and DNS names resulting in a loss of privacy for the subscriber.

These potential concerns can be mitigated through restricting access to zones containing EUI48 or EUI64 RRs or storing such information under a domain name whose construction requires that the querier already know some other permanent identifier.

## [10.](#) Acknowledgements

The author acknowledges the contributions of Olafur Gudmundsson, Mark Smith, Andrew Sullivan, Roy Arends, Michael StJohns and Donald Eastlake III.

## [11.](#) References

### [11.1.](#) Normative References

- [EUI48] IEEE, "Guidelines for use of a 48-bit Extended Unique Identifier (EUI-48)".
- [EUI64] IEEE, "Guidelines for use of a 64-bit Extended Unique Identifier (EUI-64)".
- [RFC1034] Mockapetris, P., "Domain names - concepts and facilities", STD 13, [RFC 1034](#), November 1987.
- [RFC1035] Mockapetris, P., "Domain names - implementation and specification", STD 13, [RFC 1035](#), November 1987.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[RFC5342] Eastlake, D., "IANA Considerations and IETF Protocol Usage for IEEE 802 Parameters", [BCP 141](#), [RFC 5342](#), September 2008.

## [11.2.](#) Informative References

[NTRE038D]  
CRTC Interconnection Steering Committee Network Working Group, "Implementation of IP Address Tracking in DOCSIS Networks (TIF18)".

Abley Expires October 25, 2013 [Page 13]

---

Internet-Draft Resource Records for EUI-48, EUI-64 April 2013

## [Appendix A.](#) Editorial Notes

This section (and sub-sections) to be removed prior to publication.

### [A.1.](#) RRTYPE Parameter Allocation Template

#### DNS RRTYPE PARAMETER ALLOCATION TEMPLATE

A. Submission Date: 2013-03-18

B.1 Submission Type: ☒ New RRTYPE ☐ Modification to RRTYPE

B.2 Kind of RR: ☒ Data RR ☐ Meta-RR

C. Contact Information for submitter (will be publicly posted):

Name: Joe Abley

Email Address: jabley@teksavvy.ca

International telephone number: +1 519 670 9327

Other contact handles:

D. Motivation for the new RRTYPE application.

The purpose of this RRTYPE application is to allow EUI-48 and EUI-64 addresses to be stored in the DNS. EUI-48 addresses are those used, for example, in ethernet.

E. Description of the proposed RR type.

See [draft-jabley-dnsext-eui48-eui64-rrtypes](#) for a full description.

F. What existing RRTYPE or RRTYPEs come closest to filling that need and why are they unsatisfactory?

The TXT record can be used to store arbitrary, unstructured data in the DNS and hence could be used to store EUI-48 and EUI-64 addresses. This approach is unsatisfactory for the usual reasons, i.e. there is no opportunity for validating data before it is stored, and typographical errors must consequently be detected after data retrieval.

G. What mnemonic is requested for the new RRTYPE (optional)?

EUI48 for EUI-48 addresses; EUI64 for EUI-64 addresses.

H. Does the requested RRTYPE make use of any existing IANA registry or require the creation of a new IANA sub-registry in DNS Parameters? If so, please indicate which registry is to be used or created. If a new sub-registry is needed, specify

the allocation policy for it and its initial contents. Also include what the modification procedures will be.

No.

- I. Does the proposal require/expect any changes in DNS servers/resolvers that prevent the new type from being processed as an unknown RRTYPE (see [[RFC3597](#)])?

No.

- J. Comments:

See [draft-jabley-dnsext-eui48-eui64-rrtypes](#) for a complete specification.

## [A.2.](#) Change History

- 00 Initial idea, circulated for the purposes of entertainment.
- 01 Presentation format changed from colon-separated to hyphen-separated, to better match conventional usage for big-endian representations of EUI-48 and EUI-64 addresses. IEEE trademarks acknowledged. Code-points assigned by expert review. Other minor tweaks and fixes based on early review.
- 02 Example EUI64 presentation format in text corrected (colons -> hyphens). Examples changed to use to-be-assigned addresses under the IANA OUI.
- 03 Example EUI48 and EUI64 addresses changed to match the guidance in [draft-eastlake-5342bis-00](#). "EUI48" corrected to "EUI64" in the text of [Section 4.1](#). Incorporated suggestions on DNS resolution and privacy considerations from Michael StJohns and Donald Eastlake III. Added example use case relating to Canadian DOCSIS networks.

Author's Address

Joe Abley  
TekSavvy Solutions, Inc.  
470 Moore Street  
London, ON N6C 2C2  
Canada

Phone: +1 519 670 9327  
Email: [jabley@teksavvy.ca](mailto:jabley@teksavvy.ca)

Abley

Expires October 25, 2013

[Page 16]