

CoRE Working Group
Internet-Draft
Intended status: Experimental
Expires: April 25, 2019

I. Jarvinen
M. Kojo
I. Raitahila
University of Helsinki
Z. Cao
Huawei
October 22, 2018

**Fast-Slow Retransmission Timeout and Congestion Control Algorithm for
CoAP
draft-jarvinen-core-fasor-01**

Abstract

This document specifies an alternative retransmission timeout and congestion control back off algorithm for the CoAP protocol, called Fast-Slow RTO (FASOR).

The algorithm specified in this document employs an appropriate and large enough back off of Retransmission Timeout (RTO) as the major congestion control mechanism to allow acquiring unambiguous RTT samples with high probability and to prevent building a persistent queue when retransmitting. The algorithm also aims to retransmit quickly using an accurately managed retransmission timeout when link-errors are occurring, basing RTO calculation on unambiguous round-trip time (RTT) samples.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on April 25, 2019.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
2.	Conventions	3
3.	Problems with Existing CoAP Congestion Control Algorithms . .	3
4.	FASOR Algorithm	4
4.1.	Computing Normal RT0 (FastRT0)	4
4.2.	Slow RT0	5
4.3.	Retransmission Timeout Back Off Logic	6
4.3.1.	Overview	6
4.3.2.	Retransmission State Machine	7
4.4.	Retransmission Count Option	9
4.5.	Alternatives for Exchanging Retransmission Count Information	11
5.	Security Considerations	11
6.	IANA Considerations	11
7.	References	11
7.1.	Normative References	11
7.2.	Informative References	12
Appendix A.	Pseudocode for Basic FASOR without Dithering	13
	Authors' Addresses	15

[1.](#) Introduction

CoAP senders use retransmission timeout (RT0) to infer losses that have occurred in the network. For such a heuristic to be correct, the RTT estimate used for calculating the retransmission timeout must match to the real end-to-end path characteristics. Otherwise, unnecessary retransmission may occur. Both default RT0 mechanism for CoAP [[RFC7252](#)] and CoCoA [[I-D.ietf-core-cocoa](#)] have issues in dealing with unnecessary retransmissions and in the worst-case the situation can persist causing congestion collapse [[JRCK18a](#)].

This document specifies FASOR retransmission timeout and congestion control algorithm [[JRCK18b](#)]. FASOR algorithm ensures unnecessary retransmissions that a sender may have sent due to an inaccurate RTT estimate will not persist avoiding the threat of congestion collapse. FASOR also aims to quickly restore the accuracy of the RTT estimate. Armed with an accurate RTT estimate, FASOR not only handles congestion robustly but also can quickly infer losses due to link errors.

2. Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#), [RFC 2119](#) [[RFC2119](#)].

3. Problems with Existing CoAP Congestion Control Algorithms

Correctly inferring losses requires the retransmission timeout (RTO) to be longer than the real RTT in the network. Under certain circumstances the RTO may be incorrectly small. If the real end-to-end RTT is larger than the retransmission timeout, it is impossible for the sender to avoid making unnecessary retransmissions that duplicate data still existing in the network because the sender cannot receive any feedback in time. Unnecessary retransmissions cause two basic problems. First, they increase the perceived end-to-end RTT if the bottleneck has buffering capacity, and second, they prevent getting unambiguous RTT samples. Making unnecessary retransmissions is also a pre-condition for the congestion collapse [[RFC0896](#)], which may occur in the worst case if retransmissions are not well controlled [[JRCK18a](#)]. Therefore, the sender retransmission timeout algorithm should actively attempt to prevent unnecessary retransmissions from persisting under any circumstance.

Karn's algorithm [[KP87](#)] has prevented unnecessary retransmission from turning into congestion collapse for decades due to robust RTT estimation and retransmission timeout backoff handling. The recent CoAP congestion control algorithms, however, diverge from the principles of Karn's algorithm in significant ways and may pose a threat to the stability of the Internet due to those differences.

The default RTO mechanism for CoAP [[RFC7252](#)] uses only an initial RTO dithered between 2 and 3 seconds, while CoCoA [[I-D.ietf-core-cocoa](#)] measures RTT both from unambiguous and ambiguous RTT samples and applies a modified version of the TCP RTO algorithm [[RFC6298](#)]. The algorithm in [RFC 7252](#) lacks solution to persistent congestion. The binary exponential back off used for the retransmission timeout does not properly address unnecessary retransmissions when RTT is larger

than the default RTT (ACK_TIMEOUT). If the CoAP sender performs exchanges over an end-to-end path with such a high RTT, it persistently keeps making unnecessary retransmissions for every exchange wasting some fraction of the used resources (network capacity, battery power).

CoCoA [[I-D.ietf-core-cocoa](#)] attempts to improve scenarios with link-error related losses and solve persistent congestion by basing its RTT value on an estimated RTT. However, there are couple of exceptions when the RTT estimation is not available:

- At the beginning of a flow where initial RTT of 2 seconds is used.
- When RTT suddenly jumps high enough to trigger the rule in CoCoA that prevents taking RTT samples when more than two retransmissions are needed. This may also occur when the packet drop rate on the path is high enough.

When RTT estimate is too small, unnecessary retransmission will occur also with CoCoA. CoCoA being unable to take RTT samples at all is a particularly problematic phenomenon as it is similarly persisting state as with the algorithm outlined in [RFC 7252](#) and the network remains in a congestion collapsed state due to persisting unnecessary retransmissions.

4. FASOR Algorithm

FASOR [[JRCK18b](#)] is composed of three key components: RTT computation, Slow RTT, and novel retransmission timeout back off logic.

4.1. Computing Normal RTT (FastRTT)

The FASOR algorithm measures the RTT for an CoAP message exchange over an end-to-end path and computes the RTT value using the TCP RTT algorithm specified in [[RFC6298](#)]. We call this normal RTT or FastRTT. In contrast to the TCP RTT mechanism, FASOR SHOULD NOT use 1 second lower-bound when setting the RTT because RTT is only a backup mechanisms for loss detection with TCP, whereas with CoAP RTT is the primary and only loss detection mechanism. A lower-bound of 1 second would impact timeliness of the loss detection in low RTT environments. The RTT value MAY be upper-bounded by at least 60 seconds. A CoAP sender using the FASOR algorithm SHOULD set initial RTT to 2 seconds. The computed RTT value as well as the initial RTT value is subject to dithering; they are dithered between $RTT + 1/4 \times SRTT$ and $RTT + SRTT$. For dithering initial RTT, SRTT is unset; therefore, SRTT is replaced with initial RTT / 3 which is derived from the RTT formula and equals to a hypothetical initial RTT that

would yield the initial RTT using the SRTT and RTTVAR initialization rule of [RFC 6298](#). That is, for initial RTT of 2 seconds we use SRTT value of 2/3 seconds.

FastRTT is updated only with unambiguous RTT samples. Therefore, it closely tracks the actual RTT of the network and can quickly trigger a retransmission when the network state is not dubious. Retransmitting without extra delay is very useful when the end-to-end path is subject to losses that are unrelated to congestion. When the first unambiguous RTT sample is received, the RTT estimator is initialized with that sample as specified in [[RFC6298](#)] except RTTVAR that is set to R/2K.

[4.2.](#) Slow RTT

We introduce Slow RTT as a safe way to ensure that only a unique copy of message is sent before at least one RTT has elapsed. To achieve this the sender must ensure that its retransmission timeout is set to a value that is larger than the path end-to-end RTT that may be inflated by the unnecessary retransmissions themselves. Therefore, whenever a message needs to be retransmitted, we measure Slow RTT as the elapsed time required for getting an acknowledgement. That is, Slow RTT is measured starting from the original transmission of the request message until the receipt of the acknowledgement, regardless of the number of retransmissions. In this way, Slow RTT always covers the worst-case RTT during which a number of unnecessary retransmissions were made but the acknowledgement is received for the original transmission. In contrast to computing normal RTT, Slow RTT is not smoothed because it is derived from the sending pattern of the retransmissions (that may turn out unnecessary). In order to drain the potential unnecessary retransmissions successfully from the network, it makes sense to wait for the time used for sending them rather than some smoothed value. However, Slow RTT is multiplied by a factor to allow some growth in load without making Slow RTT too aggressive (by default the factor of 1.5 is used). FASOR then applies Slow RTT as one of the backed off timer values used with the next request message.

Slow RTT allows rapidly converging towards stable operating point because 1) it lets the duplicate copies sent earlier to drain from the network reducing the perceived end-to-end RTT, and 2) allows enough time to acquire an unambiguous RTT sample for the RTT computation. Robustly acquiring the RTT sample ensures that the next RTT is set according to the recent measurement and further unnecessary retransmissions are avoided. Slow RTT itself is a form of back off because it includes the accumulated time from the retransmission timeout back off of the previous exchange. FASOR uses this for its advantage as the time included into Slow RTT is what is

needed to drain all unnecessary retransmissions possibly made during the previous exchange. Assuming a stable RTT and that all of the retransmissions were unnecessary, the time to drain them is the time elapsed from the original transmission to the sending time of the last retransmission plus one RTT. When the acknowledgement for the original transmission arrives, one RTT has already elapsed, leaving only the sending time difference still unaccounted for which is at minimum the value for Slow RTT (when an RTT sample arrives immediately after the last retransmission). Even if RTT would be increasing, the draining still occurs rapidly due to exponentially backed off frequency in sending the unnecessary retransmissions.

4.3. Retransmission Timeout Back Off Logic

4.3.1. Overview

FASOR uses normal RTT as the base for binary exponential back off when no retransmission were needed for the previous CoAP message exchange. When retransmission were needed for the previous CoAP message exchange, the algorithm rules, however, are more complicated than with the traditional RTT back off because Slow RTT is injected into the back off series to reduce high impact of using Slow RTT. FASOR logic chooses from three possible back off series alternatives:

FAST back off: Perform traditional RTT back off with the normal RTT as the base. Applied when the previous message was not retransmitted.

FAST_SLOW_FAST back off: First perform a probe using the normal RTT for the original transmission of the request message to improve cases with losses unrelated to congestion. If the probe for the original transmission of the request message is successful without retransmissions, continue with FAST back off for the next message exchange. If the request message needs to be retransmitted, continue by using Slow RTT for the first retransmission in order to respond to congestion and drain the network from the unnecessary retransmissions that were potentially sent for the previous exchange. If still further RTTs are needed, continue by backing off the normal RTT further on each timeout. FAST_SLOW_FAST back off is applied just once when the previous request message using FAST back off required one or more retransmissions.

SLOW_FAST back off: Perform Slow RTT first for the original transmission to respond to congestion and to acquire an unambiguous RTT sample with high probability. Then, if the original request needs to be retransmitted, continue with the normal RTT-based RTT back off series by backing off the normal RTT

on each timeout. SLOW_FAST back off is applied when the previous request message using FAST_SLOW_FAST or SLOW_FAST back off required one or more retransmissions. Once an acknowledgement for the original transmission with unambiguous RTT sample is received, continue with FAST back off for the next message exchange.


For the initial message, FAST is used with INITIAL_RTT as the FastRTT value. From there on, state is updated when an acknowledgement arrives. Following unambiguous RTT samples, FASOR always uses FAST. Whenever retransmissions are needed, the back off series selection is first downgraded to FAST_SLOW_FAST back off and then to SLOW_FAST back off if further retransmission are needed in FAST_SLOW_FAST.

When Slow RTT is used as the first RTT value, the sender is likely to acquire unambiguous RTT sample even when the network has high delay due to congestion because Slow RTT is based on a very recent measurement of the worst-case RTT. However, using Slow RTT may negatively impact the performance when losses unrelated to congestion are occurring. Due to its potential high cost, FASOR algorithm attempts to avoid using Slow RTT unnecessarily.

The CoAP protocol is often used by devices that are connected through a wireless network where non-congestion related losses are much more frequent than in their wired counterparts. This has implications for the retransmission timeout algorithm. While it would be possible to implement FASOR such that it immediately uses Slow RTT when a dubious network state is detected, which would handle congestion very well, it would do significant harm for performance when RTTs occur due to non-congestion related losses. Instead, FASOR uses first normal RTT for one transmission and only responds using Slow RTT if RTT expires also for that request message. Such a pattern quickly probes if the losses were unrelated to congestion and only slightly delays response if real congestion event is taking place. To ensure that an unambiguous RTT sample is also acquired on a congested network path, FASOR then needs to use Slow RTT for the original transmission of the subsequent packet if the probe was not successful.

4.3.2. Retransmission State Machine

FASOR consists of the three states discussed above while making retransmission decisions, FAST, FAST_SLOW_FAST and SLOW_FAST. The state machine of the FASOR algorithm is depicted in Figure 1.

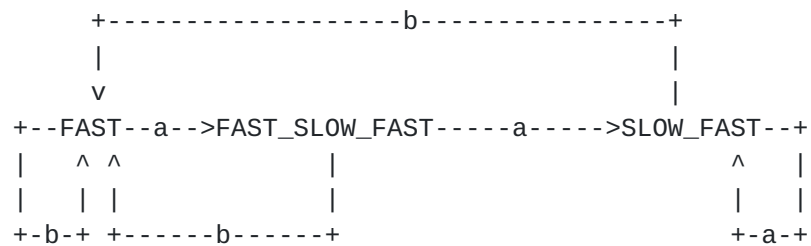

a: retransmission acknowledged, ambiguous RTT sample acquired;
b: no retransmission, unambiguous RTT sample acquired;

Figure 1: State Machine of FASOR

In the FAST state, if the original transmission of the message has not been acknowledged by the receiver within the time defined by `FastRTT0`, the sender will retransmit it. If there is still no acknowledgement of the retransmitted packet within $2 * \text{FastRTT0}$, the sender performs the second retransmission and if necessary, each further retransmission applying binary exponential back off of `FastRTT0`. The retransmission interval in this state is defined as `FastRTT0`, $2^1 * \text{FastRTT0}$, ..., $2^i * \text{FastRTT0}$.

When there is an acknowledgement after any retransmission, the sender will calculate `SlowRTT0` value based on the algorithm defined in [Section 4.2](#).

When there is an acknowledgement after any retransmission, the sender will also switch to the second state, `FAST_FLOW_FAST`. In this state, the retransmission interval is defined as `FastRTT0`, $\text{Max}(\text{SlowRTT0}, 2 * \text{FastRTT0})$, $\text{FastRTT0} * 2^1$, ..., $2^i * \text{FastRTT0}$. The state will be switched back to the FAST state once an acknowledgement is returned within `FastRTT0`, i.e., no retransmission happens for a message. This is reasonable because it shows the network has recovered from congestion or bloated queue.

If some retransmission has been made before the acknowledged arrives in the `FAST_SLOW_FAST` state, the sender updates the `SlowRTT0` value, and moves to the third state, `SLOW_FAST`. The retransmission interval in the `SLOW_FAST` state is defined as `SlowRTT0`, `FastRTT0`, $\text{FastRTT0} * 2^1$, ..., $2^i * \text{FastRTT0}$.

In `SLOW_FAST` state, the sender switches back to the FAST state if an unambiguous acknowledgement arrives. Otherwise, the sender stays in the `SLOW_FAST` state if retransmission happens again.

4.4. Retransmission Count Option

When retransmissions are needed to deliver a CoAP message, it is not possible to measure RTT for the RTO computation as the RTT sample becomes ambiguous. Therefore, it would be beneficial to be able to distinguish whether an acknowledgement arrives for the original transmission of the message or for a retransmission of it. This would allow reliably acquiring an RTT sample for every CoAP message exchange and thereby compute a more accurate RTO even during periods of congestion and loss.

The Retransmission Count Option is used to distinguish whether an Acknowledgement message arrives for the original transmission or one of the retransmissions of a Confirmable message. However, the Retransmission Count Option cannot be used with an Empty Acknowledgement (or Reset) message because the CoAP protocol specification [RFC7252] does not allow adding options to an Empty message. Therefore, Retransmission Count Option is useful only for the common case of Piggybacked Response. In case of Empty Acknowledgements the operation of FASOR is the same as without the option.

+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+
No.	C	U	N	R	Name	Format	Length	Default	
+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+
TBD			X		Rexit-Cnt	uint	0-1	0	
+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+

C=Critical, U=Unsafe, N=NoCacheKey, R=Repeatable

Table 1: Retransmission Count Option

Implementation of the Retransmission Count option is optional and it is identified as elective. However, when it is present in a CoAP message and a CoAP endpoint processes it, it MUST be processed as described in this document. The Retransmission Count option MUST NOT occur more than once in a single message.

The value of the Retransmission Count option is a variable-size (0 to 1 byte) unsigned integer. The default value for the option is the number 0 and it is represented with an empty option value (a zero-length sequence of bytes). However, when a client intends to use Retransmit Count option, it MUST reserve space for it by limiting the request message size also when the value is empty in order to fit the full-sized option into retransmissions.

The Retransmission Count option can be present in both the request and response message. When the option is present in a request it

indicates the ordinal number of the transmission for the request message.

If the server supports (implements) the Retransmission Count option and the option is present in a request, the server MUST echo the option value in its Piggybacked Response unmodified. If the server replies with an Empty Acknowledgement the server MUST silently ignore the option and MUST NOT include it in a later separate response to that request.

When Piggybacked Response carrying the Retransmission Count option arrives, the client uses the option to match the response message to the corresponding transmission of the request. In order to measure a correct RTT, the client must store the timestamp for the original transmission of the request as well as the timestamp for each retransmission, if any, of the request. The resulting RTT sample is used for the RTT computation. If the client retransmitted the request without the option but the response includes the option, the client MUST silently ignore the option.

The original transmission of a request is indicated with the number 0, except when sending the first request to a new destination endpoint. The first original transmission of the request to a new endpoint carries the number 255 (0xFF) and is interpreted the same as an original transmission carrying the number 0. Retransmissions, if any, carry the ordinal number of the retransmission. Once the first Piggybacked Response from the new endpoint arrives the client learns whether or not the other endpoint implements the option. If the first response includes the echoed option, the client learns that the other endpoint supports the option and may continue including the option to each retransmitted request. From this point on the original transmissions of requests implicitly include the option number 0 and a zero-byte integer will be sent according to the CoAP uint-encoding rules. If the first Piggybacked Response does not include the option, the client SHOULD stop including the option into the requests to that endpoint.

When the Retransmission Count option is in use, the client bases the retransmission timeout for the normal RTT in the back off series as follows:

$$\max(\text{RTT}, \text{Previous-RTT-Sample})$$

Previous-RTT-Sample is the RTT sample acquired from the previous message exchange. If no RTT sample was available with the previous message exchange (e.g., the server replied with an Empty Acknowledgement), RTT computed earlier is used like in case the Retransmission Count option is not in use.

4.5. Alternatives for Exchanging Retransmission Count Information

An alternative way of exchanging the retransmission count information between a client and server is to encode it in the Token. The Token is a client-local identifier and a client solely decides how it generates the Token. Therefore, including a varying Token value to retransmissions of the same request is all possible as long as the client can use the Token to differentiate between requests and match a response to the corresponding request. The server is required to make no assumptions about the content or structure of a Token and always echo the Token unmodified in its response.

How exactly a client encodes the retransmission count into a Token is an implementation issue. Note that the original transmission of a request may carry a zero-length Token given that the rules for generating a Token as specified in [RFC 7252](#) [[RFC7252](#)] are followed. This allows reducing the overhead of including the Token into the requests in such cases where Token could otherwise be omitted. However, similar to Retransmit Count option the maximum request message size MUST be limited to accommodate the Token with retransmit count into the retransmissions of the request.

5. Security Considerations

6. IANA Considerations

This memo includes no request to IANA.

7. References

7.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC6298] Paxson, V., Allman, M., Chu, J., and M. Sargent, "Computing TCP's Retransmission Timer", [RFC 6298](#), DOI 10.17487/RFC6298, June 2011, <<https://www.rfc-editor.org/info/rfc6298>>.
- [RFC7252] Shelby, Z., Hartke, K., and C. Bormann, "The Constrained Application Protocol (CoAP)", [RFC 7252](#), DOI 10.17487/RFC7252, June 2014, <<https://www.rfc-editor.org/info/rfc7252>>.

7.2. Informative References

- [I-D.ietf-core-cocoa]
Bormann, C., Betzler, A., Gomez, C., and I. Demirkol,
"CoAP Simple Congestion Control/Advanced", [draft-ietf-core-cocoa-03](#) (work in progress), February 2018.
- [JRCK18a] Jarvinen, I., Raitahila, I., Cao, Z., and M. Kojo, "Is CoAP Congestion Safe?", Applied Networking Research Workshop (ANRW'18), July 2018.
- [JRCK18b] Jarvinen, I., Raitahila, I., Cao, Z., and M. Kojo, "FASOR Retransmission Timeout and Congestion Control Mechanism for CoAP?", Proceedings of IEEE Global Communications Conference (Globecom 2018), to appear, December 2018.
- [KP87] Karn, P. and C. Partridge, "Improving Round-trip Time Estimates in Reliable Transport Protocols", SIGCOMM'87 Proceedings of the ACM Workshop on Frontiers in Computer Communications Technology, August 1987.
- [RFC0896] Nagle, J., "Congestion Control in IP/TCP Internetworks", [RFC 896](#), DOI 10.17487/RFC0896, January 1984, <<https://www.rfc-editor.org/info/rfc896>>.

Appendix A. Pseudocode for Basic FASOR without Dithering

```
var state = NORMAL_RTO

rfc6298_init(var fastrto, 2 secs)

var slowrto
SLOWRTO_FACTOR = 1.5

var original_sendtime
var retransmit_count

/*
 * Sending Original Copy and Retransmitting 'req'
 */
send_request(req) {
    original_sendtime = time.now
    retransmit_count = 0

    arm_rto(calculate_rto())
    send(req)
}

rto_for(req) {
    retransmit_count += 1

    arm_rto(calculate_rto())
    send(req)
}

/*
 * ACK Processings
 */
ack() {
    sample = time.now - original_sendtime
    if (retransmit_count == 0)
        unambiguous_ack(sample)
    else
        ambiguous_ack(sample)
}

unambiguous_ack(sample) {
    k = 4 // RFC6298 default K = 4
    if (rfc6298_is_first_sample(fastrto))
        k = 1
    rfc6298_update(fastrto, k, sample) // Normal RFC6298 processing
    state = NORMAL_RTO
}
```



```
ambiguous_nextstate = {
    [NORMAL_RTO] = FAST_SLOW_FAST_RTO,
    [FAST_SLOW_FAST_RTO] = SLOW_FAST_RTO,
    [SLOW_FAST_RTO] = SLOW_FAST_RTO
}

ambiguous_ack(sample) {
    slowrto = sample * SLOWRTO_FACTOR
    state = ambiguous_nextstate[state]
}

/*
 * RTT Calculations
 */
calculate_rto() {
    return <state>_rtoseries()
}

normal_rtoseries() {
    switch (retransmit_count) {
        case 0: return fastrto_series_init()
        default: return fastrto_series_backoff()
    }
}

fastslowfast_rtoseries() {
    switch (retransmit_count) {
        case 0: return fastrto_series_init()
        case 1: return MAX(slowrto, 2*fastrto)
        default: return fastrto_series_backoff()
    }
}

slowfast_rtoseries() {
    switch (retransmit_count) {
        case 0: return slowrto
        case 1: return fastrto_series_init()
        default: return fastrto_series_backoff()
    }
}

var backoff_series_timer

fastrto_series_init() {
    backoff_series_timer = fastrto
    return backoff_series_timer
}
```



```
fastrto_series_backoff() {  
    backoff_series_timer *= 2  
    return backoff_series_timer  
}
```

Figure 2

Authors' Addresses

Ilpo Jarvinen
University of Helsinki
P.O. Box 68
FI-00014 UNIVERSITY OF HELSINKI
Finland

E-Mail: ilpo.jarvinen@helsinki.fi

Markku Kojo
University of Helsinki
P.O. Box 68
FI-00014 UNIVERSITY OF HELSINKI
Finland

E-Mail: markku.kojo@cs.helsinki.fi

Iivo Raitahila
University of Helsinki
P.O. Box 68
FI-00014 UNIVERSITY OF HELSINKI
Finland

E-Mail: iivo.raitahila@helsinki.fi

Zhen Cao
Huawei
Beijing
China

E-Mail: zhencao.ietf@gmail.com

