

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: January 6, 2017

J. Jeong
H. Kim
Sungkyunkwan University
J. Park
ETRI
T. Ahn
S. Lee
Korea Telecom
July 5, 2016

Software-Defined Networking Based Security Services using Interface to
Network Security Functions
draft-jeong-i2nsf-sdn-security-services-05

Abstract

This document describes a framework, objectives, requirements, and use cases for security services based on Software-Defined Networking (SDN) using a common Interface to Network Security Functions (I2NSF). It first proposes the framework of SDN-based security services in the I2NSF framework. It then explains three use cases, such as a centralized firewall system, centralized DDoS-attack mitigation system, and centralized VoIP/VoLTE security system.

Status of This Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on January 6, 2017.

Internet-Draft

I2NSF SDN-based Security Services

July 2016

Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
2.	Requirements Language	4
3.	Terminology	4
4.	Overview	5
5.	Objectives	7
6.	Requirements	8
7.	Use Cases	9
7.1.	Centralized Firewall System	9
7.2.	Centralized DDoS-attack Mitigation System	10
7.3.	Centralized VoIP/VoLTE Security System	12
8.	Security Considerations	14
9.	Acknowledgements	14
10.	References	14
10.1.	Normative References	14
10.2.	Informative References	15
Appendix A.	Changes from draft-jeong-i2nsf-sdn-security-services-04	16

1. Introduction

Software-Defined Networking (SDN) is a set of techniques that enables users to directly program, orchestrate, control and manage network resources through software (e.g., SDN applications). It relocates the control of network resources to a dedicated network element, namely SDN controller. The SDN controller uses interfaces to arbitrate the control of network resources in a logically centralized manner. It also manages and configures the distributed network resources, and provides the abstracted view of the network resources to the SDN applications. The SDN applications can customize and automate the operations (including management) of the abstracted network resources in a programmable manner via the interfaces [[RFC7149](#)] [ITU-T.Y.3300] [[ONF-OpenFlow](#)] [ONF-SDN-Architecture].

Due to the increase of sophisticated network attacks, the legacy security services become difficult to cope with such network attacks in an autonomous manner. SDN has been introduced to make networks more controllable and manageable, and this SDN technology will be promising to autonomously deal with such network attacks in a prompt manner.

This document describes a framework, objectives and requirements to support the protection of network resources through SDN-based security services using a common interface to Network Security Functions (NSF) [[i2nsf-framework](#)]. It uses an interface to NSF (I2NSF) for such SDN-based security services that are performed in virtual machines through network functions virtualization [[ETSI-NFV](#)].

This document addresses the challenges of the existing systems for security services. As feasible solutions to handle these challenges, this document proposes three use cases of the security services, such as a centralized firewall system, centralized DDoS-attack mitigation system, and centralized VoIP/VoLTE security system.

For the centralized firewall system, this document raises limitations

in the legacy firewalls in terms of flexibility and administration costs. Since in many cases, access control management for firewall is manually performed, it is difficult to add the access control policy rules corresponding to new network attacks in a prompt and autonomous manner. Thus, this situation requires expensive administration costs. This document introduces a use case of SDN-based firewall system to overcome these limitations.

For the centralized DDoS-attack mitigation system, this document raises limitations in the legacy DDoS-attack mitigation techniques in terms of flexibility and administration costs. Since in many cases, network configuration for the mitigation is manually performed, it is

difficult to dynamically configure network devices to limit and control suspicious network traffic for DDoS attacks. This document introduces a use case of SDN-based DDoS-attack mitigation system to provide an autonomous and prompt configuration for suspicious network traffic.

For the centralized VoIP/VoLTE security system, this documents raises challenges in the legacy VoIP/VoLTE security system in terms of provisioning time, the granularity of security, cost, and the establishment of policy. This document shows a use case of SDN-based VoIP/VoLTE security system to resolve these challenges along in the I2NSF framework.

[2.](#) Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

[3.](#) Terminology

This document uses the terminology described in [[RFC7149](#)], [[ITU-T.Y.3300](#)], [[ONF-OpenFlow](#)], [[ONF-SDN-Architecture](#)], [[ITU-T.X.1252](#)], and [[ITU-T.X.800](#)]. In addition, the following terms are defined below:

- o **Software-Defined Networking:** A set of techniques that enables to directly program, orchestrate, control, and manage network resources, which facilitates the design, delivery and operation of

network services in a dynamic and scalable manner [[ITU-T.Y.3300](#)].

- o Access Control: A procedure used to determine if an entity should be granted access to resources, facilities, services, or information based on pre-established rules and specific rights or authority associated with the requesting party [[ITU-T.X.1252](#)].
- o Access Control Policy: The set of rules that define the conditions under which access may take place [[ITU-T.X.800](#)].
- o Access Control Policy Rules: Security policy rules concerning the provision of the access control service [[ITU-T.X.800](#)].
- o Network Resources: Network devices that can perform packet forwarding in a network system. The network resources include network switch, router, gateway, WiFi access points, and similar devices.


- o Firewall: A firewall that is a device or service at the junction of two network segments that inspects every packet that attempts to cross the boundary. It also rejects any packet that does not satisfy certain criteria for disallowed port numbers or IP addresses.
- o Centralized Firewall System: A centralized firewall that can establish and distribute access control policy rules into network resources for efficient firewall management. These rules can be managed dynamically by a centralized server for firewall. SDN can work as a network-based firewall system through a standard interface between firewall applications and network resources.
- o Centralized DDoS-attack Mitigation System: A centralized mitigator that can establish and distribute access control policy rules into network resources for efficient DDoS-attack mitigation. These rules can be managed dynamically by a centralized server for DDoS-attack mitigation. SDN can work as a network-based mitigation system through a standard interface between DDoS-attack mitigation applications and network resources.
- o Centralized VoIP/VoLTE Security System: A centralized security

system that handles the security issues related to VoIP and VoLTE services. SDN can work as a network-based security system through a standard interface between VoIP/VoLTE security applications and network resources.

4. Overview

This section describes the referenced architecture to support SDN-based security services, such as centralized firewall system and centralized DDoS-attack mitigation system. Also, it describes a framework for SDN-based security services using I2NSF.

As shown in Figure 1, network security functions (NSFs) as security services (e.g., firewall, DDoS-attack mitigation, VoIP/VoLTE, web filter, and deep packet inspection) run on the top of SDN controller [ITU-T.Y.3300] [ONF-SDN-Architecture]. When an administrator enforces security policies for such security services through an application interface, SDN controller generates the corresponding access control policy rules to meet such security policies in an autonomous and prompt manner. According to the generated access control policy rules, the network resources such as switches take an action to mitigate network attacks, for example, dropping packets with suspicious patterns.

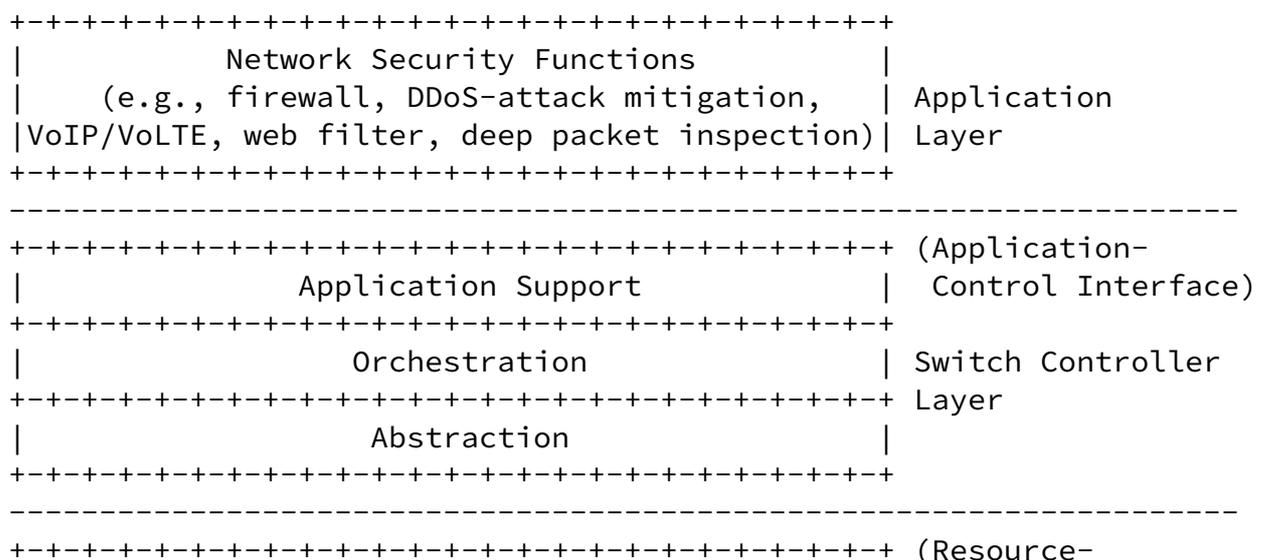

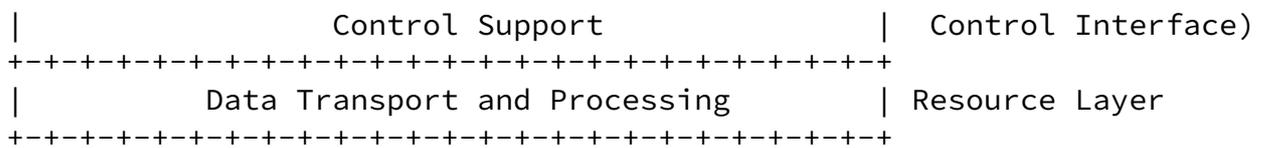


Figure 1: High-level Architecture for SDN-based Security Services

Figure 2 shows a framework to support SDN-based security services using I2NSF [[i2nsf-framework](#)]. As shown in Figure 2, I2NSF client can use security services by delivering their high-level security policies to security controller via client facing interface. Security controller asks NSFs to perform function-level security services via NSF facing interface. The NSFs run on top of virtual machines through Network Functions Virtualization (NFV) [[ETSI-NFV](#)]. NSFs ask switch controller to perform their required security services on switches under the supervision of switch controller. In addition, security controller uses registration interface to communicate with developer's management system for registering (or deregistering) the developer's NSFs into (or from) the NFV system using the I2NSF framework.

NSF facing interface between security controller and NSFs can be implemented by Network Configuration Protocol (NETCONF) [[RFC6241](#)] with a data modeling language called YANG [[RFC6020](#)] that describes function-level security services. A data model in [[i2nsf-cap-interface-yang](#)] can be used for the I2NSF capability interface, which is NSF facing interface.

The proposed framework of SDN-based security services can be combined to a security management architecture in [[i2nsf-sec-mgmt-arch](#)] for handling high-level security policies as well as low-level security policies.

Also, the proposed framework can enforce low-level security policies in NSFs by using a service function chaining (SFC) enabled I2NSF architecture in [[i2nsf-sfc-enabled-arch](#)].

5. Objectives

- o Prompt reaction to new network attacks: SDN-based security services allow private networks to defend themselves against new

sophisticated network attacks.

- o Automatic defense from network attacks: SDN-based security services identify the category of network attack (e.g., malware and DDoS attacks) and take counteraction for the defense without the intervention of network administrators.
- o Network-load-aware resource allocation: SDN-based security services measure the overhead of resources for security services and dynamically select resources considering load balance for the maximum network performance.

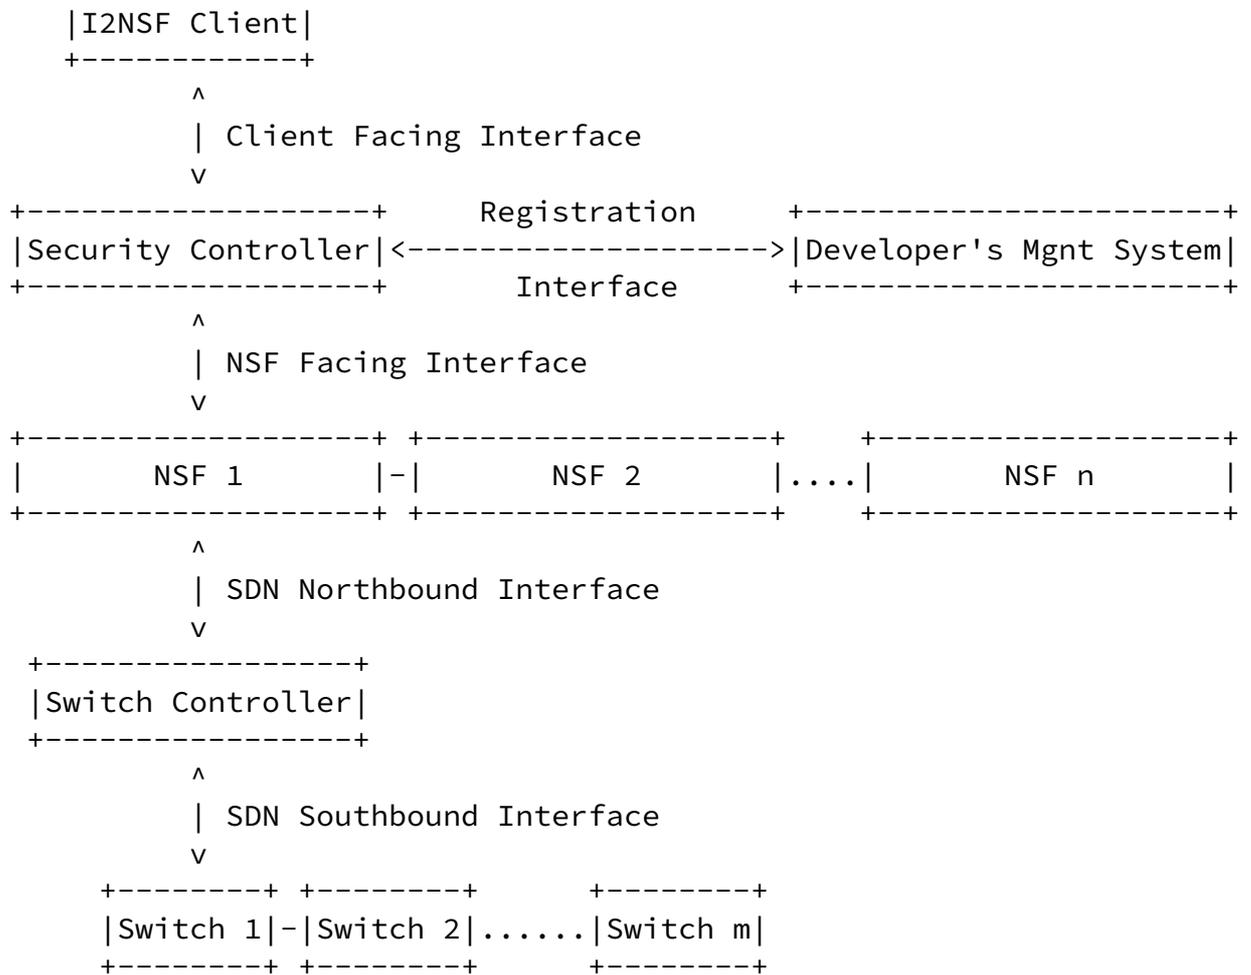


Figure 2: A Framework for SDN-based Security Services using I2NSF

6. Requirements

SDN-based security services provide dynamic and flexible network resource management to mitigate network attacks, such as malware and DDoS attacks. In order to support this capability, the requirements for SDN-based security services are described as follows:

- o SDN-based security services are required to support the programmability of network resources to mitigate network attacks.
- o SDN-based security services are required to support the orchestration of network resources and SDN applications to mitigate network attacks.
- o SDN-based security services are required to provide an application interface allowing the management of access control policies in an autonomous and prompt manner.

- o SDN-based security services are required to provide a resource-control interface for the control of network resources to mitigate network attacks.
- o SDN-based security services are required to provide the logically centralized control of network resources to mitigate network attacks.
- o SDN-based security services are required to support the seamless services to mitigate network attacks.
- o SDN-based security services are required to provide the dynamic control of network resources to mitigate network attacks.

7. Use Cases

This section introduces three use cases for security services based on SDN: (i) centralized firewall system, (ii) centralized DDoS-attack mitigation system, and (iii) centralized VoIP/VoLTE security system.

7.1. Centralized Firewall System

For the centralized firewall system, a centralized network firewall can manage each network resource and firewall rules can be managed flexibly by a centralized server for firewall (called Firewall). The centralized network firewall controls each switch for the network resource management and the firewall rules can be added or deleted dynamically.

The procedure of firewall operations in the centralized firewall system is as follows:

1. Switch forwards an unknown flow's packet to Switch Controller.
2. Switch Controller forwards the unknown flow's packet to an appropriate security service application, such as Firewall.
3. Firewall analyzes the headers and contents of the packet.
4. If Firewall regards the packet as a malware's packet with a suspicious pattern, it reports the malware's packet to Switch Controller.
5. Switch Controller installs new rules (e.g., drop packets with the suspicious pattern) into switches.

6. The malware's packets are dropped by switches.

For the above centralized firewall system, the existing SDN protocols can be used through standard interfaces between the firewall application and switches [[RFC7149](#)] [ITU-T.Y.3300] [[ONF-OpenFlow](#)] [[ONF-SDN-Architecture](#)].

Legacy firewalls have some challenges such as the expensive cost, performance, management of access control, establishment of policy, and packet-based access mechanism. The proposed framework can resolve these challenges through the above centralized firewall system based on SDN as follows:

- o **Cost:** The cost of adding firewalls to network resources such as routers, gateways, and switches is substantial due to the reason that we need to add firewall on each network resource. To solve this, each network resource can be managed centrally such that a single firewall is manipulated by a centralized server.
- o **Performance:** The performance of firewalls is often slower than the link speed of network interfaces. Every network resource for firewall needs to check firewall rules according to network conditions. Firewalls can be adaptively deployed among network switches, depending on network conditions in the framework.
- o **The management of access control:** Since there may be hundreds of network resources in an administered network, the dynamic management of access control for security services like firewall is a challenge. In the framework, firewall rules can be dynamically added for new malware.
- o **The establishment of policy:** Policy should be established for each network resource. However, it is difficult to describe what flows are permitted or denied for firewall within a specific organization network under management. Thus, a centralized view is helpful to determine security policies for such a network.
- o **Packet-based access mechanism:** Packet-based access mechanism is not enough for firewall in practice since the basic unit of access control is usually users or applications. Therefore, application level rules can be defined and added to the firewall system

through the centralized server.

[7.2.](#) Centralized DDoS-attack Mitigation System

For the centralized DDoS-attack mitigation system, a centralized DDoS-attack mitigation can manage each network resource and manipulate rules to each switch through a centralized server for DDoS-attack mitigation (called DDoS-attack Mitigator). The centralized DDoS-attack mitigation system defends servers against

DDoS attacks outside private network, that is, from public network.

Servers are categorized into stateless servers (e.g., DNS servers) and stateful servers (e.g., web servers). For DDoS-attack mitigation, traffic flows in switches are dynamically configured by traffic flow forwarding path management according to the category of servers [[AVANT-GUARD](#)]. Such a management should consider the load balance among the switches for the defense against DDoS attacks.

The procedure of DDoS-attack mitigation operations in the centralized DDoS-attack mitigation system is as follows:

1. Switch periodically reports an inter-arrival pattern of a flow's packets to Switch Controller.
2. Switch Controller forwards the flow's inter-arrival pattern to an appropriate security service application, such as DDoS-attack Mitigator.
3. DDoS-attack Mitigator analyzes the reported pattern for the flow.
4. If DDoS-attack Mitigator regards the pattern as a DDoS attack, it computes a packet dropping probability corresponding to suspiciousness level and reports this DDoS-attack flow to Switch Controller.
5. Switch Controller installs new rules into switches (e.g., forward packets with the suspicious inter-arrival pattern with a dropping probability).
6. The suspicious flow's packets are randomly dropped by switches with the dropping probability.

For the above centralized DDoS-attack mitigation system, the existing SDN protocols can be used through standard interfaces between the DDoS-attack mitigator application and switches [[RFC7149](#)] [[ITU-T.Y.3300](#)] [[ONF-OpenFlow](#)] [[ONF-SDN-Architecture](#)].

The centralized DDoS-attack mitigation system has challenges similar to the centralized firewall system. The proposed framework can resolve these challenges through the above centralized DDoS-attack mitigation system based on SDN as follows:

- o **Cost:** The cost of adding DDoS-attack mitigators to network resources such as routers, gateways, and switches is substantial due to the reason that we need to add DDoS-attack mitigator on each network resource. To solve this, each network resource can be managed centrally such that a single DDoS-attack mitigator is

manipulated by a centralized server.

- o **Performance:** The performance of DDoS-attack mitigators is often slower than the link speed of network interfaces. The checking of DDoS attacks may reduce the performance of the network interfaces. DDoS-attack mitigators can be adaptively deployed among network switches, depending on network conditions in the framework.
- o **The management of network resources:** Since there may be hundreds of network resources in an administered network, the dynamic management of network resources for performance (e.g., load balancing) is a challenge for DDoS-attack mitigation. In the framework, as dynamic network resource management, traffic flow forwarding path management can handle the load balancing of network switches [[AVANT-GUARD](#)]. With this management, the current and near-future workload can be spread among the network switches for DDoS-attack mitigation. In addition, DDoS-attack mitigation rules can be dynamically added for new DDoS attacks.
- o **The establishment of policy:** Policy should be established for each network resource. However, it is difficult to describe what flows are permitted or denied for new DDoS-attacks (e.g., DNS reflection attack) within a specific organization network under management. Thus, a centralized view is helpful to determine security policies for such a network.

7.3. Centralized VoIP/VoLTE Security System

For the centralized VoIP/VoLTE security system, a centralized VoIP/VoLTE security system can monitor each VoIP/VoLTE flow and manage VoIP/VoLTE security rules controlled by a centralized server for VoIP/VoLTE security service (called VoIP IPS). The VoIP/VoLTE security system controls each switch for the VoIP/VoLTE call flow management by manipulating the rules that can be added, deleted or modified dynamically.

The procedure of VoIP/VoLTE security operations in the centralized VoIP/VoLTE security system is as follows:

1. A switch forwards an unknown call flow's signal packet (e.g., SIP packet) to Switch Controller. Also, if the packet belongs to a matched flow's packet related to SIP (called matched SIP packet), Switch forwards the packet to Switch Controller so that the packet can be checked by an NSF for VoIP (i.e., VoIP IPS) via Switch Controller, which monitors the behavior of its SIP call.
2. Switch Controller forwards the unknown flow's packet or the matched SIP packet to an appropriate security service function,

such as VoIP IPS.

3. VoIP IPS analyzes the headers and contents of the signal packet, such as IP address, calling number, and session description [[RFC4566](#)].
4. If VoIP IPS regards the packet as a spoofed packet by hackers or a scanning packet searching for VoIP/VoLTE devices, it requests the Switch Controller to block that packet and the subsequent packets that have the same call-id.
5. Switch Controller installs new rules (e.g., drop packets) into switches.
6. The illegal packets are dropped by switches.

For the above centralized VoIP/VoLTE security system, the existing SDN protocols can be used through standard interfaces between the

VoIP IPS application and switches [[RFC7149](#)] [ITU-T.Y.3300] [[ONF-OpenFlow](#)] [ONF-SDN-Architecture].

Legacy hardware based VoIP IPSes have some challenges, such as provisioning time, the granularity of security, expensive cost, and the establishment of policy. The proposed framework can resolve these challenges through the above centralized VoIP/VoLTE security system based on SDN as follows:

- o Provisioning: The provisioning time of setting up a legacy VoIP IPS to network is substantial because it takes from some hours to some days. By managing the network resources centrally, VoIP IPS can provide more agility in provisioning both virtual and physical network resources from a central location.
- o The granularity of security: The security rules of a legacy VoIP IPS are compounded considering the granularity of security. The proposed framework can provide more granular security by centralizing security control into a switch controller. The VoIP IPS can effectively manage security rules throughout the network.
- o Cost: The cost of adding VoIP IPS to network resources, such as routers, gateways, and switches is substantial due to the reason that we need to add VoIP IPS on each network resource. To solve this, each network resource can be managed centrally such that a single VoIP IPS is manipulated by a centralized server.
- o The establishment of policy: Policy should be established for each network resource. However, it is difficult to describe what flows are permitted or denied for VoIP IPS within a specific

Jeong, et al.

Expires January 6, 2017

[Page 13]

Internet-Draft

I2NSF SDN-based Security Services

July 2016

organization network under management. Thus, a centralized view is helpful to determine security policies for such a network.

So far this document has described the procedure and impact of the three use cases for security services. To support these use cases in the proposed framework, a data model described in [[i2nsf-cap-interface-yang](#)] can be used as NSF facing interface along with NETCONF [[RFC6241](#)].

[8](#). Security Considerations

The proposed SDN-based framework in this document is derived from the I2NSF framework [[i2nsf-framework](#)], so the security considerations of the I2NSF framework should be included in this document. Therefore, proper secure communication channels should be used the delivery of control or management messages among the components in the proposed framework.

This document shares all the security issues of SDN that are specified in the "Security Considerations" section of [[ITU-T.Y.3300](#)].

[9.](#) Acknowledgements

This document was supported by Institute for Information & communications Technology Promotion (IITP) grant funded by the Korea government (MSIP) [10041244, Smart TV 2.0 Software Platform] and by MSIP/IITP [R0166-15-1041, Standard Development of Network Security based SDN].

This document has greatly benefited from inputs by Jinyong Kim, Daeyoung Hyun, Mahdi Daghmehchi-Firoozjaei, and Geumhwan Cho.

[10.](#) References

[10.1.](#) Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [i2nsf-framework] Lopez, E., Lopez, D., Dunbar, L., Strassner, J., Zhuang, X., Parrott, J., Krishnan, R., and S. Durbha, "Framework for Interface to Network Security Functions", [draft-ietf-i2nsf-framework-01](#), June 2016.

Jeong, et al. Expires January 6, 2017 [Page 14]

Internet-Draft I2NSF SDN-based Security Services July 2016

- [RFC6241] Enns, R., Bjorklund, M., Schoenwaelder, J., and A. Bierman, "Network Configuration Protocol (NETCONF)", [RFC 6241](#), June 2011.

[RFC6020] Bjorklund, M., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), October 2010.

10.2. Informative References

[i2nsf-cap-interface-yang] Jeong, J., Kim, J., Hyun, D., Park, J., and T. Ahn, "YANG Data Model of Interface to Network Security Functions Capability Interface", [draft-jeong-i2nsf-capability-interface-yang-00](#), July 2016.

[i2nsf-sec-mgmt-arch] Kim, H., Ko, H., Oh, S., Jeong, J., and S. Lee, "An Architecture for Security Management in I2NSF Framework", [draft-kim-i2nsf-security-management-architecture-01](#), July 2016.

[i2nsf-sfc-enabled-arch] Hyun, S., Woo, S., Yeo, Y., Jeong, J., and J. Park, "Service Function Chaining-Enabled I2NSF Architecture", [draft-hyun-i2nsf-sfc-enabled-i2nsf-00](#), July 2016.

[RFC7149] Boucadair, M. and C. Jacquenet, "Software-Defined Networking: A Perspective from within a Service Provider Environment", [RFC 7149](#), March 2014.

[ITU-T.Y.3300] Recommendation ITU-T Y.3300, "Framework of Software-Defined Networking", June 2014.

[ONF-OpenFlow] ONF, "OpenFlow Switch Specification (Version 1.4.0)", October 2013.

[ONF-SDN-Architecture] ONF, "SDN Architecture", June 2014.

[ITU-T.X.1252] Recommendation ITU-T X.1252, "Baseline Identity Management Terms and Definitions", April 2010.

- [ITU-T.X.800] Recommendation ITU-T X.800, "Security Architecture for Open Systems Interconnection for CCITT Applications", March 1991.
- [AVANT-GUARD] Shin, S., Yegneswaran, V., Porras, P., and G. Gu, "AVANT-GUARD: Scalable and Vigilant Switch Flow Management in Software-Defined Networks", ACM CCS, November 2013.
- [ETSI-NFV] ETSI GS NFV 002 V1.1.1, "Network Functions Virtualisation (NFV); Architectural Framework", October 2013.
- [RFC4566] Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol", [RFC 4566](#), July 2006.

[Appendix A](#). Changes from [draft-jeong-i2nsf-sdn-security-services-04](#)

The following changes were made from [draft-jeong-i2nsf-sdn-security-services-04](#):

- o According to the change of terminology in the I2NSF framework, the names of the components and interfaces are updated as follows: Application Controller -> I2NSF Client, Security Function (SF) -> Network Security Function (NSF), Vendor System -> Developer's Management System, Service Layer Interface -> Client Facing Interface, Capability Layer Interface -> NSF Facing Interface.
- o Three use cases described in this document can use a data model corresponding to the information model for the I2NSF capability interface.
- o The proposed framework of SDN-based security services can be combined to a security management architecture for handling security policies.
- o The proposed framework can enforce low-level security policies in NSFs by using a service function chaining (SFC) enabled I2NSF architecture.

Internet-Draft

I2NSF SDN-based Security Services

July 2016

Authors' Addresses

Jaehoon Paul Jeong
Department of Software
Sungkyunkwan University
2066 Seobu-Ro, Jangan-Gu
Suwon, Gyeonggi-Do 16419
Republic of Korea

Phone: +82 31 299 4957
Fax: +82 31 290 7996
EMail: pauljeong@skku.edu
URI: <http://iotlab.skku.edu/people-jaehoon-jeong.php>

Hyoungshick Kim
Department of Software
Sungkyunkwan University
2066 Seobu-Ro, Jangan-Gu
Suwon, Gyeonggi-Do 16419
Republic of Korea

Phone: +82 31 299 4324
Fax: +82 31 290 7996
EMail: hyoung@skku.edu
URI: <http://seclab.skku.edu/people/hyoungshick-kim/>

Jung-Soo Park
Electronics and Telecommunications Research Institute
218 Gajeong-Ro, Yuseong-Gu
Daejeon 305-700
Republic of Korea

Phone: +82 42 860 6514
EMail: pjs@etri.re.kr

Tae-Jin Ahn
Korea Telecom

70 Yuseong-Ro, Yuseong-Gu
Daejeon 305-811
Republic of Korea

Phone: +82 42 870 8409
EMail: taejin.ahn@kt.com

Jeong, et al.

Expires January 6, 2017

[Page 17]

Internet-Draft

I2NSF SDN-based Security Services

July 2016

Se-Hui Lee
Korea Telecom
70 Yuseong-Ro, Yuseong-Gu
Daejeon 305-811
Republic of Korea

Phone: +82 42 870 8162
EMail: sehuilee@kt.com

