

Behave Working Group
Internet-Draft
Intended status: Standards Track
Expires: September 6, 2010

J. Kato
A. Matsumoto
T. Fujisaki
NTT
March 5, 2010

Checksum-Neutral Prefix NAT for IPv6
draft-kato-behave-prefix-nat-01.txt

Abstract

This document describes a use-case of IPv6-to-IPv6 network address translation, and a translation mechanism for smaller network. To be used typically in a network where IPv6 /64 prefix is advertised, a network address translation mechanism is proposed that is based on Interface Identifier rewriting to be checksum neutral.

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on September 6, 2010.

Copyright Notice

Copyright (c) 2010 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents

(<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

Table of Contents

1.	Introduction	4
2.	Proposal of Address Translation using Interface Identifier . .	4
2.1.	Address Translation Example	4
3.	Discussion	6
4.	IANA Considerations	6
5.	Security Considerations	6
6.	References	6
6.1.	Normative References	6
6.2.	Informative References	7
	Authors' Addresses	7

1. Introduction

The IPv6-to-IPv6 translation mechanism proposed in NAT66 document. NAT66 document [[I-D.mrw-behave-nat66](#)]. This assumes that a network is assigned /48 or larger address block. This is because the mechanism uses 16 bits of IPv6 address for subnetting to make the translation neutral to address translation.

However, in some environment, a network cannot get such a large address space. Then, we propose another IPv6-to-IPv6 translation mechanism that can be used in a network with /48 or smaller address block and that is neutral to transport layer checksum. This mechanism also has a characteristics of one-to-one mapping, to keep the end-to-end transparency as much as possible.


2. Proposal of Address Translation using Interface Identifier

A IPv6 address translation mechanism for smaller network is proposed in this section. This translation mechanism is one-to-one mapping based, and is Interface Identifier rewriting based, to make it checksum neutral.

Regarding the prefix part of an IPv6 address, it is simply replaced with the predefined external/internal prefix value. Regarding the Interface Identifier part, the modified value is chosen so that the address translation does not have an impact on transport layer checksum, which is almost the same technique adopted in NAT66 [[I-D.mrw-behave-nat66](#)].

2.1. Address Translation Example

Example network structure is described below.

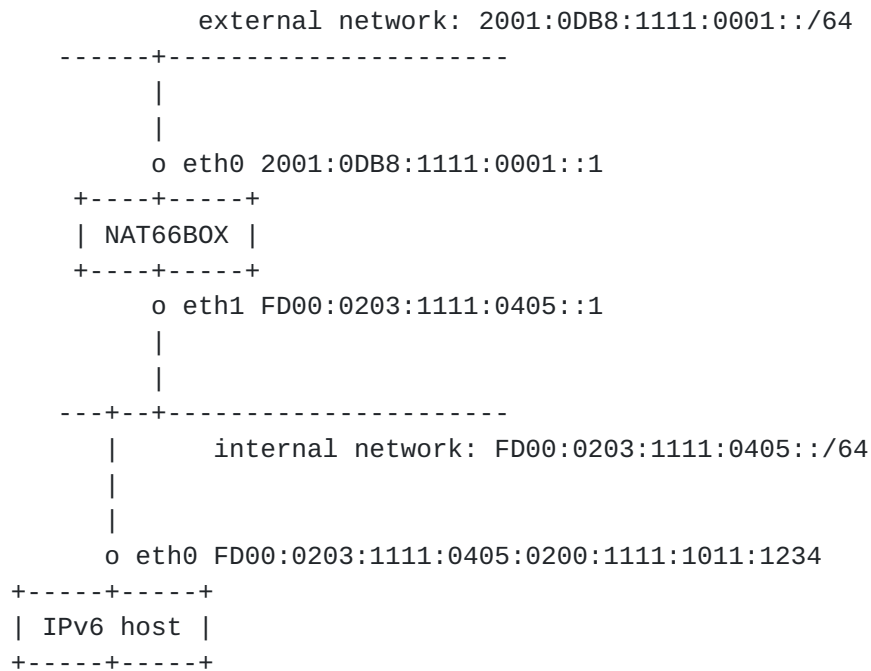

example network

When IPv6 host sends a packet destined to external network, NAT66BOX receives the following IPv6 packet.

```
dst IPv6 address:  (somewhere in external network)
src IPv6 address:  fd00:0203:1111:0405:0200:1111:1011:1234
```

NAT66BOX performs the following address translation to the source address of the IPv6 packet, and forward the packet to the upstream. Here, it is assumed that the function `cksum(x)` calculates the 16-bit one's complement sum as defined in [RFC1071](#) [[RFC1071](#)].

1. Calculates the difference between to-be-translated prefix checksum and translated prefix checksum.

```
cksum(FD01:0203:1111:0405) => 0x141B
cksum(2001:0DB8:1111:0001) => 0x3ECB
```

2. Gets the difference of the two prefixes based on one's complement sum.

```
0x3ECB - 0x141B = 0x2AB0
```


3. Gets the difference of the least significant 16 bits of the to-be-translated IPv6 address and the difference of the prefixes' checksums calculated at 2.

$0x1234 - 0x2AB0 = 0xE783$

4. Puts the value of 3 to the least significant 16 bits of the translated address Interface Identifier, and gets the translated address.

`2001:0DB8:1111:0001:0200:1111:1011:E783`

In the same way, translation of incoming packet from external network can be processed.

3. Discussion

The mechanism describes here ignores the meaning U/L bit described in [[RFC4291](#)]. As the Interface Identifier part of the translated address is not assured of uniqueness, the U/L bit should not be set to 1.

The workarounds for this issue are to have per-session translation table, to administrate the addresses of hosts in local network and make all of them use addresses with U/L bit 0.

4. IANA Considerations

This document has no actions for IANA.

5. Security Considerations

TBD

6. References

6.1. Normative References

[I-D.mrw-behave-nat66]

Wasserman, M. and F. Baker, "IPv6-to-IPv6 Network Address Translation (NAT66)", [draft-mrw-behave-nat66-02](#) (work in progress), March 2009.

[RFC1071] Braden, R., Borman, D., Partridge, C., and W. Plummer, "Computing the Internet checksum", [RFC 1071](#), September 1988.

[RFC4291] Hinden, R. and S. Deering, "IP Version 6 Addressing Architecture", [RFC 4291](#), February 2006.

[6.2.](#) Informative References

Authors' Addresses

Jun-ya Kato
NTT PF Lab
Midori-Cho 3-9-11
Musashino-shi, Tokyo 180-8585
Japan

Phone: +81 422 59 2939
Email: kato@nttv6.net

Arifumi Matsumoto
NTT PF Lab
Midori-Cho 3-9-11
Musashino-shi, Tokyo 180-8585
Japan

Phone: +81 422 59 3334
Email: arifumi@nttv6.net

Tomohiro Fujisaki
NTT PF Lab
Midori-Cho 3-9-11
Musashino-shi, Tokyo 180-8585
Japan

Phone: +81 422 59 7351
Email: fujisaki@syce.net

