

Network Working Group
Internet-Draft
Intended status: Informational
Expires: 30 October 2022

K. Sun
ETRI
Y. Kim
Soongsil University
28 April 2022

LISP Support for Dynamic Anycast Routing
draft-kjsun-lisp-dyncast-02

Abstract

Dynamic Anycast (Dyncast) is a new routing approach to support equivalent services running in distributed geolocations and connect to them by considering both network-related metric and service-related metric. In LISP, it is possible to support anycast EIDs and/or anycast RLOCs without any modification, so it is suitable for providing dyncast routing. In this document, it describes the LISP-based dyncast architecture and related standard works to meet dyncast requirements.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 30 October 2022.

Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components

Internet-Draft

LISP Anycast

April 2022

extracted from this document must include Revised BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Revised BSD License.

Table of Contents

1.	Introduction	2
2.	Terminology	3
3.	Architecture Overview	3
4.	Addressing Dyncast Requirements with LISP	6
4.1.	Anycast-based Service Addressing	6
4.2.	Instance Affinity	7
4.3.	Encoding and Signaling of Metric	8
4.4.	Dynamic Routing Decisions based using Metrics	9
4.5.	Supporting Service Dynamism	10
5.	Security Considerations	10
6.	References	10
6.1.	Informative References	10
	Authors' Addresses	11

[1.](#) Introduction

With emerging that multiple edge sites deployed at different locations and had different capacity to provide a service with edge computing, when the clients requests service, there is a requirement to make "best" decision to select edge node among requested service running simultaneously on multiple edges. While distributing service requests to a specific service having multiple instances attached to multiple edges, one of solution is to take into account computing as well as service-specific metrics in the distribution decision seen as dynamic anycast ("dyncast", for short).

The main feature of the dyncast described in [\[draft-liu-dyncast-ps-usecases\]](#) is that a unique service identifier that can be assigned to multiple instances in multiple edge environments should be able to be mapped as an actual routable unicast address. Since this concept is similar to the Location/ID separation method already used in the LISP design basis, the LISP protocol can be considered as one of the candidate protocols that can implement dyncast. This draft is proposed to design the LISP-based architecture for Dyncast and analyze the extension method of LISP to meet the requirements defined in [\[draft-liu-dyncast-reqs\]](#) for realizing dynamic anycasting between different LISP sites.

Internet-Draft

LISP Anycast

April 2022

2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document is to be interpreted as described in [\[RFC2119\]](#). This document uses the terminology described in [\[RFC6830\]](#), [\[draft-liu-dyncast-ps-usecases\]](#), [\[draft-liu-dyncast-reqs\]](#). Detailed definition of terminologies are written below.

Dyncast : As defined in [\[draft-liu-dyncast-ps-usecases\]](#), Dynamic Anycast, taking the dynamic nature of computing resource metrics into account to steer an anycast routing decision.

D-Router: A node supporting Dyncast functionalities as described in this document. Namely it is able to understand both network-related and service-instances-related metrics, take forwarding decision based upon and maintain instance affinity, i.e., forwards packets belonging to the same service demand to the same instance.

Dyncast Metric Agent (D-MA): A dyncast specific agent able to gather and send metric updates (from both network and instance perspective) but not performing forwarding decisions. May run on a D-Router, but it can be also implemented as a separate module (e.g., a software library) collocated with a service instance.

Dyncast Service Endpoint ID (DSEID) : Anycast IP address assigned to the service running on distributed locations. DSEID cannot be routed globally, and it is unique for specific service. Multiple service instances which are same service have a same DSEID.

D-BID: Dyncast Binding D-Node, an address to reach a service instance for a given DSEID. It is usually a unicast IP where service instances are attached. Different service instances provide the same service identified through D-SID but with different Dyncast Binding IDs. In the LISP architecture, D-BIDs of same service are replaced to RLOC-set of DSEID.

3. Architecture Overview

Figure 1 describes the LISP use-case for dynamic anycast. In the LISP architecture [[draft-ietf-lisp-introduction-13](#)], each edge network has one or more LISP routers deployed. For anycast address, [[RFC6830](#)] defines that anycast address can be assigned for both Endpoint ID (EID) and Routing Locator (RLOC) within each of their address spaces. In this draft, we called EID for dynamic anycasting as Dyncast Service Endpoint ID (DSEID), which is assigned to equivalent services across the multiple LISP sites. Similar to the common EID definition, the DSEID cannot be routed globally by itself,

and the same DSEID cannot be assigned to different services. In order to forward a packet destined for a DSEID between LISP edges, the addresses of the LISP Egress Tunnel Router (ETR) are used as RLOC-set, which was defined as a Dyncast Binding ID (D-BID) in [[draft-li-dyncast-architecture](#)]. Unlike D-BID which is routable and unique for all each service instance, RLOC-set is routable in the underlay but it is not unique values per each service instances. When multiple services are running in the same LISP site, they can be assigned the same RLOC which is xTR of their LISP site. Map-server/resolver of the LISP control plane can manage mapping information for DESID-to-RLOC-set mappings together with existing EID-to-RLOC mappings.

For resource-efficient forwarding decisions across multiple service instances, [[draft-li-dyncast-architecture](#)] defines Dyncast Metric Agent (D-MA) which collects metrics related network and service instances. Actual packet forwarding is handled in the Dyncast Router (D-Router) based upon collected metrics with maintaining instance affinity. In the LISP architecture, the D-Router and D-MA function can be implemented on each LISP ETR, or can be deployed as separate components within the edge for managing service instances. The LISP control plane is logically centralized and it provides an interface with each LISP router to exchange mapping information. However, it does not mean that the LISP control plane is located in a single physical location, several mechanisms for distributing the mapping system already have been defined.

+-----+
|LISP Control Plane|

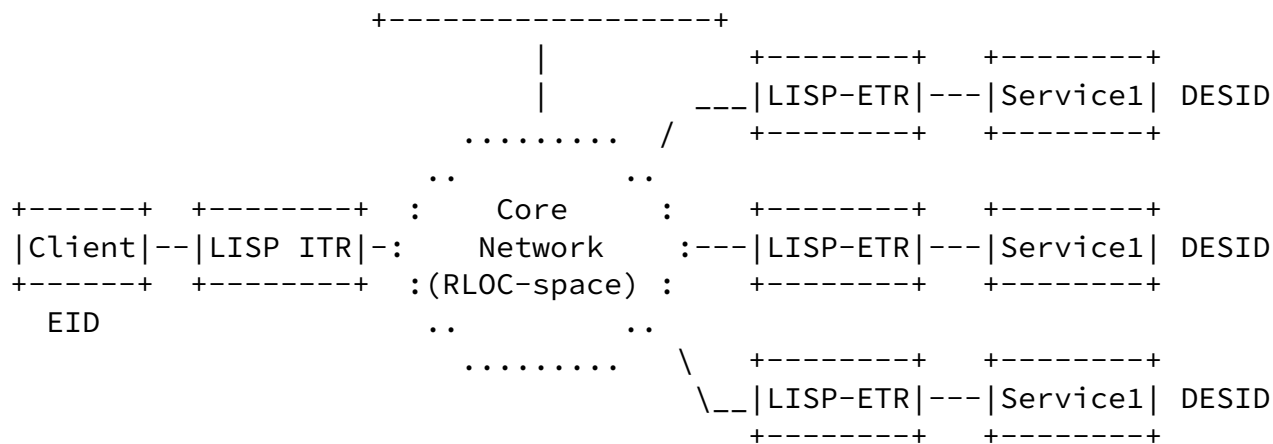


Figure 1: LISP use-case for Dynamic anycast

Figure 3 shows an example of LISP-based dynicast deployment where two services each deployed two instances at different edges. In this scenario, two services are assigned an RLOC according to the ETR

address of the LISP site. Both Service_A and Service_B instances connected to ETR_2 are assigned RLOC2, which is the RLOC of ETR_2, as a binding ID. According this figure, DSEID-to-RLOC-set mappings can be configured as an example below.


DSEID	RLOC-set
DSEID_A	RLOC-set_A ({RLOC2, metric}, {RLOC3, metric})
DSEID_B	RLOC-set_B ({RLOC2, metric}, {RLOC3, metric})

Figure 2: DSEID-to-RLOC-set Example

In addition to these examples, the RLOC-set can also be used in the form of Explicit Locator Path (ELP) or Run-Length Encoding (RLE) for the encap-path between ETR and ITR.

In the case of the edge where ETR_2 is located, as an edge composed only of service instances, the LISP Router function can be operated by being strongly coupled to the edge computing server. In this case, the D-MA function can be implemented on the ETR to insert service-instance-related metrics directly into the LISP protocol

packet. In case that a service instance and a client co-exist like an edge where ETR_3 is located, the D-MA entity can be independently deployed proximity of the service instance is running, transparent from the LISP operation for clients. Mapping information update for DSEID is performed through the LISP protocol Map-Register message, and service-instance-related metric can be delivered through in the LISP protocol header or other methods. A method of inserting service-instance-related metric information into the LISP protocol will be discussed later. When the ITR_1 receives a packet destined for the DSEID of the service by service request from the Host_1, the ITR can acquire the RLOC-set of the requested DSEID from the LISP control-plane through the Map-Request message. At the control plane, it may select a proper RLOC on the collected metric information and return it to the ITR or return the RLOC-set of multiple service instances with metric information to the ITR so the ITR selects the proper RLOC in the set. A method for determining an appropriate RLOC will be discussed later.

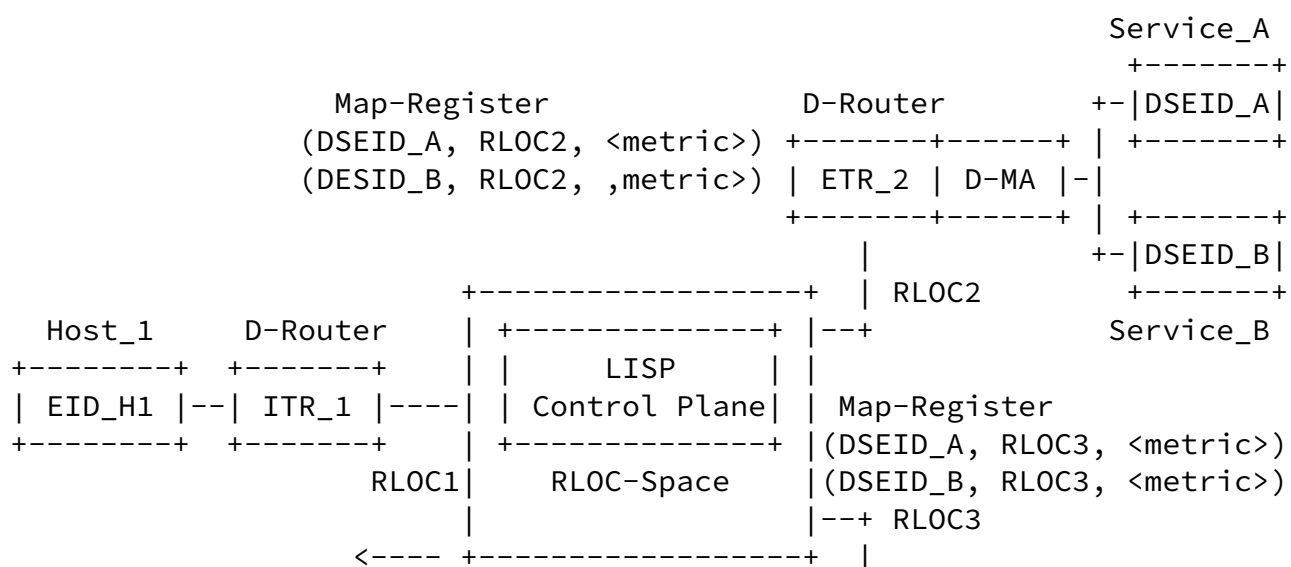

within a single site.

One of alternative addressing solution is to use anycast-SEID-to-anycast-RLOC mapping. Using this, it is required to register from one place (an SDN controller) or each ETR registering the same RLOC without any merge semantics. So the service is chosen by destination address in a packet (the anycast-EID) which maps to an anycast-RLOC where the underlay takes you to the "closest" LISP site. However, in the dyncast, routing selection is not depending on just distance but also computing resources of each service location. Depending on dynamics of these metrics, anycast-RLOC should be registered/deregistered at the ETR depending on the absence of specific anycast-EID. Further discussion is required which is more efficient rather than using indirection mapping and update it with unicast-RLOC with metric information.

[4.2.](#) Instance Affinity

For dyncast routing, it is required that the system must set "Instance Affinity" for one or several service requests to provide routing to the same service instance for the same flow. In LISP, the RLOC mapping information for the destination EID is stored in a local cache called Map-cache in the ITR for a certain period of time, and it is maintained for a set time-to-live (TTL) time. Therefore, mapping information for a specific service once requested from a client is generally maintained in the ITR until the corresponding session expires and can be delivered to the RLOC stored in the map-cache entry. However, in order to have a flexible selection of service instances between different flows at the same point, it is additionally required to assign different RLOCs for different flows depending on metrics dynamically changed. For that, it is necessary to enhance ITR Map-cache to maintain destination RLOC for each flow. In [[draft-rodrigueznatal-lisp-multi-tuple-eids](#)], it can be supported to store Multi-Tuple Extend-EID mappings. With Multi-Tuple EID mappings, it is possible to provide RLOC affinity depending on its destination DSEID as well as other information such as source EID, protocol or port number. For that, it is required to support multi-stage lookup process, where the multi-tuple EID mappings that point to an DSEID and then there is a DSEID mapping that points to RLOC-set.

In addition, although the general TTL value in LISP ITR is defined as

24 hours, in dyncast the system requires a shorter TTL time for changing network path depending on dynamically updated network-related and service-instance-related metrics. The LISP support to send a refresh Map-Request before removing map-cache entry. If it needs a shorter TTL to update the map-cache, two options are possible. First option is to send Solicit Map-Request(SMR) for refreshing cache, and another option is to use Pub/Sub which is described in [[draft-ietf-lisp-pubsub](#)].

4.3. Encoding and Signaling of Metric

In dyncast routing, the one of most important requirements is that it should be able to collect various metrics of service-instances-related as well as network-related, and include them in-network routing decisions. For that, it is necessary to define how to collect these metrics and forward them, and also where to make a decision. In the LISP environment, since that the entire EID-RLOC mapping information is managed in the control plane, one possible scenario is that the D-MA function which collects service-instance-related metrics updates them to the DSEID mapping entry in the LISP control plane. For that, it can be used an encoding method proposed in [[draft-farinacci-lisp-name-encoding](#)] that defines to insert specific information such as parameters for a specific EID or RLOC using an ASCII string. Using that, it is possible to encode a string that is pre-defined of a specific metric to interpret in the control plane and send a Map-Request message so that the control plane can select an appropriate RLOC based on it. Another possible option is to use policy distribution by a network controller, which is proposed in [[draft-kowal-lisp-policy-distribution](#)]. Using network controller, the ITR could receive and apply the QoS policies that would shape traffic to the correct rate on each ITR RLOC interface. In order to insert service-instance-related metrics from the DSEID side, the D-MA must forward the metrics of the requested service to the LISP ITR so that the metric can be inserted into the header of the Map-Register message. This metric information encoded into the Map-Register message can help the LISP control plane to make multi-tuple mapping entry and sent it to the requested ITR. Once the requested ITR receives these information, it can make a routing decision based on the multi-tuple parameters.

[4.4.](#) Dynamic Routing Decisions based using Metrics

The dyncast system is required that it must make routing decisions for all service requests, and this must be done under an understanding of all metrics. Routing decisions in the LISP can be done with two options which is done in the control plane or ITR by specifying priority and weight values for each RLOC. In case that routing decisions are made in the control plane, the Map-Resolver dynamically sets the priority and weight values of each mapped RLOCs collected from D-MAs, selects a proper RLOC based on them, and forward it to the requested ITR using the Map-Reply message. However, since this centralized approach may not be calculated based on point of requested ITR, the actual routing path may not be optimal. In case that routing decision is determined at the ITR, the LISP control plane may return one or more RLOC values for the requested DSEID to the ITR, including priority and weight values based on the collected metrics. After receiving multiple DBIDs, the ITR stores them in map-cache entry and selects an appropriate one to forward the data packet. For that, a mechanism for estimating appropriate priority and weight values based on both network-related and service-instance-related metrics is required for the control plane or ITR. When DSEID-to-RLOC-set mapping is used, it is noted that if RLOCs in the set have equal priority, the ITR can load-split traffic across RLOCs and that cause to break session connection. So, an ITR that is configured that a particular EID in its map-cache is an DSEID, it should be cared to use an RLOC-set above with each RLOC priority=1.

In the dyncast architecture described in [\[draft-li-dyncast-architecture\]](#), the D-Router collects metrics by exchanging metric information of the service identifier between another edge D-Routers and make a decision itself. This approach can minimize the signaling for routing decisions by decentralizing the authority for the anycast routing decision to an entity in the actual packet path, but the signaling for collecting metrics between each D-Router is bound to increase. In contrast, when the LISP is used, it can reduce effectively signaling of collecting metrics from the ITR since that the mapping information for DSEID and RLOC-set can be managed in a centralized control plane. However, if the metrics change too much then the contents of the RLOC-set changes which requires more frequent map-cache updates. So analyzing in depth of this tradeoff remains further studies.

Internet-Draft

LISP Anycast

April 2022

[4.5.](#) Supporting Service Dynamism

For service dynamism, the dyncast system should support different selections for each flow according to a dynamically changing metric while considering various requirements in the selection of a service instance. As mentioned in [Section 4.2](#), [\[draft-rodriqueznatal-lisp-multi-tuple-eids\]](#) can provide the map-cache to be maintained for each flow, so the forwarding path can be dynamically changed to the different service instances by allocating target RLOC to the map-cache entry per-flow according to dynamic changes of metrics. In order to refresh the DSEID-to-RLOC-set mapping upon changing metric, the Solicit Map-Request(SMR) message can be used to update so that the ITR can update the weight and priority for the RLOC which is already received from the Map-server. Additionally, as proposed in [\[draft-farinacci-lisp-telemetry\]](#), telemetry data can be collected between Encapsulating/Decapsulating xTRs of the current flow, which is expected to be used for dynamic service path reselection.

[5.](#) Security Considerations

TBD

[6.](#) References

[6.1.](#) Informative References

[\[draft-farinacci-lisp-name-encoding\]](#)

Farinacci, D., "LISP Distinguished Name Encoding", May 2021, <<https://datatracker.ietf.org/doc/draft-farinacci-lisp-name-encoding/>>.

[\[draft-farinacci-lisp-telemetry\]](#)

Farinacci, D., Ouissal, S., and E. Nordmark, "LISP Data-Plane Telemetry", May 2021, <<https://datatracker.ietf.org/doc/draft-farinacci-lisp-telemetry/>>.

[\[draft-ietf-lisp-introduction-13\]](#)

Cabellos, A. and D. Saucez, "An Architectural Introduction to the Locator/ID Separation Protocol (LISP)", April 2015, <<https://datatracker.ietf.org/doc/draft-ietf-lisp-introduction/>>.

[[draft-ietf-lisp-pubsub](#)]

Rodrigues-Natal, A., Ermagan, V., Cabellos, A., Barkai, S., and M. Boucadair, "Publish/Subscribe Functionality for LISP", June 2021, <<https://datatracker.ietf.org/doc/draft-ietf-lisp-pubsub/>>.

[[draft-kowal-lisp-policy-distribution](#)]

Kowal, M., Portoles, M., Jain, A., and D. Farinacci, "LISP Transport for Policy Distribution", September 2021, <<https://datatracker.ietf.org/doc/draft-kowal-lisp-policy-distribution/>>.

[[draft-li-dyncast-architecture](#)]

Li, Y., Iannone, L., Trossen, D., and P. Liu, "Dynamic-Anycast Architecture", February 2021, <<https://datatracker.ietf.org/doc/draft-li-dyncast-architecture/>>.

[[draft-liu-dyncast-ps-usecases](#)]

Liu, P., Willis, P., and D. Trossen, "Dynamic-Anycast (Dyncast) Use Cases; Problem Statement", February 2021, <<https://datatracker.ietf.org/doc/draft-liu-dyncast-ps-usecases/>>.

[[draft-liu-dyncast-reqs](#)]

Liu, P., Willis, P., and D. Trossen, "Dynamic-Anycast (Dyncast) Requirements", February 2021, <<https://datatracker.ietf.org/doc/draft-liu-dyncast-reqs/>>.

[[draft-rodriqueznatal-lisp-multi-tuple-eids](#)]

Rodrigues-Natal, A., Cabellos-Aparicio, A., Barkai, S.,

Ermagan, V., Lewis, D., Maino, F., and D. Farinacci, "LISP support for Multi-Tuple EIDs", October 2021, <<https://datatracker.ietf.org/doc/draft-rodriqueznatal-lisp-multi-tuple-eids/>>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [RFC 2119](#), March 1997, <<https://datatracker.ietf.org/doc/rfc2119/>>.

[RFC6830] Farinacci, D., Fuller, V., Meyer, D., and D. Lewis, "The Locator/ID Separation Protocol (LISP)", [RFC 6830](#), January 2013, <<https://datatracker.ietf.org/doc/rfc6830/>>.

Authors' Addresses

Sun & Kim

Expires 30 October 2022

[Page 11]

Internet-Draft

LISP Anycast

April 2022

Kyoungjae Sun
ETRI
218, Gajeong-ro, Yuseung-gu
Dajeon
34065
Republic of Korea
Phone: +82 10 3643 5627
Email: kjsun@etri.re.kr

Younghan Kim
Soongsil University
369, Sangdo-ro, Dongjak-gu
Seoul
06978
Republic of Korea
Phone: +82 10 2691 0904
Email: younghak@ssu.ac.kr

