

Network Working Group

Z.

Li

Internet-Draft

J.

Dong

Intended status: Standards Track

Huawei

Technologies

Expires: October 16, 2021

April 14,

2021

Encapsulation of End-to-End IETF Network Slice Information in MPLS draft-li-mppls-e2e-ietf-network-slicing-00

Abstract

Network slicing can be used to meet the connectivity and performance requirement of different services or customers in a shared network. An IETF network slice may span multiple network domains. And in the context of 5G, the 5G end-to-end network slices consist of three major types of network segments: Radio Access Network (RAN), Transport Network (TN) and Core Network (CN).

In order to facilitate the mapping between network slices in different network segments and network domains, it is beneficial to carry the identifiers of the 5G end-to-end network slice, the multi-domain IETF network slice together with the intra-domain network slice identifier in the data packet.

This document defines the mechanism of encapsulating the end-to-end network slice related identifiers in MPLS data plane.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months

and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on October 16, 2021.

Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with

respect

to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1](#) [1](#). Introduction
- [2](#) [2](#). Extensions to MPLS VTN Extension Header
- [3](#) [2.1](#). Global VTN-ID Option
- [4](#) [2.2](#). 5G Network Slice ID Option
- [5](#) [3](#). Procedures
- [5](#) [4](#). IANA Considerations
- [6](#) [5](#). Security Considerations
- [6](#) [6](#). Acknowledgements
- [6](#) [7](#). References
- [6](#) [7.1](#). Normative References
- [6](#) [7.2](#). Informative References
- [7](#) Authors' Addresses
- [7](#)

[1](#). Introduction

The definition and the characteristics of IETF are introduced in [[I-D.ietf-teas-ietf-network-slice-definition](#)], and [[I-D.ietf-teas-ietf-network-slice-framework](#)] describes a general framework of IETF network slice.

[I-D.ietf-teas-enhanced-vpn] describes the framework and the candidate component technologies for providing enhanced VPN services.

VPN+ can be built from a VPN overlay and an underlying Virtual Transport Network (VTN), which has a customized network topology and a set of dedicated or shared resources in the underlay network. Enhanced VPN (VPN+) can be used for the realization of IETF network slices.

[I-D.dong-teas-enhanced-vpn-vtn-scalability] describes the scalability considerations in the control plane and data plane to enable VPN+ services, and provide several suggestions to improve the scalability of VTN. In the control plane, It proposes the approach of decoupling the topology and resource attributes of VTN, so that multiple VTNs may share the same topology and the result of topology based path computation. In the data plane, it proposes to carry a VTN-ID in the data packet to determine the set of resources reserved for the corresponding VTN.

An IETF network slice may span multiple network domains. Further in the context of 5G, there can be end-to-end network slices which consists of three major types of network segments: Radio Access Network (RAN), Transport Network (TN) and Core Network (CN). In order to facilitate the mapping between network slices in different network segments and network domains, it may be beneficial to carry the identifiers of the 5G end-to-end network slice and the multi-domain IETF network slice together with the intra-domain network slice identifier in the data packet.

[I-D.li-teas-e2e-ietf-network-slicing] describes the framework of carrying end-to-end network slice related identifiers in the data plane, each of the identifiers may span a different network scope.

With MPLS data plane, [[I-D.li-mpls-enhanced-vpn-vtn-id](#)] specifies the extensions and mechanisms to carry the VTN-ID of a single network domain in an MPLS extension header, so as to improve the scalability of VTN [[I-D.dong-teas-enhanced-vpn-vtn-scalability](#)]. This document further specifies the extensions and mechanisms of encapsulating the identifiers of the 5G end-to-end network slice and the multi-domain IETF network slice in MPLS data plane to support the end-to-end network slicing.

2. Extensions to MPLS VTN Extension Header

This section describes the approach of encapsulating the end-to-end network slice identifiers in MPLS data plane. Two new options are defined in the MPLS VTN extension header as defined in [[I-D.li-mpls-enhanced-vpn-vtn-id](#)].

The format of the VTN extension header is shown as below:

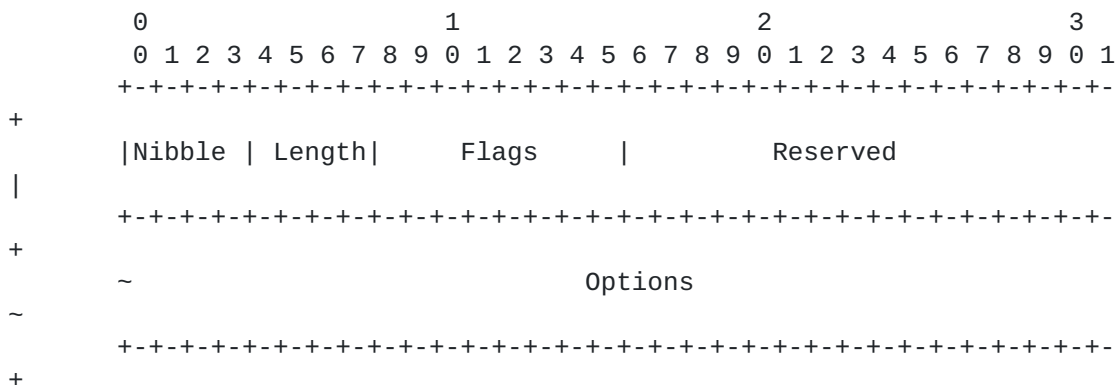


Figure 1. The format of VTN extension header

The Global VTN-ID and the 5G network slice identifier (i.e. S-NSSAI) are defined as two new options of the VTN extension header. Depending on whether a IETF network slice spans multiple domains and whether it is used as part of the 5G end-to-end network slice, the Global VTN-ID and the 5G network slice ID are optional in the data packet.

2.1. Global VTN-ID Option

The format of the Global VTN-ID option is shown as below:

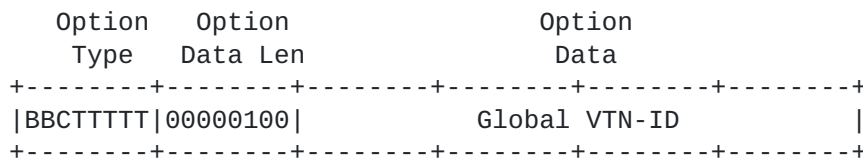


Figure 2. The format of Global VTN-ID Option

Option Type: 8-bit identifier of the type of option. The type of Global VTN-ID option is to be assigned by IANA. The highest-order bits of the type field are defined as below:

- o BB 00 The highest-order 2 bits are set to 00 to indicate that a node which does not recognize this type will skip over it and continue processing the header.
- o C 0 The third highest-order bit are set to 0 to indicate this option does not change en route.

Opt Data Len: 8-bit unsigned integer indicates the length of the option Data field of this option, in octets. The value of Opt Data Len of the Global VTN-ID option SHOULD be set to 4.

Option Data: 4-octet identifier which uniquely identifies a global VTN which spans multiple network domains.

2.2. 5G Network Slice ID Option

The format of the 5G network slice ID option is shown as below:

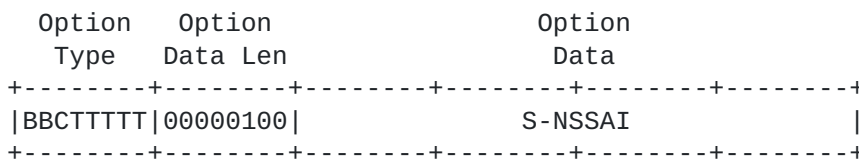


Figure 3. The format of 5G network slice ID Option

Option Type: 8-bit identifier of the type of option. The type of 5G network slice ID option is to be assigned by IANA. The highest-order bits of the type field are defined as below:

- o BB 00 The highest-order 2 bits are set to 00 to indicate that a node which does not recognize this type will skip over it and continue processing the header.
- o C 0 The third highest-order bit are set to 0 to indicate this option does not change en route.

Opt Data Len: 8-bit unsigned integer indicates the length of the option Data field of this option, in octets. The value of Opt Data Len of the 5G network slice ID option SHOULD be set to 4. This aligns with the length of the S-NSSAI defined in 3GPP.

Option Data: 4-octet identifier which uniquely identifies a 5G end-to-end network slice.

3. Procedures

The ingress node of a multi-domain IETF network slice SHOULD encapsulate the received packet with an MPLS label stack and the VTN extension header, the Global VTN-ID the packet is mapped to MAY be carried in the Global VTN-ID option of the VTN extension header.

The edge nodes of each domain MAY parse the Global VTN-ID in the VTN extension header and maps it to a local VTN. When the mechanism as defined in [[I-D.li-mpls-enhanced-vpn-vtn-id](#)] is used in the local domain, the Local VTN-ID is obtained from the mapping relationship between the Global VTN-ID and Local VTN-ID maintained on the edge node, and the Local VTN-ID SHOULD be encapsulated in the VTN extension header. The Local VTN-ID is used to identify the local network resources reserved for the VTN in the local domain. The local VTN-ID in the packet MAY be updated on the edge nodes of each domain.

When the multi-domain IETF network slice is part of a 5G end-to-end network slice, the 5G Network Slice ID option MAY be carried in the VTN extension header. The S-NSSAI MAY be used for the collection and report of the performance information of the 5G end-to-end network slice in the transport network.

4. IANA Considerations

IANA is requested to assign two option types of the VTN extension header.

Value	Description	Reference
TBD1	Global VTN-ID Option	this document
TBD2	5G Network Slice ID Option	this document

5. Security Considerations

TBD

6. Acknowledgements

TBD

7. References

7.1. Normative References

- [I-D.ietf-teas-enhanced-vpn]
Dong, J., Bryant, S., Li, Z., Miyasaka, T., and Y. Lee,
"A Framework for Enhanced Virtual Private Networks (VPN+) Service", [draft-ietf-teas-enhanced-vpn-06](#) (work in progress), July 2020.
- [I-D.ietf-teas-ietf-network-slice-definition]
Rokui, R., Homma, S., Makhijani, K., Contreras, L., and
J. Tantsura, "Definition of IETF Network Slices", [draft-ietf-teas-ietf-network-slice-definition-00](#) (work in progress), January 2021.
- [I-D.ietf-teas-ietf-network-slice-framework]
Gray, E. and J. Drake, "Framework for IETF Network Slices", March 2021, <<https://tools.ietf.org/html/draft-ietf-teas-ietf-network-slice-framework>>.

[I-D.li-mpls-enhanced-vpn-vtn-id]

Li, Z. and J. Dong, "Carrying Virtual Transport Network Identifier in MPLS Packet", [draft-li-mpls-enhanced-vpn-vtn-id-01](#) (work in progress), April 2021.

[I-D.li-teas-e2e-ietf-network-slicing]

Li, Z. and J. Dong, "Framework for End-to-End IETF Network Slicing", April 2021, <<https://tools.ietf.org/html/draft-li-teas-e2e-ietf-network-slicing>>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

7.2. Informative References

[I-D.dong-teas-enhanced-vpn-vtn-scalability]

Dong, J., Li, Z., Qin, F., and G. Yang, "Scalability Considerations for Enhanced VPN (VPN+)", [draft-dong-teas-enhanced-vpn-vtn-scalability-01](#) (work in progress), November 2020.

Authors' Addresses

Zhenbin Li
Huawei Technologies
Huawei Campus, No. 156 Beiqing Road
Beijing 100095
China

Email: lizhenbin@huawei.com

Jie Dong
Huawei Technologies
Huawei Campus, No. 156 Beiqing Road
Beijing 100095
China

Email: jie.dong@huawei.com

