

TSVWG
Internet-Draft
Intended status: Informational
Expires: January 14, 2021

Y. Li
X. Zhou
Huawei
M. Boucadair
Orange
J. Wang
China Telecom
F. Qin
China Mobile
July 13, 2020

LOOPS (Localized Optimizations on Path Segments) Problem Statement and
Opportunities for Network-Assisted Performance Enhancement
draft-li-tsvwg-loops-problem-opportunities-06

Abstract

In various network deployments, end to end forwarding paths are partitioned into multiple segments. For example, in some cloud-based WAN communications, stitching multiple overlay tunnels are used for traffic policy enforcement matters such as to optimize traffic distribution or to select paths exposing a lower latency. Likewise, in satellite communications, the communication path is decomposed into two terrestrial segments and a satellite segment. Such long-haul paths are naturally composed of multiple network segments with various encapsulation schemes. Packet loss may show different characteristics on different segments.

Traditional transport protocols (e.g., TCP) respond to packet loss slowly especially in long-haul networks: they either wait for some signal from the receiver to indicate a loss and then retransmit from the sender or rely on sender's timeout which is often quite long. With the increase of end-to-end transport encryption (e.g., QUIC), traditional PEP (performance enhancing proxy) techniques such as TCP splitting are no longer applicable.

LOOPS (Local Optimizations on Path Segments) is a network-assisted performance enhancement over path segment and it aims to provide local in-network recovery to achieve better data delivery by making packet loss recovery faster. In an overlay network scenario, LOOPS can be performed over a variety of the existing, or purposely created, tunnel-based path segments.

Internet-Draft

LOOPS Problem & opportunities

July 2020

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 14, 2021.

Copyright Notice

Copyright (c) 2020 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
1.1.	The Problem and Opportunity Overview	3
1.2.	Sketching a Work Direction: Rationale & Goals	4
2.	Terminology	5
3.	Usage Scenarios	6
3.1.	Cloud-Internet Overlay Network	6
3.2.	Satellite Communication	8
3.3.	Branch Office WAN Connection	9
4.	Impact of Packet loss	10

4.1.	Tail Loss or Loss in Short Flows	10
4.2.	Packet Loss in Real Time Media Streams	11
5.	Features to be Considered for LOOPS	11
5.1.	Local Recovery	11
5.2.	Congestion Control Interaction	12

5.3.	Overlay Protocol Extensions	12
6.	Local in-network Recovery and End-to-end Retransmission . . .	13
7.	Summary	14
8.	Security Considerations	15
9.	IANA Considerations	15
10.	Acknowledgements	15
11.	Informative References	15
	Authors' Addresses	18

[1.](#) Introduction

[1.1.](#) The Problem and Opportunity Overview

Packet loss is ubiquitous in Internet. A reliable transport layer normally employs some end-to-end retransmission mechanisms which also address congestion control [[RFC0793](#)] [[RFC5681](#)]. The sender either waits for the receiver to send some signals on a packet loss or sets some form of timeout for retransmission. For unreliable transport protocols such as RTP [[RFC3550](#)], optional and limited usage of end-to-end retransmission is employed to recover from packet loss [[RFC4585](#)] [[RFC4588](#)]. End-to-end retransmission to recover lost packets is slow especially when the network is long-haul. For short-lived flows and transactional flows, latency suffers a lot from tail loss.

Tunnels are widely deployed within many networks to achieve various engineering goals, including long-haul WAN interconnection or enterprise wireless access networks. A connection between two endpoints can be decomposed into many connection legs. As such, the corresponding forwarding path can be partitioned into multiple path segments that some of them are using network overlays by means of tunnels. This design serves a number of purposes such as steering the traffic, optimizing egress/ingress link utilization, optimizing traffic performance metrics (such as delay, delay variation, or loss), optimizing resource utilization by invoking resource bonding, provide high-availability, etc.

When a path is partitioned into multiple path segments that are realized typically as overlay tunnels, LOOPPS (Local Optimizations on Path Segments) aims to provide in-network recovery over segments to achieve better data delivery by making packet loss recovery faster. In an overlay network scenario, LOOPPS can be performed over the existing, or purposely created, overlay tunnel based path segments. Figure 1 show an overall usage scenarios of LOOPPS.

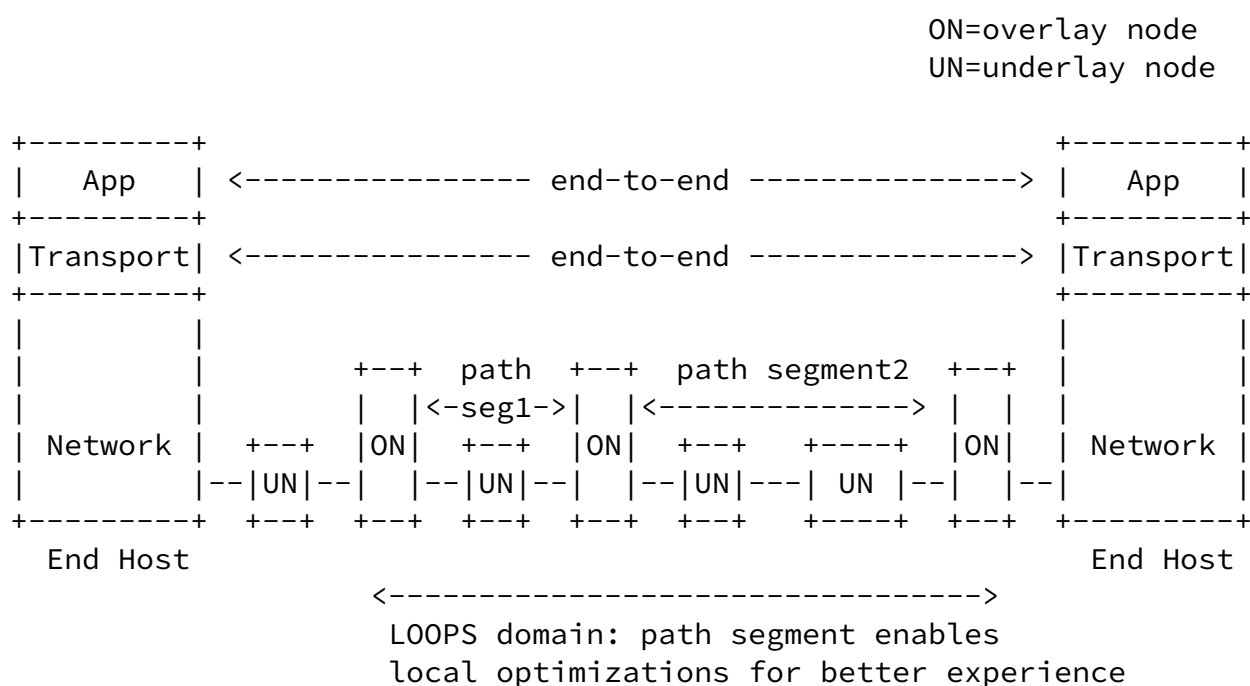


Figure 1: LOOPPS Usage Scenario

1.2. Sketching a Work Direction: Rationale & Goals

This document sketches a proposal that is meant to experimentally investigate to what extent a network-assisted approach can contribute to increase the overall perceived quality of experience in specific situations (e.g., Sections 3.5 and 3.6 of [RFC8517]) without requiring access to internal transport primitives. The rationale beneath this approach is that some information (loss detection and

segment characteristics, etc.) can be used to trigger local in-network recovery actions which have a faster effect while not impacting the end-to-end congestion control loop.

To that aim, the work is structured into two (2) phased stages:

- o Stage 1: Network-assisted optimization. This one assumes that optimizations can be implemented at the network without requiring defining new interaction with the endpoint. Existing tools such as ECN will be used. Loss signal would be converted to CE (congestion experienced) signal to interact with the end-to-end control loop.
- o Stage 2: Collaborative networking optimization. This one requires more interaction between the network and an endpoint to implement coordinated and more surgical network-assisted optimizations based on information/instructions shared by an endpoint or sharing locally-visible information with endpoint for better and faster recovery.

The document focuses on the first stage. Effort related to the second stage is out of scope of the initial planned work.

The proposed mechanism is not meant to be applied to all traffic, but only to a subset which is particularly benefits from, and has been selected for the network-assisted optimization service.

Which traffic is selected is deployment-specific and policy-based. For example, techniques for dynamic information about optimization function (e.g., SFC) may be leveraged to unambiguously identify the aggregate of traffic that is eligible to the service. Such identification may be triggered by subscription actions made by customers or be provided by a network provider (e.g., specific applications, during specific events such as during severe DDoS attack or flash crowds events).

Likewise, whether the optimization function is permanently instantiated or on-demand is deployment-specific.

This document does not intend to provide a comprehensive list of target deployment cases. Sample scenarios are described to illustrate some LOOPS potentials. Similar issues and optimizations

may be helpful in other deployments such as enhancing the reliability of data transfer when a fleet of drones are used for specific missions (e.g., site inspection, live streaming, and emergency service). Captured data should be reliably transmitted via paths involving radio connections.

It is not required that all segments are L00PS-aware to benefit from L00PS advantages.

[Section 3](#) presents the issues and opportunities found in some multiple path segments scenarios. [Section 3](#) describes the impact of packet loss for different traffic. [Section 5](#) describes the L00PS desired features and their impact on existing network technologies. [Section 6](#) shows the analysis on local retransmission and end-to-end retransmission. [Section 7](#) summarizes L00PS key elements.

[2.](#) Terminology

This document makes use of the following terms:

L00PS: Local Optimizations on Path Segments. L00PS includes the local in-network (i.e., non end-to-end) recovery functions and other supporting features such as local measurement, loss detection, and congestion feedback.

L00PS Node: A node supporting L00PS functions.

Overlay Node (ON): A node having overlay functions (e.g., overlay protocol encapsulation/decapsulation, header modification, TLV inspection) and L00PS functions in the L00PS overlay network usage scenario.

Overlay Tunnel: A tunnel with designated ingress and egress nodes using some network overlay protocol as encapsulation, optionally with a specific traffic type.

Path segment: A L00PS enabled tunnel-based network subpath. It is used interchangeably with overlay segment in this document when the context wants to emphasize on its overlay encapsulated nature. It is also called segment for simplicity in this document.

Overlay segment: Refers to path segment.

Underlay Node (UN): A node not participating in the overlay network.

[3.](#) Usage Scenarios

[3.1.](#) Cloud-Internet Overlay Network

CSPs (Cloud Service Providers) are connecting their data centers using the Internet or via self-constructed networks/links. This expands the traditional Internet's infrastructure and, together with the original ISP's infrastructure, forms the Internet underlay.

Automation techniques and NFV (Network Function Virtualization) make it easier to dynamically provision a new virtual node/function as a workload in a cloud for CPU/storage intensive functions. Virtual nodes can be in form of virtual machines or containers hosting the workloads sharing a physical node's infrastructure. With the aid of various mechanisms such as kernel bypassing and Virtual IO, forwarding based on virtual nodes is becoming more and more effective. The interconnection among the purposely positioned virtual nodes and/or the existing nodes with virtualization functions potentially form an overlay infrastructure. It is called the Cloud-Internet Overlay Network (CION) in this document for short.

This architecture scenario makes use of overlay technologies to direct the traffic going through the specific overlay path in order to achieve better service delivery. It purposely creates or selects overlay nodes (ON) from providers. By continuously measuring the delay of path segments and use them as metrics for path selection, when the number of overlay nodes is sufficiently large, there is a high chance that a better path could be found

[[DOI 10.1109 ICDCS.2016.49](#)] [[DOI 10.1145 3038912.3052560](#)].

[[DOI 10.1145 3038912.3052560](#)] further shows all cloud providers

experience random loss episodes and random loss accounts for more than 35% of total loss.

Figure 2 shows an example of an overlay path over large geographic distances. An overlay node (ON) is usually a virtual node, though it does not have to be. Three path segments, i.e., ON1-ON2, ON2-ON3, ON3-ON4 are shown. Each segment transmits packets using some form of network overlay protocol encapsulation. ON has the computing and

memory resources that can be used for some functions like packet loss detection, network measurement and feedback, packet retransmission and FEC (Forward Error Correction) computation. ONs here are managed by a single administrator though they can be workloads created from different CSPs.

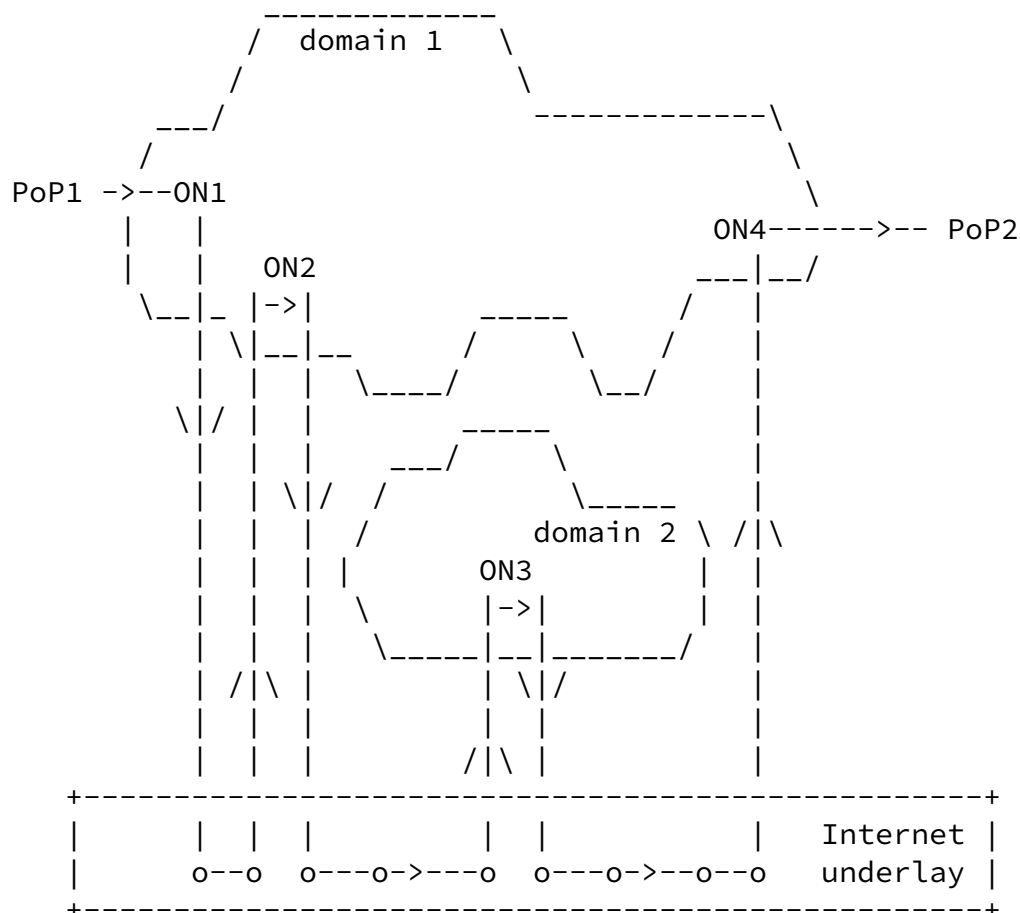


Figure 2: Cloud-Internet Overlay Network (CION)

We tested based on 37 overlay nodes from multiple cloud providers globally. Each pair of the overlay nodes are used as sender and receiver. When the traffic is not intentionally directed to go through any intermediate virtual nodes, we call the path followed by the traffic in the test the default path. When any of the virtual nodes is intentionally used as an intermediate node to forward the

traffic, the path that the traffic takes is called an overlay path.

The preliminary experiments showed that the delay of a specifically selected overlay path has lower latency than the one of the default path in 69% of cases at 99% percentile and improvement is 17.5% at 99% percentile when we probe Ping packets every second for a week. The average number of hops for an overlay path is 3.02. More experimental information can be found in [\[DOI 10.1109/INFCOMW.2019.8845208\]](#).

Lower average delay does not necessarily mean less or no packet loss. Different path segments have different packet loss rates. Loss rate is another major factor impacting the user experience, especially for the short-lived or transactional flows. From some customer requirements, the target loss rate is set in the test to be less than 1% at 99% percentile and 99.9% percentile, respectively. The loss was measured between any two overlay nodes, i.e., any potential path segment. Two thousand Ping packets were sent every 20 seconds between two overlay nodes for 55 hours. This preliminary experiment showed that the packet loss rate satisfaction are only 44.27% and 29.51% at the 99% and 99.9% percentiles, respectively.

As CION naturally consists of multiple overlay segments, LOOPS can leverage this to perform local optimizations on a single hop between two overlay nodes. ("Local" here is a concept relative to end-to-end, it does not mean such optimization is limited to LAN networks.)

[3.2.](#) Satellite Communication

Traditionally, satellite communications deploy PEP (performance enhancing proxy [[RFC3135](#)]) nodes around the satellite link to enhance end-to-end performance. TCP splitting is a common approach employed by such PEPs, where the TCP connection is split into three: the segment before the satellite hop, the satellite section (uplink, downlink), and the segment behind the satellite hop. This requires heavy interactions with the end-to-end transport protocols, usually without the explicit consent of the end hosts. Unfortunately, this is indistinguishable from a man-in-the-middle attack on TCP. With end-to-end encryption moving under the transport (QUIC), this approach is no longer useful.

Geosynchronous Earth Orbit (GEO) satellites have a one-way delay (up to the satellite and back) on the order of 250 milliseconds. This does not include queueing, coding and other delays in the satellite ground equipment. The Round Trip Time for a TCP or QUIC connection going over a satellite hop in both directions, in the best case, will be on the order of 600 milliseconds. And, it may be considerably longer. RTTs on this order of magnitude have significant performance implications.

Packet loss recovery is an area where splitting the TCP connection into different parts helps. Packets lost on the terrestrial links can be recovered at terrestrial latencies. Packet loss on the satellite link can be recovered more quickly by an optimized satellite protocol between the PEPs and/or link layer FEC than they could be end to end. Again, encryption makes TCP splitting no longer applicable. Enhanced error recovery at the satellite link layer helps for the loss on the satellite link but doesn't help for the terrestrial links. Even when the terrestrial segments are short, any loss must be recovered across the satellite link delay. And, there are cases when a satellite ground station connects to the general Internet with a potentially larger terrestrial segment (e.g., to a correspondent host in another country). Faster recovery over such long terrestrial segments is desirable.

There are two high level classes of solutions for making encrypted transport traffic like QUIC work well over satellite:

- o Hooks in the transport protocol which can adapt to large BDPs where both the bandwidth and the latency are large. This would require end to end enhancement.
- o Capabilities (such as LOOPS) under the transport protocol to improve performance over specific segments of the path. In particular, separating the terrestrial from the satellite losses. Fixing the terrestrial loss quickly.

This document focuses on the latter.

[3.3.](#) Branch Office WAN Connection

Enterprises usually require network connections between the branch offices, or between branch office and cloud data center over geographic distances. With the increasing deployment of vCPE (virtual CPE), services hosted on the CPE are moved to the provider network from the customer site. Such vCPE approach enables some value added service to be provided such as WAN optimization and traffic steering.

Figure 3 shows a branch office access to public cloud via a selected PoP (point of presence) for service access or reaching another branch office via vPC (Virtual Private Cloud) interconnect. vCPE connects to the PoP which can be hundreds of kilometers away via Internet. From vCPE1 to vCPE2, it can consist of three segments, vCPE1-PoP1, PoP1-PoP2 and PoP2-vCPE2. Packet loss can happen on any of them. Segment based in-network recovery can be employed here to improve the

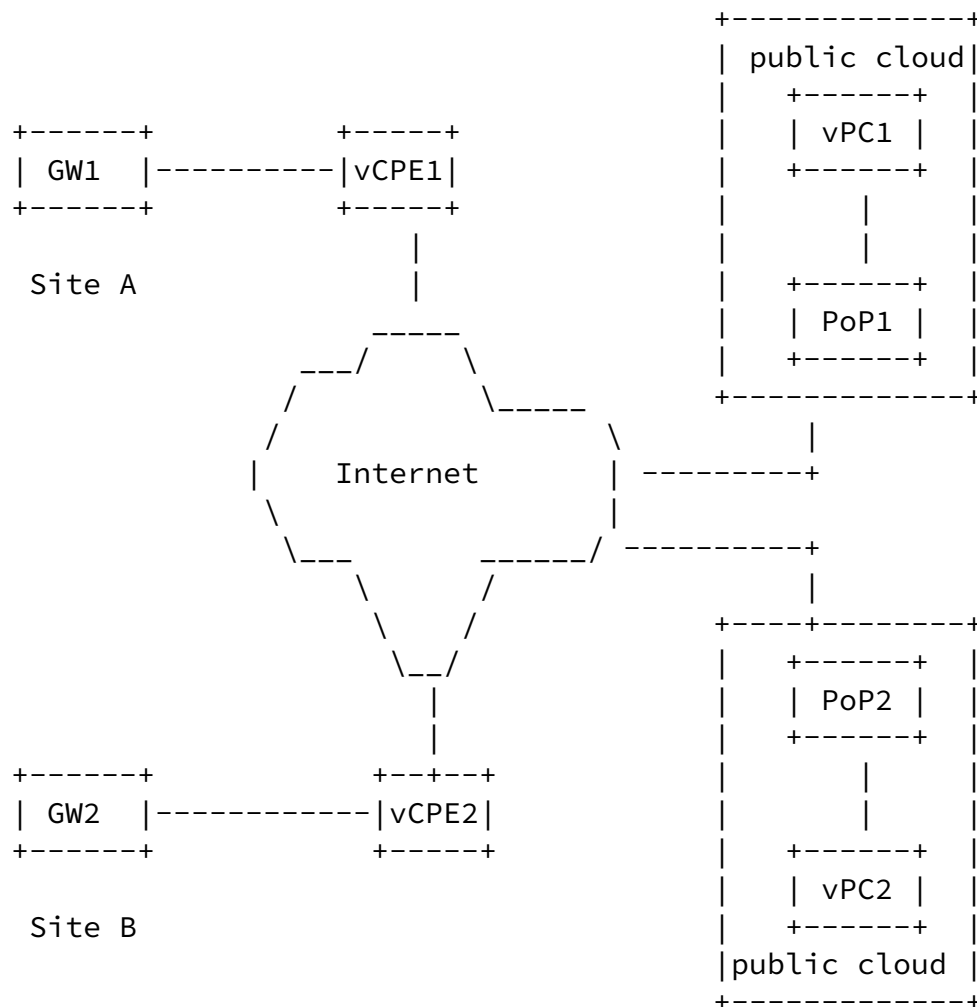


Figure 3: Enterprise Cloud Access

[4.](#) Impact of Packet loss

[4.1.](#) Tail Loss or Loss in Short Flows

When the lost segments are at the end of a transaction, TCP's fast retransmit algorithm does not work as there are no ACKs to trigger it. When a sender does not receive an ACK for a given segment within

a certain amount of time called retransmission timeout (RTO), it re-sends the segment [[RFC6298](#)]. RTO can be as long as several seconds. Hence the recovery of lost segments triggered by RTO is lengthy. [[I-D.dukkipati-tcpm-tcp-loss-probe](#)] indicates that large RTOs make a significant contribution to the long tail on the latency statistics of short flows such as loading web pages.

The short-lived flows often complete in one or two RTTs. Even when the lost packet is not an exact tail, it can possibly add another RTT

because there may not be enough packets in flight to trigger the fast retransmit). In long-haul networks, it can result in extra time of tens or hundreds of milliseconds. For ant short lived or transactional flows, it affects the latency greatly.

An overlay segment transmits the aggregated flows from ON to ON. As short-lived flows are aggregated, the probability of tail loss over this specific overlay segment decreases compared to an individual flow. The overlay segment is much shorter than the end-to-end path, hence loss recovery over an overlay segment helps to obtain low latency.

[4.2.](#) Packet Loss in Real Time Media Streams

The Real-time transport protocol (RTP) is widely used in interactive audio and video. Packet loss degrades the quality of the received media. When the latency tolerance of the application is sufficiently large, the RTP sender may use RTCP NACK feedback from the receiver [[RFC4585](#)] to trigger the retransmission of the lost packets before the playout time is reached at the receiver.

The end-to-end path over WAN can be hundreds of milliseconds, so the end-to-end feedback based retransmission may be not be very useful when applications can not tolerate one more RTT. Loss recovery over an overlay segment can then be used for the scenarios in which a shorter delayed retransmission can catch up with the playout time.

[5.](#) Features to be Considered for LOOPS

This section provides an overview of the LOOPS features. This section is not meant to document a detailed specification, but it is meant to highlight some design choices that may be followed during

the solution design phase.

[5.1.](#) Local Recovery

LOOPS (Local Optimizations on Path Segments) aims to provide in-network recovery over segments to achieve better data delivery by making packet loss recovery faster. This is viable because LOOPS nodes will be instantiated to partition the path into segments. At the same time, LOOPS does not replace the end-to-end loss recovery (if any). With the advent of automation and technologies like NFV and virtual IO, it is possible to dynamically instantiate functions to nodes. The enabling of LOOPS is expected to be dynamic. When to enable this function is out of scope. The operator or administrator can make the decision based on their historical experience or real-time monitoring.

Li, et al.

Expires January 14, 2021

[Page 11]

Internet-Draft

LOOPS Problem & opportunities

July 2020

There are two ways to recover packet, retransmission and Forward Error Correction (FEC). A document to specify the generic elements for loss detection, sequence number space, acknowledgment generation and state transition is available in [[I-D.welzl-loops-gen-info](#)].

[5.2.](#) Congestion Control Interaction

When a TCP-like transport layer protocol is used, local recovery in LOOPS has to interact with the upper layer transport congestion control. Classic TCP adjusts the congestion window when a loss is detected and then fast retransmit is invoked. LOOPS performs in-network recovery which may cause a loss event not being observed by the TCP sender. Then TCP sender may overshoot then.

To solve this issue, LOOPS needs to report the loss to end-to-end congestion control LOOPS. LOOPS can CE(Congestion Experienced) marks its recovered packets as the loss signal to end-to-end. Converting a packet loss signal to CE marking signal brings the benefits of reducing Head-of-Line blocking and probability of RTO expiry [[RFC8087](#)] without affecting TCP sender's loss based congestion control behaviour while enjoying the faster local recovery. ECN based indication is equivalent to a loss event at the TCP sender [[RFC3168](#)]. In this way, a requirement is set for applying LOOPS. Only ECT (ECN-Capable Transport) flows should be directed to an LOOPS enabled path segment.

5.3. Overlay Protocol Extensions

Some tunnel protocols such as VXLAN [RFC7348], GENEVE [I-D.ietf-nvo3-geneve], LISP [RFC6830] or CAPWAP [RFC5415] are employed in overlay network. They are used in various ways. A path can have single overlay tunnel as a sub-path or stitch multiple segments together, like VXLAN [RFC7348] or GENEVE [I-D.ietf-nvo3-geneve], or specify a sequence of intermediate nodes, as in SRv6 [RFC8754].

LOOPS does not look into the inner packet. LOOPS information is required to be embedded in the overlay protocol header. An example shown in Figure 4. The current protocol focus is GENEVE [I-D.ietf-nvo3-geneve]. The specific information is to be defined in separate documents.

```
+-----+-----+-----+-----+-----+
|Outer IP hdr|Overlay hdr |LOOPS information|Inner hdr|payload  |
+-----+-----+-----+-----+-----+
```

Figure 4: LOOPS Extension Header Example

6. Local in-network Recovery and End-to-end Retransmission

Most transport layer protocols have their own end-to-end retransmission to recover the lost packet. When LOOPS is in use, its local recovery can affect the end-to-end one. This section talks about such impacts.

There are two ways to perform local recovery, retransmission and FEC (Forward Error Correction). They are possibly used together in some cases. Such approaches between two overlay nodes recover the lost packet in relatively shorter distance and thus shorter latency. Therefore the local recovery is generally faster compared to end-to-end.

End-to-end retransmission is normally triggered by a NACK as in RTCP, multiple duplicate ACKs as in traditional TCP or time based detection as in RACK [I-D.ietf-tcpm-rack].

When FEC is used for local recovery, it may come with a buffer to make sure the recovered packets delivered are in order subsequently. Therefore the receiver side is unlikely to see the out-of-order packets and then send a NACK or multiple duplicate ACKs. The side effect to unnecessarily trigger end-to-end retransmit is minimum. When FEC is used in this way, if redundancy and block size are determined, extra latency required to recover lost packets is also bounded. Then RTT variation caused by it is predictable. In some extreme case like a large number of packet loss caused by persistent burst, FEC may not be able to recover it. Then end-to-end retransmit will work as a last resort. In summary, when FEC is used as local recovery, the impact on end-to-end retransmission is limited.

When local retransmission is used, it has the following impacts on the end-to-end retransmission.

For packet loss in RTP streaming, local retransmission can recover those packets which would not be retransmitted end-to-end otherwise due to long RTT. Therefore when the segment(s) being retransmitted on is a small portion of the whole end to end path, the retransmission will have a significant effect of improving the quality at receiver.

When the sender also re-transmits the packet based on a NACK received, the receiver may receive the duplicated retransmitted packets.

For packet loss in TCP flows, TCP RENO and CUBIC use duplicate ACKs as a loss signal to trigger the fast retransmit. Though we are not

standardize the buffering feature of a L0OPS egress, an introductory analysis is given as follows.

- o The egress overlay node can buffer the out-of-order packets for a while, giving a limited time for a packet being retransmitted somewhere in the overlay path to reach it. The retransmitted packet and the buffered packets caused by it may increase the RTT variation at the sender. When the retransmitted latency is a small portion of RTT or the loss is rare, such RTT variation will be smoothed without much impact.

The buffer management is nontrivial in this case. It has to be determined how many out-of-order packets can be buffered at the egress overlay node before it gives up waiting for a successful local retransmission. In some extreme case the lost packet is not recovered successfully locally, the sender may invoke end-to-end fast retransmit slower than it would be in classic TCP.

- o If LOOPS network does not buffer the out-of-order packets caused by packet loss, TCP sender which uses a time based loss detection like RACK [[I-D.ietf-tcpm-rack](#)] will perform well here. It uses the notion of time to replace the conventional DUPACK threshold approach to detect losses. Hence it prevents the TCP sender from invoking fast retransmit too early. Local retransmission will not interfere the sender's retransmission generally in this case. If time based loss detection is not supported at the sender, end to end retransmission may be invoked as usual. It consumes extra bandwidth Because the lost packets (i.e. recovered packet) is normally a very small percentage of the total packets. Then extra bandwidth cost is not significant.

[7.](#) Summary

LOOPS will extend the existing overlay protocols in data plane, potential starting from GENEVE [[I-D.ietf-nvo3-geneve](#)] which has good extensibility. Path or segment selection can be feature provided by the overlay protocols via SDN techniques [[RFC7149](#)] or other approaches and is not a part of LOOPS. LOOPS is a set of functions to be implemented on Overlay Nodes as a tunnel transport with best effort reliability. LOOPS targets the following features.

1. Local recovery: Local recovery: Retransmission, FEC, or combination thereof can be used as local recovery method. Such recovery mechanism is in-network. It is performed by two network nodes with computing and memory resources.

2. Local measurement: Ingress/Egress overlay nodes measure the local segment RTT, loss and/or throughput to immediately get the overlay segment status for loss detection.

3. Interact with end-to-end congestion control: Convert a packet loss signal to an ECN-marking signal to notify the end host sender.

8. Security Considerations

LOOPS does not require access to the traffic payload in clear, so encrypted payload does not affect functionality of LOOPS.

The use of LOOPS introduces some issues which impact security. ON with LOOPS function represents a point in the network where the traffic can be potentially manipulated and intercepted by malicious nodes. Means to ensure that only legitimate nodes are involved should be considered.

Denial of service attack can be launched from an ON. A rogue ON might be able to spoof packets as if it come from a legitimate ON. It may also modify the ECN CE marking in packets to influence the sender's rate. In order to protected from such attacks, the overlay protocol itself should have some built-in security protection which is used by LOOPS. The operator should use some authentication mechanism to make sure ONs are valid and non-compromised.

9. IANA Considerations

No IANA action is required.

10. Acknowledgements

Thanks to etosat mailing list about the discussion about the SatCom and LOOPS use case.

11. Informative References

- [RFC0793] Postel, J., "Transmission Control Protocol", STD 7, [RFC 793](#), DOI 10.17487/RFC0793, September 1981, <<https://www.rfc-editor.org/info/rfc793>>.
- [RFC3135] Border, J., Kojo, M., Griner, J., Montenegro, G., and Z. Shelby, "Performance Enhancing Proxies Intended to Mitigate Link-Related Degradations", [RFC 3135](#), DOI 10.17487/RFC3135, June 2001, <<https://www.rfc-editor.org/info/rfc3135>>.

- [RFC3168] Ramakrishnan, K., Floyd, S., and D. Black, "The Addition of Explicit Congestion Notification (ECN) to IP", [RFC 3168](#), DOI 10.17487/RFC3168, September 2001, <<https://www.rfc-editor.org/info/rfc3168>>.
- [RFC3550] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), DOI 10.17487/RFC3550, July 2003, <<https://www.rfc-editor.org/info/rfc3550>>.
- [RFC4585] Ott, J., Wenger, S., Sato, N., Burmeister, C., and J. Rey, "Extended RTP Profile for Real-time Transport Control Protocol (RTCP)-Based Feedback (RTP/AVPF)", [RFC 4585](#), DOI 10.17487/RFC4585, July 2006, <<https://www.rfc-editor.org/info/rfc4585>>.
- [RFC4588] Rey, J., Leon, D., Miyazaki, A., Varsa, V., and R. Hakenberg, "RTP Retransmission Payload Format", [RFC 4588](#), DOI 10.17487/RFC4588, July 2006, <<https://www.rfc-editor.org/info/rfc4588>>.
- [RFC5415] Calhoun, P., Ed., Montemurro, M., Ed., and D. Stanley, Ed., "Control And Provisioning of Wireless Access Points (CAPWAP) Protocol Specification", [RFC 5415](#), DOI 10.17487/RFC5415, March 2009, <<https://www.rfc-editor.org/info/rfc5415>>.
- [RFC5681] Allman, M., Paxson, V., and E. Blanton, "TCP Congestion Control", [RFC 5681](#), DOI 10.17487/RFC5681, September 2009, <<https://www.rfc-editor.org/info/rfc5681>>.
- [RFC6298] Paxson, V., Allman, M., Chu, J., and M. Sargent, "Computing TCP's Retransmission Timer", [RFC 6298](#), DOI 10.17487/RFC6298, June 2011, <<https://www.rfc-editor.org/info/rfc6298>>.
- [RFC6830] Farinacci, D., Fuller, V., Meyer, D., and D. Lewis, "The Locator/ID Separation Protocol (LISP)", [RFC 6830](#), DOI 10.17487/RFC6830, January 2013, <<https://www.rfc-editor.org/info/rfc6830>>.
- [RFC7149] Boucadair, M. and C. Jacquenet, "Software-Defined Networking: A Perspective from within a Service Provider Environment", [RFC 7149](#), DOI 10.17487/RFC7149, March 2014, <<https://www.rfc-editor.org/info/rfc7149>>.

Internet-Draft

LOOPS Problem & opportunities

July 2020

- [RFC7348] Mahalingam, M., Dutt, D., Duda, K., Agarwal, P., Kreeger, L., Sridhar, T., Bursell, M., and C. Wright, "Virtual eXtensible Local Area Network (VXLAN): A Framework for Overlaying Virtualized Layer 2 Networks over Layer 3 Networks", [RFC 7348](#), DOI 10.17487/RFC7348, August 2014, <<https://www.rfc-editor.org/info/rfc7348>>.
- [RFC8087] Fairhurst, G. and M. Welzl, "The Benefits of Using Explicit Congestion Notification (ECN)", [RFC 8087](#), DOI 10.17487/RFC8087, March 2017, <<https://www.rfc-editor.org/info/rfc8087>>.
- [RFC8517] Dolson, D., Ed., Snellman, J., Boucadair, M., Ed., and C. Jacquenet, "An Inventory of Transport-Centric Functions Provided by Middleboxes: An Operator Perspective", [RFC 8517](#), DOI 10.17487/RFC8517, February 2019, <<https://www.rfc-editor.org/info/rfc8517>>.
- [RFC8754] Filsfils, C., Ed., Dukes, D., Ed., Previdi, S., Leddy, J., Matsushima, S., and D. Voyer, "IPv6 Segment Routing Header (SRH)", [RFC 8754](#), DOI 10.17487/RFC8754, March 2020, <<https://www.rfc-editor.org/info/rfc8754>>.
- [I-D.dukkipati-tcpm-tcp-loss-probe]
Dukkipati, N., Cardwell, N., Cheng, Y., and M. Mathis, "Tail Loss Probe (TLP): An Algorithm for Fast Recovery of Tail Losses", [draft-dukipati-tcpm-tcp-loss-probe-01](#) (work in progress), February 2013.
- [I-D.ietf-nvo3-geneve]
Gross, J., Ganga, I., and T. Sridhar, "Geneve: Generic Network Virtualization Encapsulation", [draft-ietf-nvo3-geneve-16](#) (work in progress), March 2020.
- [I-D.ietf-tcpm-rack]
Cheng, Y., Cardwell, N., Dukkipati, N., and P. Jha, "RACK: a time-based fast loss detection algorithm for TCP", [draft-ietf-tcpm-rack-08](#) (work in progress), March 2020.
- [I-D.welzl-loops-gen-info]

Welzl, M. and C. Bormann, "L00PS Generic Information Set",
[draft-welzl-loops-gen-info-03](#) (work in progress), March
2020.

Li, et al.

Expires January 14, 2021

[Page 17]

Internet-Draft

LOOPS Problem & opportunities

July 2020

[DOI_10.1109_ICDCS.2016.49]

Cai, C., Le, F., Sun, X., Xie, G., Jamjoom, H., and R.
Campbell, "CRONets: Cloud-Routed Overlay Networks", 2016
IEEE 36th International Conference on Distributed
Computing Systems (ICDCS), DOI 10.1109/icdcs.2016.49, June
2016.

[DOI_10.1145_3038912.3052560]

Haq, O., Raja, M., and F. Dogar, "Measuring and Improving
the Reliability of Wide-Area Cloud Paths", Proceedings of
the 26th International Conference on World Wide Web,
DOI 10.1145/3038912.3052560, April 2017.

[DOI_10.1109_INFCOMW.2019.8845208]

Xu, Z., Ju, R., Gu, L., Wang, W., Li, J., Li, F., and L.
Han, "Using Overlay Cloud Network to Accelerate Global
Communications", IEEE INFOCOM 2019 - IEEE Conference on
Computer Communications Workshops (INFOCOM WKSHPS),
DOI 10.1109/infcomw.2019.8845208, April 2019.

Authors' Addresses

Yizhou Li
Huawei Technologies

Email: liyizhou@huawei.com

Xingwang Zhou
Huawei Technologies

Email: zhouxingwang@huawei.com

Mohamed Boucadair
Orange

Email: mohamed.boucadair@orange.com

Jianglong Wang
China Telecom

Email: wangjl1.bri@chinatelecom.cn

Li, et al.	Expires January 14, 2021	[Page 18]
------------	--------------------------	-----------

Internet-Draft	LOOPS Problem & opportunities	July 2020
----------------	-------------------------------	-----------

Fengwei Qin
China Mobile

Email: qinfengwei@chinamobile.com

