

Network Working Group
Internet-Draft
Intended status: Experimental
Expires: February 18, 2019

H. Li
Huawei Technologies Co., Ltd.
T. Haag
B. Witschurke
Deutsche Telekom
August 17, 2018

**Access Extensions for the Access Node Control Protocol
draft-lihawi-ancp-protocol-access-extension-00**

Abstract

The purpose of this document is to specify extensions to ANCP (Access Node Control Protocol) ([RFC6320](#)) to support PON as described in [RFC6934](#) and some other DSL Technologies including G.fast. This document updates [RFC6320](#) by modifications to terminologies, flows and specifying new TLV types.

This document updates [RFC6320](#) by modifications to terminologies, flows and specifying new TLV types.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on February 18, 2019.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](https://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1. Introduction](#) [3](#)
- [2. Terminology](#) [3](#)
- [3. 3. Modification to ANCP - General Aspects](#) [4](#)
- [4. Modification to DSL-Type TLV 0x0091](#) [5](#)
- [5. Extension to DSL Sub TLV](#) [5](#)
 - [5.1. Expected Throughput \(ETR\) TLV](#) [5](#)
 - [5.2. Attainable Expected Throughput \(ATTETR\)](#) [6](#)
 - [5.3. Attainable Expected Throughput at L2](#) [6](#)
 - [5.4. Gamma data rate \(GDR\) upstream](#) [6](#)
 - [5.5. Gamma data rate \(GDR\) downstream](#) [6](#)
 - [5.6. Attainable Gamma data rate \(ATTGDR\) upstream](#) [7](#)
 - [5.7. Attainable Gamma data rate \(ATTGDR\) downstream](#) [7](#)
- [6. ANCP-Based PON Topology Discovery](#) [7](#)
 - [6.1. ANCP Port Up and Port Down Event Message Descriptions](#) [7](#)
 - [6.2. PON Access Line Identification](#) [9](#)
 - [6.2.1. Access-Loop-Circuit-ID TLV](#) [9](#)
 - [6.2.2. Access-Loop-Remote-ID TLV](#) [10](#)
 - [6.3. TLVs for PON Access Line Attributes](#) [10](#)
 - [6.3.1. PON-Access-Line-Attributes TLV](#) [10](#)
 - [6.3.2. PON-Access-Type TLV](#) [10](#)
 - [6.3.3. ONT/ONU-Average-Data-Rate-Downstream TLV](#) [11](#)
 - [6.3.4. ONT/ONU-Peak-Data-Rate-Downstream TLV](#) [11](#)
 - [6.3.5. ONT/ONU-Maximum-Data-Rate-Upstream TLV](#) [11](#)
 - [6.3.6. ONT/ONU-Assured-Data-Rate-Upstream TLV](#) [11](#)
 - [6.3.7. PON-Tree-Maximum-Data-Rate-Upstream TLV](#) [12](#)
 - [6.3.8. PON-Tree-Maximum-Data-Rate-Downstream TLV](#) [12](#)
 - [6.3.9. Reserved TLV](#) [12](#)
 - [6.3.10. Reserved TLV](#) [12](#)
- [7. IANA Actions](#) [12](#)
 - [7.1. ANCP TLV Type Registry](#) [12](#)
- [8. Security Considerations](#) [13](#)

[9.](#) Acknowledgements [13](#)
[10.](#) References [14](#)
 [10.1.](#) Normative References [14](#)
 [10.2.](#) Informative References [14](#)
Authors' Addresses [14](#)

1. Introduction

[RFC6934](#) introduces application of ANCP to PON. However, [RFC6320](#) [[RFC6320](#)] haven't been updated to support PON. Besides, DSL technology is also evolving. G.fast, VDSL2 Vectoring and VDSL2 Annex Q were introduced as upgraded versions to provide higher bandwidths for the last mile..

This document considers all existing Access technologies used in a Telco network, yet not supported by [RFC6320](#) and specifies new TLVs accordingly.

2. Terminology

This section repeats some definitions from [RFC6320](#) and [RFC6934](#) [[RFC6934](#)], but also updates some definitions where appropriate.

Access Node (AN): [[RFC5851](#)] Network device, usually located at a service provider central office or street cabinet that terminates access (local) loop connections from subscribers. In case the access loop is a Digital Subscriber Line (DSL), the Access Node provides DSL signal termination and is referred to as a DSL Access Multiplexer (DSLAM). In case the access loop is a Passive Optical Network (PON), the Access Node is referred to as an Optical Line Terminal (OLT).

Optical Line Terminal (OLT): is located in the service provider's central office (CO) or street cabinet. It terminates and aggregates multiple PONs (providing fiber access to multiple premises or neighborhoods) on the subscriber side and interfaces with the Network Access Server (NAS) that provides subscriber management.

Optical Network Terminal (ONT): terminates PON on the network side and provides PON adaptation. The subscriber side interface and the location of the ONT are dictated by the type of network deployment. For an FTTP deployment (with fiber all the way to the apartment or living unit), ONT has Ethernet (Fast Ethernet (FE) / Gigabit Ethernet (GE) / Multimedia over Coax Alliance (MoCA)) connectivity with the Home Gateway (HGW) / Customer Premises Equipment (CPE). In certain cases, one ONT may provide connections to more than one Home Gateway at the same time.

Optical Network Unit (ONU): a generic term denoting a device that terminates any one of the distributed (leaf) endpoints of an Optical Distribution Network (ODN), implements a PON protocol, and adapts PON PDUs to subscriber service interfaces. In the case of a multi-dwelling unit (MDU) or multi-tenant unit (MTU), a multi-subscriber ONU typically resides in the basement or a wiring closet (FTTB case) and has FE/GE/Ethernet over native Ethernet link or over xDSL (typically VDSL2) connectivity with each CPE at the subscriber premises. In the case where fiber is terminated outside the premises (neighborhood or curb side) on an ONT/ONU, the last-leg-premises connections could be via existing or new copper, with xDSL physical layer (typically VDSL2). In this case, the ONU effectively is a "PON-fed DSLAM". In new FTTP based deployments the access node is named DPU (Distribution Point Unit). Basically from ANCP perspective this node provides the same functionality.

3. 3. Modification to ANCP - General Aspects

ANCP message formats remain the same as described in [section 3.5.1 of RFC6320](#) when it's applied to PON. However, some message descriptions need to be modified to make them applicable to variant Access Networks, other than DSL specific.

The ANCP Adjacency message is extended to other Access Technologies than DSL. Generalize the message format to following:

The following capabilities are defined for ANCP:

o Capability Type: Access Topology Discovery = 0x01

Access technology: ANY

Length (in bytes): 0

Capability Data: NULL

For the detailed protocol specification of this capability, see [Section 6 of RFC6320](#).

o Capability Type: Access Line Configuration = 0x02

Access technology: ANY

Length (in bytes): 0

Capability Data: NULL

For the detailed protocol specification of this capability, see [Section 7 of RFC6320](#).

o Capability Type: Access Remote Line Connectivity Testing = 0x04

Access technology: ANY

Length (in bytes): 0

Capability Data: NULL

For the detailed protocol specification of this capability, see [Section 8 of RFC6320](#).

[4.](#) Modification to DSL-Type TLV 0x0091

Add following new DSL-Type values.

Value: 32-bit unsigned integer

G.fast = 8

VDSL2 Annex Q = 9

SDSL bonded = 10

VDSL2 bonded = 11

G.fast bonded = 12

VDSL2 Annex Q bonded = 13

[5.](#) Extension to DSL Sub TLV

DSL sub TLVs are listed in [Section 6.5 of RFC6320](#). G.Fast requires beside existing TLVs the following new TLVs.

[5.1.](#) Expected Throughput (ETR) TLV

Type: 0x009B Expected Throughput at L2 (ETR) upstream

Description: Reports the expected throughput downstream after retransmission (ITU-T G.997.2, clause 7.11.1.2)

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

Type: 0x009C Expected Throughput at L2 (ETR) downstream

Description: Reports the expected throughput upstream after retransmission (ITU-T G.997.2, clause 7.11.1.2)

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

5.2. Attainable Expected Throughput (ATTETR)

Type: 0x009D

Description: Reports the attainable expected Throughput at L2 (ITU-T G.997.2, clause 7.11.2.2) upstream

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

5.3. Attainable Expected Throughput at L2

Type: 0x009E

Description: Reports the attainable expected Throughput at L2 (ITU-T G.997.2, clause 7.11.2.2) downstream

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

5.4. Gamma data rate (GDR) upstream

Type: 0x009F

Description: Reports the Gamma data rate (GDR) (ITU-T G.997.2, clause 7.11.1.3) upstream

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

5.5. Gamma data rate (GDR) downstream

Type: 0x00A0

Description: Reports the Gamma data rate (GDR) (ITU-T G.997.2, clause 7.11.1.3) downstream

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

5.6. Attainable Gamma data rate (ATTGDR) upstream

Type: 0x00A1

Description: Reports the Attainable Gamma data rate (ATTGDR) (ITU-T G.997.2, clause 7.11.2.3) upstream

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

5.7. Attainable Gamma data rate (ATTGDR) downstream

Type: 0x00A2

Description: Reports the Attainable Gamma data rate (ATTGDR) (ITU-T G.997.2, clause 7.11.2.3) downstream

Length: 4 bytes


Value: Rate in kbits/s as a 32-bit unsigned integer

6. ANCP-Based PON Topology Discovery

This section describes topology discovery messages applied for PON. TLVs not addressed here remain the same as applied for DSL.

6.1. ANCP Port Up and Port Down Event Message Descriptions

The format of the ANCP Port Up and Port Down Event messages is shown in Figure xx1. It has the same format as the one described in [section 6.3 of RFC6320](#). The only difference is that DSL-Line-Attributes TLV is updated as Access-Line-Attributes TLV.

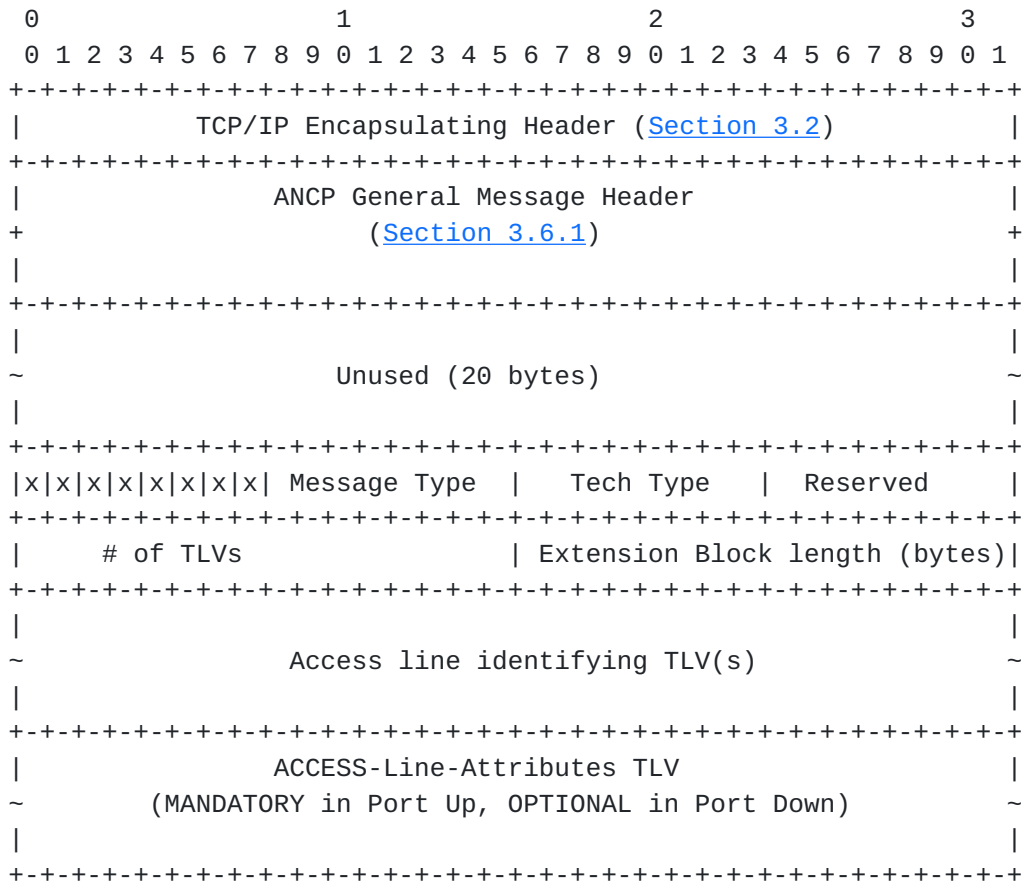

Format of the ANCP Port Up and Port Down Event Messages for PON Topology Discovery

NOTE: TLVs MAY be in a different order from what is shown in this figure.

Figure xx1: Format of the ANCP Port Up and Port Down Event Messages for PON Topology Discovery

See [Section 3.6.1 of RFC6320](#) for a description of the ANCP general message header. The Message Type field MUST be set to 80 for Port Up, 81 for Port Down. It is applicable to both DSL and PON based access systems. The 4-bit Result field MUST be set to zero (signifying Ignore). The 12-bit Result Code field and the 24-bit Transaction Identifier field MUST also be set to zeroes. Other fields in the general header MUST be set as described in [Section 3.6 of RFC6320](#).

The five-word Unused field is a historical leftover. The handling of unused/reserved fields is described in [Section 3.4 of RFC6320](#).

The remaining message fields belong to the "extension block", and are described as follows:

Extension Flags (8 bits): The flag bits denoted by 'x' are currently unspecified and reserved.

Message Type (8 bits): Message Type has the same value as in the general header (i.e., 80 or 81).

Tech Type (8 bits): MUST be set to 0x01 (PON).

Reserved (8 bits): set as described in [Section 3.4 of RFC6320](#).

of TLVs (16 bits): The number of TLVs that follow, not counting TLVs encapsulated within other TLVs.

Extension Block Length (16 bits): The total length of the TLVs carried in the extension block in bytes, including any padding within individual TLVs.

TLVs: One or more TLVs to identify a PON Access line and zero or more TLVs to define its characteristics.

6.2. PON Access Line Identification

Most ANCP messages involve actions relating to a specific access line. Thus, it is necessary to describe how PON access lines are identified within those messages. This section defines four TLVs for that purpose and provides an informative description of how they are used in PON. TLVs not addressed here remain unchanged applied for DSL.

6.2.1. Access-Loop-Circuit-ID TLV

Type: 0x0001

Description: A locally administered human-readable string generated by or configured on the Access Node, uniquely identifying the corresponding access loop logical port on the user side of the Access Node, as described in [Section 5.7](#) of [TR-156].

Length: Up to 63 bytes

Value: ASCII string

6.2.2. Access-Loop-Remote-ID TLV

Type: 0x0002

Description: An operator-configured string that uniquely identifies the user on the associated access line, as described in [Section 5.7](#) of [TR-156].

Length: Up to 63 bytes

Value: ASCII string

6.3. TLVs for PON Access Line Attributes

6.3.1. PON-Access-Line-Attributes TLV

Type: 0x0012

Description: This TLV encapsulates attribute values of a PON access line serving a subscriber.

Length: Variable (up to 1023 bytes)

Value: One or more encapsulated TLVs corresponding to PON access line attributes. The PON-Access-Line-Attributes TLV MUST contain at least one TLV when it is present in a Port Up or Port Down message. The actual contents are determined by the AN control application. Non PON specific attributes of [RFC6320](#) such as TLV0x0090 are valid for PON and not repeated here..

6.3.2. PON-Access-Type TLV

Type: 0x0092

Description: Indicates the type of PON transmission system in use.

Length: 4 bytes

Value: 32-bit unsigned integer

OTHER = 0

GPON = 1

XG-PON1 = 2

TWDM-PON = 3

XGS-PON = 4

WDM-PON = 5

Unknown = 7

6.3.3. ONT/ONU-Average-Data-Rate-Downstream TLV

Type: 0x0093

Description: ONT/ONU downstream average data rate L2

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

6.3.4. ONT/ONU-Peak-Data-Rate-Downstream TLV

Type: 0x0094

Description: ONT/ONU downstream peak data rate L2

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

6.3.5. ONT/ONU-Maximum-Data-Rate-Upstream TLV

Type: 0x0095

Description: ONT/ONU upstream maximum data rate L2

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

6.3.6. ONT/ONU-Assured-Data-Rate-Upstream TLV

Type: 0x0096

Description: ONT/ONU upstream assured data rate L2

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

6.3.7. PON-Tree-Maximum-Data-Rate-Upstream TLV

Type: 0x0097

Description: PON Tree upstream maximum data rate L2

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

6.3.8. PON-Tree-Maximum-Data-Rate-Downstream TLV

Type: 0x0098

Description: PON Tree downstream maximum data rate L2

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

6.3.9. Reserved TLV

Type: 0x0099

Description: Reserved

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

6.3.10. Reserved TLV

Type: 0x009A

Description: Reserved

Length: 4 bytes

Value: Rate in kbits/s as a 32-bit unsigned integer

7. IANA Actions

7.1. ANCP TLV Type Registry

This document defines following sets of TLVs for PON, some of them have defined by [RFC6320](#) and are referenced here for completeness:

Type Code	TLV Name	Reference
0x0000	Reserved	
RFC 6320		
0x0001	Access-Loop-Circuit-ID	RFC 6320
0x0002	Access-Loop-Remote-ID	RFC 6320
0x0003	Access-Aggregation-Circuit-ID-ASCII	RFC 6320
0x0005	Service-Profile-Name	RFC 6320
0x0006	Access-Aggregation-Circuit-ID-Binary	RFC 6320
0x0011	Command	
RFC 6320		
0x0012	PON-Access-Line-Attributes	RFC xxxx
0x0092	PON-Access-Type	RFC xxxx
0x0093	ONT/ONU-Average-Data-Rate-Downstream	RFC xxxx
0x0094	ONT/ONU-Peak-Data-Rate-Downstream	RFC xxxx
0x0095	ONT/ONU-Maximum-Data-Rate-Upstream	RFC xxxx
0x0096	ONT/ONU-Assured-Data-Rate-Upstream	RFC xxxx
0x0097	PON-Tree-Maximum-Data-Rate-Upstream	RFC xxxx
0x0098	PON-Tree-Maximum-Data-Rate-Downstream	RFC xxxx
0x0099	Reserved	
RFC xxxx		
0x009A	Reserved	
RFC xxxx		
0x009B	Expected Throughput (ETR) upstream	RFC xxxx
0x009C	Expected Throughput (ETR)-downstream	RFC xxxx
0x009D	Attainable Expected Throughput (ATTETR) upstream	

RFC xxxx				
0x009E		Attainable Expected Throughput (ATTETR)-downstream		
RFC xxxx				
0x009F		Guaranteed Data Rate (GDR)-		
upnstream			RFC xxxx	
0x00A0		Guaranteed Data Rate (GDR)		
downstream			RFC xxxx	
0x00A1		Attainable Guaranteed Data Rate (ATTGDR)-upstream		
RFC xxxx				
0x00A2		Attainable Guaranteed Data Rate (ATTGDR)-downstream		RFC
xxxx				
0x0106		Status-		
Info				
RFC 6320				
0x1000		Target (single access line		
variant)			RFC 6320	
0x1001 -		Reserved for Target		
variants			RFC 6320	
+-----+-----+-----+-----+-----+				

8. Security Considerations

There are no new security considerations beyond what is described in [RFC6320](#) and [RFC6934](#).

9. Acknowledgements

Many thanks to Norbert Voigt, John Gibbons, Sven Ooghe, Koen De Sagher and Sven Leimer for joint work reviewing the document and providing valuable comments to this document.

10. References

10.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC6320] Wadhwa, S., Moisand, J., Haag, T., Voigt, N., and T. Taylor, Ed., "Protocol for Access Node Control Mechanism in Broadband Networks", [RFC 6320](#), DOI 10.17487/RFC6320, October 2011, <<https://www.rfc-editor.org/info/rfc6320>>.
- [RFC6934] Bitar, N., Ed., Wadhwa, S., Ed., Haag, T., and H. Li, "Applicability of the Access Node Control Mechanism to Broadband Networks Based on Passive Optical Networks (PONs)", [RFC 6934](#), DOI 10.17487/RFC6934, June 2013, <<https://www.rfc-editor.org/info/rfc6934>>.

10.2. Informative References

- [RFC5515] Mammoliti, V., Pignataro, C., Arberg, P., Gibbons, J., and P. Howard, "Layer 2 Tunneling Protocol (L2TP) Access Line Information Attribute Value Pair (AVP) Extensions", [RFC 5515](#), DOI 10.17487/RFC5515, May 2009, <<https://www.rfc-editor.org/info/rfc5515>>.
- [TR-156_Issue-3]
The Broadband Forum, "Using GPON Access in the context of TR-101", November 2012.

Authors' Addresses

Hongyu Li
Huawei Technologies Co., Ltd.
Industrial Base, bantain Longgang
Shenzhen 518129
P.R. China

Email: lihy@huawei.com

Thomas Haag
Deutsche Telekom
Heinrich-Hertz_Strasse 3-7
Darmstadt 64295
Germany

Email: haagt@telekom.de

Birgit Witschurke
Deutsche Telekom
Winterfeldstrasse 21
Berlin 10781
Germany

Email: b.witschurke@telekom.de

