

ANIMA WG  
INTERNET-DRAFT  
Intended Status: Standard Track  
Expires: January 9, 2020

B. Liu  
Huawei Technologies  
X. Xiao  
MRC, Huawei Technologies  
S. Jiang  
Huawei Technologies  
A. Hecker  
Z. Despotovic  
MRC, Huawei Technologies  
July 8, 2019

**Information Distribution in Autonomic Networking**  
**draft-liu-anima-grasp-distribution-11**

**Abstract**

This document discusses the requirement to autonomic nodes supporting information distribution based over GRASP in autonomic networks. In general, information distribution can be categorized into two different modes: 1) one autonomic node instantly sends information to other nodes in the domain; 2) one autonomic node publishes some information and asynchronously some other interested nodes request the published information. In the former case, information data will be generated and consumed instantly. In the latter case, information data live longer in the network.

These capabilities are basic and fundamental to an autonomous network system (i.e. ANI [[I-D.ietf-anima-reference-model](#)]). This document clarifies possible use cases of information distribution in ANI and requirements to ANI so that rich information distribution can be natively supported. Extensions to autonomic nodes are proposed and detailed embodiments based on GRASP are discussed.

**Status of this Memo**

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months

and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at

<http://www.ietf.org/1id-abstracts.html>

The list of Internet-Draft Shadow Directories can be accessed at

<http://www.ietf.org/shadow.html>

## Copyright and License Notice

Copyright (c) 2019 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">2</a>	Terminology . . . . .	<a href="#">3</a>
<a href="#">3</a>	Requirements of Advanced Information Distribution . . . . .	<a href="#">4</a>
<a href="#">4</a>	Information Distribution in ANI . . . . .	<a href="#">5</a>
<a href="#">5</a>	Node Behaviors . . . . .	<a href="#">5</a>
<a href="#">5.1</a>	Instant Information Distribution . . . . .	<a href="#">6</a>
<a href="#">5.2</a>	Asynchronous Information Distribution . . . . .	<a href="#">7</a>
<a href="#">5.3</a>	Summary . . . . .	<a href="#">11</a>
<a href="#">6</a>	Protocol Specification (GRASP extension) . . . . .	<a href="#">12</a>
6.1	Un-solicited Synchronization Message (A new GRASP Message)	12
<a href="#">6.2</a>	Selective Flooding Option . . . . .	<a href="#">12</a>
<a href="#">6.3</a>	Subscription Objective Option . . . . .	<a href="#">13</a>
<a href="#">6.4</a>	Un_Subscription Objective Option . . . . .	<a href="#">13</a>
<a href="#">6.5</a>	Publishing Objective Option . . . . .	<a href="#">13</a>
<a href="#">7</a>	Security Considerations . . . . .	<a href="#">14</a>
<a href="#">8</a>	IANA Considerations . . . . .	<a href="#">14</a>
<a href="#">9</a>	References . . . . .	<a href="#">14</a>
<a href="#">9.1</a>	Normative References . . . . .	<a href="#">14</a>



<a href="#">9.2 Informative References</a> . . . . .	<a href="#">14</a>
<a href="#">Appendix A</a> . . . . .	<a href="#">15</a>
Authors' Addresses . . . . .	<a href="#">16</a>

## [1](#) Introduction

In an autonomic network, autonomic functions (AFs) running on autonomic nodes would exchange information constantly, both for controlling/management signaling and data exchange. This document discusses the information distribution capability of such exchanges between AFs.

According to the number of participants, information distribution can happen with the following scenarios:

- 1) Point-to-point (P2P) Communication: information are exchanged between two communicating parties from one node to another node.
- 2) One-to-Many Communication: information exchanges involve an information source and multiple receivers.

The approaches of distributing information could be categorized into two basic modes:

- 1) An instant communication: a sender connects and sends the information data (e.g. control/management signaling, synchronization data and so on) to the receiver(s) immediately.
- 2) An asynchronous communication: a sender saves the information in the network, may or may not publish the information to the other who is interested in the published information, to which a node asks to retrieve.

The ANI should have provided a generic way to support these information distribution scenarios among AFs, rather than AFs managing to use other transport or routing protocols (HTTP, BGP/IGP as bearing protocols etc.). In fact, GRASP already provides part of the capabilities.

In this document, we first analyze requirements of information distribution in autonomic networks ([Section 3](#)), and then introduce its relationship to the other modules in ANI ([Section 4](#)). After that, the node behaviors and extensions to the existing GRASP are introduced in [Section 5](#) and [Section 6](#), respectively.

## [2](#). Terminology



The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

### **3. Requirements of Advanced Information Distribution**

If the information exchanged is just short and simple, this can be done instantly. In practice, however, this is not always the case. In the following cases, a mixture of instant and asynchronous communication models is more appropriate.

1) Long Communication Intervals. The time interval of the communication is not necessarily always short and instant. Advanced AFs may rather involve heavy jobs/tasks (e.g. database lookup, authentication etc.) when gearing the network, so the instant mode may introduce unnecessary pending time and become less efficient. If simply using an instant mode, the AF has to wait until the tasks finish and return. A better way is that an AF instantly sends the request but switches to an synchronous mode, once the jobs are finished, AFs will get notified.

2) Common Interest Distribution. As mentioned, some information are common interests among AFs. For example, the network intent is distributed to network nodes enrolled, which is a typical one-to-many scenario. We can also finish the intent distribution by an instant flooding (e.g. via GRASP) to every network nodes across the network domain. Because of network dynamic, however, not every node can be just ready at the moment when the network intent is flooded. Actually, nodes may join in the network sequentially. In this situation, an asynchronous communication model could be a better choice where every (newly joining) node can subscribe the intent information and will get notified if it is ready (or updated).

3) Distributed Coordination. With computing and storage resources on autonomic nodes, alive AFs not only consumes but also generates data information. For example, AFs coordinating with each other as distributed schedulers, responding to service requests and distributing tasks. It is critical for those AFs to make correct decisions based on local information, which might be asymmetric as well. AFs may also need synthetic/aggregated data information (e.g. statistic info, like average values of several AFs, etc.) to make decisions. In these situations, AFs will need an efficient way to form a global view of the network (e.g. about resource consumption, bandwidth and statistics). Obviously, purely relying on instant communication model is inefficient, while a scalable, common, yet distributed data layer, on which AFs can store and share information in an asynchronous way, should be a better



choice.

For ANI, in order to support various communication scenarios, an information distribution module is required, and both instant and asynchronous communication models should be supported.

#### 4. Information Distribution in ANI

This section describes how the information distribution module fits into the ANI including what extensions of GRASP are required [I-D.ietf-anima-grasp].

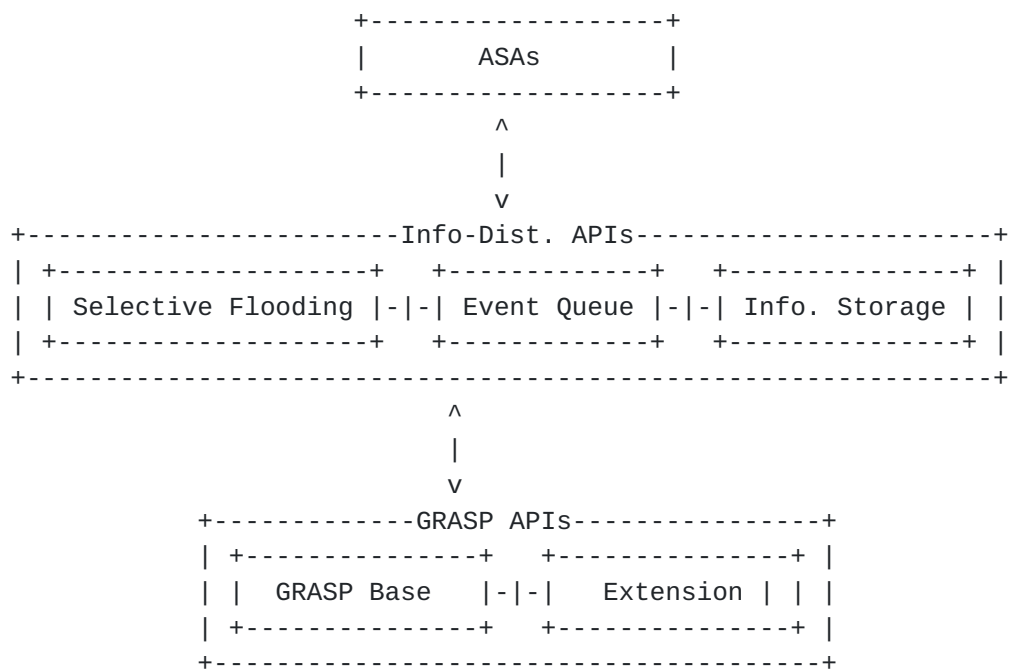


Figure 1. Information Distribution Module and GRASP Extension.

As the Fig 1 shows, the information distribution module includes three sub-modules, all of which provides APIs for ASAs. Specific behaviors of these modules is described in [Section 5](#). In order to support the modules, the GRASP is also extended, which is described in [Section 6](#).

#### 5. Node Behaviors

In this section, we discuss how each autonomic node should behave in order to support the two modes of information distribution introduced before. ANI is a distributed system, so the information distribution module must be implemented in a distributed way as well, where every node participates to contribute.





## **5.1 Instant Information Distribution**

In this case, sender(s) and receiver(s) are specified. Information will be directly sent from the sender(s) to the receiver(s). This requires that every node is equipped by some signaling/transport protocols so that they can coordinate with each other and correctly deliver the information.

### **5.1.1 Instant P2P and Flooding Communications**

Current GRASP already provides the capability to support instant P2P and flooding. It is natural to use the GRASP Synchronization message directly for P2P distribution. Furthermore, it is also natural to use the GRASP Flood Synchronization message for broadcast.

However, as mentioned in [Section 3](#), in some scenarios one node needs to actively send some information to another. GRASP Synchronization just lacks such capability, therefore an un-solicited synchronization mechanism is needed. An extension of GRASP message (i.e. M\_UNSOLIDSYN) is defined in [Section 6.1](#).

### **5.1.2 Instant Selective Flooding Communication**

When doing selective flooding, the distributed information needs to contain the criteria for nodes to judge which interfaces should be sent the distributed information and which are not. Specifically, the criteria contain:

- o Matching condition: a set of matching rules.
- o Matching object: the object that the match condition would be applied to. For example, the matching object could be node itself or its neighbors.
- o Action: what behavior the node needs to do when the matching object matches or failed the matching condition. For example, the action could be forwarding or discarding the distributed message.

The criteria information must be include in the message that carries the distributed information from the sender. The receiving node decides the action according to the criteria carried in the message. Still considering the criteria attached with the distributed information, the node behaviors can be:

- o When the Matching Object is "Neighbors", then the node matches the relevant information of its neighbors to the Matching Condition. If the node finds one neighbor matches the Matching Condition, then it forwards the distributed message to the



neighbor. If not, the node discards forwarding the message to the neighbor.

o When the Matching Object is the node itself, then the node matches the relevant information of its own to the Matching Condition. If the node finds itself matches the Matching Condition, then it forwards the distributed message to its neighbors; if not, the node discards forwarding the message to the neighbors.

GRASP is extended with a new option field (i.e. selective-flood-option) to support selective flooding, shown in [Section 6.2](#). This option will be included in the original flooding message of GRASP. An example of selective flooding is briefly described in the [Appendix A](#).

## **[5.2](#) Asynchronous Information Distribution**

Asynchronous information distribution happens in a different way where sender(s) and receiver(s) are not immediately specified. Both senders and receivers may come up in an asynchronous way. First of all, this requires that the information can be stored; secondly, it requires an information publication and subscription (Pub/Sub) mechanism (corresponding protocol specification of Pub/Sub is defined in [Section 6](#)).

As we sketched in the previous section that in general each node requires two modules: 1) Information Storage (IS) module and 2) Event Queue (EQ) module in the information distribution module. We introduce details of the two modules in the following sections.

### **5.2.1 Information Storage**

IS module handles how to save and retrieve information for ASAs across the network. The IS module uses a syntax to index information, generating the hash index value (e.g. a hash key) of the information and mapping the hash index to a certain node in ANI. Note that, this mechanism can use existing solutions. Specifically, storing information in an ANIMA network will be realized in the following steps.

- 1) ASA-to-IS Negotiation. An ASA calls the API provided by information distribution module (directly supported by IS sub-module) to request to store the information somewhere in the network. Such a request will be checked by the IS module who will be responsible for the request whether such a request is feasible according to criteria such as permitted information size.

- 2) Destination Node Mapping. The information block will be handled



by the IS module in order to calculate/map to a destination node in the network. Since ANIMA network is a peer-to-peer network, a typical way is to use dynamic hash table (DHT) to map information to a unique index identifier. For example, if the size of the information is reasonable, the information block itself can be hashed, otherwise, some meta-data of the information block can be used to generate the mapping.

3) Destination Node Negotiation Request. Negotiation request of storing the information will be sent from the IS module to the IS module on the destination node. The negotiation request contains parameters about the information block from the source IS module. According to the parameters as well as the local available resource, the destination node will feedback the source IS module.

4) Destination Node Negotiation Response. Negotiation response from the destination node is sent back to the source IS module. If the source IS module gets confirmation that the information can be stored, source IS module will prepare to transfer the information block; otherwise, a new destination node must be discovered (i.e. going to step 7).

5) Information Block Transfer. Before sending the information block to the destination node that accepts the request, the IS module of the source node will check if the information block can be afforded by one GRASP message. If so, the information block will be directly sent by calling a GRASP API. Otherwise, bulk data transmission with GRASP will be triggered, where multi-time GRASP message sending will be used so that one information block will be transferred by smaller pieces [[I-D.ietf-anima-reference-model](#)].

6) Information Writing. Once the information block (or a smaller block) is received, the IS module of the destination node will store the data block in the local storage, which is accessible.

7) (Optional) New Destination Node Discovery. If the previously selected destination node is not available to store the information block, the source IS module will have to identify a new destination node to start a new negotiation. In this case, the discovery can be done by using discovery GRASP API to identify a new candidate, or more complex mechanisms can be introduced.

Similarly, Getting information from an ANIMA network will be realized in the following steps.

1) ASA-to-IS Request. An ASA accesses the IS module via the APIs exposed by the information distribution module. The key/index of the interested information will be sent to the IS module. An



assumption here is that the key/index should be ready to an ASA before an ASA can ask for the information. This relates to the publishing/subscribing of the information, which are handled by other modules (e.g. Event Queue with Pub/Sub supported by GRASP).

2) Destination Node Mapping. IS module maps the key/index of the requested information to a destination node, and prepares to start to request the information. The mapping here follows the same mechanism when the information is stored.

3) Retrieval Negotiation Request. The source IS module sends a request to the destination node identified in the previous step and asks if such an information object is available.

4) Retrieval Negotiation Response. The destination node checks the key/index of the requested information, and replies to the source IS module. If the information is found and the information block can be afforded within one GRASP message, the information will be sent together with the response to the source IS module.

5) (Optional) New Destination Request. If the information is not found after the source IS module gets the response from the original destination node, the source IS module will have to discover where the location storing the requested information is.

IS module can reuse distributed databases and key value stores like NoSQL, Cassandra, DHT technologies. storage and retrieval of information are all event-driven responsible by the EQ module.

### 5.2.2 Event Queue

The main job of Event Queue (EQ) module is to help ASAs to show interests to particular information and notify the occurrences of that in asynchronous communication scenarios. In ANI, information generated on network nodes is labeled as an event identified with an event ID, which is semantically related to the topic of the information. Key features of EQ module are summarized as follows.

1) Event Group: EQ module provides isolated queues for different event groups. If two groups of AFs could have completely different purposes or interests, EQ module allows to create multiple queues where only AFs interested in the same topic will be aware of the corresponding event queue.

2) Event Prioritization: Events do not have to be delivered in the same priority. This corresponds to how much important the event implies. Some of them are more urgent than regular ones. Prioritization allows AFs to differentiate events (i.e. information)





they publish/subscribe.

3) Event Matching: an information consumer has to be identified from the queue in order to deliver the information from the provider. Event matching keeps looking for the subscriptions in the queue to see if there is an exact published event there. Whenever a match is found, it will notify the upper layer to inform the corresponding ASAs who are the information provider and subscriber(s) respectively.

The procedure of how EQ module on every network node works is introduced as follows.

1) Event ID Generation: If information of an ASA is ready, an event ID is generated according to the content of the information. This is also related to how the information is stored/saved by the IS module introduced before. Meanwhile, the type of the event is also specified where it can be of control purpose or user plane data.

2) Priority Specification: According to the type of the event, the ASA may specify its priority to say how this event is wanted to be processed. By considering both aspects, the priority of the event will be determined and ready for enqueueing.

3) Event Enqueue: Given the event ID, event group and its priority, a queue is identified locally if all criteria can be satisfied. If there is such a queue, the event will be simply added into the queue, otherwise a new queue will be created to accommodate such an event.

4) Event Propagation: The published event will be propagated to the other network nodes in the ANIMA domain. A propagation algorithm can be employed to here in order to optimize the propagation efficiency of the updated event queue states.

5) Event Match and Notification: While propagating updated event states, EQ module in parallel keeps matching published events and its interested consumers. Once a match is found, the provider and subscriber(s) will be notified for final information retrieval.

Event contains the address where the information is stored, after a subscriber is notified, it directly retrieves the information from the given location.

### 5.2.3 Integrating with GRASP APIs

Actions triggered to the information distribution module will



eventually invoke underlying GRASP APIs. Moreover, EQ and IS modules are usually correlated. When an AF(ASA) publishes information, not only such an event is translated and sent to EQ module, but also the information is indexed and stored simultaneously. Similarly, when an AF(ASA) subscribes information, not only subscribing event is triggered and sent to EQ module, but also the information will be retrieved by IS module at the same time.

o Storing and publishing information: This action involves both IS and EQ modules where a node that can store the information will be discovered first and related event will be published to the network. For this, GRASP APIs `discover()`, `synchronize()` and `flood()` are combined to compose such a procedure. In specific, `discover()` call will specify its objective being to "store\_data" and the return parameters could be either an `ASA_locator` who will accept to store the data, or an error code indicating that no one could afford such data; after that, `synchronize()` call will send the data to the specified `ASA_locator` and the data will be stored at that node, with return of processing results like `store_data_ack`; meanwhile, such a successful event (i.e. data is stored successfully) will be flooded via a `flood()` call to interesting parties (such a multicast group existed).

o Subscribing and getting information: This action involves both IS and EQ modules as well where a node that is interested in a topic will subscribe the topic by triggering EQ module and if the topic is ready IS module will retrieve the content of the topic (i.e. the data). GRASP APIs such as `register_objective()`, `flood()`, `synchronize()` are combined to compose the procedure. In specific, any subscription action received by EQ module will be translated to `register_objective()` call where the interested topic will be the parameter inside of the call; the registration will be (selectively) flooded to the network by an API call of `flood()` with the option we extended in this draft; once a matched topic is found (because of the previous procedure), the node finding such a match will call API `synchronize()` to send the stored data to the subscriber.

### **5.3 Summary**

In summary, the general requirements for the information distribution module on each autonomic node are two sub-modules handling instant communications and asynchronous communications, respectively. For instant communications, node requirements are simple, in which signaling protocols have to be supported. With minimum efforts, reusing the existing GRASP is possible. For asynchronous communications, information distribution module requires event queue and information storage mechanism to be supported.



## **6. Protocol Specification (GRASP extension)**

There are multiple ways to integrate the information distribution module. The principle we follow is to minimize modifications made to the current ANI. We consider to use GRASP as a base to build up the information distribution module. The main reason is that the current version of GRASP is already an information distribution module for the cases of P2P and flooding. In the following discussions, we introduce how to complete the missing part.

### **6.1 Un-solicited Synchronization Message (A new GRASP Message)**

In fragmentary CDDL, a Un-solicited Synchronization message follows the pattern:

```
unsolicited_synch-message = [M_UNSOLIDSYNCH, session-id,  
objective]
```

A node MAY actively send a unicast Un-solicited Synchronization message with the Synchronization data, to another node. This MAY be sent to port GRASP\_LISTEN\_PORT at the destination address, which might be obtained by GRASP Discovery or other possible ways. The synchronization data are in the form of GRASP Option(s) for specific synchronization objective(s).

### **6.2 Selective Flooding Option**

In fragmentary CDDL, the selective flood follows the pattern:

```
selective-flood-option = [O_SELECTIVE_FLOOD, +O_MATCH-CONDITION,  
match-object, action]  
O_MATCH-CONDITION = [O_MATCH-CONDITION, Obj1, match-rule, Obj2]  
  Obj1 = text  
  match-rule = GREATER / LESS / WITHIN / CONTAIN  
  Obj2 = text  
match-object = NEIGHBOR / SELF  
action = FORWARD / DROP
```

The selective flood option encapsulates a match-condition option which represents the conditions regarding to continue or discontinue flood the current message. For the match-condition option, the Obj1 and Obj2 are to objects that need to be compared. For example, the Obj1 could be the role of the device and Obj2 could be "RSG". The match rules between the two objects could be greater, less than, within, or contain. The match-object represents of which Obj1 belongs to, it could be the device itself or the neighbor(s) intended to be flooded. The action means, when the match rule applies, the current device just continues flood or discontinues.



### **6.3 Subscription Objective Option**

In fragmentary CDDL, a Subscription Objective Option follows the pattern:

```
subscription-objection-option = [SUBSCRIPTION, 2, 2, subobj]
objective-name = SUBSCRIPTION
objective-flags = 2
loop-count = 2
subobj = text
```

This option MAY be included in GRASP M\_Synchronization, when included, it means this message is for a subscription to a specific object.

### **6.4 Un\_Subscription Objective Option**

In fragmentary CDDL, a Un\_Subscribe Objective Option follows the pattern:

```
Unsubscribe-objection-option = [UNSUBSCRIB, 2, 2, unsubobj]
objective-name = SUBSCRIPTION
objective-flags = 2
loop-count = 2
unsubobj = text
```

This option MAY be included in GRASP M\_Synchronization, when included, it means this message is for a un-subscription to a specific object.

### **6.5 Publishing Objective Option**

In fragmentary CDDL, a Publish Objective Option follows the pattern:

```
publish-objection-option = [PUBLISH, 2, 2, pubobj] objective-name
= PUBLISH
objective-flags = 2
loop-count = 2
pubobj = text
```

This option MAY be included in GRASP M\_Synchronization, when included, it means this message is for a publish of a specific object data.

Note that extended GRASP messages with new arguments inside here will be triggered by interactions/actions from information distribution module introduced in [Section 5](#).





## **7. Security Considerations**

The distribution source authentication could be done at multiple layers:

- o Outer layer authentication: the GRASP communication is within ACP (Autonomic Control Plane, [[I-D.ietf-anima-autonomic-control-plane](#)]). This is the default GRASP behavior.
- o Inner layer authentication: the GRASP communication might not be within a protected channel, then there should be embedded protection in distribution information itself. Public key infrastructure might be involved in this case.

## **8. IANA Considerations**

TBD.

## **9. References**

### **9.1 Normative References**

[I-D.ietf-anima-grasp]  
Bormann, D., Carpenter, B., and B. Liu, "A Generic Autonomic Signaling Protocol (GRASP)", [draft-ietf-animagrasp-15](#) (Standard Track), October 2017.

### **9.2 Informative References**

[RFC7575] Behringer, M., "Autonomic Networking: Definitions and Design Goals", [RFC 7575](#), June 2015

[I-D.ietf-anima-autonomic-control-plane]  
Eckert, T., Behringer, M., and S. Bjarnason, "An Autonomic Control Plane (ACP)", [draft-behringer-anima-autonomic-control-plane-13](#), December 2017.

[I-D.ietf-anima-stable-connectivity-10]  
Eckert, T., Behringer, M., "Using Autonomic Control Plane for Stable Connectivity of Network OAM", [draft-ietf-anima-stable-connectivity-10](#), February 2018.

[I-D.ietf-anima-reference-model]  
Behringer, M., Carpenter, B., Eckert, T., Ciavaglia, L., Pierre P., Liu, B., Nobre, J., and J. Strassner, "A Reference Model for Autonomic Networking", [draft-ietf-](#)



anima-reference-model-05, October 2017.

[I-D.du-anima-an-intent]

Du, Z., Jiang, S., Nobre, J., Ciavaglia, L., and M. Behringer, "ANIMA Intent Policy and Format", [draft-duanima-an-intent-05](#) (work in progress), February 2017.

[I-D.ietf-anima-grasp-api]

Carpenter, B., Liu, B., Wang, W., and X. Gong, "Generic Autonomic Signaling Protocol Application Program Interface (GRASP API)", [draft-ietf-anima-grasp-api-00](#) (work in progress), December 2017.

[I-D.carpenter-anima-grasp-bulk-02]

Carpenter, B., Jiang, S., Liu, B., "Transferring Bulk Data over the GeneRic Autonomic Signaling Protocol (GRASP)", [draft-carpenter-anima-grasp-bulk-02](#) (work in progress), June 30, 2018

[3GPP.29.500]

3GPP, "Technical Realization of Service Based Architecture", 3GPP TS 29.500 15.1.0, 09 2018

[3GPP.23.501]

3GPP, "System Architecture for the 5G System", 3GPP TS 23.501 15.2.0, 6 2018,  
<<http://www.3gpp.org/ftp/Specs/html-info/23501.htm>>.

[3GPP.23.502]

3GPP, "Procedures for the 5G System", 3GPP TS 23.502 15.2.0, 6 2018, <<http://www.3gpp.org/ftp/Specs/html-info/23502.htm>>.

[5GAA.use.cases]

White Paper "Toward fully connected vehicles: Edge computing for advanced automotive communications", 5GAA  
<<http://5gaa.org/news/toward-fully-connected-vehicles-edge-computing-for-advanced-automotive-communications/>>

## Appendix A.

GRASP includes flooding criteria together with the delivered information so that every node will process and act according to the criteria specified in the message. An example of extending GRASP with



selective criteria can be:

- o Matching condition: "Device role=IPRAN\_RSG"
- o Matching objective: "Neighbors"
- o Action: "Forward"

This example means: only distributing the information to the neighbors who are IPRAN\_RSG.

#### Authors' Addresses

Bing Liu  
Huawei Technologies  
Q27, Huawei Campus  
No.156 Beiqing Road  
Hai-Dian District, Beijing 100095  
P.R. China

Email: leo.liubing@huawei.com

Sheng Jiang  
Huawei Technologies  
Q27, Huawei Campus  
No.156 Beiqing Road  
Hai-Dian District, Beijing 100095  
P.R. China

Email: jiangsheng@huawei.com

Xun Xiao  
Munich Research Center  
Huawei technologies  
Riesstr. 25, 80992, Muenchen, Germany

Emails: xun.xiao@huawei.com

Artur Hecker  
Munich Research Center  
Huawei technologies  
Riesstr. 25, 80992, Muenchen, Germany

Emails: artur.hecker@huawei.com

Zoran Despotovic



Munich Research Center  
Huawei technologies  
Riesstr. 25, 80992, Muenchen, Germany

Emails: zoran.despotovic@huawei.com

## [Appendix A](#) Real-world Use Cases of Information Distribution

The requirement analysis in [Section 3](#) shows that generally information distribution should be better of as an infrastructure layer module, which provides to upper layer utilizations. In this section, we review some use cases from the real-world where an information distribution module with powerful functions do plays a critical role there.

### A.1 Service-Based Architecture (SBA) in 3GPP 5G

In addition to Internet, the telecommunication network (i.e. carrier mobile wireless networks) is another world-wide networking system. The architecture of the upcoming 5G mobile networks from 3GPP has already been defined to follow a service-based architecture (SBA) where any network function (NF) can be dynamically associated with any other NF(s) when needed to compose a network service. Note that one NF can simultaneously associate with multiple other NFs, instead of being physically wired as in the previous generations of mobile networks. NFs communicate with each other over service-based interface (SBI), which is also standardized by 3GPP [[3GPP.23.501](#)].

In order to realize an SBA network system, detailed requirements are further defined to specify how NFs should interact with each other with information exchange over the SBI. We now list three requirements that are related to information distribution here.

1) NF Pub/Sub: Any NF should be able to expose its service status to the network and any NF should be able to subscribe the service status of an NF and get notified if the status is available. An concrete example is that a session management function (SMF) can subscribe the REGISTER notification from an access management function (AMF) if there is a new user entity trying to access the mobile network [[3GPP.23.502](#)].

2) Network Exposure Function (NEF): A particular network function that is required to manage the event exposure and distributions. In specific, SBA requires such a functionality to register network events from the other NFs (e.g. AMF, SMF and so on), classify the events and properly handle event distributions accordingly in





terms of different criteria (e.g. priorities) [[3GPP.23.502](#)].

3) Network Repository Function (NRF): A particular network function where all service status information is stored for the whole network. An SBA network system requires all NFs to be stateless so as to improve the resilience as well as agility of providing network services. Therefore, the information of the available NFs and the service status generated by those NFs will be globally stored in NRF as a repository of the system. This clearly implies storage capability that keeps the information in the network and provides those information when needed. A concrete example is that whenever a new NF comes up, it first of all registers itself at NRF with its profile. When a network service requires a certain NF, it first inquires NRF to retrieve the availability information and decides whether or not there is an available NF or a new NF must be instantiated [[3GPP.23.502](#)].

(Note: 3GPP CT might finally adopt HTTP2.0/JSON to be the protocol communicating between NFs, but autonomic networks can also load HTTP2.0 with in ACP.)

## A.2 Vehicle-to-Everything

Carrier networks On-boarding services of vertical industries are also one of some blooming topics that are heavily discussed. Connected car is clearly one of the important scenarios interested in automotive manufacturers, carriers and vendors. 5G Automotive Alliance - an industry collaboration organization defines many promising use cases where services from car industry should be supported by the 5G mobile network. Here we list two examples as follows [[5GAA.use.cases](#)].

1) Software/Firmware Update: Car manufacturers expect that the software/firmware of their car products can be remotely updated/upgraded via 5G network in future, instead of onsite visiting their 4S stores/dealers offline as nowadays. This requires the network to provide a mechanism for vehicles to receive the latest software updates during a certain period of time. In order to run such a service for a car manufacturer, the network shall not be just like a network pipe anymore. Instead, information data have to be stored in the network, and delivered in a publishing/subscribing fashion. For example, the latest release of a software will be first distributed and stored at the access edges of the mobile network, after that, the updates can be pushed by the car manufacturer or pulled by the car owner as needed.

2) Real-time HD Maps: Autonomous driving clearly requires much finer details of road maps. Finer details not only include the



details of just static road and streets, but also real-time information on the road as well as the driving area for both local urgent situations and intelligent driving scheduling. This asks for situational awareness at critical road segments in cases of changing road conditions. Clearly, a huge amount of traffic data that are real-time collected will have to be stored and shared across the network. This clearly requires the storage capability, data synchronization and event notifications in urgent cases from the network, which are still missing at the infrastructure layer.

### A.3 Summary

Through the general analysis and the concrete examples from the real-world, we realize that the ways information are exchanged in the coming new scenarios are not just short and instant anymore. More advanced as well as diverse information distribution capabilities are required and should be generically supported from the infrastructure layer. Upper layer applications (e.g. ASAs in ANIMA) access and utilize such a unified mechanism for their own services.

