

Network Working Group  
Internet Draft  
Intended status: Standards Track

H. Long, M. Ye  
Huawei Technologies Co., Ltd  
G. Mirsky  
Ericsson  
A. Alessandro  
Telecom Italia S.p.A  
H. Shah  
Ciena  
Expires: January 2015

July 4, 2014

**RSVP-TE Signaling Extension for Links with Variable Discrete  
Bandwidth  
draft-long-ccamp-rsvp-te-bandwidth-availability-05.txt**

Abstract

Packet switching network MAY contain links with variable bandwidth, e.g., copper, radio, etc. The bandwidth of such link is sensitive to external environment. Availability is typically used for describing the link during network planning. This document describes an extension for RSVP-TE signaling for setting up a label switching path (LSP) in a Packet Switched Network (PSN) network which contains links with discretely variable bandwidth by introducing an Extended Ethernet Bandwidth Profile TLV and an OPTIONAL Availability sub\_TLV in RSVP-TE signaling.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at  
<http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at  
<http://www.ietf.org/shadow.html>

This Internet-Draft will expire on January 4, 2014.

## Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction .....	<a href="#">3</a>
<a href="#">2.</a>	Overview .....	<a href="#">4</a>
<a href="#">3.</a>	Extension to RSVP-TE Signaling.....	<a href="#">5</a>
<a href="#">3.1.1.</a>	Extended Ethernet Bandwidth Profile TLV.....	<a href="#">5</a>
<a href="#">3.1.2.</a>	Availability sub-TLV.....	<a href="#">6</a>
<a href="#">3.2.</a>	FLowsPEC Object.....	<a href="#">6</a>
<a href="#">3.3.</a>	Signaling Process.....	<a href="#">6</a>
<a href="#">4.</a>	Security Considerations.....	<a href="#">7</a>
<a href="#">5.</a>	IANA Considerations .....	<a href="#">7</a>
<a href="#">5.1</a>	Ethernet Sender TSpec TLVs .....	<a href="#">7</a>
<a href="#">5.2</a>	Extended Ethernet Bandwidth Profile TLV .....	<a href="#">8</a>
<a href="#">6.</a>	References .....	<a href="#">8</a>
<a href="#">6.1.</a>	Normative References.....	<a href="#">8</a>
<a href="#">6.2.</a>	Informative References.....	<a href="#">9</a>
<a href="#">7.</a>	Acknowledgments .....	<a href="#">9</a>
<a href="#">Appendix A</a>	.....	<a href="#">9</a>

## Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC-2119](#) [[RFC2119](#)].

The following acronyms are used in this draft:

RSVP-TE    Resource Reservation Protocol-Traffic Engineering

LSP        Label Switched Path



PSN	Packet Switched Network
SNR	Signal-to-noise Ratio
TLV	Type Length Value
PE	Provider Edge
LSA	Link State Advertisement

## **1. Introduction**

The RSVP-TE specification [[RFC3209](#)] and GMPLS extensions [[RFC3473](#)] specify the signaling message including the bandwidth request for setting up a label switching path in a PSN network.

Some data communication technologies allow seamless change of maximum physical bandwidth through a set of known discrete values. For example, in mobile backhaul network, microwave links are very popular for providing connection of last hops. In case of heavy rain, to maintain the link connectivity, the microwave link MAY lower the modulation level since demodulating lower modulation level need lower signal-to-noise ratio (SNR). This is called adaptive modulation technology [EN 302 217]. However, lower modulation level also means lower link bandwidth. When link bandwidth reduced because of modulation down-shifting, high priority traffic can be maintained, while lower priority traffic is dropped. Similarly the cooper links MAY change their link bandwidth due to external interference.

The parameter availability [[G.827](#), [F.1703](#), [P.530](#)] is often used to describe the link capacity during network planning. A more detailed example on the bandwidth availability can be found in [Appendix A](#). Assigning different availability classes to different types of service over such kind of links provides more efficient planning of link capacity. To set up an LSP across these links, availability information is required for the nodes to verify bandwidth satisfaction and make bandwidth reservation. The availability information SHOULD be inherited from the availability requirements of the services expected to be carried on the LSP. For example, voice service usually needs 'five nines' availability, while non-real time services MAY adequately perform at four or three nines availability. Since different service types MAY need different availabilities guarantee, multiple <availability, bandwidth> pairs MAY be required when signaling.

If the availability requirement is not specified in the signaling message, the bandwidth will be reserved as the highest availability.



For example, the bandwidth with 99.999% availability of a link is 100Mbps; the bandwidth with 99.99% availability is 200Mbps. When a video application requests for 120Mbps without availability requirement, the system will compare 120Mbps with 100Mbps, therefore cannot set up the LSP path. But in fact, video application doesn't need 99.999% availability, 99.99% availability is enough. In this case, the LSP could be set up if availability is specified in the signaling message.

To fulfill LSP setup by signaling in these scenarios, this document specifies an Extended Ethernet Bandwidth Profile and an Availability sub-TLV. The Availability sub-TLV can be applicable to any kind of physical links with variable discrete bandwidth, such as microwave or DSL. Multiple Extended Ethernet Bandwidth Profiles with different availability can be carried in the Ethernet SENDER\_TSPEC object.

## 2. Overview

A PSN tunnel MAY span one or more links in a network. To setup a label switching path (LSP), a PE node MAY collect link information which is spread in routing message, e.g., OSPF TE LSA message, by network nodes to get to know about the network topology, and calculate out an LSP route based on the network topology, and send the calculated LSP route to signaling to initiate a PATH/RESV message for setting up the LSP.

In case that there is(are) link(s) with variable discrete bandwidth in a network, a <bandwidth, availability> requirement list SHOULD be specified for an LSP. Each <bandwidth, availability> pair in the list means that listed bandwidth with specified availability is required. The list could be inherited from the results of service planning for the LSP.

A node which has link(s) with variable discrete bandwidth attached SHOULD contain a <bandwidth, availability> information list in its OSPF TE LSA messages. The list provides the information that how much bandwidth a link can support for a specified availability. This information is used for path calculation by the PE node(s). The routing extension for availability can be found in [\[ARTE\]](#).

When a PE node initiates a PATH/RESV signaling to set up an LSP, the PATH message SHOULD carry the <bandwidth, availability> requirement list as bandwidth request. Intermediate node(s) will allocate the bandwidth resource for each availability requirement from the remaining bandwidth with corresponding availability. An error message MAY be returned if any <bandwidth, availability> request cannot be satisfied.









If the AF field is set to 1, Availability sub-TLV MUST be included in the Extended Ethernet Bandwidth Profile TLV. If the AF field is set to value 0, then an Availability sub-TLV SHOULD NOT be included.

### 3.1.2. Availability sub-TLV

The Availability sub-TLV has the following format:

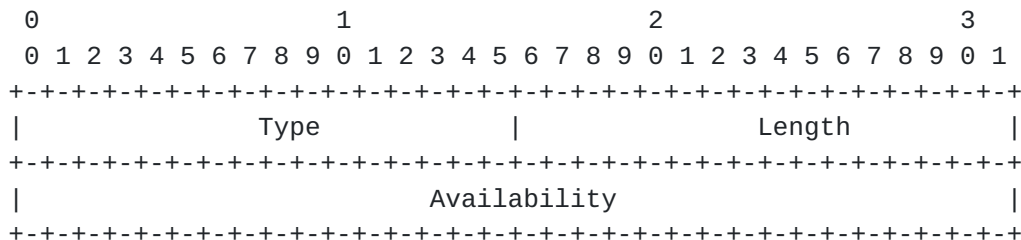


Figure 2: Availability sub-TLV

Type (2 octets): TBD

Length (2 octets): 4

Availability (4 octets): a 32-bit floating number describes the decimal value of availability requirement for this bandwidth request. The value MUST be less than 1.

As the Extended Ethernet Bandwidth Profile TLV can be carried for one or more times in the Ethernet SENDER\_TSPEC object, the Availability sub-TLV can also be present for one or more times.

### 3.2. FLOWSPEC Object

The FLOWSPEC object (Class-Num = 9, Class-Type = TBD) has the same format as the Ethernet SENDER\_TSPEC object.

### 3.3. Signaling Process

The source node initiates PATH messages including one or more Extended Bandwidth Profile TLVs with different availability value in the SENDER\_TSPEC object. Each Extended Bandwidth Profile TLV specifies the portion of bandwidth request with referred availability requirement.

The intermediate and destination nodes check whether they can satisfy the bandwidth requirements by comparing each bandwidth requirement inside the SENDER\_TSPEC objects with the remaining link



sub-bandwidth resource with respective availability guarantee when received the PATH message.

- o If all <bandwidth, availability> requirements can be satisfied, it SHOULD reserve the bandwidth resource from each remaining sub-bandwidth portion to set up this LSP. Optionally, the higher availability bandwidth can be allocated to lower availability request when the lower availability bandwidth cannot satisfy the request.
- o If at least one <bandwidth, availability> requirement cannot be satisfied, it SHOULD generate PathErr message with the error code "Admission Control Error" and the error value "Requested Bandwidth Unavailable" (see [[RFC2205](#)]).

If two LSPs request for the bandwidth with the same availability requirement, a way to resolve the contention is comparing the node ID, the node with the higher node ID will win the contention. More details can be found in [[RFC3473](#)].

If a node does not support the Extended Bandwidth Profile TLV and Availability sub-TLV, it SHOULD generate PathErr message with the error code "Extended Class-Type Error" and the error value "Class-Type mismatch" (see [[RFC2205](#)]).

#### **4. Security Considerations**

This document does not introduce new security considerations to the existing RSVP-TE signaling protocol.

#### **5. IANA Considerations**

IANA maintains registries and sub-registries for RSVP-TE used by GMPLS. IANA is requested to make allocations from these registries as set out in the following sections.

##### **5.1 Ethernet Sender TSpec TLVs**

IANA maintains a registry of GMPLS parameters called "'Generalized Multi-Protocol Label Switching (GMPLS) Signaling Parameters'".

IANA has created a new sub-registry called "'Ethernet Sender TSpec TLVs / Ethernet Flowspec TLVs'" to contain the TLV type values for TLVs carried in the Ethernet SENDER\_TSPEC object. A new value is as follow:



Type	Description	Reference
-----	-----	-----
TBD	Extended Ethernet Bandwidth Profile	[This ID]

## 5.2 Extended Ethernet Bandwidth Profile TLV

IANA has created a new sub-registry called 'Extended Ethernet Bandwidth Profiles' to contain bit flags carried in the Extended Ethernet Bandwidth Profile TLV of the Ethernet SENDER\_TSPEC object.

Bits are to be allocated by IETF Standards Action. Bits are numbered from bit 0 as the low order bit. A new bit field is as follow:

Bit	Hex	Description	Reference
---	----	-----	-----
0	0x01	Coupling Flag (CF)	[ <a href="#">RFC6003</a> ]
1	0x02	Color Mode (CM)	[ <a href="#">RFC6003</a> ]
2	0x03	Availability Field (AF)	[This ID]

Sub-TLV types for Extended Ethernet Bandwidth Profiles are to be allocated by IETF Standard Action. Initial values are as follows:

Type	Length	Format	Description
---	----	-----	-----
0	-	Reserved	Reserved value
0x01	4	see <a href="#">Section 3.1.2</a>	Availability sub-TLV

## 6. References

### 6.1. Normative References

- [RFC2210] Wroclawski, J., 'The Use of RSVP with IETF Integrated Services', [RFC 2210](#), September 1997.
- [RFC3209] Awduche, D., Berger, L., Gan, D., Li, T., Srinivasan, V., and G. Swallow, "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), December 2001.

- [RFC3473] Berger, L., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Resource ReserVation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), January 2003.
- [RFC6003] Papadimitriou, D. "'Ethernet Traffic Parameters'", [RFC 6003](#), October 2010.
- [G.827] ITU-T Recommendation, "'Availability performance parameters and objectives for end-to-end international constant bit-rate digital paths'", September, 2003.
- [F.1703] ITU-R Recommendation, "'Availability objectives for real digital fixed wireless links used in 27 500 km hypothetical reference paths and connections'", January, 2005.
- [P.530] ITU-R Recommendation, "'Propagation data and prediction methods required for the design of terrestrial line-of-sight systems'", February, 2012
- [EN 302 217] ETSI standard, "'Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas'", April, 2009
- [ARTE] H., Long, M., Ye, Mirsky, G., Alessandro, A., Shah, H., "'OSPF Routing Extension for Links with Variable Discrete Bandwidth'", Work in Progress, February, 2014

## **[6.2. Informative References](#)**

- [MCOS] Minei, I., Gan, D., Kompella, K., and X. Li, "Extensions for Differentiated Services-aware Traffic Engineered LSPs", Work in Progress, June 2006.

## **[7. Acknowledgments](#)**

The authors would like to thank Khuzema Pithewan, Lou Berger, Yuji Tochio, Dieter Beller, and Autumn Liu for their comments on the document.

## **[Appendix A](#)**

Presuming that a link has three discrete bandwidth levels:

The link bandwidth under modulation level 1, e.g., QPSK, is 100Mbps;

The link bandwidth under modulation level 2, e.g., 16QAM, is 200Mbps;





The link bandwidth under modulation level 3, e.g., 256QAM, is 400Mbps.

In sunny day, the modulation level 3 can be used to achieve 400Mbps link bandwidth.

A light rain with  $X$  mm/h rate triggers the system to change the modulation level from level 3 to level 2, with bandwidth changing from 400Mbps to 200Mbps. The probability of  $X$  mm/h rain in the local area is 52 minutes in a year. Then the dropped 200Mbps bandwidth has 99.99% availability.

A heavy rain with  $Y(Y > X)$  mm/h rate triggers the system to change the modulation level from level 2 to level 1, with bandwidth changing from 200Mbps to 100Mbps. The probability of  $Y$  mm/h rain in the local area is 26 minutes in a year. Then the dropped 100Mbps bandwidth has 99.995% availability.

For the 100M bandwidth of the modulation level 1, only the extreme weather condition can cause the whole system unavailable, which only happens for 5 minutes in a year. So the 100Mbps bandwidth of the modulation level 1 owns the availability of 99.999%.

In a word, the maximum bandwidth is 400Mbps. According to the weather condition, the sub-bandwidth and its availability are shown as follows:

Sub-bandwidth(Mbps)	Availability
-----	-----
200	99.99%
100	99.995%
100	99.999%

Authors' Addresses

Hao Long  
Huawei Technologies Co., Ltd.  
No.1899, Xiyuan Avenue, Hi-tech Western District  
Chengdu 611731, P.R.China

Phone: +86-18615778750  
Email: longhao@huawei.com

Min Ye (editor)  
Huawei Technologies Co., Ltd.  
No.1899, Xiyuan Avenue, Hi-tech Western District  
Chengdu 611731, P.R.China

Email: amy.yemin@huawei.com

Greg Mirsky (editor)  
Ericsson

Email: gregory.mirsky@ericsson.com

Alessandro D'Alessandro  
Telecom Italia S.p.A

Email: alessandro.dalessandro@telecomitalia.it

Himanshu Shah  
Ciena Corp.  
3939 North First Street  
San Jose, CA 95134  
US

Email: hshah@ciena.com