

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: October 16, 2016

K. Ma
Ericsson
J. Seedorf
NEC
April 14, 2016

CDNI Footprint & Capabilities Advertisement Interface
draft-ma-cdni-capabilities-08

Abstract

Content Distribution Network Interconnection (CDNI) is predicated on the ability of downstream CDNs (dCDNs) to handle end-user requests in a functionally equivalent manner to the upstream CDN (uCDN). The uCDN must be able to assess the ability of the dCDN to handle individual requests. The CDNI Footprint & Capabilities Advertisement interface (FCI) is provided for the advertisement of capabilities and the footprints to which they apply by the dCDN to the uCDN. This document describes an approach to implementing the CDNI FCI.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on October 16, 2016.

Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
1.1.	Terminology	4
2.	CDNI FCI Capability Advertisement	4
2.1.	CDNI FCI Capability Initialization	5
3.	CDNI FCI Capabilities Service	5
3.1.	CDNI FCI Map	5
3.1.1.	Media Type	6
3.1.2.	HTTP Method	6
3.1.3.	Accept Input Parameters	6
3.1.4.	Capabilities	6
3.1.5.	Uses	6
3.1.6.	Response	6
3.1.7.	CDNI FCI Capabilities	7
3.1.7.1.	Delivery Protocol	7
3.1.7.2.	Acquisition Protocol	9
3.1.7.3.	Redirection Mode	11
3.1.7.4.	Logging Capabilities	13
3.1.7.5.	Metadata Capabilities	14
4.	CDNI FCI Capabilities Filtering Service	16
4.1.	Filtered CDNI FCI Map	16
4.1.1.	Media Type	16
4.1.2.	HTTP Method	16
4.1.3.	Accept Input Parameters	16
4.1.4.	Capabilities	16
4.1.5.	Uses	16
4.1.6.	Response	16
4.1.7.	Example	17
5.	Footprint via ALTO Network Map	17
5.1.	ALTO Network Maps	17
5.2.	Example ALTO Network Map for CDNI FCI Footprint	17
5.3.	Example of ALTO Network Map Footprint in FCI Map	18

6.	IANA Considerations	19
6.1.	ALTO Media Types	20
6.1.1.	ALTO CDNI FCI Map Media Type	20
6.1.2.	ALTO CDNI FCI Map Filter Media Type	21
6.2.	CDNI Payload Types	23
6.2.1.	CDNI FCI Logging Payload Type	23
6.2.2.	CDNI FCI Metadata Payload Type	23
6.3.	CDNI Footprint Types	23
7.	Security Considerations	24
7.1.	Securing the CDNI Footprint & Capabilities Advertisement interface	24
8.	Acknowledgements	25
9.	References	25
9.1.	Normative References	25
9.2.	Informative References	26
Appendix A.	Capability Aggregation	27
A.1.	Downstream CDN Aggregation	27
A.2.	Internal Request Router Aggregation	28
A.3.	Internal Capability Aggregation	30
	Authors' Addresses	32

[1.](#) Introduction

The need for footprint and capabilities advertisement in Content Distribution Network Interconnection (CDNI) is described in the CDNI requirements document [[RFC7337](#)]. Requirements FCI-1 and FCI-2 describe the need to allow dCDNs to communicate capabilities to the uCDN. Requirement FCI-3 describes how a uCDN may aggregate the footprint and capabilities information for all cascaded dCDNs and use the aggregated information in advertisements to CDNs further upstream. This concept of aggregation can apply to both organizationally different dCDNs (e.g., other CDN providers, or different business units within a larger organization) or logical entities within the same CDN (e.g., using multiple request routers for scalability reasons, to segregate surrogates based on specific protocol support, or to segregate surrogates based on software version or feature level, etc.).

[Appendix A](#) contains more detailed descriptions of different footprint and capabilities management scenarios, but it is important to note that it is the ability of the dCDN to service each request in a functionally equivalent manner as the uCDN that is important, not the physical layout of resources through which it services the request. The aggregation of resource knowledge by the dCDN into a simple set of capabilities and their affective footprints, that is then advertised to the uCDN, enables efficient decision making at each delegation point in the CDN interconnection hierarchy.

It is assumed that an authoritative request router in each CDN will be responsible for aggregating and advertising capabilities information in a dCDN and/or receiving and aggregating capabilities information in the uCDN. The CDNI Footprint & Capabilities Advertisement interface (FCI) along with the CDNI Request Routing Redirection interface (RI) [[I-D.ietf-cdni-redirection](#)] make up the CDNI Request Routing Interface. As there is no other centralized CDNI controller, the authoritative request router seems the most logical place for capabilities aggregation to occur, as it is the request router that needs such information to make delegation decisions. The protocol defined herein may be implemented as part of an entity other than an authoritative request router, but for the purposes of this discussion, the authoritative request router is assumed to be the centralized capabilities aggregation point.

Though there is an obvious need for the ability to exchange and update footprint and capability information in real-time, it is assumed that capabilities do not change very often. It is also assumed that the capabilities are not by themselves useful for making delegation decisions. Capability information is assumed to be input into business logic. It is the business logic which provides the algorithms for delegation decision making. The definition of business logic occurs outside the scope of CDNI and outside the timescale of footprint and capability advertisement [[I-D.ietf-cdni-footprint-capabilities-semantic](#)]. It may be the case that the business logic anticipates and reacts to changes in dCDN capabilities, however, it may also be the case that business logic is tailored through offline processes as dCDN capabilities change. The FCI is agnostic to the business processes employed by any given uCDN. The footprints and capabilities that are advertised over the FCI may be used by the uCDN at its discretion, to implement delegation rules. Setting proper defaults in the business logic should prevent any unwanted delegation from occurring when dCDN capabilities change, however, that is beyond the scope of this discussion.

[1.1](#). Terminology

This document uses the terminology defined in [section 1.1](#) of the CDNI Framework [[RFC7336](#)] document.

[2](#). CDNI FCI Capability Advertisement

The FCI is implemented as an ALTO [[RFC7285](#)] Service. The ALTO protocol defines an HTTP-based transport through which ALTO service information may be retrieved using either a GET or POST method. The uCDN request router may at any time query the dCDN ALTO FCI Service for the full set of dCDN capability information. The uCDN may use a

separate FCI Filter Service to retrieve a subset of the dCDN capability information.

[Ed.: Need to update this with ALTO asynchronous update support.]

[Ed.: Need to update this with ALTO incremental update support.]

2.1. CDNI FCI Capability Initialization

In lieu of any out-of-band pre-configured capability information, when the FCI is first brought up between a uCDN and a dCDN, the uCDN SHOULD assume that the dCDN has no CDNI capabilities. If an out-of-band capability baseline has been exchanged, the uCDN MAY use that information to initialize its capabilities database. In either case, the uCDN SHOULD verify the initial state of the dCDN (as a temporary outage may affect availability in the dCDN).

The dCDN MUST support sending its entire set of capabilities to the uCDN through the ALTO service interface

3. CDNI FCI Capabilities Service

As described in Requirement FCI-2, there is a basic set of capabilities that must be supported by the FCI for the uCDN to be able to determine if the dCDN is functionally able to handle a given request. [[I-D.ietf-cdni-footprint-capabilities-semantics](#)] lists mandatory capabilities types:

- o Delivery Protocol
- o Acquisition Protocol
- o Redirection Mode
- o CDNI Logging Capabilities
- o CDNI Metadata Capabilities

To be consistent with the base ALTO service definitions, we use the JSON object definition notation as specified in the ALTO protocol [[RFC7285](#)].

3.1. CDNI FCI Map

3.1.1. Media Type

The media type of CDNI FCI Map is "application/alto-cdni-fcimap+json"

3.1.2. HTTP Method

A CDNI FCI Map resource is requested using the HTTP GET method.

3.1.3. Accept Input Parameters

None.

3.1.4. Capabilities

None.

3.1.5. Uses

None.

3.1.6. Response

The data component of a CDNI FCI Map resource is named "fcimap" which is a JSON object of type FCIMapData:

```
object {
  FCIMapData fcimap<0..*>;
} InfoResourceFCIMap : ResponseEntityBase;

object {
  FCICapability capabilities<1..*>;
} FCIMapData;

object {
  JSONString capability-type;
  JSONValue capability-value
  FCIFootprint footprints<0..*>;
} FCICapability;

object {
  JSONString footprint-type;
  JSONString footprint-value<1..*>;
} FCIFootprint;
```

The FCIMapData object contains a CDNI Payload Type [[RFC7736](#)] "ptype" which identifies the capability and a "value" object containing the associated Capability Advertisement Object (e.g., delivery-protocols, acquisition-protocols, or redirection-modes, as defined in

[[I-D.ietf-cdni-footprint-capabilities-semantic](#)]). The FCIMapData object may also contain an optional list of FCIFootprint objects "footprints". The FCIFootprint object specifies a "footprint-type" (as defined by the CDNI Metadata Footprint Types registry, e.g., ipv4cidr, ipv6cidr, asn, or countrycode [[I-D.ietf-cdni-metadata](#)]) which identifies the contents and encoding of the individual footprint entries contained in the associated "footprint-value" array.

The "footprints" list MUST NOT contain multiple FCIFootprint objects of the same type. Footprint restriction information MAY be specified using multiple different footprint-types. If no footprint restriction list is specified (or an empty list is specified), it SHALL be understood that all footprint types MUST be reset to "global" coverage.

Note: Further optimization of the footprint object to provide quality information for a given footprint is certainly possible, however, it is not necessary for the basic interconnection of CDNs. The ability to transfer quality information in capabilities advertisements may be desirable and is noted here for completeness, however, the specifics of such mechanisms are outside the scope of this document.

Multiple FCIMapData objects with the same capability type are allowed within a given CDNI FCI Map response as long as the capability option footprint-value do not overlap, i.e., a given capability option value MUST NOT show up in multiple FCIMapData objects within a single CDNI FCI Map response. If multiple FCIMapData objects for a given capability type exist, those capability objects MUST have different footprint restrictions. Capability objects of a given capability type with identical footprint restrictions MUST be combined into a single capability object.

[3.1.7.](#) CDNI FCI Capabilities

[3.1.7.1.](#) Delivery Protocol

The delivery protocol refers to the protocol over which an end user (EU) has requested content. If a dCDN does not support the protocol requested by the client, then the dCDN is not a viable candidate for delegation.

Though the delivery protocol is specified in the URI scheme (as defined in [[RFC3986](#)]) of the client request URL, protocol feature subsets or augmented protocol feature sets MAY be defined and SHOULD correspond with the protocols listed in the CDNI Metadata Protocol Types registry, e.g., http1.1 or https1.1 [[I-D.ietf-cdni-metadata](#)].

The following example shows two lists of delivery protocols with different footprints.

```
GET /fcimap HTTP/1.1
Host: alto.example.com
Accept: application/alto-fcimap+json,application/alto-error+json

HTTP/1.1 200 OK
Content-Length: 627
Content-Type: application/alto-fcimap+json
{
  "meta" : {
  },
  "fcimap": {
    "capabilities": [
      { "capability-type": "FCI.DeliveryProtocol"
        "capability-value": {
          "delivery-protocols": [
            "http1.1"
          ]
        }
      },
      { "capability-type": "FCI.DeliveryProtocol"
        "capability-value": {
          "delivery-protocols": [
            "https1.1"
          ]
        }
      },
      "footprints": [
        { "footprint-type": "ipv4cidr",
          "footprint-value": [
            "10.1.0.0/16",
            "10.10.10.0/24"
          ]
        }
      ]
    }
  ]
}
```

In the above example, the HTTP/1.1 protocol is supported globally, while the HTTP/1.1 over TLS protocol is only supported in a restricted footprint (in this case, specified by IPv4 prefix).

A given protocol MUST NOT appear in multiple FCIMapData FCI.DeliveryProtocol object values.

3.1.7.2. Acquisition Protocol

The acquisition protocol refers to the protocol over which an end user (EU) has requested content. If a dCDN does not support the protocol requested by the client, then the dCDN is not a viable candidate for delegation.

Though the acquisition protocol is specified in the URI scheme (as defined in [[RFC3986](#)]) of the client request URL, protocol feature subsets or augmented protocol feature sets MAY be defined and SHOULD correspond with the protocols listed in the CDNI Metadata Protocol Types registry, e.g., http1.1 or https1.1 [[I-D.ietf-cdni-metadata](#)].

The following example shows two lists of acquisition protocols with different footprints.


```
GET /fcimap HTTP/1.1
Host: alto.example.com
Accept: application/alto-fcimap+json,application/alto-error+json
```

```
HTTP/1.1 200 OK
Content-Length: 620
Content-Type: application/alto-fcimap+json
{
  "meta" : {
  },
  "fcimap": {
    "capabilities": [
      { "capability-type": "FCI.AcquisitionProtocol"
        "capability-value": {
          "acquisition-protocols": [
            "http1.1"
          ]
        }
      },
      { "capability-type": "FCI.AcquisitionProtocol"
        "capability-value": {
          "acquisition-protocols": [
            "https1.1"
          ]
        }
      },
      "footprints": [
        { "footprint-type": "asn",
          "footprint-value": [
            "AS0",
            "AS65535"
          ]
        }
      ]
    }
  ]
}
```

In the above example, the HTTP/1.1 protocol is supported globally, while the HTTP/1.1 over TLS protocol is only supported in a restricted footprint (in this case, specified by Autonomous System number).

A given protocol MUST NOT appear in multiple FCIMapData FCI.AcquisitionProtocol value objects.

3.1.7.3. Redirection Mode

The redirection mode refers to the method(s) employed by request routers to perform request redirection. The CDNI framework [[RFC7336](#)] document describes four possible request routing modes:

- o DNS iterative (DNS-I)
- o DNS recursive (DNS-R)
- o HTTP iterative (HTTP-I)
- o HTTP recursive (HTTP-R)

[I-D.ietf-cdni-footprint-capabilities-semantics] defines the "CDNI Capabilities Redirection Modes" registry and the initial supported redirection mode values shown in parentheses above.

If a dCDN supports only a specific mode or subset of modes that does not overlap with the modes supported by the uCDN, then the dCDN might not be a viable candidate for delegation.

The following example shows two lists of redirection modes with different footprints.


```
GET /fcimap HTTP/1.1
Host: alto.example.com
Accept: application/alto-fcimap+json,application/alto-error+json
```

```
HTTP/1.1 200 OK
Content-Length: 767
Content-Type: application/alto-fcimap+json
```

```
{
  "meta" : {
  },
  "fcimap": {
    "capabilities": [
      { "capability-type": "FCI.RedirectionMode",
        "capability-value": {
          "redirection-modes": [
            "DNS-I",
            "HTTP-I"
          ]
        }
      },
      { "capability-type": "FCI.RedirectionMode",
        "capability-value": {
          "redirection-modes": [
            "DNS-R",
            "HTTP-R"
          ]
        }
      },
      "footprints": [
        { "footprint-type": "countrycode",
          "footprint-value": [
            "SE"
          ]
        },
        { "footprint-type": "ipv6cidr",
          "footprint-value": [
            "9876:5432::1/36"
          ]
        }
      ]
    }
  }
}
```

In the above example, iterative redirection is supported globally, while recursive redirection is only supported in a restricted

footprint (in this case, specified by both Country Code and IPv6 prefix).

A given mode MUST NOT appear in multiple FCIMapData FCI.RedirectionMode object values.

3.1.7.4. Logging Capabilities

[I-D.ietf-cdni-logging] describes the "cdni_http_request_v1" logging record-types and optional vs. mandatory-to-implement logging fields for that record-type. It also allows new logging record-types and logging fields to be defined which would be optional for a dCDN to implement.

If a dCDN does not support certain logging parameters which may affect billing agreements or legal requirements of the uCDN, then the dCDN is not a viable candidate for delegation.

3.1.7.4.1. CDNI Logging Capability Object

The CDNI Logging capability object is used to indicate support for CDNI Logging record-types, as well as CDNI Logging fields which are marked as optional for the specified record-types [[I-D.ietf-cdni-logging](#)].

Property: record-type

Description: Supported CDNI Logging record-type.

Type: String corresponding to an entry from the CDNI Logging record-types registry [[I-D.ietf-cdni-logging](#)])

Mandatory-to-Specify: Yes.

Property: fields

Description: List of supported CDNI Logging fields that are optional for the specified record-type.

Type: List of Strings corresponding to entries from the CDNI Logging Field Names registry [[I-D.ietf-cdni-logging](#)].

Mandatory-to-Specify: No. Default is that all optional fields are supported. Inclusion of an empty list SHALL be understood to mean that none of the optional fields are supported. Otherwise, only those optional fields that are listed SHALL be understood to be supported.

3.1.7.4.2. CDNI Logging Capability Object Serialization

The following shows an example of CDNI Logging Capability Object Serialization, for a CDN that supports the optional Content Collection ID logging field (but not the optional Session ID logging field) for the "cdni_http_request_v1" record type.

```
{
  "capabilities": [
    {
      "capability-type": "FCI.Logging",
      "capability-value": {
        "record-type": "cdni_http_request_v1",
        "fields": [ "s-ccid" ]
      },
      "footprints": [
        <Footprint objects>
      ]
    }
  ]
}
```

The next example shows the CDNI Logging Capability Object Serialization, for a CDN that supports all optional fields for the "cdni_http_request_v1" record type.

```
{
  "capabilities": [
    {
      "capability-type": "FCI.Logging",
      "capability-value": {
        "record-type": "cdni_http_request_v1"
      },
      "footprints": [
        <Footprint objects>
      ]
    }
  ]
}
```

3.1.7.5. Metadata Capabilities

[I-D.ietf-cdni-metadata] describes GenericMetadata types which may be optional for a dCDN to implement, but which, if present, are mandatory-to-enforce. It also allows for new GenericMetadata to be defined which would be optional for a dCDN to implement.

If a dCDN does not support certain GenericMetadata types which are designated mandatory-to-enforce and may affect the correctness or security of the content being delivered, then the dCDN is not a viable candidate for delegation.

3.1.7.5.1. CDNI Metadata Capability Object

The CDNI Metadata capability object is used to indicate support for CDNI GenericMetadata types [[I-D.ietf-cdni-metadata](#)].

Property: metadata

Description: List of supported CDNI GenericMetadata types.

Type: List of Strings corresponding to entries from the CDNI Payload Type registry [[RFC7736](#)]) that correspond to CDNI GenericMetadata objects.

Mandatory-to-Specify: Yes. It SHALL be understood that only those GenericMetadata types listed are supported; an empty list SHALL be understood to mean that only structural metadata and simple types are supported [[I-D.ietf-cdni-metadata](#)].

3.1.7.5.2. CDNI Metadata Capability Object Serialization

The following shows an example of CDNI Metadata Capability Object Serialization, for a CDN that supports only the SourceMetadata GenericMetadata type (i.e., it can acquire and deliver content, but cannot enforce and security policies, e.g., time, location, or protocol ACLs).

```
{
  "capabilities": [
    {
      "capability-type": "FCI.Metadata",
      "capability-value": {
        "metadata": ["MI.SourceMetadata"]
      },
      "footprints": [
        <Footprint objects>
      ]
    }
  ]
}
```

The next example shows the CDNI Metadata Capability Object Serialization, for a CDN that supports only structural metadata

(i.e., it can parse metadata as a transit CDN, but cannot enforce security policies or deliver content).

```
{
  "capabilities": [
    {
      "capability-type": "FCI.Metadata",
      "capability-value": {
        "metadata": []
      },
      "footprints": [
        <Footprint objects>
      ]
    }
  ]
}
```

4. CDNI FCI Capabilities Filtering Service

4.1. Filtered CDNI FCI Map

4.1.1. Media Type

Since a Filtered CDNI FCI Map is still a CDNI FCI Map, it uses the media type defined for CDNI FCI Map (see [Section 3.1.1](#)).

4.1.2. HTTP Method

A Filtered CDNI FCI Map is requested using the HTTP POST method.

4.1.3. Accept Input Parameters

TBD.

4.1.4. Capabilities

None.

4.1.5. Uses

TBD.

4.1.6. Response

The format is the same as unfiltered CDNI FCI Map (see [Section 3.1.6](#)).

4.1.7. Example

TBD.

5. Footprint via ALTO Network Map

5.1. ALTO Network Maps

The ALTO Protocol offers an information service "ALTO map service" that provides information to ALTO clients in the form of Network Map and Cost Map [[RFC7285](#)]. As an alternative to the explicit definition of a CDNI Footprint Type (e.g., ipv4cidr, ipv6cidr, as, countrycode), a reference to an ALTO network map can be used to define an FCI footprint. To enable such referencing to ALTO network maps, a new CDNI Footprint Type "altonetworkmap" is defined (see also [Section 6.3](#)).

The first altonetworkmap entry must be a URI for accessing the ALTO server that hosts the ALTO network map (as defined in the ALTO protocol specification [[RFC7285](#)]). All subsequent altonetworkmap entries must be of type PIDName (as defined in [[RFC7285](#)], where the PIDName corresponds to a PID in the ALTO network map referenced by the preceding URI. Parsing and processing of an ALTO network map follows the ALTO protocol specification [[RFC7285](#)].

5.2. Example ALTO Network Map for CDNI FCI Footprint

An ALTO client can retrieve a network map of media type 'application/alto-networkmap+json' under a given URI (e.g., 'http://alto.example.com/fcifootprint001') with a GET request for a network map as specified in the ALTO protocol [[RFC7285](#)]. The following network map would convey to a uCDN that the given dCDN (which would provide the map) has three footprints called "south-france" and "germany", and provides the corresponding IPv4 address ranges for these footprints.


```
GET /networkmap HTTP/1.1
Host: http://alto.example.com/fcifootprint001
Accept: application/alto-networkmap+json,application/alto-error+json
```

```
HTTP/1.1 200 OK
Content-Length: 319
Content-Type: application/alto-networkmap+json
```

```
{
  "meta" : {
    "vtag": [
      { "resource-id": "my-eu-netmap",
        "tag": "1266506139"
      }
    ]
  },
  "network-map" : {
    "south-france" : {
      "ipv4" : [ "192.0.2.0/24", "198.51.100.0/25" ]
    },
    "germany" : {
      "ipv4" : [ "192.0.3.0/24" ]
    }
  }
}
```

5.3. Example of ALTO Network Map Footprint in FCI Map

To reference an ALTO network map as an FCI footprint, set the footprint-type to "altonetworkmap", and set the first entry in the footprint-value to the URI of the ALTO server hosting the network map, followed by a list of PID names contained in the network map.

The following example shows two lists of delivery protocols (see [Section 3.1.7.1](#)), with the second having an ALTO network map footprint.


```
GET /fcimap HTTP/1.1
Host: alto.example.com
Accept: application/alto-fcimap+json,application/alto-error+json
```

```
HTTP/1.1 200 OK
Content-Length: 618
Content-Type: application/alto-fcimap+json
```

```
{
  "meta" : {
  },
  "fcimap": {
    "capabilities": [
      { "capability-type": "FCI.DeliveryProtocol",
        "capability-value": [
          "http1.1"
        ]
      },
      { "capability-type": "FCI.DeliveryProtocol",
        "capability-value": [
          "values": [
            "https1.1"
          ],
          "footprints": [
            { "footprint-type": "altonetworkmap",
              "footprint-value": [
                "http://alto.example.com/fcifootprint001",
                "germany",
                "south-france"
              ]
            }
          ]
        }
      ]
    }
  ]
}
```

In the above example, the HTTP/1.1 protocol is supported globally, while the HTTP/1.1 over TLS protocol is only supported in a restricted footprint (in this case, specified by an ALTO network map for Germany and Southern France).

[6.](#) IANA Considerations

6.1. ALTO Media Types

This document requests the registration of the following media types:

+-----+-----+	
Type	Subtype
+-----+-----+	
application	alto-cdni-fcimap+json
application	alto-cdni-fcimapfilter+json
+-----+-----+	

6.1.1. ALTO CDNI FCI Map Media Type

Type name: application

Subtype name: alto-cdni-fcimap+json

Required parameters: none

Optional parameters: none

Encoding considerations:

Encoding considerations are identical to those specified for the "application/json" media type. See [[RFC7159](#)].

Security considerations:

Security considerations relating to the generation and consumption of ALTO Protocol messages are discussed in [Section 15 of \[RFC7285\]](#). Additional security considerations for the CDNI Footprint & Capabilities Advertisement interface are discussed in [Section 7](#).

Interoperability considerations:

[RFC7285] and RFCthis specify the format of conforming messages and the interpretation thereof. [RFC Editor: Please replace RFCthis with the published RFC number for this document.]

Published specification: RFCthis [RFC Editor: Please replace RFCthis with the published RFC number for this document.]

Applications that use this media type:

ALTO servers and ALTO clients either stand alone or are embedded within other applications.

Fragment identifier considerations: N/A

Additional information: N/A

Deprecated alias names for this type: N/A

Magic number(s): N/A

File extension(s): N/A

Macintosh file type code(s): N/A

Person & email address to contact for further information:

Kevin Ma <kevin.j.ma@ericsson.com>

Intended usage: LIMITED USE

Restrictions on usage:

This media type is intended only for use in CDNI Footprint & Capabilities Advertisement interface protocol message exchanges.

Author: IETF CDNI working group

Change controller: IETF CDNI working group

Provisional registration: no

6.1.2. ALTO CDNI FCI Map Filter Media Type

Type name: application

Subtype name: alto-cdni-fcimapfilter+json

Required parameters: none

Optional parameters: none

Encoding considerations:

Encoding considerations are identical to those specified for the "application/json" media type. See [[RFC7159](#)].

Security considerations:

Security considerations relating to the generation and consumption of ALTO Protocol messages are discussed in [Section 15](#) of

[[RFC7285](#)]. Additional security considerations for the CDNI Footprint & Capabilities Advertisement interface are discussed in [Section 7](#).

Interoperability considerations:

[RFC7285] and RFCthis specify the format of conforming messages and the interpretation thereof. [RFC Editor: Please replace RFCthis with the published RFC number for this document.]

Published specification: RFCthis [RFC Editor: Please replace RFCthis with the published RFC number for this document.]

Applications that use this media type:

ALTO servers and ALTO clients either stand alone or are embedded within other applications.

Fragment identifier considerations: N/A

Additional information: N/A

Deprecated alias names for this type: N/A

Magic number(s): N/A

File extension(s): N/A

Macintosh file type code(s): N/A

Person & email address to contact for further information:

Kevin Ma <kevin.j.ma@ericsson.com>

Intended usage: LIMITED USE

Restrictions on usage:

This media type is intended only for use in CDNI Footprint & Capabilities Advertisement interface protocol message exchanges.

Author: IETF CDNI working group

Change controller: IETF CDNI working group

Provisional registration: no

6.2. CDNI Payload Types

This document requests the registration of the following CDNI Payload Types under the IANA CDNI Payload Type registry:

+-----+-----+		
Payload Type	Specification	
+-----+-----+		
FCI.Logging	RFCthis	
FCI.Metadata	RFCthis	
+-----+-----+		

[RFC Editor: Please replace RFCthis with the published RFC number for this document.]

6.2.1. CDNI FCI Logging Payload Type

Purpose: The purpose of this payload type is to distinguish FCI advertisement objects for supported CDNI Logging record-types and optional CDNI Logging Field Names.

Interface: FCI

Encoding: see [Section 3.1.7.4.1](#) and [Section 3.1.7.4.2](#)

6.2.2. CDNI FCI Metadata Payload Type

Purpose: The purpose of this payload type is to distinguish FCI advertisement objects for supported CDNI GenericMetadata types.

Interface: FCI

Encoding: see [Section 3.1.7.5.1](#) and [Section 3.1.7.5.2](#)

6.3. CDNI Footprint Types

This document requests the following addition to the "CDNI Metadata Footprint Types" registry:

+-----+-----+-----+		
Footprint Type	Description	Specification
+-----+-----+-----+		
altonetworkmap	URI of an ALTO Server hosting an	RFCthis
	ALTO network map, followed by a	
	list of PID-names	
+-----+-----+-----+		

[RFC Editor: Please replace RFCthis with the published RFC number for this document.]

7. Security Considerations

There are a number of security concerns associated with the FCI. The FCI essentially provides configuration information which the uCDN uses to make request routing decisions. Injection of fake capability advertisement messages or the interception and discard of real capability advertisement messages may be used for denial of service (e.g., by falsely advertising or deleting capabilities or preventing capability advertisements from reaching the uCDN). FCI messages may also be monitored to detect when CDN performance degrades or outages occur. Such information may be considered private by the dCDN.

dCDN capability advertisements MUST be authenticated by the uCDN to prevent unauthorized capability injection. uCDN FCI servers MUST be authenticated by the dCDN to prevent unauthorized interception of ALTO messages. Encryption MUST be used to ensure confidentiality of the dCDN's private messages.

7.1. Securing the CDNI Footprint & Capabilities Advertisement interface

An implementation of the CDNI Footprint & Capabilities Advertisement interface MUST support TLS transport as per [\[RFC2818\]](#) and [\[RFC7230\]](#). The use of TLS for transport of the CDNI metadata interface messages allows:

- o The dCDN and uCDN to authenticate each other.

and, once they have mutually authenticated each other, it allows:

- o The dCDN and uCDN to authorize each other (to ensure they are transmitting/receiving CDNI FCI messages from an authorized CDN);
- o CDNI FCI messages to be transmitted with confidentiality; and
- o The integrity of the CDNI FCI messages to be protected during the exchange.

In an environment where any such protection is required, TLS MUST be used (including authentication of the remote end) by the server-side (uCDN) and the client-side (dCDN) of the CDNI Footprint & Capabilities Advertisement interface unless alternate methods are used for ensuring the confidentiality of the information in the CDNI FCI messages (such as setting up an IPsec tunnel between the two CDNs or using a physically secured internal network between two CDNs that are owned by the same corporate entity).

When TLS is used, the general TLS usage guidance in [[RFC7525](#)] MUST be followed.

8. Acknowledgements

The authors would like to thank Jon Peterson, Ray van Brandenburg, Gilles Bertrand, and Scott Wainner for their timely reviews and invaluable comments.

Jan Seedorf is partially supported by the GreenICN project (GreenICN: Architecture and Applications of Green Information Centric Networking), a research project supported jointly by the European Commission under its 7th Framework Program (contract no. 608518) and the National Institute of Information and Communications Technology (NICT) in Japan (contract no. 167). The views and conclusions contained herein are those of the authors and should not be interpreted as necessarily representing the official policies or endorsements, either expressed or implied, of the GreenICN project, the European Commission, or NICT.

9. References

9.1. Normative References

- [I-D.ietf-cdni-footprint-capabilities-semantic]
Seedorf, J., Peterson, J., Previdi, S., Brandenburg, R., and K. Ma, "CDNI Request Routing: Footprint and Capabilities Semantics", [draft-ietf-cdni-footprint-capabilities-semantic-16](#) (work in progress), April 2016.
- [I-D.ietf-cdni-logging]
Faucheur, F., Bertrand, G., Oprescu, I., and R. Peterkofsky, "CDNI Logging Interface", [draft-ietf-cdni-logging-25](#) (work in progress), April 2016.
- [I-D.ietf-cdni-metadata]
Niven-Jenkins, B., Murray, R., Caulfield, M., and K. Ma, "CDN Interconnection Metadata", [draft-ietf-cdni-metadata-15](#) (work in progress), April 2016.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.

- [RFC7230] Fielding, R., Ed. and J. Reschke, Ed., "Hypertext Transfer Protocol (HTTP/1.1): Message Syntax and Routing", [RFC 7230](#), DOI 10.17487/RFC7230, June 2014, <<http://www.rfc-editor.org/info/rfc7230>>.
- [RFC7285] Alimi, R., Ed., Penno, R., Ed., Yang, Y., Ed., Kiesel, S., Previdi, S., Roome, W., Shalunov, S., and R. Woundy, "Application-Layer Traffic Optimization (ALTO) Protocol", [RFC 7285](#), DOI 10.17487/RFC7285, September 2014, <<http://www.rfc-editor.org/info/rfc7285>>.
- [RFC7525] Sheffer, Y., Holz, R., and P. Saint-Andre, "Recommendations for Secure Use of Transport Layer Security (TLS) and Datagram Transport Layer Security (DTLS)", [BCP 195](#), [RFC 7525](#), DOI 10.17487/RFC7525, May 2015, <<http://www.rfc-editor.org/info/rfc7525>>.

9.2. Informative References

- [I-D.ietf-cdni-redirection] Niven-Jenkins, B. and R. Brandenburg, "Request Routing Redirection interface for CDN Interconnection", [draft-ietf-cdni-redirection-17](#) (work in progress), February 2016.
- [RFC2818] Rescorla, E., "HTTP Over TLS", [RFC 2818](#), DOI 10.17487/RFC2818, May 2000, <<http://www.rfc-editor.org/info/rfc2818>>.
- [RFC3986] Berners-Lee, T., Fielding, R., and L. Masinter, "Uniform Resource Identifier (URI): Generic Syntax", STD 66, [RFC 3986](#), DOI 10.17487/RFC3986, January 2005, <<http://www.rfc-editor.org/info/rfc3986>>.
- [RFC7159] Bray, T., Ed., "The JavaScript Object Notation (JSON) Data Interchange Format", [RFC 7159](#), DOI 10.17487/RFC7159, March 2014, <<http://www.rfc-editor.org/info/rfc7159>>.
- [RFC7336] Peterson, L., Davie, B., and R. van Brandenburg, Ed., "Framework for Content Distribution Network Interconnection (CDNI)", [RFC 7336](#), DOI 10.17487/RFC7336, August 2014, <<http://www.rfc-editor.org/info/rfc7336>>.
- [RFC7337] Leung, K., Ed. and Y. Lee, Ed., "Content Distribution Network Interconnection (CDNI) Requirements", [RFC 7337](#), DOI 10.17487/RFC7337, August 2014, <<http://www.rfc-editor.org/info/rfc7337>>.

[RFC7736] Ma, K., "Content Delivery Network Interconnection (CDNI) Media Type Registration", [RFC 7736](https://www.rfc-editor.org/rfc/7736), DOI 10.17487/RFC7736, December 2015, <<http://www.rfc-editor.org/info/rfc7736>>.

Appendix A. Capability Aggregation

The following sections show examples of three aggregation scenarios. In each case, CDN-U is the ultimate uCDN and CDN-P is the penultimate CDN which must perform capabilities aggregation.

A.1. Downstream CDN Aggregation

Figure A1 shows five organizationally different CDNs: CDN-U, CDN-P, and CDNs A, B, and C, the dCDNs of CDN-P which are being aggregated. Given the setup shown in Figure A1, we can construct a number of use cases, based on the coverage areas of each dCDN (i.e., CDNs P, A, B, and C). Note: In all cases, the reachability of the uCDN (i.e., CDN-U) is a don't care as it is assumed that the uCDN knows its own coverage area and is likely to favor itself in most situations, and if it has decided that it needs to delegate to a dCDN, then the only relevant question is if the dCDN can handle the request.

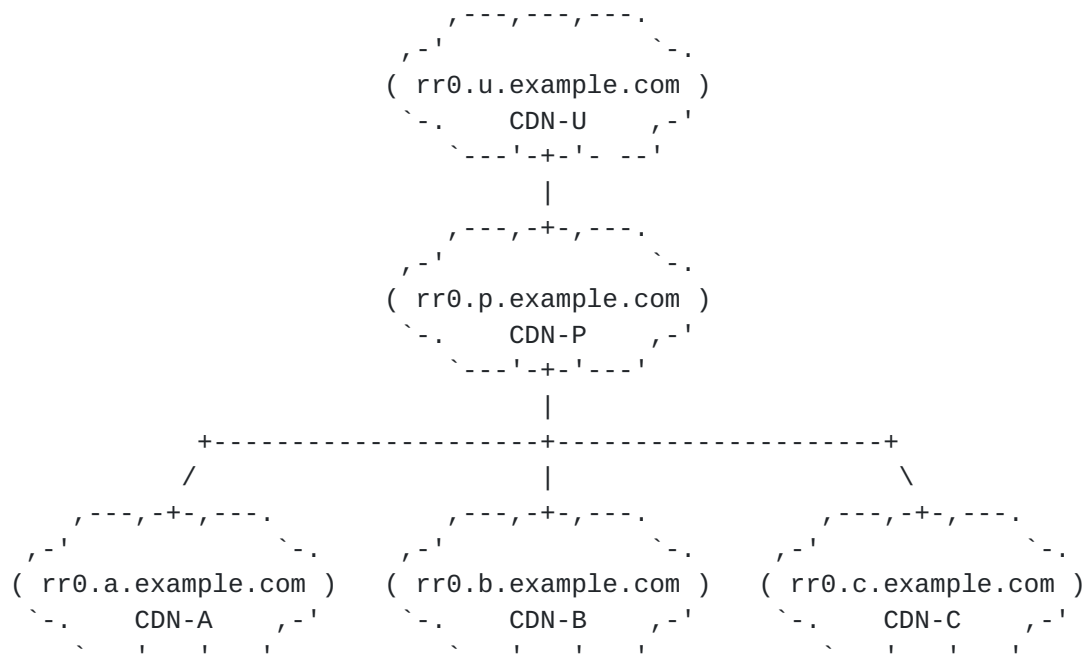


Figure A1: CDNI dCDN Request Router Aggregation

- o None of the four dCDNs (CDNs P, A, B, and C) have global reachability. In this case, each CDN is likely to advertise footprint information with its capabilities, specifying its reachability. When CDN-P advertises capabilities to CDN-U, it may

advertise the aggregate footprint of itself and CDNs A, B, and C. Note: CDN-P MAY exclude any dCDN, and consequently its footprint, per its own internal aggregation decision criteria.

- o All four dCDNs (CDNs P, A, B, and C) have global reachability. In this case, none of the CDNs is likely to advertise any footprint information as none have any footprint restrictions. When CDN-P advertises capabilities to CDN-U, the aggregate of all global reachability is global reachability.
- o Some of the four dCDNs (CDNs P, A, B, and C) have global reachability and some do not. In this case, even though some dCDNs do not have global reachability, the aggregate of some dCDNs having global reachability and some not should still be global reachability (for the given capability). When CDN-P advertises capabilities to CDN-U, CDN-P may advertise capabilities for which at least one dCDN has global reach as being supported with global reachability. It is up to the CDN-P request router to properly select a dCDN to process individual client requests and not choose a dCDN whose restricted footprint makes it unsuitable for delivering the requested content.

A.2. Internal Request Router Aggregation

Figure A2 shows CDN-U and CDN-P where CDN-P internally has four request routers: the authoritative request router rr0, and three other request routers rr1, rr2, and rr3. The use of multiple request routers may be used to distribute request routing load across resources, possibly in different geographic regions covered by CDN-P. Similar to Figure A1, the setup shown in Figure A2 requires the authoritative request router rr0 in CDN-P to aggregate capabilities information from downstream request routers rr1, rr2, and rr3. The primary difference between the scenario is that the request routers in Figure A2 are logically within the same CDN-P organization. The same reachability scenarios apply to Figure A2 as with Figure A1.

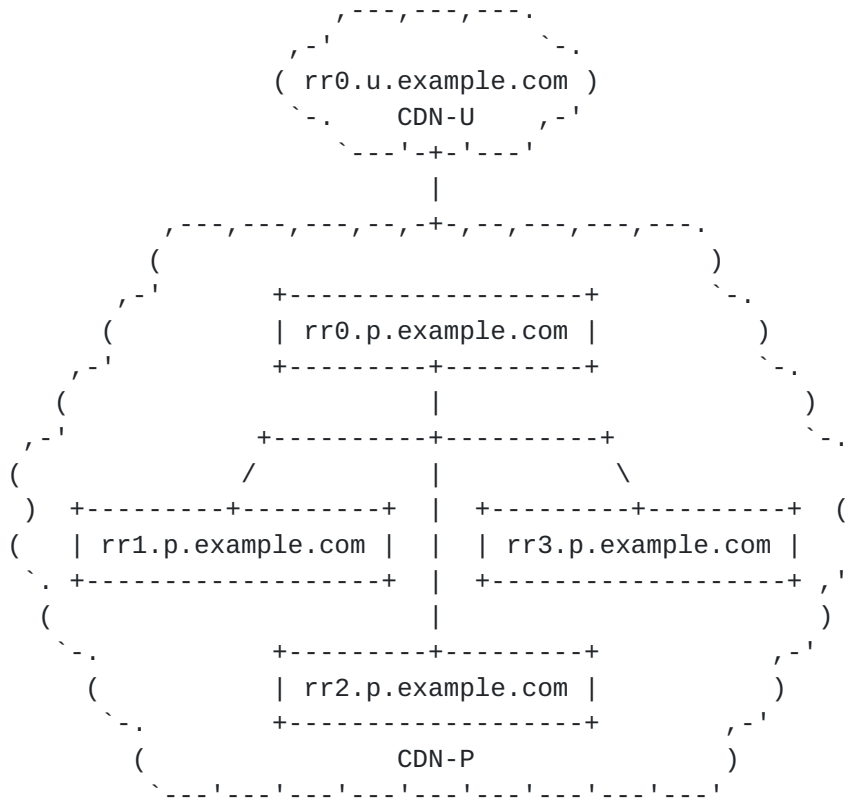


Figure A2: Local CDN Request Router Aggregation

- o None of the four CDN-P request routers have global reachability. In this case, each request router is likely to advertise footprint information with its capabilities, specifying its reachability. When rr0 advertises capabilities to CDN-U, it may advertise the aggregate footprint of itself and rr1, rr2, and rr3.
- o All four CDN-P request routers have global reachability. In this case, none of the request routers is likely to advertise any footprint information as none has any footprint restrictions. When rr0 advertises capabilities to CDN-U, the aggregate of all global reachability is global reachability.
- o Some of the four CDN-P request routers have global reachability and some do not. In this case, even though some request routers do not have global reachability, the aggregate of some request routers having global reachability and some not should still be global reachability (for the given capability). When rr0 advertises capabilities to CDN-U, CDN-P may advertise capabilities for which at least one request router has global reach as being supported with global reachability. It is up to the authoritative request router rr0 to properly select from the other request routers for any given request, and not choose a request router

whose restricted footprint makes it unsuitable for delivering the requested content.

A.3. Internal Capability Aggregation

Figure A3 shows CDN-U and CDN-P where the delivery network of CDN-P is segregated by delivery protocol (e.g., RTSP, HTTP, and RTMP). Figure A3 differs from Figures A1 and A2 in that request router rr0 of CDN-P is not aggregating the capabilities advertisements of multiple other downstream request routers, but rather it is managing the disparate capabilities across resources within its own local CDN. Though not every delivery node has the same protocol capabilities, the aggregate delivery protocol capabilities advertised by CDN-A may include all delivery protocols. Note, Figure A3 should not be construed to imply anything about the coverage areas for each delivery protocol. They may all support the same delivery footprint, or they may have different delivery footprints. It is the responsibility of the request router rr0 to properly assign protocol-appropriate delivery nodes to individual content requests. If certain protocols have limited reachability, CDN-P may advertise footprint restrictions for each protocol.

It should be noted that though the delivery protocol capability was selected for this example, the concept of internal capability aggregation applies to all capabilities as discussed below.

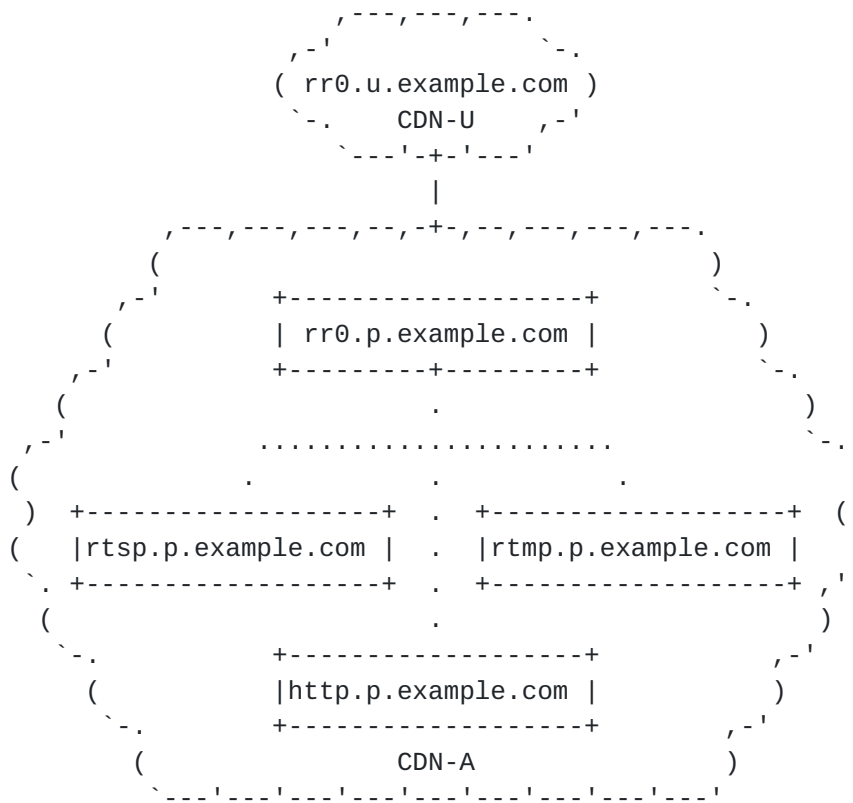


Figure A3: Local CDN Capability Segregation

Another situation in which physical footprint may not matter in an aggregated view has to do with feature support (e.g., new CDNI metadata features or new redirection modes). Situations often arise when phased roll-out of software upgrades, or staging network segregation result in only certain portions of a CDN's resources supporting the new feature set. The dCDN has a few options in this case:

- o Enforce atomic update: The dCDN does not advertise support for the new capability until all resources have been upgraded to support the new capability.
- o Transparent segregation: The dCDN advertises support for the new capability, and when requests are received that require the new capability, the dCDN request router properly selects a resource which supports that capability.
- o Advertised segregation: The dCDN advertises support for the new capability with a footprint restriction allowing the uCDN to make delegation decisions based on the dCDN's limit support.

The level of aggregation employed by the dCDN is likely to vary as business relationships dictate, however, the FCI should support all possible modes of operation.

Authors' Addresses

Kevin J. Ma
Ericsson
43 Nagog Park
Acton, MA 01720
USA

Phone: +1 978-844-5100
Email: kevin.j.ma@ericsson.com

Jan Seedorf
NEC
Kurfuerstenanlage 36
Heidelberg 69115
Germany

Phone: +49 6221 4342 221
Fax: +49 6221 4342 155
Email: seedorf@neclab.eu

