

RTG Working Group
Internet-Draft
Intended status: Standards Track
Expires: 1 October 2022

G. Mirsky
Ericsson
J. Tantsura
Microsoft
G. Mishra
Verizon Inc.
30 March 2022

Bidirectional Forwarding Detection (BFD) on Multi-chassis Link
Aggregation Group (MC-LAG) Interfaces
draft-mtm-rtgwg-bfd-mc-lag-04

Abstract

This document describes the use of Bidirectional Forwarding Detection for Multi-chassis Link Aggregation Group to provide faster than Link Aggregation Control Protocol convergence. This specification enhances [RFC 7130](#) "Bidirectional Forwarding Detection (BFD) on Link Aggregation Group (LAG) Interfaces".

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 1 October 2022.

Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components

extracted from this document must include Revised BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Revised BSD License.

Table of Contents

1.	Introduction	2
1.1.	Conventions used in this document	2
1.1.1.	Acronyms	2
1.1.2.	Requirements Language	3
2.	Problem Statement	3
3.	BFD on MC-LAG with IP-only Data Plane	3
4.	BFD on MC-LAG with IP/MPLS Data Plane	3
5.	IANA Considerations	4
6.	Security Considerations	4
7.	Acknowledgements	4
8.	References	4
8.1.	Normative References	4
8.2.	Informative	5
	Authors' Addresses	5

[1.](#) Introduction

The [\[RFC7130\]](#) defines the use of Bidirectional Forwarding Detection (BFD) on Link Aggregation Group (LAG) interfaces. A multi-chassis LAG (MC-LAG) is a type of LAG [\[IEEE.802.1AX.2008\]](#) with member links terminated on separate chassis. [\[IEEE.802.1AX.2008\]](#) does not specify MC-LAG but doesn't preclude it either. Link Aggregation Control Protocol (LACP), also defined in [\[IEEE.802.1AX.2008\]](#), can work with MC-LAG but, as in the LAG case, the fastest link failure detection interval is only in a range of single-digit seconds. This document defines how the mechanism defined to work on LAG interfaces [\[RFC7130\]](#) can be adapted to the MC-LAG case to enable sub-second detection of member link failure.

[1.1.](#) Conventions used in this document

[1.1.1.](#) Acronyms

BFD: Bidirectional Forwarding Detection

LAG: Link Aggregation Group

LACP: Link Aggregation Control Protocol

MC-LAG: Multi-chassis Link Aggregation Group

MPLS: Multi-Protocol Label Switching

Mirsky, et al.

Expires 1 October 2022

[Page 2]

Internet-Draft

BFD for MC-LAG

March 2022

[1.1.2.](#) Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

[2.](#) Problem Statement

[[RFC7130](#)] does not specify the selection of the destination IP address for the BFD control packet. The only requirement related to the selection is in [Section 2.1](#), stating that the use of the address family across all member links of the given LAG MUST be consistent across all the links. Thus it is implied that the same unicast IP address will be used on all member links of the LAG as the use of different destination addresses would defeat the purpose of [[RFC7130](#)] transforming the case into a set of single-hop BFD sessions [[RFC5881](#)]. But a single unicast IP address may not work in the MC-LAG case as the member links are terminated on the separate chassis. This document proposes overcoming this problem if using IP or Multi-Protocol Label Switching (MPLS) data plane encapsulation.

[3.](#) BFD on MC-LAG with IP-only Data Plane

As described in [[RFC7130](#)], a micro-BFD session on the LAG interfaces may use IPv4 or IPv6 address family. In some cases, two sessions, one with IPv4 and one with IPv6 addresses, may run concurrently. This document doesn't change any of these but specifies the selection of the destination IP address in the MC-LAG use case:

- * if IPv4 address family is used for the micro-BFD session, then an address from the link-local multicast address 224.0.0.0/24 range SHOULD be used as the destination IP address. The subnet broadcast address MAY be used as the destination IP address as well;

- * if the address family used is IPv6, then the IPv6 All Routers address with the link scope, as defined in [[RFC4291](#)], FF02::2/128 MUST be used as the destination IP address.

4. BFD on MC-LAG with IP/MPLS Data Plane

IP/UDP is the most natural encapsulation format for the case of micro-BFD on MC-LAG over IP/MPLS data plane as displayed in Figure 1.

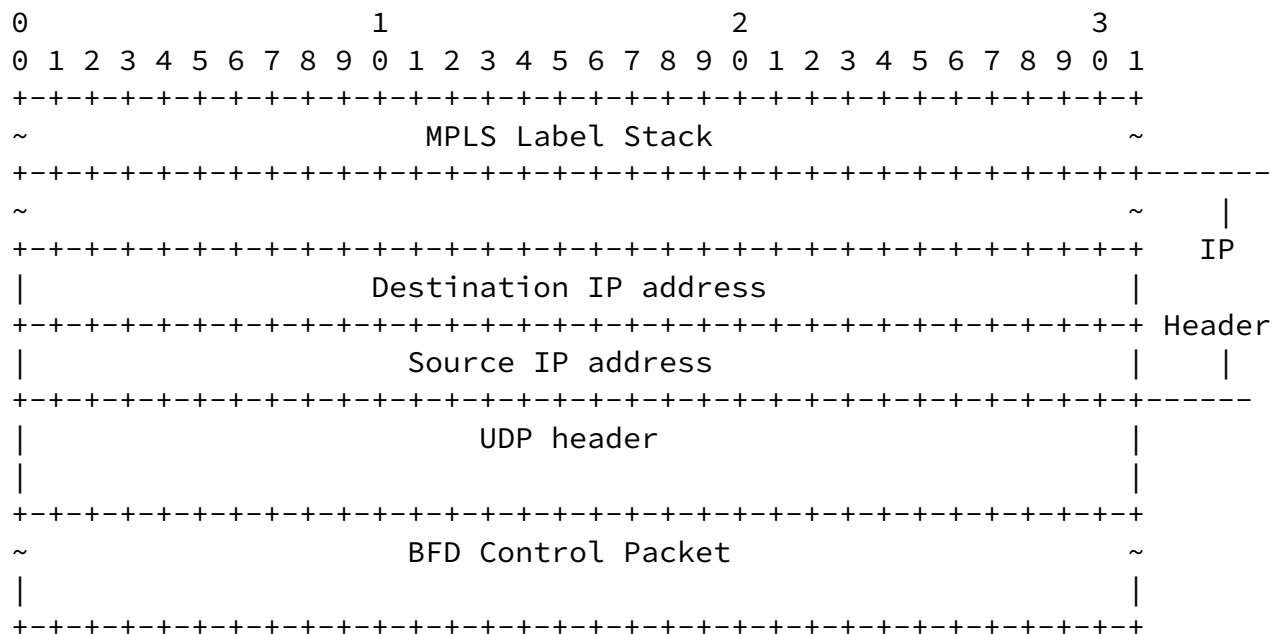


Figure 1: BFD on MC-LAG member link on IPv4/MPLS data plane

An IP and UDP headers immediately follow an MPLS label stack. The destination IP address MUST be set to the loopback address 127.0.0.1/32 for IPv4 [[RFC1812](#)], or the loopback address ::1/128 for IPv6 [[RFC4291](#)]. TTL or Hop Limit field value MUST be set to 255, according to [[RFC5881](#)].

5. IANA Considerations

This document makes no requests for IANA allocations. This section

may be deleted by RFC Editor.

6. Security Considerations

This document does not introduce new security concerns but inherits all security considerations discussed in [[RFC5881](#)] and [[RFC7130](#)].

7. Acknowledgements

TBD

8. References

8.1. Normative References

[IEEE.802.1AX.2008]

"IEEE Standard for Local and metropolitan area networks - Link Aggregation", IEEE 802.1-AX, November 2008.

Mirsky, et al.

Expires 1 October 2022

[Page 4]

Internet-Draft

BFD for MC-LAG

March 2022

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC5881] Katz, D. and D. Ward, "Bidirectional Forwarding Detection (BFD) for IPv4 and IPv6 (Single Hop)", [RFC 5881](#), DOI 10.17487/RFC5881, June 2010, <<https://www.rfc-editor.org/info/rfc5881>>.
- [RFC7130] Bhatia, M., Ed., Chen, M., Ed., Boutros, S., Ed., Binderberger, M., Ed., and J. Haas, Ed., "Bidirectional Forwarding Detection (BFD) on Link Aggregation Group (LAG) Interfaces", [RFC 7130](#), DOI 10.17487/RFC7130, February 2014, <<https://www.rfc-editor.org/info/rfc7130>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

8.2. Informative

- [RFC1812] Baker, F., Ed., "Requirements for IP Version 4 Routers", [RFC 1812](https://www.rfc-editor.org/info/rfc1812), DOI 10.17487/RFC1812, June 1995, <<https://www.rfc-editor.org/info/rfc1812>>.
- [RFC4291] Hinden, R. and S. Deering, "IP Version 6 Addressing Architecture", [RFC 4291](https://www.rfc-editor.org/info/rfc4291), DOI 10.17487/RFC4291, February 2006, <<https://www.rfc-editor.org/info/rfc4291>>.

Authors' Addresses

Greg Mirsky
Ericsson
Email: gregimirsky@gmail.com

Jeff Tantsura
Microsoft
Email: jefftant.ietf@gmail.com

Gyan Mishra
Verizon Inc.
Email: gyan.s.mishra@verizon.com