

IDR
Internet-Draft
Expires: August 27, 2008

S. Hares
Green Hills Software
P. Muley
Alcatel
K. Patel
Cisco Systems
B. Schliesser
Saavis Communications
February 24, 2008

Group Co-operative Route Filtering capability for BGP-4
draft-muley-hares-idr-orf-order-01

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on August 27, 2008.

Copyright Notice

Copyright (C) The IETF Trust (2008).

Internet-Draft

Group-ORF

February 2008

Abstract

Currently BGP-4 is capable of carrying multiple (Outbound Route Filters) ORFs entries for a given "AFI/SAFI". Each ORF provides a filter that a route whose NLRI matches AFI/SAFI, must pass through to be transmitted in the BGP Update message. Efficient processing of ORF filters may require ordering of individual ORFs in certain sequence and grouping of ORFs that should be applied together. The grouping functionality also provides the support for logical OR operation between the grouped ORFs.

This group ORF provides an ORF type that specifies that ordering and grouping. The route set that passes set of ORFs running in a "Group ORF" will pass the same ORFs sent in normal ORFs.

Table of Contents

1.	Definitions	3
1.1.	Conventions used in this document	3
2.	Introduction	4
3.	Past Contriburos	5
4.	Group ORF Type	6
5.	Group ORF Encoding	7
6.	ORF Entry Encoding	10
7.	Group Cooperative route filtering capability	11
8.	Operation	12
9.	Deployment Scenarios	14
10.	Security Considerations	17
11.	IANA Considerations	18
12.	References	19
	Authors' Addresses	20
	Intellectual Property and Copyright Statements	21

Internet-Draft

Group-ORF

February 2008

[1.](#) Definitions

[1.1.](#) Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119](#) [1].

2. Introduction

Currently it is not uncommon for a BGP speaker to receive set of ORFs from an ORF capable BGP peer. Each ORF provides a filter that a route must pass through to be transmitted in the BGP update message. Today's operational procedure for cooperative route filtering provides the AFI/SAFI as the only context. ORF by definition in its current form have logical OR within ORF entries and logical AND within the ORF types. Efficient processing and expression of filters for ORF may require ordering of ORFs filters and ORF entries in certain sequence. Efficient processing entails both BGP processing and quick processing of the ORF generated from User policies.

This document defines GROUP ORF, a new BGP-4 ORF type that allows BGP to send to its peer a group of set of ordered ORF filters. Group ORF provides a context for filtering rules that need to be interpreted together further within that context AFI/SAFI. The grouping functionality also provides the support for logical OR operation between grouped ORFs.

Today ORF entries of same ORF type have logical OR functionality only, which limits the flexibility of defining an efficient ORF with less grammar description. Group ORF capability will help in defining the relational meaning within the ORF entries as well.

One example of this is the use of ORFs to efficiently handle complex ORF policies applied per VPN per peer, in BGP/MPLS VPN deployment as defined in: [RFC4364](#) [2].

[3.](#) Past Contributors

The authors want to acknowledge the contributions of Luyuan Fang and Nabil Bitar.

[4.](#) Group ORF Type

The group ORF type allows a set of ORF entries of different ORF types and ORF entries within the type, to be grouped, and ordered in the BGP ROUTE-REFRESH message [RFC2918](#) [6]. The Group ORF provides group cooperative route filtering.

Conceptually a Group ORF consist of multiple different types of ORF entries as defined in [BGP-ORF] [7], [ASPATH-ORF] [9] and [prefix-ORF] [8]. Each such ORF type, will have ordered ORF entries, with an operation of logical OR or logical AND defined with each other.

[5.](#) Group ORF Encoding

The value of the ORF-Type for Group ORF is [TBD].


Conceptually the Route Refresh message carrying Group ORF can be viewed as below.

+-----+

Address Family Identifier (2 octets)	
+-----+	
Reserved (1 octet)	
+-----+	
Subsequent Address Family Identifier (1 octet)	
+-----+	
When-to-refresh (1 octet)	
+-----+	
ORF Type (1 octet) (Group)	
+-----+	
ORF Group Flags	
+-----+	
Length of ORFs (2 octets)	
+-----+	
First ORF entry (variable) (Group)	
+-----+	
Second ORF entry (variable) (Group)	
+-----+	
.....	
+-----+	
N-th ORF entry (variable)	
+-----+	

ORF byte layout

Each Group ORF entry will be encoded as follows.

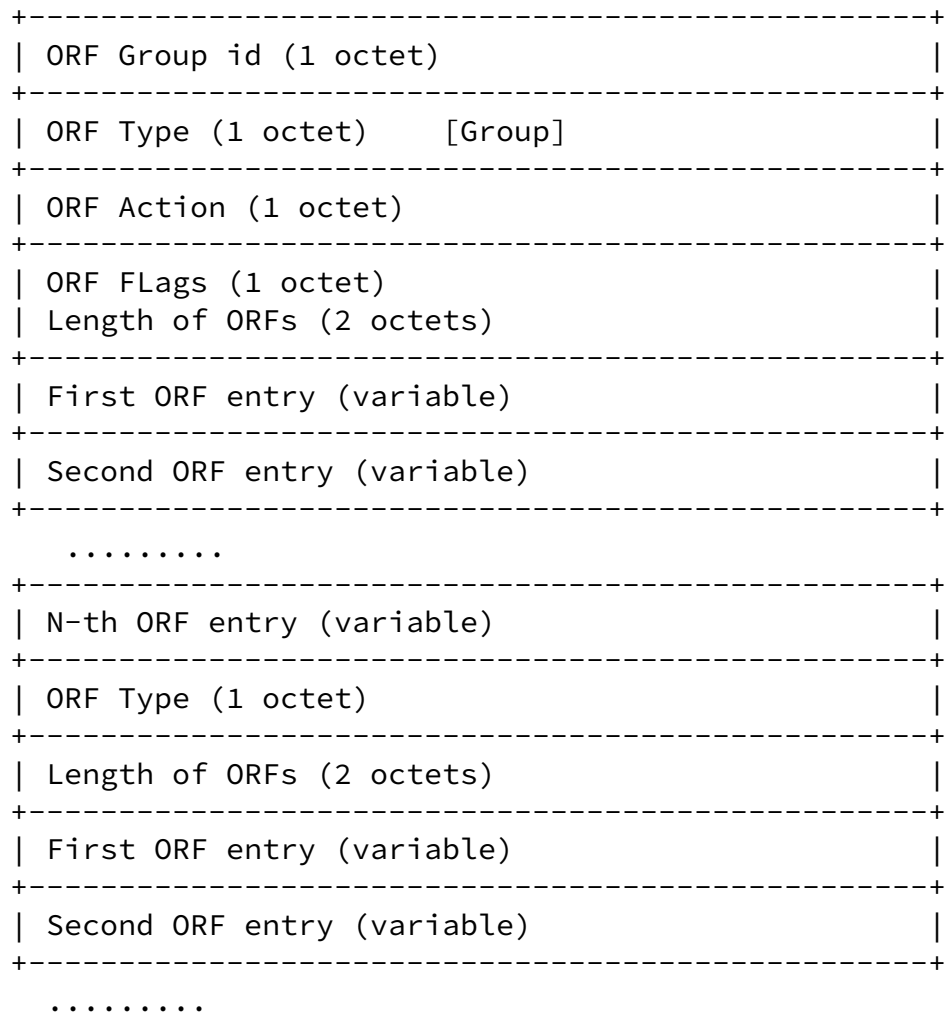

Group ORF byte layout

ORF Action:

Byte that indicates operation of "AND and OR" function within the full Group ORF.

Value 000 Use AND or OR specified in Group ORF. OR between GROUP IDs.

Value 001 Always AND between attributes in Flag Byte

Always ORed between same Route-map's different sequences.

ORF FLAG:

Value 0000 0001 Route-Map

Value 0000 0002 Access Control List

Value 1000 0000 Ignore ORF Action BIT

6. ORF Entry Encoding

As specified in the [BGP-ORF] [7] the ORF entry definition has common part and type specific part. The encoding of common part of the ORF entries on Group ORF capability negotiation as defined below.

```
+-----+
| Action (2 bit) |
+-----+
| Match (1 bit) |
+-----+
| AND/OR (1 bit) |
+-----+
| Reserved (4 bits) |
+-----+
| Type specific part (variable) |
+-----+
```

Group ORF Entry Byte

The new AND/OR is a one bit field additional to the definition specified in [BGP-ORF] [7]. The value of this field is 0 for expression of logical OR and 1 for logical AND with the next ORF entry. The ORF entries grammar expression for logical OR followed by logical AND ORF entries will be for the over all the group of such and-ed ORF entries. This field in the last entry of the ORF type will be ignored.

[7](#). Group Cooperative route filtering capability

A BGP speaker that is willing to receive Group ORF entries from its peer, or a BGP speaker that would like to send ORF entries to its peer advertises this to the peer by using the Cooperative Route Filtering Capability, as described below.

The Group ORF Capability is a new BGP capability

[BGP-CAP] [\[3\]](#) defined as follows

Capability code: X [IANA consideration]

Capability length: variable

Capability value: one or more of the entries as defined for ORF entries in the [BGP-ORF] [\[7\]](#).

The use of ORF entry in Group ORF will depend upon the send/receive value of the ORF type in capability negotiation

[8.](#) Operation

In addition to operational procedures defined in [BGP-ORF] [\[7\]](#) several additional operational rules needs to be followed.

The Group ORF Group-ID allows a tag for a group of ORFs. If multiple instances of a Group ORF with the same Group-ID exist within a Route Refresh Message, the additional group information is appended to the set of previously received ORFs with the same Group-ID. The complete list of ORFs within the Group will be included in the "and-ing" process for that Group.

When processing multiple Group ORFs into a filter, the Group ORFs will be applied in ascending order of the Group ID.

When the BGP speaker receives multiple ORFs within a Group ORF entry, the order of the ORFs is preserved and applied as per first ORF entry match rule.

For each Group ORF, a BGP speaker will pass the set of candidate NLRIs (routes) through each ORF that is a member of the Group, and-ing the results (and-ing of PERMIT and DENY results in DENY). If a Group ORF would result in a PERMIT for a given NLRI, it is advertised to the peer and it is removed from the list of candidate NLRIs. If a Group ORF would result in a DENY for a given NLRI, it is not

advertised to the peer and it is removed from the list of candidate NLRIs. The remaining list of candidate NLRIs are then filtered through the next Group ORF.

This process is repeated until the candidate NLRIs have been filtered through all Group ORFs. The remaining candidate NLRIs are then filtered through any non-Group ORFs that might exist. While processing the ORF entries in the ORF type the result of ORF entry match with AND/OR bit set will be and-ed with the subsequent ORF entry match. The ORF entry with AND/OR bit is set to 0 will OR the match result with subsequent entry match result. Rest of the procedure for treatment of NLRI remains same as described in the [BGP-ORF] [\[7\]](#).

To remove a group ORF then all the ORF entries in the Group ORF will have the action component as REMOVE.

The Group ORF MUST always have higher preference than non-Group ORFs, and will be processed first.

Note: Group ORF are independent of ORF preference and configuration to occur without concern for order of transmission. Individual ORF type preference within the Group ORF will occur based on

configuration policy.

[9.](#) Deployment Scenarios

Following are few deployment examples where Group ORF helps in filtering and offering flexibility in ORF expression.

Scenario 1

An example of group ORF could be in the IPVPN case is where multiple BGP communities [BGP-COM} [\[4\]](#) and/or extended communities need to be considered together for a given VPN in the filtering rules although all IPVPN routes belong to the same AFI/SAFI.

Consider the case where there are two VPNs, red and yellow, have routes belonging to sites tagged by community attributes that express city locations. The Red VPN wants or needs to get routes from certain site locations but not others. Similarly, the yellow VPN wants or needs to get sites from certain location not others. For the purpose of ease in manageability, it would be desired to affiliate the community attribute value with the city location only. That is the red VPN and yellow VPN routes will carry the same city community value when these routes reside in same city.

If cooperative route filtering is used without group ORF, it will not be possible to express the ORFs when the the two VPNs have different rules whereby different city routes need to be imported to another city for the two VPNs. This is because of the ORing operation within the same ORF type and ANDing operation across ORF types.

To illustrate further consider the following example where routers in the red VPN in city 4 needs to get the routes from city 1 only and not from city 2 and 3. On the other hand, the routers in the yellow VPN in city 4 needs to get routes from city 2 but not city 3 and city 1. In current procedures for cooperative route filtering without group ORF, the only way to express that for ORF from the routers hosting VPN sites in city 4 is:

AFI/SAFI = IPVPN

Extended ORF Type = Target Extended Community

Permit Red

Permit Yellow

ORF Type = Community

Permit City1

Permit City2

Based on this ORF routes tagged with Red and City2 will be permitted and routes tagged with Yellow and City1 will be permitted although

these are not desired routes and will need to be filtered out by a local policy on the routers in City4.

If group ORF was available, the ORF policy can be more flexibly expressed in the following manner:

AFI/SAFI = IPVPN

Group 1 (implicitly Red VPN)

Extended ORF Type = Target Extended Community

Permit Red

ORF Type = Community

Permit City1

Group 2 (implicitly Yellow VPN)

Extended ORF Type = Target Extended Community

Permit Yellow

ORF Type = Community

Permit City2

Thus Group 1 provides a context for the red VPN and Group 2 provides a context for the yellow VPN. Only routes that are tagged with Red target extended community attributes and City1 community or routes tagged with Yellow target community attributes and City2 community will be permitted to be advertised to the BGP client that sent this ORF, achieving the desired result.

It may be argued that in this simple case, the problem could be addressed with existing ORF capabilities by simply tagging the Red and City 1 routes with a new extended community tag (Red_City1) and the routes with the Yellow and City2 tags with a new target extended community tag (Yellow_City2) and including these in the ORF. However, this can get complicated as the number of combinations of BGP extended communities [RFC4360](#) [5] and communities increases. Having group ORF capability offers the needed flexibility.

It is also true that the same result can be achieved by defining local policies on the routers but the tradeoff as in any ORF case is between the work done at a client and that done at the route reflector when used in topology.

Scenario 2

An example Group ORF in the global routing context can be where a BGP speaker wants to learn certain more specific NLRIs only if they traverse certain AS path. Otherwise routes which are less specific than /25. A Group ORF will look like as defined below where X,Y,Z are the more specific NLRIs to be learnt only if it learn it from AS1.

```
AFI/SAFI = IPV4
```

Group 1

```
ORF Type = Prefix
```

```
Permit X
```

```
Permit Y
```

```
Permit Z
```

```
ORF Type = ASpath
```

```
Permit AS1
```

Group 2

```
ORF Type = Prefix
```

```
Deny prefix( */25) or longer
```

Group 3

```
ORF Type = Prefix
```

```
Permit prefix(*)
```

Although its possible to achieve the above mentioned application by making use of route policies, use of Group ORF helps in simplifying the configuration.

[10.](#) Security Considerations

This extension to BGP does not change the underlying security issues.

[11.](#) IANA Considerations

IANA will need to assign the value of the ORF-Type for Group ORF.

12. References

- [1] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", March 1997, <[ftp://ftp.isi.edu/in-notes/rfc2119](http://ftp.isi.edu/in-notes/rfc2119)>.
- [2] Cisco and Juniper, "BGP/MPLS VPN", February 2006, <<http://www.ietf.org/rfc/rfc4364.txt>>.
- [3] Cisco and Cisco, "Capabilities Advertisement with BGP-4", November 2002, <<http://www.ietf.org/rfc/rfc3392.txt>>.
- [4] Cisco, Cisco, and Cisco, "BGP/MPLS VPN", August 1996, <[ftp://ftp.isi.edu/rfc/rfc-1997](http://ftp.isi.edu/rfc/rfc-1997)>.
- [5] Cisco, Cisco, and Juniper, "BGP Extended Communities Attribute", July 2006, <<http://www.ietf.org/rfc/rfc4360.txt>>.
- [6] Cisco, "Route Refresh Capability for BGP-4", September 2000, <<http://www.ietf.org/rfc/rfc2918>>.
- [7] Sangli, S. and Cisco, "'Cooperative Router Filtering for BGP-4'", July 2005, <<http://www.ietf.org/internet-drafts/draft-ietf-idr-route-filter-15.txt>>.
- [8] Sangli, S. and Cisco, "'Address Prefix Based Outbound Route Filter for BGP-4'", March 2005, <<http://www.ietf.org/>>.

[internet-drafts/draft-ietf-idr-bgp-prefix-orf-04.txt](http://www.ietf.org/internet-drafts/draft-ietf-idr-bgp-prefix-orf-04.txt)>.

- [9] Hares, S. and K. Patel, "Aspath Based Outbound Route Filter for BGP-4", August 2007, <<http://www.ietf.org/internet-drafts/draft-ietf-idr-aspath-orf-09.txt>>.

Hares, et al.

Expires August 27, 2008

[Page 19]

Internet-Draft

Group-ORF

February 2008

Authors' Addresses

Susan Hares
Green Hills Software
825 Victors Way
Ann Arbor, MI 48108

Phone: +1-734-222-1610
Email: shares@ghs.com

Praveen Muley
Alcatel
701, E. Middle Field Rd
Mountain View, CA 94043

Phone: +1-650-623-2622
Email: Praveen.Muley@alcatel.com

Keyur Patel
Cisco Systems

Phone:
Email: keyupate@cisco.com

Benson Schliesser
Saavis Communications
1 Savvis Parkway
Town and Country, MO 63017

Phone: +1-314-628-7036
Email: bensons@savvis.net

Hares, et al.

Expires August 27, 2008

[Page 20]

Internet-Draft

Group-ORF

February 2008

Full Copyright Statement

Copyright (C) The IETF Trust (2008).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS

OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Acknowledgment

Funding for the RFC Editor function is provided by the IETF Administrative Support Activity (IASA).