

6lowpan
Internet-Draft
Intended status: Informational
Expires: January 27, 2011

C. O'Flynn
Atmel Corporation
July 26, 2010

ICMPv6/ND Compression for 6LoWPAN Networks
draft-oflynn-6lowpan-icmphc-00

Abstract

Compression for ICMPv6 Messages, specifically designed for 6lowpan-nd.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 27, 2011.

Copyright Notice

Copyright (c) 2010 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Background	3
2.	ICMPv6 Compression Format	3
3.	LOWPAN_ICMPHC Encoding	3
 3.1.	GENERIC LOWPAN_ICMPHC Encoding	4
 3.2.	NON-GENERIC LOWPAN_ICMPHC Encoding	4
 3.2.1.	A and B bit usage	5
4.	LOWPAN_ICMPOC Encoding	6
 4.1.	HIJK Usage	7
5.	Examples of Compressed/Uncompressed ICMPv6 Messages	9
 5.1.	RFC2463 Messages	10
 5.1.1.	Destination Unreachable Message	10
 5.1.2.	Time Exceeded Message	10
 5.2.	RFC4861 Messages	11
 5.2.1.	Router Solicitation Message	11
 5.2.2.	Router Advertisement Message	12
 5.2.3.	Neighbor Solicitation Message	12
 5.2.4.	Neighbor Advertisement Message	14
 5.3.	RFC4861 Options	15
 5.3.1.	Source/Target Link-Layer Address	15
 5.3.2.	Prefix Information	16
 5.3.3.	MTU Header	17
 5.3.4.	Redirect Header	18
 5.4.	6lowpan-nd Options	19
 5.4.1.	Address Registration Option	19
 5.4.2.	6LoWPAN Context Prefix Option	20
 5.4.3.	Authoritative Border Router	21
6.	Acknowledgements	22
7.	Security Considerations	22
8.	IANA Considerations	22
9.	Informative References	22
	Author's Address	23

O'Flynn

Expires January 27, 2011

[Page 2]

1. Background

This document was written VERY quickly. It does not yet go over exhaustively how each option works, see the examples ([Section 5](#)) section for more details.

2. ICMPv6 Compression Format

The ICMPv6 compression has two parts. The first is the ICMPv6 header compression, the second is the ICMPv6 options compression. In 6lowpan-hc-07, the Next Header Compression (NHC) field is shown as fitting in as follows:

LOWPAN_IPHC	In-line Encoding	LOWPAN_NHC	In-line Header Fields	Next Header Fields	Payload
	IP Fields	Encoding			

This is thus extended, where the LOWPAN_NHC is just the LOWPAN_ICMPHC field. However it may additionally have LOWPAN_ICMPOC (OC = Option Compression) fields after it. As an ICMPv6 message may have multiple options, each option that is compressed will have a LOWPAN_ICMPOC header. Thus a buffer with two ICMPv6 options would look like:

LOWPAN_IPHC	In-line Encoding	LOWPAN_ICMPHC	In-line Header Fields	ICMPv6 Header Fields	Payload
	IP Fields	Encoding			

LOWPAN_ICMPOC	Inline Option Encoding #1	LOWPAN_ICMPOC	Inline Option Encoding #2	Payload Fields for #1	
	Fields for #1			Fields for #2	

The payload could be additional ICMP data, or could be uncompressed ICMP options.

3. LOWPAN_ICMPHC Encoding

The LOWPAN_ICMPHC header has two forms. The first is a 'generic' compression format, which is a single octet. The second is a specific form which compresses certain frequently occurring ICMPv6 messages better than the generic format.

The format is as follows:

O'Flynn

Expires January 27, 2011

[Page 3]

```

0   1   2   3   4   5   6   7
+---+---+---+---+---+---+---+
| 1 | 1 | 1 | 1 | 1 | G | X | X |
+---+---+---+---+---+---+---+

```

G: Generic Compress Format Flag:

1: LOWPAN ICMPHC is a GENERIC format

0: LOWPAN_ICMPHC is a NON-GENERIC format

XX: Depends on the GENERIC flag. See two sections below.

3.1. GENERIC LOWPAN_ICMPHC Encoding

The format is as follows:

```

0   1   2   3   4   5   6   7
+---+---+---+---+---+---+---+
| 1 | 1 | 1 | 1 | 1 | 1 | R | C |
+---+---+---+---+---+---+---+

```

R: Reserved Octets Elided:

1: 4 Octets have been elided, at an offset of 4 octets from the start of the ICMPv6 Header.

θ : No Change

C: Code Elided:

1: Code field in the ICMPv6 header has been elided, and is zero.

0: No Change

The GENERIC form takes advantage of two factors: many ICMPv6 messages have 4 reserved octets at a specific location, and many ICMPv6 messages do not use the CODE field. When using the GENERIC ICMPHC there is NO option compression used. Option compression is only possible when using the NON-GENERIC ICMP compression.

3.2. NON-GENERIC LOWPAN_ICMPHC Encoding

The format is as follows:

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15					
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+				
	1		1		1		1		0		RSV		TYPE		A		B		NUMOPTS	

O'Flynn

Expires January 27, 2011

[Page 4]

+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

RSV: Reserved Field, Do not use

TYPE: Type of ICMPv6 Message to Follow

000: RESERVED.

001: [RFC4861](#) Router Solicitation

010: [RFC4861](#) Router Advertisement

011: [RFC4861](#) Neighbor Solicitation

100: [RFC4861](#) Neighbor Advertisement

101: [RFC4861](#) Redirect

A: Usage depends on TYPE field

B: Usage depends on TYPE field

NUMOPTS: Number of ICMPv6 Compressed Options that will follow. Used so 6lowpan-icmphc knows when to stop processing!

3.2.1. A and B bit usage

TYPE = Router Solicitation

A: Not Used

B: Not Used

TYPE = Router Advertisement

A: Reachable Time Compression:

1: Reachable time field elided. Assume reachable time is zero.

0: Reachable time field inlined.

B: Retrans Time Compression:

1: Retrans time field elided. Assume retrans time is zero.

0: Retrans time field inlined.

TYPE = Neighbor Solicitation or Neighbor Advertisement. In this case

O'Flynn

Expires January 27, 2011

[Page 5]

A and B are combined to form a 2-bit field AB:

00: No changes to TARGET ADDRESS field, included in-line.

01: TARGET ADDRESS field is elided. Target address is same as destination IPv6 address from IPv6 Header.

10: TARGET ADDRESS field is elided. Target address is same as source IPv6 address from IPv6 Header.

11: Reserved.

TYPE = Redirect

A: TARGET ADDRESS field compression:

1: Target address field elided, assume target address is same as destination address field.

0: Target address field inlined.

B: Not used

4. LOWPAN_ICMPOC Encoding

As mentioned option compression is only possible with NON-GENERIC ICMPHC format.

The option compression format is as follows:

0	1	2	3	4	5	6	7			
+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+			
	OPTTYPE		H		I		J		K	
+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+	+-----+			

OPTTYPE is the OPTION TYPE. Defined values are:

0000: Reserved

0001: Source Link-layer Address ([RFC4861](#))

0010: Target Link-layer Address ([RFC4861](#))

0011: Prefix Information ([RFC4861](#))

0100: Redirected Header ([RFC4861](#))

O'Flynn

Expires January 27, 2011

[Page 6]

0101: MTU ([RFC4861](#))

0110: Address Registration (6lowpan-nd)

0111: 6LoWPAN Context (6lowpan-nd)

1000: Authoritative Border Router (6lowpan-nd)

H: Depends on the OPTTYPE Field

I: Depends on the OPTTYPE Field

J: Depends on the OPTTYPE Field

K: Depends on the OPTTYPE Field

4.1. HIJK Usage

OPTTYPE = Source Link-Layer Address or Target Link-Layer Address.

HI: L2 Address Source:

 00: L2 Address and Address Length Inline

 01: L2 Address taken from L2 Source

 10: L2 Address taken from L2 Dest

J: Length Compression:

 0: Disabled

 1: Enabled (only valid if HI = 00). Length compression removes any trailing zeros from the option, to a maximum of 15. It then splits the 'length' field up into two nibbles, and writes the number of trailing zeros removed in the upper nibble of the length field.

K: Not used

OPTTYPE = Prefix Information

H: On-Link/Autoconfiguration Flag Compression:

 1: 'L', 'A', and 6 bits of reserved space elided. When reconstructing option set L=0, A=1

O'Flynn

Expires January 27, 2011

[Page 7]

0: 'L', 'A', and 6 bits of reserved space inlined

I: Valid Lifetime Compression:

1: Valid lifetime elided, assumed to be infinite (0xFFFFFFFF)

0: Valid Lifetime inlined

J: Preferred Lifetime Compression:

1: Preferred lifetime elided, assumed to be same as valid.

0: Preferred Lifetime inlined

K: Prefix length compression

1: Prefix length is elided, assumed to be 64 bits

0: Prefix length inlined

OPTTYPE = Redirected Header

H: Not Used

I: Not Used

J: Not Used

K: Not Used

OPTTYPE = MTU

H: MTU Compression:

1: MTU is 1260

0: MTU is contained in next two bytes

I: Not Used

J: Not Used

K: Not Used

OPTTYPE = Address Registration

H: EUI64 Compression:

O'Flynn

Expires January 27, 2011

[Page 8]

1: EUI64 Elided, copy from destination L2 Address

0: EUI64 Inlined

I: Registered Address Compression (Only valid if 'Registered Address Present Flag' is set):

1: Registered address elided, take from NA or NS TARGET address

0: Registered address inlined

J: Registered Address Present Flag:

1: Registered address present, so length field is 4

0: Registered address not present, so length field is 2

K: Not Used

OPTTYPE = 6LoWPAN Context

H: Context Length Compression:

1: Context length is elided, assumed to be 64

0: Context length is inlined

I: Not Used

J: Not Used

K: Not Used

OPTTYPE = Authoritative Boarder Router

H: Not Used

I: Not Used

J: Not Used

K: Not Used

5. Examples of Compressed/Uncompressed ICMPv6 Messages

O'Flynn

Expires January 27, 2011

[Page 9]

5.1. RFC2463 Messages

5.1.1. Destination Unreachable Message

Uncompressed

0	1	2	3	
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1	
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+				
Type	Code	Checksum		
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+				
Unused				
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+				
As much of invoking packet				
+ as will fit without the ICMPv6 packet				+
exceeding the minimum IPv6 MTU [IPv6]				

Compressed: 4 Octet Savings

0	1	2	3	
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1	
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+				
1 1 1 1 1 1 Type	Checksum			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+				
As much of invoking packet				
+ as will fit without the ICMPv6 packet				+
exceeding the minimum IPv6 MTU [IPv6]				

5.1.2. Time Exceeded Message

Uncompressed

0	1	2	3	
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1	
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+				
Type	Code	Checksum		
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+				
Unused				
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+				
As much of invoking packet				
+ as will fit without the ICMPv6 packet				+
exceeding the minimum IPv6 MTU [IPv6]				

O'Flynn

Expires January 27, 2011

[Page 10]

Compressed: 4 Octet Savings

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
1 1 1 1 1 1 1	Type	Checksum	
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
	As much of invoking packet		
+	as will fit without the ICMPv6 packet		+
	exceeding the minimum IPv6 MTU [IPv6]		

[5.2.](#) [RFC4861](#) Messages

[5.2.1.](#) Router Solicitation Message

Uncompressed

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
Type	Code	Checksum	
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
Reserved			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
Options ...			
+---+---+---+---+---+---+---+			

Compressed with GENERIC: 4 Octet Savings

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
1 1 1 1 1 1 1	Type	Checksum	
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
Options ...			
+---+---+---+---+---+---+---+			

Compressed with NON-GENERIC: 4 Octet Savings

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
1 1 1 1 1 0 0 0 0 1 0 0 X X X		Checksum	
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
Options ...			
+---+---+---+---+---+---+---+			

O'Flynn

Expires January 27, 2011

[Page 11]

5.2.2. Router Advertisement Message

Maximum Saving: 8 Octets. Minimum Saving: 0 Octets.

Uncompressed

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1
+-----+-----+-----+-----+			
Type Code Checksum			
+-----+-----+-----+-----+			
Cur Hop Limit M 0 Reserved Router Lifetime			
+-----+-----+-----+-----+			
Reachable Time			
+-----+-----+-----+-----+			
Retrans Timer			
+-----+-----+-----+-----+			
Options ...			
+-----+-----+-----+			

Compressed: 8 Octet Savings

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1
+-----+-----+-----+-----+			
1 1 1 1 0 0 0 0 1 0 1 1 X X X	Checksum		
+-----+-----+-----+-----+			
Cur Hop Limit M 0 Reserved Router Lifetime			
+-----+-----+-----+-----+			
Options ...			
+-----+-----+-----+-----+			

5.2.3. Neighbor Solicitation Message

Uses NON-GENERIC header compression. Maximum Saving: 20 Octets.
Minimum Saving: 4 Octets

O'Flynn

Expires January 27, 2011

[Page 12]

Uncompressed

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Type Code Checksum			
+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Reserved			
+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
+			
+ Target Address +			
+			
+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Options ...			
+-+-+-----+-----+-----+			

Compressed: 4 Octet Saving

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
1 1 1 1 0 0 0 0 1 1 0 0 X X X Checksum			
+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
+			
+ Target Address +			
+			
+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Options ...			
+-+-+-----+-----+-----+			

O'Flynn

Expires January 27, 2011

[Page 13]

Compressed: 20 Octet Saving

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
1 1 1 1 0 0 0 0 1 1 0 1 X X	Checksum		
+-+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Options ...			
+-+-+-+-----+-----+-----+			

5.2.4. Neighbor Advertisement Message

Uses NON-GENERIC header compression. Maximum Saving: 19 Octets.
Minimum Saving: 3 Octets

Uncompressed

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Type Code Checksum			
+-+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
R S O Reserved			
+-+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
+			+
+ Target Address +			
+			+
+-+-+-+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Options ...			
+-+-+-+-----+-----+-----+			

O'Flynn


Expires January 27, 2011

[Page 14]

Compressed: 3 Octet Saving




Compressed: 19 Octet Saving

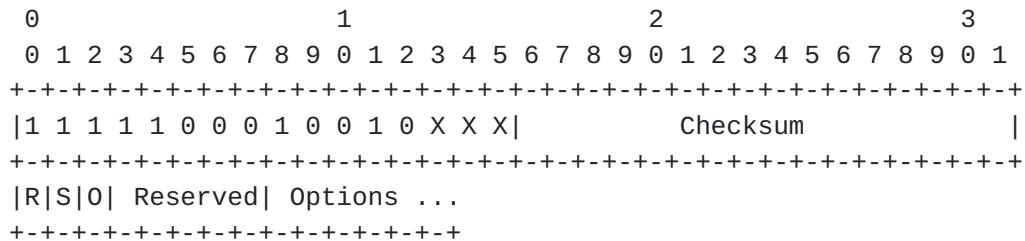

[5.3.](#) [RFC4861](#) Options

[5.3.1.](#) Source/Target Link-Layer Address

Uncompressed, 8-byte L2 Address

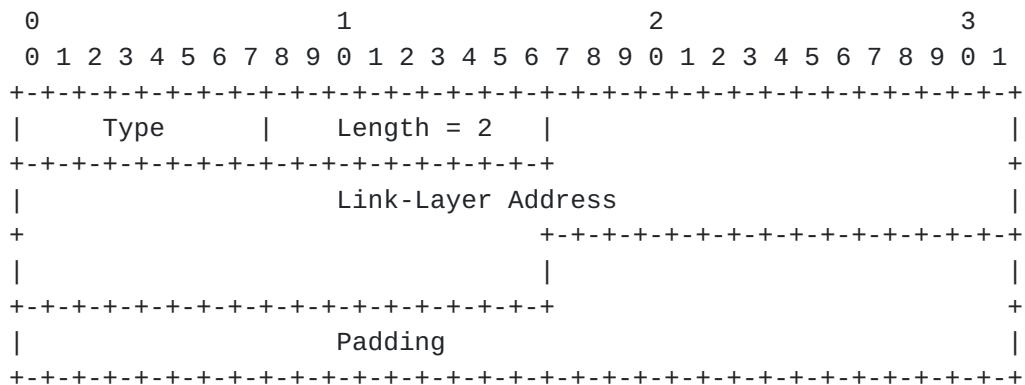

O'Flynn

Expires January 27, 2011

[Page 15]

Compressed: 15 Octet Saving

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+---+---+---+---+---+			
0 0 0 1 0 1 0 0			
+---+---+---+---+---+			

Compressed: 6 Octet Saving

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
0 0 0 1 0 0 1 0 6 2			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
Link-Layer Address			
+ ---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			

5.3.2. Prefix Information

Uncompressed

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
Type Length Prefix Length L A Reserved1			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
Valid Lifetime			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
Preferred Lifetime			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
Reserved2			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			
+			
+ Prefix			
+			
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+			

O'Flynn

Expires January 27, 2011

[Page 16]

Compressed: 7 Octet Saving (112 bit prefix)

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
0 0 1 1 0 0 0 0 Prefix Length L A Reserved1 Valid Lifetime			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Valid Lifetime Continued Pref Lifetime			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Preferred Lifetime Continued			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
+			
Prefix			
+			
+			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
+			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			

Compressed: 22 Octet Saving (64 bit prefix)

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
0 0 1 1 1 1 1 1			
+-----+-----+-----+-----+			
Prefix			
+			
+-----+-----+-----+-----+-----+-----+-----+-----+			
+			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			

5.3.3. MTU Header

Uncompressed

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Type Length Reserved			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
MTU			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			

O'Flynn

Expires January 27, 2011

[Page 17]

Compressed: 5 Octet Saving

Compressed: 7 Octet Saving

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+	+---+---+---+---+---+	+---+---+---+---+---+	+---+---+---+---+---+
0 1 0 1 1 0 0 0			
+---+---+---+---+---+			

5.3.4. Redirect Header

Uncompressed

The diagram illustrates the structure of an IP datagram across four fields:

- Field 0:** Contains binary values 0, 1, 2, 3, 4, 5, 6, 7, 8, 9.
- Field 1:** Contains binary values 0, 1, 2, 3, 4, 5, 6, 7, 8, 9.
- Field 2:** Contains binary values 0, 1, 2, 3, 4, 5, 6, 7, 8, 9.
- Field 3:** Contains binary values 0, 1.

Following these fields are two reserved fields:

- Type:** Contains binary values 0, 1, 2, 3, 4, 5, 6, 7, 8, 9.
- Length:** Contains binary values 0, 1, 2, 3, 4, 5, 6, 7, 8, 9.

After the length field is another reserved field:

- Reserved:** Contains binary values 0, 1, 2, 3, 4, 5, 6, 7, 8, 9.

The final part of the diagram shows the **IP header + data** section, which is preceded by a tilde (~) and followed by another tilde (~).

Compressed: 6 Octet Saving

The diagram illustrates the structure of an IP datagram across four fields:

- Field 0:** Contains bits 0-9.
- Field 1:** Contains bits 0-9.
- Field 2:** Contains bits 0-9.
- Field 3:** Contains bits 0-1.

Below the fields, a vertical line indicates the start of the IP header and data payload. The label "Length" is positioned between Fields 1 and 2, and "IP header + data" is centered below Field 2.

O'Flynn

Expires January 27, 2011

[Page 18]

5.4. 6lowpan-nd Options

5.4.1. Address Registration Option

Uncompressed

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+
Type Length Status Reserved	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+
+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+
Reserved Registration Lifetime	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+
+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+
+ EUI-64			+
+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+
+			+
+ Registered Address (Optional)			+
+			+
+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+

Compressed: 4 Octet Saving

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0 1	
+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+
0 1 1 0 0 0 X 0 Status Registration Lifetime	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+
+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+
+ EUI-64			+
+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+
+			+
+ Registered Address (Optional)			+
+			+
+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+	+-----+-----+-----+-----+

O'Flynn

Expires January 27, 2011

[Page 19]

Compressed: 28 Octet Saving

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
0 1 1 0 1 1 1 0 Status	Registration Lifetime		
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			

5.4.2. 6LoWPAN Context Prefix Option

Uncompressed 112-bit Context

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Type Length Context Length Res C CID			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Reserved Valid Lifetime			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
+			
+ Context Prefix			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Padding			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			

Compressed 112-bit Context: 5 Octet Saving

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
0 1 1 1 0 0 0 0 Context Length Res C CID Valid Lifetime			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Valid Lifetime			
+-----+-----+-----+-----+			
+ Context Prefix			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Padding			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			

O'Flynn

Expires January 27, 2011

[Page 20]

Uncompressed 64-bit Context

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Type Length Context Length Res C CID			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Reserved Valid Lifetime			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
+ Context Prefix +			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			

Compressed 64-bit Context: 4 Octet Saving

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
0 1 1 1 0 0 Res C CID Valid Lifetime			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
+ Context Prefix +			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			

5.4.3. Authoritative Border Router

Uncompressed


0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Type Length = 3 Reserved			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
Reserved Version Number			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			
+ +			
+ 6LBR Address +			
+ +			
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+			

O'Flynn

Expires January 27, 2011

[Page 21]

Compressed: 5 Octet Saving

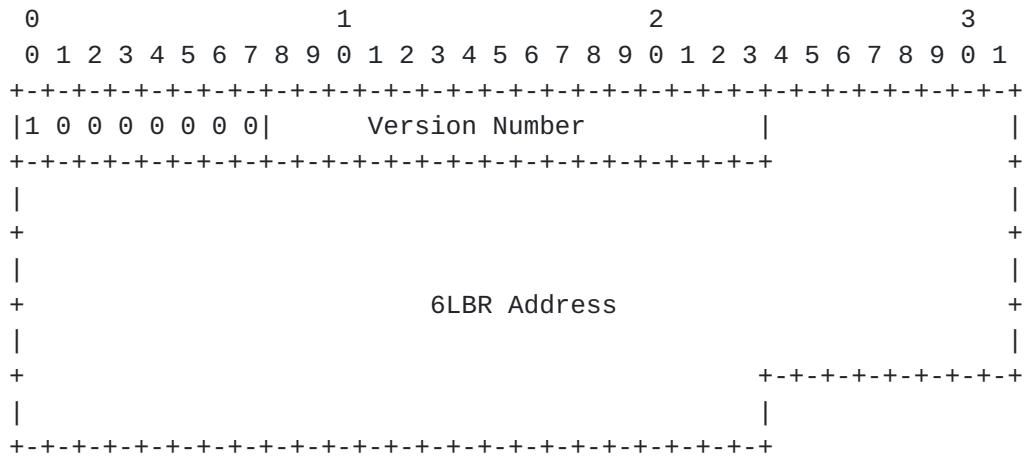

[6.](#) Acknowledgements

Thanks to Zach Shelby and Daniel Gavelle for various comments.

[7.](#) Security Considerations

None

[8.](#) IANA Considerations

This memo includes no request to IANA.

All drafts are required to have an IANA considerations section (see the update of [RFC 2434](#) [[I-D.narten-iana-considerations-rfc2434bis](#)] for a guide). If the draft does not require IANA to do anything, the section contains an explicit statement that this is the case (as above). If there are no requirements for IANA, the section will be removed during conversion into an RFC by the RFC Editor.

[9.](#) Informative References

[I-D.ietf-6lowpan-nd]

Shelby, Z., Chakrabarti, S., and E. Nordmark, "Neighbor Discovery Optimization for Low-power and Lossy Networks", [draft-ietf-6lowpan-nd-11](#) (work in progress), July 2010.

[I-D.narten-iana-considerations-rfc2434bis]

Narten, T. and H. Alvestrand, "Guidelines for Writing an

O'Flynn

Expires January 27, 2011

[Page 22]

IANA Considerations Section in RFCs",
[draft-narten-iana-considerations-rfc2434bis-09](#) (work in
progress), March 2008.

Author's Address

Colin Patrick O'Flynn
Atmel Corporation
Colorado Springs, Colorado
USA

Email: colin.oflynn@atmel.com