

Workgroup: DetNet
Published: 8 June 2021
Intended Status: Standards Track
Expires: 10 December 2021
Authors: P. Thubert, Ed.
Cisco Systems

IPv6 Hop-by-Hop Options for DetNet

Abstract

RFC 8938, the Deterministic Networking Data Plane Framework relies on the 6-tuple to identify an IPv6 flow. But the full DetNet operations require also the capabilities to signal meta-information such as a sequence within that flow, and to transport different types of packets along the same path with the same treatment, e.g., Operations, Administration, and Maintenance packets and/or multiple flows with fate and resource sharing. This document introduces new Hop-by-Hop header option that can signal that information to the intermediate relays.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 10 December 2021.

Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in

Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1. Introduction](#)
- [2. Terminology](#)
- [3. The DetNet Options](#)
 - [3.1. Sequencing Option](#)
 - [3.2. RPL Packet Information](#)
 - [3.3. DetNet Local Path Option](#)
 - [3.4. DetNet Global Path Option](#)
- [4. Security Considerations](#)
- [5. IANA Considerations](#)
- [6. Acknowledgments](#)
- [7. References](#)
 - [7.1. Normative References](#)
 - [7.2. Informative References](#)
- [Author's Address](#)

1. Introduction

Section 2 of the [Deterministic Networking Problem Statement](#) [[DetNet-PS](#)] introduces the concept of Deterministic Networking (DetNet) to the IETF. DetNet extends the reach of lower layer technologies such as Time-Sensitive Networking (TSN) [[IEEE 802.1 TSN](#)] and Timeslotted Channel Hopping (TSCH) [[IEEE Std. 802.15.4](#)] over IPv6 and MPLS [[RFC8938](#)].

The "[Deterministic Networking Architecture](#)" [[DetNet-ARCHI](#)] details the contribution of layer-3 protocols, and defines three planes: the Application (User) Plane, the Controller Plane, and the Network Plane. [[DetNet-ARCHI](#)] places an emphasis on the centralized model whereby a controller instantiates per-flow state in the routers to perform adequate forwarding operations so as to provide end-to-end reliability and bounded latency guarantees.

The "[6TiSCH Architecture](#)" [[6TiSCH-ARCHI](#)] leverages RPL, the "[Routing Protocol for Low Power and Lossy Networks](#)" [[RFC6550](#)] and introduces concept of a Track as a highly redundant RPL Destination Oriented Directed Acyclic Graph (DODAG) rooted at the Track Ingress node, that can be installed using so-called projected routes [[RPL-PDAO](#)]. In that case, the TrackId is an index from a namespace associated to one IPv6 address of the Track Ingress node, and the Track that an IPv6 packet follows is signaled by the combination of the source address (of the Track Ingress node), and the TrackID placed in a RPL Option [[RFC6553](#)] located in an IPv6 Hop-by-Hop (HbH) Options Header [[IPv6](#)] in the IPv6 packet.

The ["Reliable and Available Wireless \(RAW\) Architecture/Framework" \[RAW-ARCHI\]](#), extends the DetNet Network Plane to accomodate one or multiple hops of homogeneous or heterogeneous wireless technologies, e.g. a Wi-Fi6 Mesh or parallel radio access links combining Wi-Fi and 5G. The RAW Architecture reuses the concept of Track and introduces a new dataplane component, the Path Selection Engine (PSE), to dynamically select a subpath and maintain the required quality of service within a Track in the face of the rapid evolution of the medium properties.

With [\[IPv6\]](#), the behavior of a router upon an IPv6 packet with a HbH Options Header has evolved, making the examination of the header by routers along the path optional, as opposed to previously mandatory. Additionally, the Option Type for any option in a HbH Options Header encodes in the leftmost bits whether a router that inspects the header should drop the packet or ignore the option when encountering an unknown option. Combined, these capabilities enable a larger use of the header beyond the boundaries of a limited domain, as exemplified by the change of behavior of the RPL data plane, that was changed to allow a packet with a RPL option to escape the RPL domain in the larger Internet [\[RFC9008\]](#).

["IPv6 Hop-by-Hop Options Processing Procedures" \[HbH-PROCESS\]](#) further specifies the procedures for how IPv6 Hop-by-Hop options are processed to make their processing even more practical and increase their use in the Internet. In that context, it makes sense to consider the Hop-by-Hop Options to transport the information that is relevant to DetNet, making it independant of the transport and placing it early in the header chain.

The ["Deterministic Networking Data Plane Framework" \[RFC8938\]](#) relies on the 6-tuple to identify an IPv6 flow. But the full DetNet *operations require also the capabilities to signal meta-information such as a sequence within that flow, and to transport different types of packets along the same path with the same treatment. For instance, it is required that Operations, Administration, and Maintenance (OAM) [\[RFC6291\]](#) packets and/or multiple flows share the same fate and resource sharing over the same Track or the same Traffic Engineered (TE) [\[RFC3272\]](#) DetNet path.

This document introduces new Hop-by-Hop options that can signal path and sequencing information to the intermediate relays early in the packet and independantly of the transport layer.

2. Terminology

Timestamp semantics and timestamp formats used in this document are defined in ["Guidelines for Defining Packet Timestamps" \[RFC8877\]](#).

The Deterministic Networking terms used in this document are defined in the ["Deterministic Networking Architecture"](#) [[DetNet-ARCHI](#)].

The terms Track and TrackID are defined in the ["6TiSCH Architecture"](#) [[6TiSCH-ARCHI](#)].

3. The DetNet Options

This document defines a number of IPv6 options to be placed in a HbH Options Header; the format of these options follow the generic definition in section 4.2 of [[IPv6](#)].

3.1. Sequencing Option

A typical packet sequence can be expressed uniquely as a wrapping counter, represented as an unsigned integer in the option. In that case, the size of the representation MUST be large enough to cover several times the upper bound on out-of-order packet delivery in terms of number of packets.

This specification also allows to use a time stamp for the packet sequencing following the recommendations in [[RFC8877](#)]. This can be accomplished by utilizing the Precision Time Protocol (PTP) format defined in IEEE Std. 1588 [[IEEE Std. 1588](#)] or Network Time Protocol (NTP) [[RFC5905](#)] formats. In that case, the timestamp resolution at the node that builds the option MUST be fine enough to ensure that two consecutive packets are never stamped with the same value.

This specification also allows for an hybrid model with a coarse grained packet sequence within a coarse grained time stamp. In that case, both a time stamp option and a wrapping counter options are found, and the counter is used to compare packets with the same time stamp.

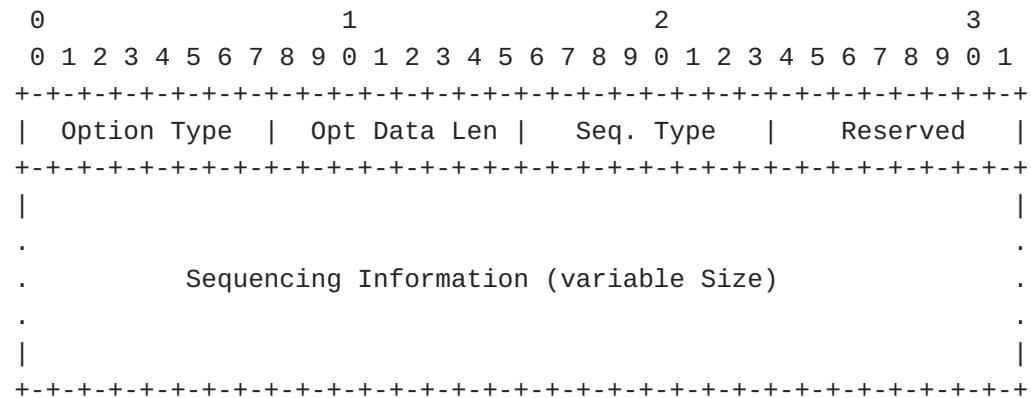


Figure 1: Sequencing Option Format

Sequencing Option fields:

Option Type:

8-bit identifier of the type of option. Value TBD by IANA.

Sequence Type: 8-bit identifier of the type of sequencing information. Value to be confirmed by IANA.

Seq. Type Value	Sequencing Type	Commin Name	Sequencing Information Format
1	Wrapping Counter	Basic Sequence Counter	32-bit unsigned integer
2	Wrapping Counter	Zero-avoiding Sequence Counter	32-bit unsigned integer, wraps to 1
3	Wrapping Counter	RPL Sequence Counter	8-bit RPL sequence, see section 7. of [RFC6550]
11	Time Stamp	Fractional NTP	NTP 64-bit Timestamp Format, see section 4.2.1. of [RFC8877]
12	Time Stamp	Short NTP	NTP 32-bit Timestamp Format, see section 4.2.2. of [RFC8877]
13	Time Stamp	PTP	PTP 80-bit Timestamp Format, see [IEEE Std. 1588]
13	Time Stamp	Short PTP	PTP 64-bit Truncated Timestamp Format, see section 4.3. of [RFC8877]

Table 1: Sequence Type values (suggested)

3.2. RPL Packet Information

6TiSCH [\[6TiSCH-ARCHI\]](#) and RAW [\[RAW-ARCHI\]](#) signal a Track using a RPL Option [\[RFC6553\]](#) with a RPLInstanceID used as TrackID. This specification reuses the RPL option as a method to signal a DetNet path. In that case, the Projected-Route 'P' flag [\[RPL-PDAO\]](#) MUST be set to 1, and the O, R, F flags, as well as the Sender Rank field, MUST be set to 0 by the originator, forwarded as-is, and ignored on reception.

3.3. DetNet Local Path Option

This specification also allows for an hybrid model with a coarse grained packet sequence within a coarse grained time stamp. In that case, both a time stamp option and a wrapping counter options are found, and the counter is used to compare packets with the same time stamp.

Option Type:

8-bit identifier of the type of option. Value TBD by IANA.

Opt Data Len: 8-bit length of the option data, set to 6.

Origin Autonomous System: 16-bit identifier of the Autonomous Systems (AS) that originates the path.

Global Path ID: 32-bit identifier of the DetNet Path, taken from a local namespace associated with the origin AS of the DetNet path. The value of 0 signals a DetNet path that is constrained within the local AS or the local administrative DetNet domain.

4. Security Considerations

5. IANA Considerations

This document has no IANA actions.

6. Acknowledgments

TBD

7. References

7.1. Normative References

[IPv6] Deering, S. and R. Hinden, "Internet Protocol, Version 6 (IPv6) Specification", STD 86, RFC 8200, DOI 10.17487/RFC8200, July 2017, <<https://www.rfc-editor.org/info/rfc8200>>.

[RFC8877] Mizrahi, T., Fabini, J., and A. Morton, "Guidelines for Defining Packet Timestamps", RFC 8877, DOI 10.17487/RFC8877, September 2020, <<https://www.rfc-editor.org/info/rfc8877>>.

[Hbh-PROCESS] Hinden, R. M. and G. Fairhurst, "IPv6 Hop-by-Hop Options Processing Procedures", Work in Progress, Internet-Draft, draft-hinden-6man-hbh-processing-00, 3 December 2020, <<https://tools.ietf.org/html/draft-hinden-6man-hbh-processing-00>>.

[DetNet-ARCHI] Finn, N., Thubert, P., Varga, B., and J. Farkas, "Deterministic Networking Architecture", RFC 8655, DOI 10.17487/RFC8655, October 2019, <<https://www.rfc-editor.org/info/rfc8655>>.

7.2. Informative References

[RPL-PDAO]

Thubert, P., Jadhav, R. A., and M. Gillmore, "Root initiated routing state in RPL", Work in Progress, Internet-Draft, draft-ietf-roll-dao-projection-16, 15 January 2021, <<https://tools.ietf.org/html/draft-ietf-roll-dao-projection-16>>.

[RAW-ARCHI]

Thubert, P., Papadopoulos, G. Z., and R. Buddenberg, "Reliable and Available Wireless Architecture/Framework", Work in Progress, Internet-Draft, draft-pthubert-raw-architecture-05, 15 November 2020, <<https://tools.ietf.org/html/draft-pthubert-raw-architecture-05>>.

[RFC6291]

Andersson, L., van Helvoort, H., Bonica, R., Romascanu, D., and S. Mansfield, "Guidelines for the Use of the "OAM" Acronym in the IETF", BCP 161, RFC 6291, DOI 10.17487/RFC6291, June 2011, <<https://www.rfc-editor.org/info/rfc6291>>.

[RFC5905]

Mills, D., Martin, J., Ed., Burbank, J., and W. Kasch, "Network Time Protocol Version 4: Protocol and Algorithms Specification", RFC 5905, DOI 10.17487/RFC5905, June 2010, <<https://www.rfc-editor.org/info/rfc5905>>.

[RFC6550]

Winter, T., Ed., Thubert, P., Ed., Brandt, A., Hui, J., Kelsey, R., Levis, P., Pister, K., Struik, R., Vasseur, JP., and R. Alexander, "RPL: IPv6 Routing Protocol for Low-Power and Lossy Networks", RFC 6550, DOI 10.17487/RFC6550, March 2012, <<https://www.rfc-editor.org/info/rfc6550>>.

[RFC6553]

Hui, J. and JP. Vasseur, "The Routing Protocol for Low-Power and Lossy Networks (RPL) Option for Carrying RPL Information in Data-Plane Datagrams", RFC 6553, DOI 10.17487/RFC6553, March 2012, <<https://www.rfc-editor.org/info/rfc6553>>.

[DetNet-PS]

Finn, N. and P. Thubert, "Deterministic Networking Problem Statement", RFC 8557, DOI 10.17487/RFC8557, May 2019, <<https://www.rfc-editor.org/info/rfc8557>>.

[RFC9008]

Robles, M.I., Richardson, M., and P. Thubert, "Using RPI Option Type, Routing Header for Source Routes, and IPv6-in-IPv6 Encapsulation in the RPL Data Plane", RFC 9008, DOI 10.17487/RFC9008, April 2021, <<https://www.rfc-editor.org/info/rfc9008>>.

[6TiSCH-ARCHI]

Thubert, P., Ed., "An Architecture for IPv6 over the Time-Slotted Channel Hopping Mode of IEEE 802.15.4

(6TiSCH)", RFC 9030, DOI 10.17487/RFC9030, May 2021,
<<https://www.rfc-editor.org/info/rfc9030>>.

[RFC3272] Awduche, D., Chiu, A., Elwalid, A., Widjaja, I., and X. Xiao, "Overview and Principles of Internet Traffic Engineering", RFC 3272, DOI 10.17487/RFC3272, May 2002, <<https://www.rfc-editor.org/info/rfc3272>>.

[RFC8938] Varga, B., Ed., Farkas, J., Berger, L., Malis, A., and S. Bryant, "Deterministic Networking (DetNet) Data Plane Framework", RFC 8938, DOI 10.17487/RFC8938, November 2020, <<https://www.rfc-editor.org/info/rfc8938>>.

[IEEE Std. 802.15.4] IEEE standard for Information Technology, "IEEE Std. 802.15.4, Part. 15.4: Wireless Medium Access Control (MAC) and Physical Layer (PHY) Specifications for Low-Rate Wireless Personal Area Networks".

[IEEE 802.1 TSN] IEEE 802.1, "Time-Sensitive Networking (TSN) Task Group", <<http://www.ieee802.org/1/pages/tsn.html>>.

[IEEE Std. 1588] IEEE, "IEEE Standard for a Precision Clock Synchronization Protocol for Networked Measurement and Control Systems", IEEE Standard 1588, <<https://ieeexplore.ieee.org/document/4579760/>>.

Author's Address

Pascal Thubert (editor)
Cisco Systems, Inc
France

Phone: [+33 497 23 26 34](tel:+33497232634)
Email: pthubert@cisco.com