

Internet Engineering Task Force
Internet Draft
Expiration Date: August 2003

P. Savola
CSC/FUNET

B. Haberman
Caspian Networks

February 2003

Embedding the Address of RP in IPv6 Multicast Address

[draft-savola-mboned-mcast-rpaddr-01.txt](#)

Status of this Memo

This document is an Internet-Draft and is subject to all provisions of [Section 10 of RFC2026](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

To view the list Internet-Draft Shadow Directories, see <http://www.ietf.org/shadow.html>.

Abstract

As has been noticed, there is exists a huge deployment problem with global, interdomain IPv6 multicast: PIM RPs have no way of communicating the information about multicast sources to other multicast domains, as there is no MSDP, and the whole interdomain Any Source Multicast model is rendered unusable; SSM avoids these problems. This memo outlines a way to embed the address of the RP in the multicast address, solving the interdomain multicast problem. The problem is three-fold: specify an address format, adjust the operational procedures and configuration if necessary, and modify PIM implementations of those who want to join a group (DR's) or create one (RP's). In consequence, there would be no need for interdomain MSDP.

Internet Draft [draft-savola-mboned-mcast-rpaddr-01.txt](#) February 2003

Table of Contents

1.	Introduction	2
2.	Unicast-Prefix-based Address Format	3
3.	Modified Unicast-Prefix-based Address Format	3
4.	Embedding the Address of the RP in the Multicast Address ...	4
5.	Examples	5
5.1.	Example 1	5
5.2.	Example 2	5
5.3.	Example 3	6
5.4.	Example 4	6
6.	Operational Requirements	6
6.1.	Anycast-RP	6
6.2.	Guidelines for Assigning IPv6 Addresses to RPs	6
7.	Required PIM Modifications	7
7.1.	Overview of the Model	8
8.	Scalability/Usability Analysis	8
9.	Acknowledgements	9
10.	Security Considerations	9
11.	References	10
11.1.	Normative References	10
11.2.	Informative References	10
	Authors' Addresses	11
A.	Open Issues/Discussion	11

[1.](#) Introduction

As has been noticed [[V6ISSUES](#)], there exists a huge deployment problem with global, interdomain IPv6 multicast: PIM [[PIM](#)] RPs have no way of communicating the information about multicast sources to other multicast domains, as there is no MSDP [[MSDP](#)], and the whole interdomain Any Source Multicast model is rendered unusable; SSM [[SSM](#)] avoids these problems.

This memo outlines a way to embed the address of the RP in the multicast address, solving the interdomain multicast problem. The problem is three-fold: specify an address format, adjust the operational procedures and configuration if necessary, and modify receiver-side PIM implementations. In consequence, there would be no need for interdomain MSDP.

The solution is founded upon unicast-prefix-based IPv6 multicast addressing [[UNIPRFXM](#)] and making some assumptions about IPv6 address assignment for the RPs in the PIM domain.

Internet Draft [draft-savola-mboned-mcast-rpaddr-01.txt](#) February 2003

Further, a change in how interdomain PIM operates with these addresses is presented: multicast receivers' DR's join the RP embedded in the address -- not their locally configured RP.

It is self-evident that one can't embed, in the general case, two 128-bit addresses in one 128-bit address. In this memo, some assumptions on how this could be done are made. If these assumptions can't be followed, either operational procedures and configuration must be slightly changed or this mechanism not be used.

The assignment of multicast addresses is outside the scope of this document.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

[2.](#) Unicast-Prefix-based Address Format

As described in [[UNIPRFXM](#)], the multicast address format is as follows:

	8		4		4		8		8		64		32	
+	-----	+	----	+	----	+	-----	+	-----	+	-----	+	-----	+
	11111111		flgs		scop		reserved		plen		network prefix		group ID	
+	-----	+	----	+	----	+	-----	+	-----	+	-----	+	-----	+

Where flgs are "0011". (The first two bits are yet undefined and thus zero.)

[3.](#) Modified Unicast-Prefix-based Address Format


This memo proposes a modification to the unicast-prefix-based address format:

1. If the second high-order bit in "flgs" is set to 1, the address

of the RP is embedded in the multicast address, as described in this memo.

2. If the second high-order bit in "flgs" was set to 1, interpret the last low-order 4 bits of "reserved" field as signifying the RP interface ID, as described in this memo.

In consequence, the address format becomes:

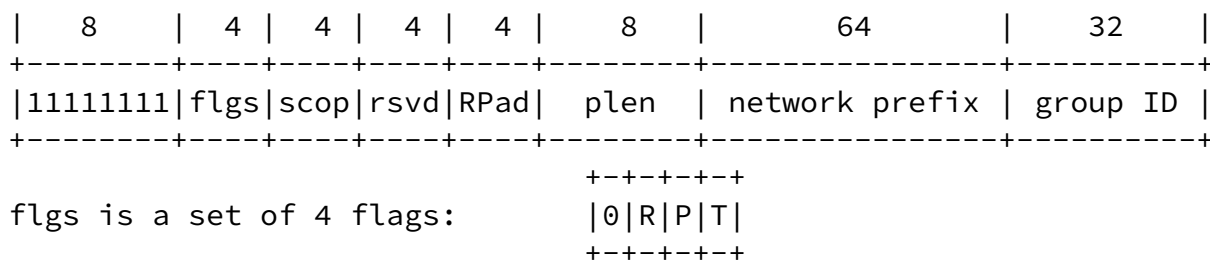

R = 1 indicates a multicast address that embeds the address of the PIM RP. Then P MUST BE set to 1, and consequently T MUST be set to 1, as specified in [[UNIPRFXM](#)].

In the case that R = 1, the last 4 bits of previously reserved field ("RPad") are interpreted as embedding the interface ID of the RP, as specified in this memo.

R = 0 indicates a multicast address that does not embed the address of the PIM RP and follows the semantics defined in [[ADDRARCH](#)] and [[UNIPRFXM](#)]. In this context, the value of "RPad" has no meaning.

4. Embedding the Address of the RP in the Multicast Address

The address of the RP can only be embedded in unicast-prefix -based addresses, but the scheme could be extended to other forms of multicast addresses as well. Further, the mechanism cannot be combined with SSM, as SSM has no RP's.

To identify whether an address is a multicast address as specified in this memo and to be processed any further, it must satisfy all of the

below:

- o it MUST be a multicast address and have R, P, and T flag bits set to 1 (that is, be part of the prefix FF7::/12 or FFF::/12)
- o "plen" MUST NOT be 0 (ie. not SSM)
- o "plen" MUST NOT be greater than 96

The address of the RP can be obtained from a multicast address satisfying the above criteria by taking the following steps:

1. take the last 96 bits of the multicast address add 32 zero bits at the end,
2. zero the last 128-"plen" bits, and

3. replace the last 4 bits with the contents of "RPad".

One should note that there are several operational scenarios when [\[UNIPRFXM\]](#) statement "All non-significant bits of the network prefix field SHOULD be zero" is ignored. This is to allow multicast address assignments to third parties which still use your RP; see example 2 below.

"Plen" higher than 64 SHOULD NOT be used as that would overlap with the upper bits of multicast group-id.

The implementation MUST perform at least the same address validity checks to the calculated RP address as to one received via other means (like MSDP), to avoid e.g. the address being "::" or ":::1".

One should note that the 4 bits reserved for "RPad" set the upper bound for RP's per multicast group address; not the number of RP's in a subnet, PIM domain or large-scale network.

[5. Examples](#)

[5.1. Example 1](#)

The network administrator of 3FFE:FFFF::/32 wants to set up an RP for the network and all of his customers. He chooses network prefix=3FFE:FFFF and plen=32, and wants to use this addressing mechanism. The multicast addresses he will be able to use are of the form:

FF7x:y20:3FFE:FFFF:zzzz:zzzz:<group-id>

Where "x" is the multicast scope, "y" the interface ID of the RP address, and "zzzz:zzzz" will be freely assignable within the PIM domain. In this case, the address of the PIM RP would be:

3FFE:FFFF::y

(and "y" could be anything from 0 to F); the address 3FFE:FFFF::y/128 is added as a Loopback address and injected to the routing system.

[5.2.](#) Example 2

As above, the network administrator can also allocate multicast addresses like "FF7x:y20:3FFE:FFFF:DEAD::/80" to some of his customers within the PIM domain. In this case the RP address would still be "3FFE:FFFF::y" (note the prefix length rule: "plen" does not need to have anything to do with real unicast/multicast address prefix lengths).

[5.3.](#) Example 3

In the above network, the network admin sets up addresses as above, but an organization wants to have their own PIM domain; that's reasonable. The organization can pick multicast addresses like "FF7x:y30:3FFE:FFFF:BEEF::/80", and then their RP address would be "3FFE:FFFF:BEEF::y".

[5.4.](#) Example 4

In the above networks, if the admin wants to specify the RP to be in a non-zero /64 subnet, he could always use something like "FF7x:y40:3FFE:FFFF:BEEF:FEED::/96", and then their RP address would be "3FFE:FFFF:BEEF:FEED::y". There are still 32 bits of multicast group-id's to assign to customers and self.

[6. Operational Requirements](#)

[6.1. Anycast-RP](#)

One should note that MSDP is also used, in addition to interdomain connections between RPs, in anycast-RP [\[ANYCASTRP\]](#) -technique, for sharing the state information between different RPs in one PIM domain. However, there are other propositions, like [\[ANYPIMRP\]](#).

Anycast-RP mechanism is incompatible with this addressing method unless MSDP is specified and implemented. Alternatively, another method for sharing state information could be used.

Anycast-RP and other possible RP failover mechanisms are outside of the scope of this memo.

[6.2. Guidelines for Assigning IPv6 Addresses to RPs](#)

With this mechanism, the RP can be given basically any network prefix up to /64 (and even beyond, by using the upper bits of multicast group-id). The interface identifier will have to be manually configured to match "RPad".

If an administrator wishes to use an RP address that does not conform to the addressing topology, that address can be injected into the routing system via a host route. This RP address SHOULD be assigned out of the network's prefix in order to ensure aggregation at the border.

[7. Required PIM Modifications](#)


The use of multicast addresses with embedded RP addresses requires additional PIM processing. Namely, a PIM router will need to be able to recognize the encoding and derive the RP address from the address using the rules in [section 4](#) and to be able to use the embedded RP, instead of its own for multicast addresses in this specified range.

The two key places where these modifications are used are the Designated Routers (DRs) on the receiver networks and the RPs in the sending domain (see figure below).

For the DR's (rtrR1, rtrR23, and rtrR4), this means sending PIM Join/Prune/Register messages to the foreign RP (rtrRP_S). Naturally, PIM Register-Stop and other messages must also be allowed from the foreign RP. Receivers in the local PIM domain (receiverS) do the same, but the RP used is the same as with regular Any-Source Multicast (ASM).

For the RP (rtrRP_S), this means being able to recognize and validate PIM messages originated from any DR at all and which use RP-embedded addressing.

In particular, there is no need to have all routers on the path modified: this is a major benefit for quick deployment.

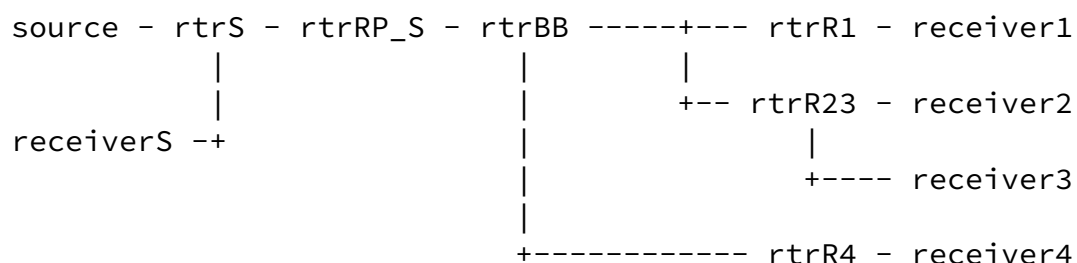

In addition, the administration of the PIM domain will require a policy decision on where the PIM messages to the encoded RP be sent; this is typically assumed to everywhere unless explicitly configured otherwise.

The extraction of the RP information from the multicast address should be done during forwarding state creation. That is, if no state exists for the multicast address, PIM must take the embedded RP information into account when creating forwarding state. Depending on administrative policy, this would result in a receiver's DR initiating a PIM Join towards the foreign RP.

It should be noted that this approach removes the need to run inter-domain MSDP. Multicast distribution trees in foreign networks can be

joined by issuing a PIM Join/Prune/Register to the RP address encoded

in the multicast address.

[7.1.](#) Overview of the Model

The steps when a receiver wishes to join a group are:

1. A receiver finds out a group address from some means (e.g. SDR or a web page)
2. The receiver issues an MLD Report Joining the group
3. The receiver's DR will initiate the PIM Join process towards the RP embedded in the multicast address

The sender side has two cases:

1. A sender in the local domain. Nothing should be different here.
2. A sender in a foreign domain. The DR will send the packets unicast-encapsulated in PIM Register-messages to the RP address encoded in the multicast address. The messages go on as before, often with a Register-Stop and SPT Join; there is no difference in them except for the fact that the RP address is derived from the multicast address.

Whether a sender is in local or foreign domain can be distinguished by checking whether the embedded address is one of RP's configured using conventional mechanisms. Further mechanisms and behaviour is TBD (also see the appendix).

[8.](#) Scalability/Usability Analysis

Interdomain MSDP model for connecting PIM domains is mostly hierarchical. The "embedded RP address" changes this to a mostly flat, sender-centered, full-mesh virtual topology.

This may or may not cause some effects; it may or may not be desirable. At the very least, it makes many things much more robust as the number of third parties is minimized. A good scalability analysis is needed.

In some cases (especially if e.g. every home user is employing site-local multicast), some degree of hierarchy would be highly desirable, for scalability (e.g. take the advantage of shared multicast state) and administrative point-of-view.

Being able to join/send to remote RP's has security considerations that are considered below, but it has an advantage too: every group has a "home RP" which is able to control (to some extent) who are

able to send to the group.

One should note that the model presented here simplifies the PIM multicast routing model slightly by removing the receivers' local RP. One scalability consideration should be noted: previously foreign sources sent the unicast-encapsulated data to their local RP, now they do so to foreign RP. This is especially important with large multicast groups where there are a lot of heavy senders -- particularly if implementations do not handle unicast-decapsulation well.

9. Acknowledgements

Jerome Durand commented on an early draft of this memo. Marshall Eubanks noted an issue regarding short plen values. Tom Pusateri noted problems with earlier SPT-join approach. Rami Lehtonen pointed out issues with the scope of SA-state. The whole MboneD working group is also acknowledged for the continued support and comments.

10. Security Considerations

The address of the PIM RP is embedded in the multicast address. RPs may be a good target for Denial of Service attacks, and in this way, the target would be clearly visible. However, it could be argued that if interdomain multicast was to be made work e.g. with MSDP, the address would have to be visible anyway (through via other channels, which may be more easily securable).

As any RP will have to accept PIM Join/Prune/Register messages from any DR's, this might cause a potential DoS attack scenario. However, this can be mitigated by the fact that the RP can discard all such messages for all multicast addresses that do not embed the address of the RP, and if deemed important, the implementation could also allow manual configuration of which multicast addresses or prefixes embedding the RP could be used; however, at least with addresses, this would increase the need for coordination between multicast sources and administration.

In a similar fashion, DR's must accept similar PIM messages back from the foreign RP's for which a receiver in DR's network has joined.

One consequence of the usage model is that it allows Internet-wide multicast state creation (from receiver(s) in another domain to the RP in another domain) compared to the domain wide state creation in the MSDP model.

RPs may become a bit more single points of failure as anycast-RP mechanism is not (at least immediately) available. This can be

Internet Draft [draft-savola-mboned-mcast-rpaddr-01.txt](#) February 2003

partially mitigated by the fact that some other forms of failover are still possible, and there should be less need to store state as with MSDP.

The implementation MUST perform at least the same address validity checks to the embedded RP address as to one received via other means (like MSDP), to avoid the address being e.g. "::" or ":::1".

TBD: the implications (if any) with regard to embedding the RP address in the packets (e.g. packet laundering and DoS do not seem possible due to the way multicast works, but more analysis is needed).

[11.](#) References

[11.1.](#) Normative References

- [ADDRARCH] Hinden, R., Deering, S., "IP Version 6 Addressing Architecture", [RFC2373](#), July 1998.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [UNIPRFXM] Haberman, B., Thaler, D., "Unicast-Prefix-based IPv6 Multicast Addresses", [RFC3306](#), August 2002.

[11.2.](#) Informative References

- [ANYCASTRP] Kim, D. et al, q(Anycast RP mechanism using PIM and MSDP", work-in-progress, [draft-ietf-mboned-anycast-rp-08.txt](#), May 2001.
- [ANYPIMRP] Farinacci, D., Cai, Y., "Anycast-RP using PIM", work-in-progress, [draft-farinacci-pim-anycast-rp-00.txt](#), January 2003.
- [MSDP] Meyer, D., Fenner, B, (Eds.), "Multicast Source Discovery Protocol (MSDP)", work-in-progress, [draft-ietf-msdp-spec-14.txt](#), November 2002.

- [PIM] Fenner, B. et al, "Protocol Independent Multicast - Sparse Mode (PIM-SM): Protocol Specification (Revised), work-in-progress, [draft-ietf-pim-sm-v2-new-06.txt](#), December 2002.
- [SSM] Holbrook, H. et al, "Source-Specific Multicast for IP", work-in-progress, [draft-ietf-ssm-arch-00.txt](#), November 2001.

Savola & Haberman

[Expires August 2003]

[Page 10]

Internet Draft [draft-savola-mboned-mcast-rpaddr-01.txt](#) February 2003

- [V6ISSUES] Savola, P., "IPv6 Multicast Deployment Issues", work-in-progress, [draft-savola-v6ops-multicast-issues-01.txt](#), November 2002.

Authors' Addresses

Pekka Savola
CSC/FUNET
Espoo, Finland
EMail: psavola@funet.fi

Brian Haberman
Caspian Networks
One Park Drive
Suite 400
Research Triangle Park, NC 27709
EMail: bkhab@nc.rr.com
Phone: +1-919-949-4828

[A.](#) Open Issues/Discussion

The initial thought was to use only SPT join from local RP/DR to foreign RP, rather than a full PIM Join to foreign RP. However, this turned out to be problematic, as this kind of SPT joins were disregarded because the path had not been set up before sending them. A full join to foreign PIM domain is a much clearer approach.

One could argue that there can be more RPs than the 4-bit "RPad" allows for, especially if anycast-RP cannot be used. In that light, extending "RPad" to take full advantage of whole 8 bits would seem reasonable. However, this would use up all of the reserved bits, and leave no room for future flexibility. In case of large number of

RPs, an operational workaround could be to split the PIM domain: for example, using two /33's instead of one /32 would gain another 16 RP addresses.

Some hierarchy (e.g. two-level, "ISP/customer") for RPs could possibly be added if necessary, but that would be torturing one 128 bits even more.

One particular case with a sender in the local domain is where regular ASM RP would be X, and the embedded RP address would be Y. This would typically be due to a misconfiguration, but the DR SHOULD be conservative and use the configured address X. Any other thoughts on that?