

AVT Core Working Group  
Internet-Draft  
Intended status: Experimental  
Expires: September 15, 2011

V. Singh  
T. Karkkainen  
J. Ott  
S. Ahsan  
Aalto University  
L. Eggert  
Nokia  
March 14, 2011

**Multipath RTP (MPRTP)**  
**draft-singh-avtcore-mprtp-01**

Abstract

The Real-time Transport Protocol (RTP) is used to deliver real-time content and, along with the RTP Control Protocol (RTCP), forms the control channel between the sender and receiver. However, RTP and RTCP assume a single delivery path between the sender and receiver and make decisions based on the measured characteristics of this single path. Increasingly, endpoints are becoming multi-homed, which means that they are connected via multiple Internet paths. Network utilization can be improved when endpoints use multiple parallel paths for communication. The resulting increase in reliability and throughput can also enhance the user experience. This document extends the Real-time Transport Protocol (RTP) so that a single session can take advantage of the availability of multiple paths between two endpoints.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 15, 2011.

Copyright Notice

Copyright (c) 2011 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction . . . . .</a>	<a href="#">4</a>
<a href="#">1.1.</a>	<a href="#">Requirements Language . . . . .</a>	<a href="#">4</a>
<a href="#">1.2.</a>	<a href="#">Terminology . . . . .</a>	<a href="#">4</a>
<a href="#">1.3.</a>	<a href="#">Use-cases . . . . .</a>	<a href="#">5</a>
<a href="#">2.</a>	<a href="#">Goals . . . . .</a>	<a href="#">5</a>
<a href="#">2.1.</a>	<a href="#">Functional goals . . . . .</a>	<a href="#">5</a>
<a href="#">2.2.</a>	<a href="#">Compatibility goals . . . . .</a>	<a href="#">6</a>
<a href="#">3.</a>	<a href="#">RTP Topologies . . . . .</a>	<a href="#">6</a>
<a href="#">4.</a>	<a href="#">MPRTP Architecture . . . . .</a>	<a href="#">6</a>
<a href="#">4.1.</a>	<a href="#">Relationship of MPRTP with Session Signaling . . . . .</a>	<a href="#">8</a>
<a href="#">5.</a>	<a href="#">Example Media Flow Diagrams . . . . .</a>	<a href="#">8</a>
<a href="#">5.1.</a>	<a href="#">Streaming use-case . . . . .</a>	<a href="#">8</a>
<a href="#">5.2.</a>	<a href="#">Conversational use-case . . . . .</a>	<a href="#">9</a>
<a href="#">5.3.</a>	<a href="#">Challenges with Multipath Interface Discovery . . . . .</a>	<a href="#">10</a>
<a href="#">6.</a>	<a href="#">MPRTP Functional Blocks . . . . .</a>	<a href="#">10</a>
<a href="#">7.</a>	<a href="#">Available Mechanisms within the Functional Blocks . . . . .</a>	<a href="#">11</a>
<a href="#">7.1.</a>	<a href="#">Session Setup . . . . .</a>	<a href="#">11</a>
<a href="#">7.2.</a>	<a href="#">Expanding RTP . . . . .</a>	<a href="#">11</a>
<a href="#">7.3.</a>	<a href="#">Adding New Interfaces . . . . .</a>	<a href="#">11</a>
<a href="#">7.4.</a>	<a href="#">Expanding RTCP . . . . .</a>	<a href="#">12</a>
<a href="#">7.5.</a>	<a href="#">Checking and Failure Handling . . . . .</a>	<a href="#">12</a>
<a href="#">8.</a>	<a href="#">MPRTP Protocol . . . . .</a>	<a href="#">12</a>
<a href="#">8.1.</a>	<a href="#">Overview . . . . .</a>	<a href="#">13</a>
<a href="#">8.1.1.</a>	<a href="#">Subflow or Interface advertisement . . . . .</a>	<a href="#">14</a>
<a href="#">8.1.2.</a>	<a href="#">Path selection . . . . .</a>	<a href="#">14</a>
<a href="#">8.1.3.</a>	<a href="#">Opening subflows . . . . .</a>	<a href="#">15</a>
<a href="#">8.2.</a>	<a href="#">RTP Transmission . . . . .</a>	<a href="#">15</a>
<a href="#">8.3.</a>	<a href="#">Playout Considerations at the Receiver . . . . .</a>	<a href="#">15</a>
<a href="#">8.4.</a>	<a href="#">Subflow-specific RTCP Statistics and RTCP Aggregation . . . . .</a>	<a href="#">16</a>
<a href="#">8.5.</a>	<a href="#">RTCP Transmission . . . . .</a>	<a href="#">16</a>
<a href="#">9.</a>	<a href="#">Packet Formats . . . . .</a>	<a href="#">16</a>
<a href="#">9.1.</a>	<a href="#">RTCP Extension for Interface advertisement . . . . .</a>	<a href="#">16</a>



<a href="#">9.1.1.</a>	Interface Advertisement block . . . . .	<a href="#">18</a>
<a href="#">9.2.</a>	MPRTP RTP Header Extension . . . . .	<a href="#">19</a>
<a href="#">9.2.1.</a>	MPRTP RTP Extension for a Subflow . . . . .	<a href="#">20</a>
<a href="#">9.2.2.</a>	MPRTP RTP Extension for Connectivity Checks . . . . .	<a href="#">21</a>
<a href="#">9.2.3.</a>	MPRTP RTP Extension for Keep-alive Packets . . . . .	<a href="#">21</a>
<a href="#">9.3.</a>	MPRTP Extension for Subflow Reporting (MPRTCP) . . . . .	<a href="#">21</a>
<a href="#">9.3.1.</a>	MPRTCP Generic Extension . . . . .	<a href="#">21</a>
<a href="#">9.3.2.</a>	MPRTCP for Subflow-specific SR, RR and XR . . . . .	<a href="#">23</a>
<a href="#">10.</a>	SDP Considerations . . . . .	<a href="#">25</a>
<a href="#">10.1.</a>	Increased Throughput . . . . .	<a href="#">25</a>
<a href="#">10.2.</a>	Increased Reliability . . . . .	<a href="#">25</a>
<a href="#">10.3.</a>	MPRTP using preloaded interfaces from ICE . . . . .	<a href="#">25</a>
<a href="#">11.</a>	IANA Considerations . . . . .	<a href="#">25</a>
<a href="#">12.</a>	Security Considerations . . . . .	<a href="#">26</a>
<a href="#">13.</a>	Acknowledgements . . . . .	<a href="#">26</a>
<a href="#">14.</a>	References . . . . .	<a href="#">26</a>
<a href="#">14.1.</a>	Normative References . . . . .	<a href="#">26</a>
<a href="#">14.2.</a>	Informative References . . . . .	<a href="#">27</a>
	Authors' Addresses . . . . .	<a href="#">27</a>



## **1. Introduction**

Multi-homed endpoints are becoming common in today's Internet, e.g., devices that support multiple wireless access technologies such as 3G and Wireless LAN. This means that there is often more than one network path available between two endpoints. Transport protocols, such as RTP, have not been designed to take advantage of the availability of multiple concurrent paths and therefore cannot benefit from the increased capacity and reliability that can be achieved by pooling their respective capacities.

Multipath RTP (MPRTP) is an OPTIONAL extension to RTP [[1](#)] that allows splitting a single RTP stream into multiple subflows that are transmitted over different paths. In effect, this pools the resource capacity of multiple paths. Multipath RTCP (MPRTCP) is an extension to RTCP, it is used along with MPRTP to report per-path sender and receiver characteristics.

Other IETF transport protocols that are capable of using multiple paths include SCTP [[9](#)], MPTCP MPTCP [[10](#)] and SHIM6 [[11](#)]. However, these protocols are not suitable for realtime communications.

### **1.1. Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[2](#)].

### **1.2. Terminology**

- o Endpoint: host either initiating or terminating an RTP connection.
- o Interface: logical or physical component that is capable of acquiring a unique IP address.
- o Path: sequence of links between a sender and a receiver. Typically, defined by a set of source and destination addresses.
- o Subflow: flow of RTP packets along a specific path, i.e., a subset of the packets belonging to an RTP stream. The combination of all RTP subflows forms the complete RTP stream. Typically, a subflow would map to a unique path, i.e., each combination of IP addresses and port pairs (4-tuple) is a unique subflow.



### **1.3. Use-cases**

The primary use-case for MPRTTP is transporting high bit-rate streaming multimedia content between endpoints, where at least one is multi-homed. Such endpoints could be residential IPTV devices that connect to the Internet through two different Internet service providers (ISPs), or mobile devices that connect to the Internet through 3G and WLAN interfaces. By allowing RTP to use multiple paths for transmission, the following gains can be achieved:

- o Higher quality: Pooling the resource capacity of multiple Internet paths allows higher bit-rate and higher quality codecs to be used. From the application perspective, the available bandwidth between the two endpoints increases.
- o Load balancing: Transmitting one RTP stream over multiple paths can reduce the bandwidth usage, compared to transmitting the same stream along a single path. This reduces the impact on other traffic.
- o Fault tolerance: When multiple paths are used in conjunction with redundancy mechanisms (FEC, re-transmissions, etc.), outages on one path have less impact on the overall perceived quality of the stream.

A secondary use-case for MPRTTP is transporting Voice over IP (VoIP) calls to a device with multiple interfaces. Again, such an endpoint could be a mobile device with multiple wireless interfaces. In this case, little is to be gained from resource pooling, i.e., higher capacity or load balancing, because a single path should be easily capable of handling the required load. However, using multiple concurrent subflows can improve fault tolerance, because traffic can shift between the subflows when path outages occur. This results in very fast transport-layer handovers that do not require support from signaling.

## **2. Goals**

This section outlines the basic goals that multipath RTP aims to meet. These are broadly classified as Functional goals and Compatibility goals.

### **2.1. Functional goals**

Allow unicast RTP session to be split into multiple subflows in order to be carried over multiple paths. This may prove beneficial in case of video streaming.





- o Increased Throughput: Cumulative capacity of the two paths may meet the requirements of the multimedia session. Therefore, MP RTP MUST support concurrent use of the multiple paths.
- o Improved Reliability: MP RTP SHOULD be able to send redundant packets or re-transmit packets along any available path to increase reliability.

The protocol SHOULD be able to open new subflows for an existing session when new paths appear and MUST be able to close subflows when paths disappear.

## **2.2. Compatibility goals**

MP RTP MUST be backwards compatible; an MP RTP stream needs to fall back to be compatible with legacy RTP stacks if MP RTP support is not successfully negotiated.

- o Application Compatibility: MP RTP service model MUST be backwards compatible with existing RTP applications, i.e., an MP RTP stack MUST be able to work with legacy RTP applications and not require changes to them. Therefore, the basic RTP APIs MUST remain unchanged, but an MP RTP stack MAY provide extended APIs so that the application can configure any additional features provided by the MP RTP stack.
- o Network Compatibility: individual RTP subflows MUST themselves be well-formed RTP flows, so that they are able to traverse NATs and firewalls. This MUST be the case even when interfaces appear after session initiation. Interactive Connectivity Establishment (ICE) [3] MAY be used for discovering new interfaces or performing connectivity checks.

## **3. RTP Topologies**

[RFC 5117](#) [12] describes a number of scenarios using mixers and translators in single-party (point-to-point), and multi-party (point-to-multipoint) scenarios. [RFC 3550](#) [1] ([Section 2.3](#) and 7.x) discuss in detail the impact of mixers and translators on RTP and RTCP packets. MP RTP assumes that if a mixer or translator exists in the network, then either all of the multiple paths or none of the multiple paths go via this component.

## **4. MP RTP Architecture**

In a typical scenario, an RTP session uses a single path. In an



MPRTP scenario, an RTP session uses multiple subflows that each use a different path. Figure 1 shows the difference.

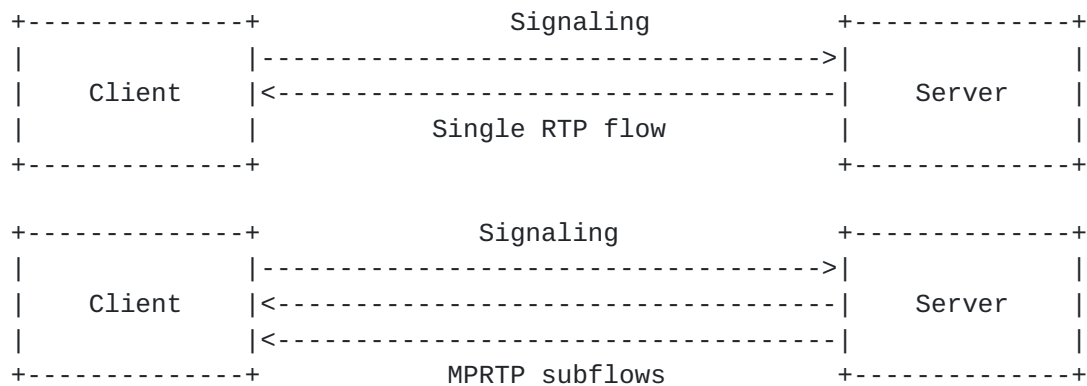


Figure 1: Comparison between traditional RTP streaming and MPRTp

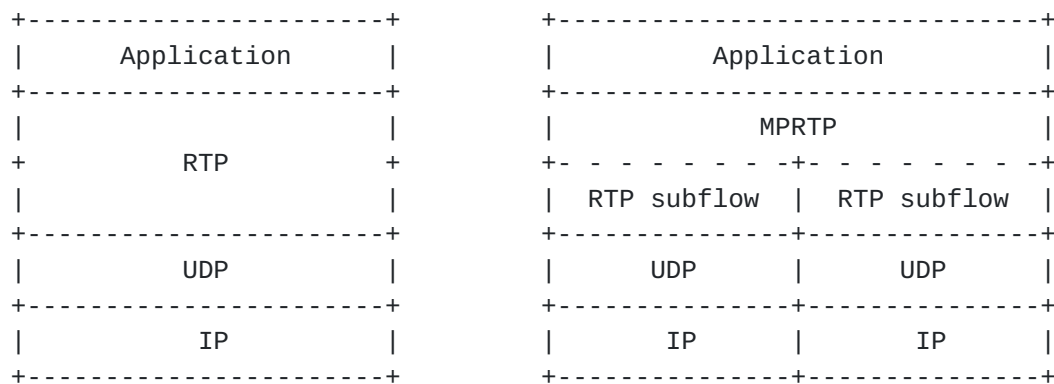


Figure 2: MP RTP Architecture

Figure 2 illustrates the differences between the standard RTP stack and the MP RTP stack. MP RTP receives a normal RTP session from the application and splits it into multiple RTP subflows. Each subflow is then sent along a different path to the receiver. To the network, each subflow appears as an independent, well-formed RTP flow. At the receiver, the subflows are combined to recreate the original RTP session. The MP RTP layer performs the following functions:

- o Path Management: The layer is aware of alternate paths to the other host, which may, for example, be the peer's multiple interfaces. So that it is able to send differently marked packets along separate paths. MPRTTP also selects interfaces to send and receive data. Furthermore, it manages the port and IP address pair bindings for each subflow.



- o Packet Scheduling: the layer splits a single RTP flow into multiple subflows and sends them across multiple interfaces (paths). The splitting MAY BE done using different path characteristics.
- o Subflow recombination: the layer creates the original stream by recombining the independent subflows. Therefore, the multipath subflows appear as a single RTP stream to applications.

#### **4.1. Relationship of MP RTP with Session Signaling**

Session signaling (e.g., SIP [[13](#)], RTSP [[14](#)]) SHOULD be done over a failover-capable or multipath-capable transport for e.g., SCTP [[9](#)] or MPTCP [[10](#)] instead of TCP or UDP.

### **5. Example Media Flow Diagrams**

There may be many complex technical scenarios for MP RTP, however, this memo only considers the following two scenarios: 1) a unidirectional media flow that represents the streaming use-case, and 2) a bidirectional media flow that represents a conversational use-case.

#### **5.1. Streaming use-case**

In the unidirectional scenario, the receiver (client) initiates a multimedia session with the sender (server). The receiver or the sender may have multiple interfaces and both endpoints are MP RTP-capable. Figure 3 shows this scenario. In this case, host A has multiple interfaces. Host B performs connectivity checks on host A's multiple interfaces. If the interfaces are reachable, then host B streams multimedia data along multiple paths to host A. Moreover, host B also sends RTCP Sender Reports (SR) for each subflow and host A responds with a standard RTCP Receiver Report (RR) for the overall session and receiver statistics for each subflow. Host B distributes the packets across the subflows based on the individually measured path characteristics.

Alternatively, to reduce media startup time, host B may start streaming multimedia data to host A's initiating interface and then perform connectivity checks for the other interfaces. This method of updating a single path session to a multipath session is called "multipath session upgrade".



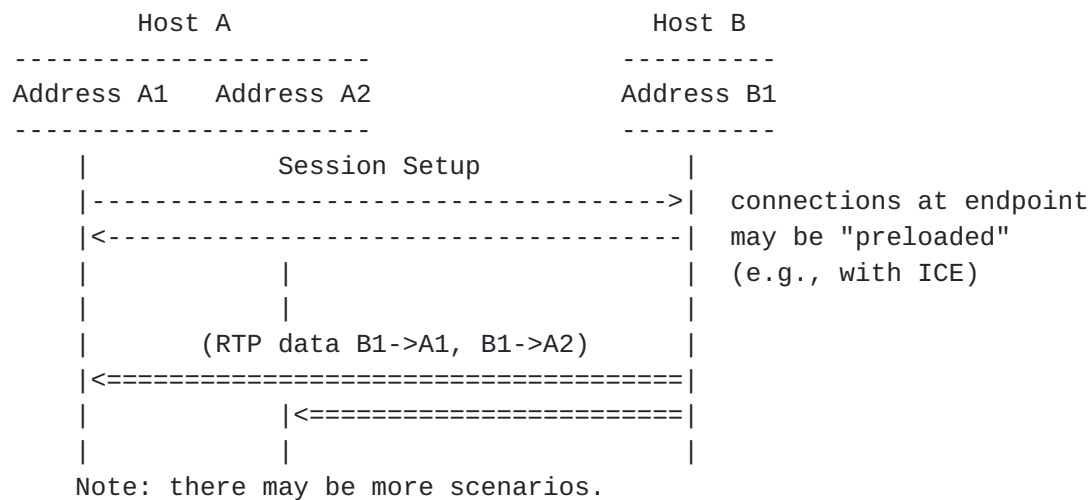


Figure 3: Unidirectional media flow

## 5.2. Conversational use-case

In the bidirectional scenario, multimedia data flows in both directions. The two hosts exchange their lists of interfaces with each other and perform connectivity checks. Communication begins after each host finds suitable address, port pairs. Interfaces that receive data send back RTCP receiver statistics for that path (based on the 4-tuple). The hosts balance their multimedia stream across multiple paths based on the per path reception statistics and its own volume of traffic. Figure 4 describes an example of a bidirectional flow.

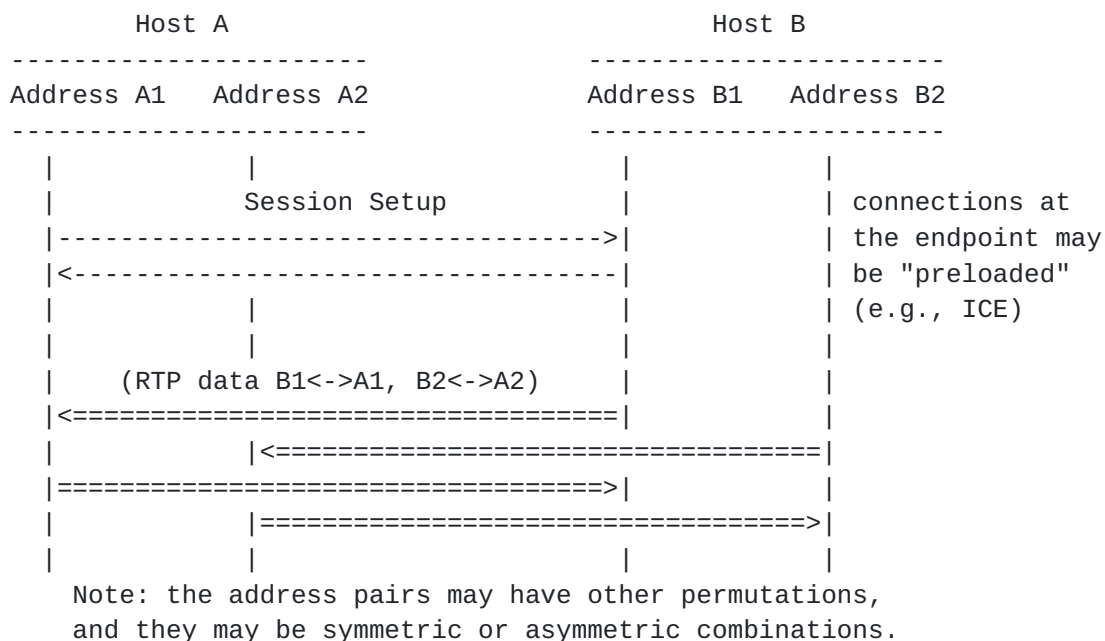






Figure 4: Bidirectional flow

### 5.3. Challenges with Multipath Interface Discovery

For some applications, where the user expects immediate playback, e.g., High Definition Media Streaming or IPTV, it may not be possible to perform connectivity checks within the given time bound. In these cases, connectivity checks MAY need to be done ahead of time.

[Open Issue: ICE or any other system would have to be aware of the endpoint's interfaces ahead of time].

## 6. MPRTP Functional Blocks

This section describes some of the functional blocks needed for MPRTP. We then investigate each block and consider available mechanisms in the next section.

1. **Session Setup:** Multipath session setup is an upgrade or add-on to a typical RTP session. Interfaces may appear or disappear at anytime during the session. To preserve backward compatibility with legacy applications, a multipath session MUST look like a bundle of individual RTP sessions.
2. **Expanding RTP:** For a multipath session, each subflow MUST look like an independent RTP flow, so that individual RTCP messages can be generated per subflow. Furthermore, MPRTP splits the single multimedia stream into multiple subflows based on path characteristics (e.g. RTT, loss-rate, receiver rate, bandwidth-delay product etc.) and dynamically adjusts the load on each link.
3. **Adding Interfaces:** Interfaces on the host need to be regularly discovered and signaled. This can be done at session setup and/or during the session. When discovering and receiving new interfaces, the MPRTP layer needs to select address and port pairs.
4. **Expanding RTCP:** MPRTP MUST recombine RTCP reports from each path to re-create a single RTCP message to maintain backward compatibility with legacy applications.
5. **Maintenance and Failure Handling:** In a multi-homed endpoint interfaces may appear and disappear. If this happens at the sender, it has to re-adjust the load on the available links. On the other hand, if this occurs on the receiver, then the multimedia data transmitted by the sender to those interfaces is



lost. This data may be re-transmitted along a different path i.e., to a different interface on the receiver. Furthermore, the receiver has to explicitly signal the disappearance of an interface, or the sender has to detect it. [Open Issue: What happens if the interface that setup the session disappears? does the control channel also failover? re-start the session?]

6. Teardown: The MP RTP layer releases the occupied ports on the interfaces.

## **7. Available Mechanisms within the Functional Blocks**

This section discusses some of the possible alternatives for each functional block mentioned in the previous section.

### **7.1. Session Setup**

MP RTP session can be set up in many possible ways e.g., during handshake, or upgraded mid-session. The capability exchange may be done using out-of-band signaling (e.g., SDP [15] in SIP [13], RTSP [14]) or in-band signaling (e.g., RTP/RTCP header extension). Furthermore, ICE [3] may be used for discovering and performing connectivity checks during session setup.

### **7.2. Expanding RTP**

RTCP [1] is generated per media session. However, with MP RTP, the media sender spreads the RTP load across several interfaces. The media sender SHOULD make the path selection, load balancing and fault tolerance decisions based on the characteristics of each path. Therefore, apart from normal RTP sequence numbers defined in [1], the MP RTP sender MUST add subflow-specific sequence numbers to help calculate fractional losses, jitter, RTT, playout time, etc., for each path and a subflow identifier to associate the characteristics with a path. The RTP header extension for MP RTP is shown in [Section 9](#)).

### **7.3. Adding New Interfaces**

When interfaces appear and disappear mid-session, ICE [3] may be used for discovering interfaces and performing connectivity checks. However, MP RTP may require a capability re-negotiation (using SDP) to include all these new interfaces. This method is referred to as out-of-band multipath advertisement.

Alternatively, when new interfaces appear, the interface advertisements may be done in-band using RTP/RTCP extensions. The



endpoints perform connectivity checks (see Figure 5 for more details). If the connectivity packets are received by the peers, then multimedia data can flow between the new address, port pairs.

#### **7.4. Expanding RTCP**

To provide accurate per path information an MP RTP endpoint **MUST** send (SR/RR) report for each unique subflow along with the overall session RTCP report. Therefore, the additional subflow reporting affects the RTCP bandwidth and the RTCP reporting interval for each subflow. RTCP report scheduling for each subflow may cause a problem for RTCP recombination and reconstruction in cases when 1) RTCP for a subflow is lost, and 2) RTCP for a subflow arrives later than the other subflows. (There may be other cases as well.)

The sender distributes the media across different paths using the per path RTCP reports. However, this document doesn't cover algorithms for congestion control or load balancing.


#### **7.5. Checking and Failure Handling**

[Note: If the original interface that setup the session disappears then does the session signaling failover to another interface? Can we recommend that SIP/RTSP be run over MPTCP, SCTP].

### **8. MP RTP Protocol**

To enable a quick start of a multimedia session, a multipath session **MUST** be upgraded from a single path session. Therefore, no explicit changes are needed in multimedia session setup and the session can be setup as before.



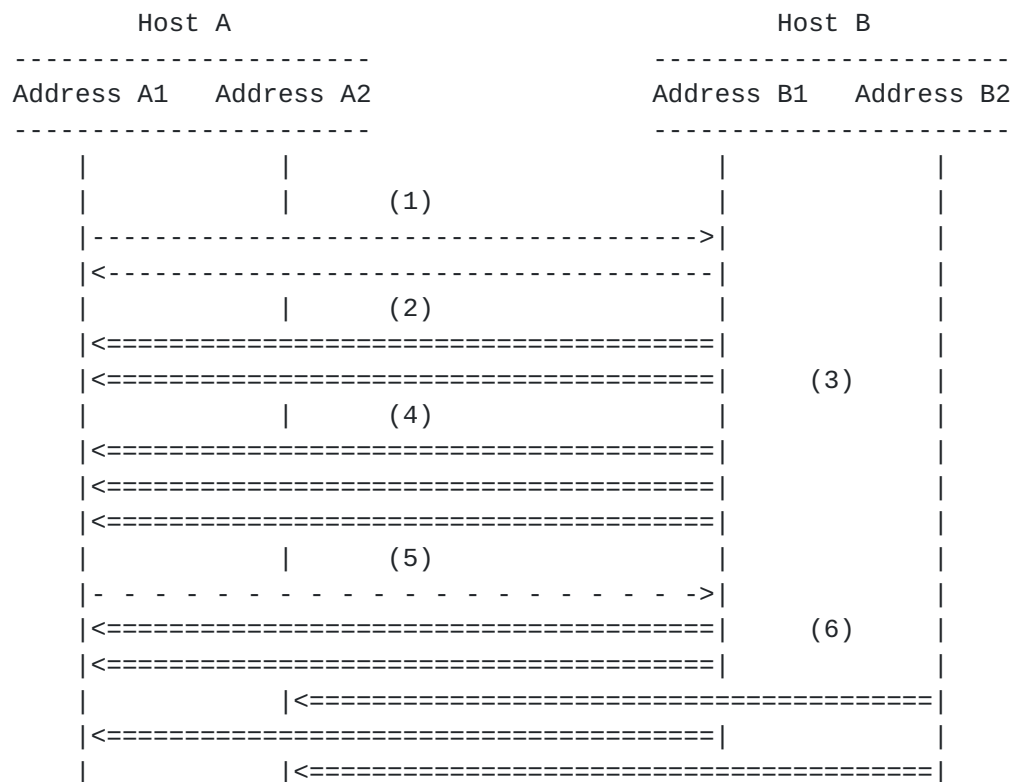

Key:

| Interface

---> Signaling Protocol

<=== RTP Packets

- -> RTCP Packet

Figure 5: MPRTP New Interface

### 8.1. Overview

The bullet points explain the different steps shown in Figure 5 for upgrading a standard single path multimedia session to multipath session.

(1) The first two interactions between the hosts represents the standard session setup. This may be SIP or RTSP.

(2) Following the setup, like in a conventional RTP scenario, host B using interface B1 starts to stream data to host A at interface A1.

(3) Host B is an MPRTP-capable media sender and becomes aware of another interface B2.





(4) Host B advertises the multiple interface addresses using an RTCP header extensions.

(5) Host A is an MPRTTP-capable media receiver and becomes aware of another interface A2. It advertises the multiple interface addresses using an RTCP extension.

Side note, even if an MPRTTP-capable host has only one interface, it SHOULD respond to the advertisement with its single interface.

(6) Each host receives information about the additional interfaces and performs the connectivity tests (not shown in figure). If the paths are reachable then the host starts to stream the multimedia content using the additional paths.

#### **8.1.1. Subflow or Interface advertisement**

To advertise the multiple interfaces, an MPRTTP-capable endpoint MUST add the MPRTTP Interface Advertisement defined in Figure 6 with the RTCP Sender Report (SR). Each unique address is encapsulated in an Interface Advertisement block and contains the IP address, RTP and RTCP port addresses. The Interface Advertisement blocks are ordered based on a decreasing priority level. On receiving the MPRTTP Interface Advertisement, an MPRTTP-capable receiver MUST respond with its own set of interfaces.

If the sender and receiver have only one interface, then the endpoints MUST respond with the default IP, RTP port and RTCP port addresses. If an endpoint receives an RTCP report without the MPRTTP Interface Advertisement, then the endpoint MUST assume that the other endpoint is not MPRTTP capable.

#### **8.1.2. Path selection**

After MPRTTP support has been discovered and interface advertisements have been exchanged, the sender MUST initiate connectivity checks to determine which interface pairs offer valid paths between the sender and the receiver. Each combination of IP addresses and port pairs (4-tuple) is a unique subflow. An endpoint MUST associate a Subflow ID to each unique subflow.

To initiate a connectivity check, the endpoints send an RTP packet using the appropriate MPRTTP extension header (See Figure 10), associated Subflow ID and no RTP payload. The receiving endpoint replies to each connectivity check with an RTCP packet with the appropriate packet type (See Figure 7) and Subflow ID. After the endpoint receives the reply, the path is considered a valid candidate for sending data. An endpoint MAY choose to do any number of



connectivity checks for any interface pairs at any point in a session.

[Open Issue: How should the endpoint adjust the RTCP Reporting interval/schedule the RTCP packet on receiving a connectivity check containing a new Subflow ID? Editor: One option is send immediately as defined in [4]. Another option is the RTCP timing defined in [16].]

### **8.1.3. Opening subflows**

The sender MAY open any number of subflows from the set of candidate subflows after performing connectivity checks. To use the subflow, the sender simply starts sending the RTP packets with an MPRTP extension shown in Figure 9. The MPRTP extension carries a mapping of a subflow packet to the aggregate flow. Namely, sequence numbers and timestamps associated with the subflow.

An endpoint MAY use all or a subset of candidate subflows for sending media packets. To avoid redoing the connectivity checks the endpoint MAY send keep-alive MPRTP packets (see [Section 9.2.3](#)) to the passive subflows to keep the NAT bindings alive.

[Open Issue: How to differentiate between Passive and Active connections? Editor: Active paths get "regular flow" of media packets while passive paths are for failover of active paths. ]

[Open Issue: How to keep a passive connection alive, if not actively used? Alternatively, what is the maximum timeout? Editor: keep-alive for ICE/NAT bindings should not be less than 15 seconds [3].]

## **8.2. RTP Transmission**

The MPRTP layer SHOULD associate an RTP packet with a subflow based on a scheduling strategy. The scheduling strategy may either choose to augment the paths to create higher throughput or use the alternate paths for enhancing resilience or error-repair. Due to the changes in path characteristics, an MPRTP sender can change its scheduling strategy during an ongoing session. The MPRTP sender MUST also populate the subflow specific fields described in the MPRTP extension header (see [Section 9.2.1](#)).

## **8.3. Playout Considerations at the Receiver**

A media receiver, irrespective of MPRTP support or not, should be able to playback the media stream because the received RTP packets are compliant to [1], i.e., a non-MPRTP receiver will ignore the MPRTP header and still be able to playback the RTP packets. However,



the variation of jitter and loss per path may affect proper playout. By calculating optimum skew across all paths, the receiver can compensate for the jitter by modifying the playout delay (adaptive playout) of the received RTP packets.

#### **8.4. Subflow-specific RTCP Statistics and RTCP Aggregation**

Aggregate RTCP provides the overall media statistics and follows the standard RTCP defined in [RFC3550](#) [1]. However, subflow specific RTCP provides the per path media statistics because the aggregate RTCP report may not provide sufficient per path information to an MPRTS scheduler. Specifically, the scheduler should be aware of each path's RTT and loss-rate, which an aggregate RTCP cannot provide. The sender/receiver MUST use non-compound RTCP reports defined in [RFC5506](#) [5] to transmit the aggregate and subflow-specific RTCP reports. Also, each subflow and the aggregate RTCP report MUST follow the timing rules defined in [4].

The RTCP reporting interval is locally implemented and the scheduling of the RTCP reports may depend on the the behavior of each path. For instance, the RTCP interval may be different for a passive path than an active path to keep port bindings alive. Additionally, an endpoint may decide to share the RTCP reporting bit rate equally across all its paths or schedule based on the receiver rate on each path.

#### **8.5. RTCP Transmission**

The sender sends an RTCP SR on each active path. For each SR the receiver gets, it echoes one back to the same IP address-port pair that sent the SR. The receiver tries to choose the symmetric path and if the routing is symmetric then the per-path RTT calculations will work out correctly. However, even if the paths are not symmetric, the sender would at maximum, under-estimate the RTT of the path by a factor of half of the actual path RTT.

### **9. Packet Formats**

In this section we define the protocol structures described in the previous sections.

#### **9.1. RTCP Extension for Interface advertisement**

This sub-section defines the RTCP header extension for in-band interface advertisement by the receiver, instead of relying on ICE or in situations when the interface appears after SDP session establishment.



The interface advertisement SHOULD immediately follow the Receiver Report. If the Receiver Report is not present, then it MUST be appended to the Sender Report.

The endpoint MUST advertise all its interfaces when a new interface appears. Furthermore, an endpoint MUST advertise all its interfaces when it receives an Interface Advertisement.

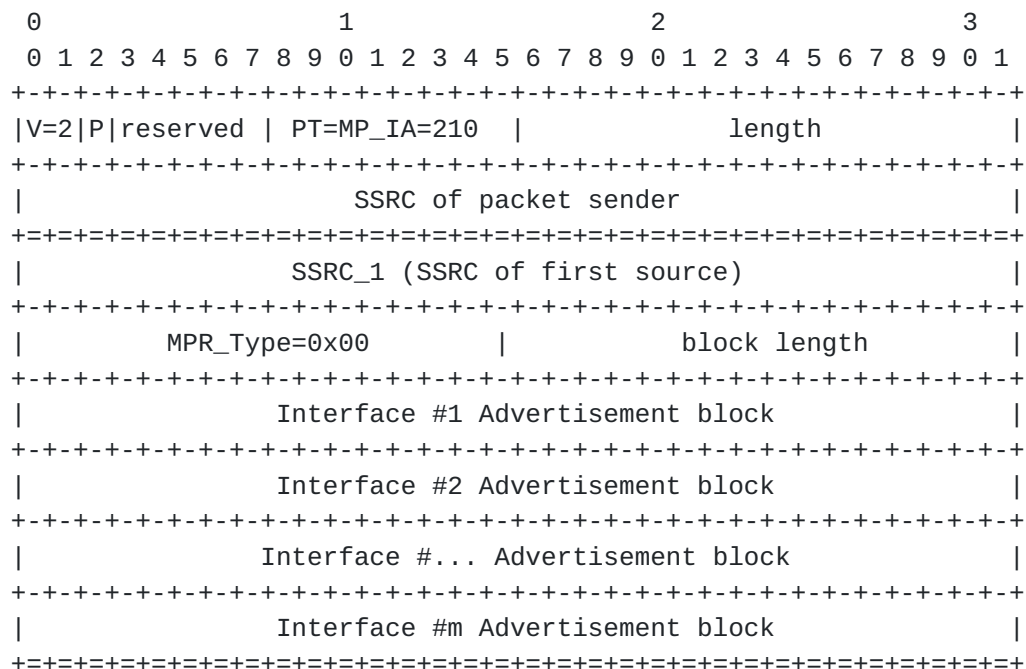


Figure 6: MPRTP Interface Advertisement. (appended to SR/RR)

MP\_IA: 8 bits

Contains the constant 210 to identify this as an interface advertisement.

length: 16 bits

As described for the RTCP packet (see [Section 6.4.1](#) of the RTP specification [1]), the length of this is in 32-bit words minus one, including the header and any padding.

MPR\_Type: 16-bits

The MPRR\_Type field corresponds to the type of MPRTP RTCP packet. Namely:





MPR_Type Value	Use
0x00	Interface Advertisement
0x01	Connectivity Check. For this case the length is set to 0
TBD	Keep Alive Packet.

Figure 7: RTP header extension values for MPRTTP (MPR\_Type)

block length: 16-bits

The 16-bit length field is the length of the encapsulated advertisement blocks in 32-bit word length not including the MPR\_Type and length fields. The value zero indicates there is no data following.

Interface Advertisement block: variable size

Defined later in 9.1.1.

#### 9.1.1. Interface Advertisement block

This block describes a method to represent IPv4, IPv6 and generic DNS-type addresses in a block format. It is based on the sub-reporting block in [RFC 5760](#) [6].

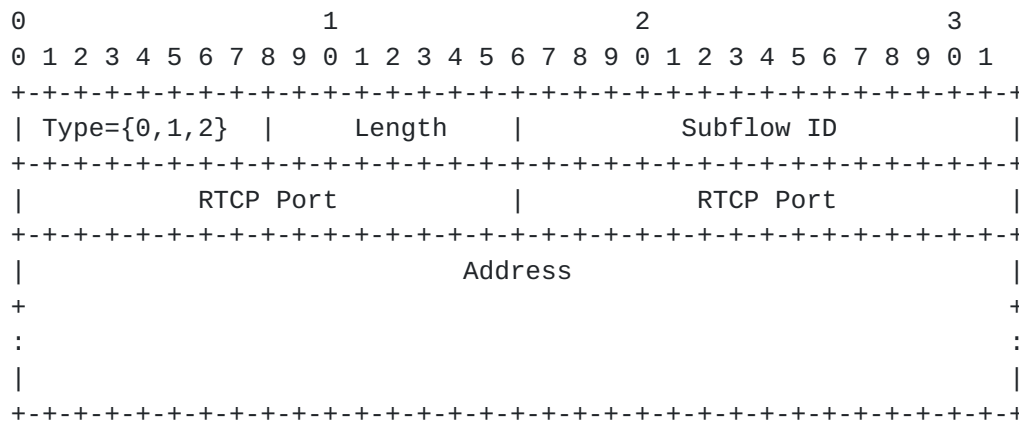


Figure 8: Interface Advertisement block during path discovery

Type: 8 bits

The Type corresponds to the type of address. Namely:



0: IPv4 address

1: IPv6 address

2: DNS name

Length: 8 bits

The length of the Interface Advertisement block in bytes.

For an IPv4 address, this should be 9 (i.e., 5 octets for the header and 4 octets for IPv4 address).

For an IPv6 address, this should be 21.

For a DNS name, the length field indicates the number of octets making up the string plus the 5 byte header.

RTP Port: 2 octets

The port number to which the sender sends RTP data. A port number of 0 is invalid and MUST NOT be used.

RTCP Port: 2 octets

The port number to which receivers send feedback reports. A port number of 0 is invalid and MUST NOT be used.

Address: 4 octets (IPv4), 16 octets (IPv6), or n octets (DNS name)

The address to which receivers send feedback reports. For IPv4 and IPv6, fixed-length address fields are used. A DNS name is an arbitrary-length string. The string MAY contain Internationalizing Domain Names in Applications (IDNA) domain names and MUST be UTF-8 encoded [7].

## **9.2. MP RTP Header Extension**

The MP RTP header extension is used to 1) distribute a single RTP stream over multiple subflows, 2) perform connectivity checks on the advertised interfaces, and 3) keep-alive passive interfaces (paths).

The header conforms to the 2-byte RTP header extension defined in [8]. The header extension contains a 16-bit length field that counts the number of 32-bit words in the extension, excluding the four-octet extension header (therefore zero is a valid length, see Section 5.3.1 of [1] for details).







The 8-bit length field is the length of extension data in bytes not including the H-Ext ID and length fields. The value zero indicates there is no data following.

Subflow ID: Identifier of the subflow. Every RTP packet belonging to the same subflow carries the same unique subflow identifier.

Flow-Specific Sequence Number (FSSN): Sequence of the packet in the subflow. Each subflow has its own strictly monotonically increasing sequence number space.

#### **9.2.2. MP RTP Extension for Connectivity Checks**

[Open Issue: What sequence number to use for the RTP session?  
Alternative 1: An MP RTP receiver MUST NOT send the packet with H-Ext ID=0x01 to the decoder and ignore these packets from RTCP calculation. Alternative 2: Instead of sending an RTP packet the sender transmits a modified STUN packet.]

#### **9.2.3. MP RTP Extension for Keep-alive Packets**

[Editor: Waiting for the progress on RTCP guidelines for the RTP keep alive packet [\[16\]](#).]

### **9.3. MP RTP Extension for Subflow Reporting (MP RTCP)**

The MP RTP RTCP header extension is used to 1) provide RTCP feedback per subflow to determine the characteristics of each path, 2) perform connectivity check on the other endpoint's interfaces, and 3) to keep alive a passive connection.

#### **9.3.1. MP RTCP Generic Extension**

When sending a report for a specific subflow the sender or receiver MUST add only the reports associated with that 4-tuple. Each subflow is reported independently using the following MP RTCP Feedback header.





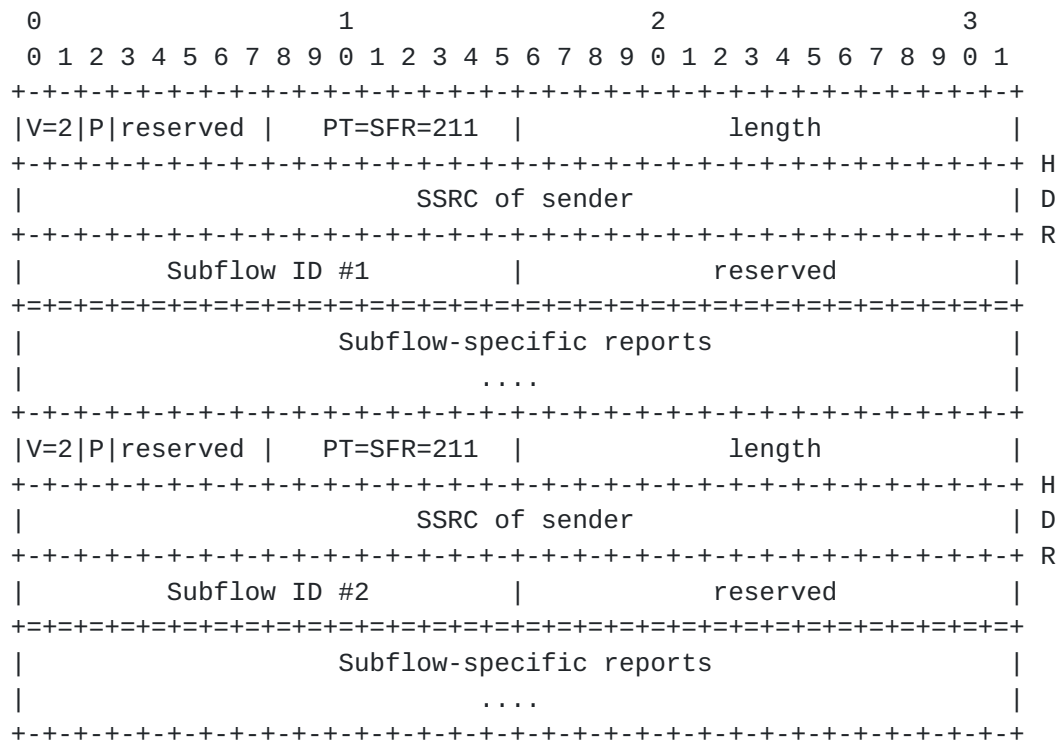


Figure 11: MPRTCP Generic Feedback Header

Subflow ID: 16 bits

Subflow identifier is the value associated with the subflow the endpoint is reporting about. If it is a sender it MUST use the Subflow ID associated with the 4-tuple. If it is a receiver it MUST use the Subflow ID received in the Subflow-specific Sender Report.

length: 16 bits

The length of this RTCP packet in 32-bit words minus one, including the header and any padding. It MUST contain at least one subflow report, for e.g., Sender Subflow Report, Receiver Subflow Report, or Subflow Extension Reports, etc.

Subflow-specific reports: variable

Subflow-specific report contains all the reports associated with the Subflow ID. For a sender, it MUST include the Subflow-specific Sender Report (SSR). For a receiver, it MUST include Subflow-specific Receiver Report (SRR). Additionally, if the receiver supports subflow-specific extension reports then it MUST append them to the SRR.



### **9.3.2. MPRTCP for Subflow-specific SR, RR and XR**

[Editor: inside the context of subflow specific reports can we reuse the payload type code for Sender Report (PT=200), Receiver Report (PT=201), Extension Report (PT=207). Transport and Payload specific RTCP messages are session specific and SHOULD be used as before.]

Example:

```

      0              1              2              3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|V=2|P|reserved |   PT=SFR=211   |           length=9           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+ H
|                               SSRC of sender                     | D
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+ R
|   Subflow ID #1           |           reserved                 |
+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+
|V=2|P|   RC   |   PT=SR=200   |           length               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               SSRC of sender                     |
+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+
|                               NTP timestamp, most significant word |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               NTP timestamp, least significant word |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               RTP timestamp                       |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               subflow's packet count              |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               subflow's octet count                |
+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+
|V=2|P|reserved |   PT=SFR=211   |           length               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+ H
|                               SSRC of sender                     | D
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+ R
|   Subflow ID #2           |           reserved                 |
+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+
|V=2|P|   RC   |   PT=RR=201   |           length               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               SSRC of packet sender               |
+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+
| fraction lost |           cumulative number of packets lost       |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               extended highest sequence number received |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               interarrival jitter                 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               last SR (LSR)                       |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               delay since last SR (DLSR)         |
+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+===+
|                               Subflow specific extension reports   |
|                               ....                                  |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Figure 12: Example of reusing RTCP SR and RR inside an MPRTCP header



(Bi-directional use-case).

## **10. SDP Considerations**

The packet formats specified in this document define extensions for RTP and RTCP. The use of MPRTTP is left to the discretion of the sender and receiver.

A participant of a media session MAY use SDP to signal that it supports MPRTTP. Not providing this information may/will make the sender or receiver ignore the header extensions. However, MPRTTP MAY be used by either sender or receiver without prior signaling.

```
mprtp-attr = "a=" "mprtp" [ ":"  
    mprtp-optional-parameter ]  
    CRLF ; flag to enable MPRTTP
```

The literal 'mprtp' MUST be used to indicate support for MPRTTP. Generally, senders and receivers SHOULD indicate this capability if they support MPRTTP and would like to use it in the specific media session being signaled. However, it is possible for an MPRTTP sender to stream data using multiple paths to a non-MPRTTP client.

Currently, there are no extensions defined for the literal 'mprtp' but we provide the opportunity to extend it using the mprtp-optional-parameter.

### **10.1. Increased Throughput**

The MPRTTP layer MAY choose to augment paths to increase throughput. If the desired media rate exceeds the current media rate, the endpoints MUST renegotiate the application specific ("b=AS:") [\[17\]](#) bandwidth.

### **10.2. Increased Reliability**

TBD

### **10.3. MPRTTP using preloaded interfaces from ICE**

TBD

## **11. IANA Considerations**

This document defines a new SDP attribute, "mprtp", within the existing IANA registry of SDP Parameters.





TBD.

## **12. Security Considerations**

All drafts are required to have a security considerations section. See [RFC 3552](#) [[18](#)] for a guide.

## **13. Acknowledgements**

Varun Singh, Saba Ahsan, and Teemu Karkkainen are supported by Trilogy (<http://www.trilogy-project.org>), a research project (ICT-216372) partially funded by the European Community under its Seventh Framework Program. The views expressed here are those of the author(s) only. The European Commission is not liable for any use that may be made of the information in this document.

## **14. References**

### **14.1. Normative References**

- [1] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), July 2003.
- [2] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [3] Rosenberg, J., "Interactive Connectivity Establishment (ICE): A Protocol for Network Address Translator (NAT) Traversal for Offer/Answer Protocols", [RFC 5245](#), April 2010.
- [4] Ott, J., Wenger, S., Sato, N., Burmeister, C., and J. Rey, "Extended RTP Profile for Real-time Transport Control Protocol (RTCP)-Based Feedback (RTP/AVPF)", [RFC 4585](#), July 2006.
- [5] Johansson, I. and M. Westerlund, "Support for Reduced-Size Real-Time Transport Control Protocol (RTCP): Opportunities and Consequences", [RFC 5506](#), April 2009.
- [6] Ott, J., Chesterfield, J., and E. Schooler, "RTP Control Protocol (RTCP) Extensions for Single-Source Multicast Sessions with Unicast Feedback", [RFC 5760](#), February 2010.
- [7] Yergeau, F., "UTF-8, a transformation format of ISO 10646", STD 63, [RFC 3629](#), November 2003.



- [8] Singer, D. and H. Desineni, "A General Mechanism for RTP Header Extensions", [RFC 5285](#), July 2008.

#### **14.2. Informative References**

- [9] Stewart, R., "Stream Control Transmission Protocol", [RFC 4960](#), September 2007.
- [10] Ford, A., Raiciu, C., Handley, M., Barre, S., and J. Iyengar, "Architectural Guidelines for Multipath TCP Development", [draft-ietf-mptcp-architecture-05](#) (work in progress), January 2011.
- [11] Nordmark, E. and M. Bagnulo, "Shim6: Level 3 Multihoming Shim Protocol for IPv6", [RFC 5533](#), June 2009.
- [12] Westerlund, M. and S. Wenger, "RTP Topologies", [RFC 5117](#), January 2008.
- [13] Rosenberg, J., Schulzrinne, H., Camarillo, G., Johnston, A., Peterson, J., Sparks, R., Handley, M., and E. Schooler, "SIP: Session Initiation Protocol", [RFC 3261](#), June 2002.
- [14] Schulzrinne, H., Rao, A., Lanphier, R., Westerlund, M., and M. Stiemerling, "Real Time Streaming Protocol 2.0 (RTSP)", [draft-ietf-mmusic-rfc2326bis-27](#) (work in progress), March 2011.
- [15] Rosenberg, J. and H. Schulzrinne, "An Offer/Answer Model with Session Description Protocol (SDP)", [RFC 3264](#), June 2002.
- [16] Marjou, X. and A. Sollaud, "Application Mechanism for keeping alive the Network Address Translator (NAT) mappings associated to RTP/RTCP flows.", [draft-ietf-avt-app-rtp-keepalive-10](#) (work in progress), March 2011.
- [17] Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol", [RFC 4566](#), July 2006.
- [18] Rescorla, E. and B. Korver, "Guidelines for Writing RFC Text on Security Considerations", [BCP 72](#), [RFC 3552](#), July 2003.



## Authors' Addresses

Varun Singh  
Aalto University  
School of Science and Technology  
Otakaari 5 A  
Espoo, FIN 02150  
Finland

Email: [varun@comnet.tkk.fi](mailto:varun@comnet.tkk.fi)

URI: <http://www.netlab.tkk.fi/~varun/>

Teemu Karkkainen  
Aalto University  
School of Science and Technology  
Otakaari 5 A  
Espoo, FIN 02150  
Finland

Email: [teemuk@comnet.tkk.fi](mailto:teemuk@comnet.tkk.fi)

Joerg Ott  
Aalto University  
School of Science and Technology  
Otakaari 5 A  
Espoo, FIN 02150  
Finland

Email: [jo@comnet.tkk.fi](mailto:jo@comnet.tkk.fi)

Saba Ahsan  
Aalto University  
School of Science and Technology  
Otakaari 5 A  
Espoo, FIN 02150  
Finland

Email: [sahsan@cc.hut.fi](mailto:sahsan@cc.hut.fi)



Lars Eggert  
Nokia Research Center  
P.O. Box 407  
Nokia Group 00045  
Finland

Phone: +358 50 48 24461

Email: [lars.eggert@nokia.com](mailto:lars.eggert@nokia.com)

URI: [http://research.nokia.com/people/lars\\_eggert](http://research.nokia.com/people/lars_eggert)