

PCE Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: September 22, 2016

S. Sivabalan  
C. Filsfils  
S. Previdi  
Cisco Systems, Inc.  
J. Tantsura  
Ericsson  
J. Hardwick  
Metaswitch Networks  
M. Nanduri  
Microsoft Corporation  
March 21, 2016

Carrying Binding Label/Segment-ID in PCE-based Networks.  
draft-sivabalan-pce-binding-label-sid-01.txt

## Abstract

It is possible to associate a binding label to RSVP-TE signaled Traffic Engineering Label Switching Path or binding Segment-ID (SID) to Segment Routed Traffic Engineering path. Such a binding label/SID can be used by an upstream node for steering traffic into the appropriate TE path to enforce TE policies. This document proposes an approach for reporting binding label/SID to Path Computation Element (PCE) for supporting PCE-based Traffic Engineering policies.

## Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 22, 2016.

Internet-Draft

Binding Label/Segment-ID

March 2016

## Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	Terminology . . . . .	<a href="#">4</a>
<a href="#">3.</a>	Path Binding TLV . . . . .	<a href="#">5</a>
<a href="#">4.</a>	Operation . . . . .	<a href="#">5</a>
<a href="#">5.</a>	Security Considerations . . . . .	<a href="#">7</a>
<a href="#">6.</a>	IANA Considerations . . . . .	<a href="#">7</a>
<a href="#">6.1.</a>	TE-PATH-BINDING TLV . . . . .	<a href="#">7</a>
<a href="#">6.2.</a>	PCEP Error Type and Value . . . . .	<a href="#">7</a>
<a href="#">7.</a>	Acknowledgements . . . . .	<a href="#">7</a>
<a href="#">8.</a>	Normative References . . . . .	<a href="#">7</a>
	Authors' Addresses . . . . .	<a href="#">9</a>

[1.](#) Introduction

A PCE can compute Traffic Engineering paths (TE paths) through a network that are subject to various constraints. Currently, TE paths are either set up using the RSVP-TE signaling protocol or Segment Routed (SR). We refer to such paths as RSVP-TE paths and SR-TE paths respectively in this document.

Similar to assigning label to a Forwarding Equivalence Class (FEC) via Label Distribution Protocol (LDP), a binding label can be assigned to a RSVP-TE LSP. If the topmost label of an incoming packet is the binding label, the packet is steered onto the RSVP-TE LSP. As such, any upstream node can use binding labels to steer the packets that it originates to appropriate TE LSPs to enforce TE

policy. Similarly, a binding SID (see [\[I-D.ietf-isis-segment-routing-extensions\]](#) and [\[I-D.ietf-ospf-segment-routing-extensions\]](#)) can be used to enforce TE policy with SR-TE path. Note that if an SR-TE path is represented as a forwarding-adjacency, then the corresponding adjacency SID can be

used as the binding SID. In such case, the path is advertised using the routing protocols as described in [\[RFC5440\]](#). The binding SID provides an alternate mechanism without additional overhead on routing protocols.

[\[RFC5440\]](#) describes the Path Computation Element Protocol (PCEP) for communication between a Path Computation Client (PCC) and a PCE or between a pair of PCEs. [\[I-D.ietf-pce-stateful-pce\]](#) specifies extension to PCEP that allows a PCC to delegate its LSPs to a PCE. The PCE can then update the state of LSPs delegated to it. [\[I-D.ietf-pce-pce-initiated-lsp\]](#) specifies a mechanism allowing a PCE to dynamically instantiate an LSP on a PCC by sending the path and characteristics of the LSP. The PCEP extension to setup and maintain SR-TE paths is specified in [\[I-D.ietf-pce-segment-routing\]](#).

Binding label/SID has local significance to the ingress node of the corresponding TE path. When a stateful PCE is deployed for setting up TE paths, it may be desirable to report the binding label or SID to the PCE for the purpose of enforcing end-to-end TE policy. A sample Data Center (DC) use-case is illustrated in the following diagram. In the MPLS DC network, an SR LSP (without traffic engineering) is established using a prefix SID advertised by BGP (see [\[I-D.keyupate-idr-bgp-prefix-sid\]](#)). In IP/MPLS WAN, an SR-TE LSP is setup using the PCE. The list of SIDs of the SR-TE LSP is {A, B, C, D}. The gateway node 1 (which is the PCC) allocates a binding SID X and reports it to the PCE. In order for the access node to steer the traffic over the SR-TE LSP, the PCE passes the SID stack {Y, X} where Y is the prefix SID of the gateway node-1 to the access node. In the absence of the binding SID X, the PCE should pass the SID stack {Y, A, B, C, D} to the access node. This example also illustrates the additional benefit of using the binding SID to reduce the number of SIDs imposed on the access nodes with a limited forwarding capacity.

Internet-Draft

Binding Label/Segment-ID

March 2016

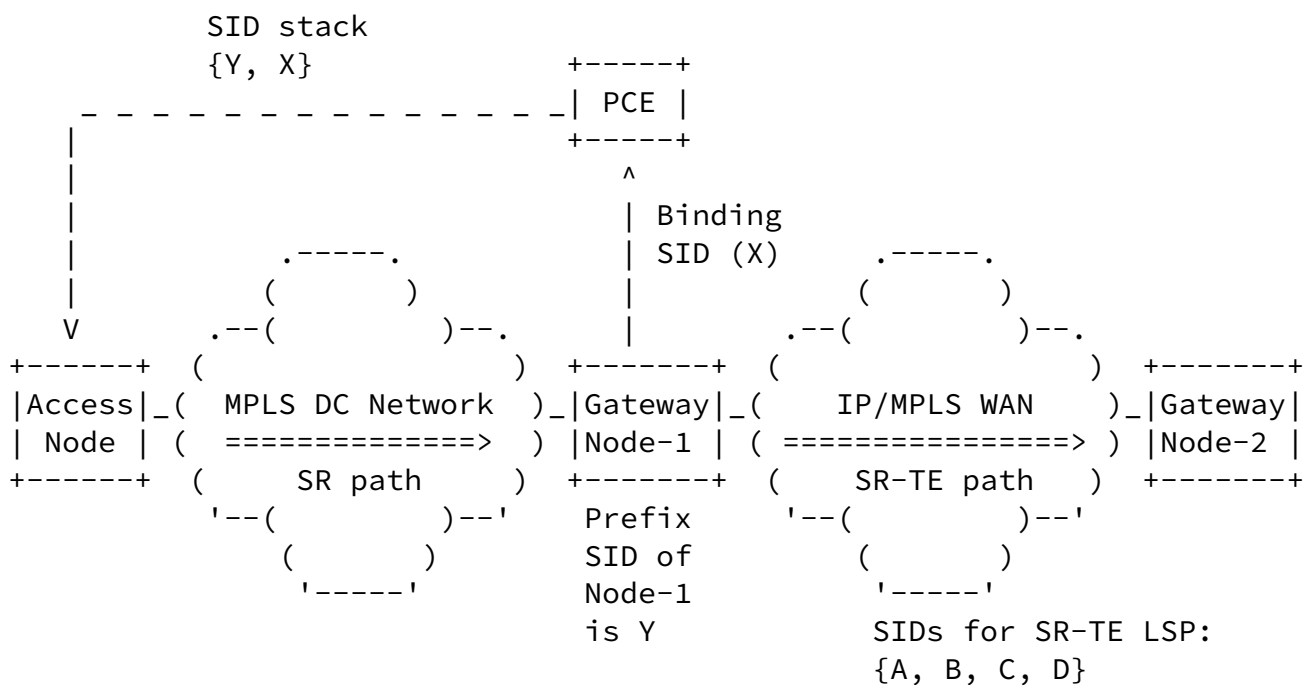


Figure 1: A sample Use-case of Binding SID

It may be possible for a PCE to request a PCC to allocate a specific binding label/SID by sending an update message. If the PCC can successfully allocate the specified binding value, it reports the binding value to the PCE. Otherwise, the PCC sends an error message to the PCE indicating the cause of the failure.

In this document, we introduce a new OPTIONAL TLV that a PCC can use in order to report the binding label/SID associated with a TE LSP, or a PCE to request a PCC to allocate a binding label/SID. This TLV is intended for TE LSPs established using RSVP-TE, SR, or any other future method. Also, in the case of SR-TE LSPs, the TLV can carry an MPLS label (for SR-TE path with MPLS data-plane) or a binding SID (e.g., IPv6 address for SR-TE paths with IPv6 data-plane). However, use of this TLV for carrying non-MPLS binding SID will be described in separate document(s). Binding value means either MPLS label or SID throughout this document.

## 2. Terminology


The following terminologies are used in this document:

LER: Label Edge Router.  
 LSP: Label Switched Path.  
 LSR: Label Switching Router.  
 PCC: Path Computation Client.

PCE: Path Computation Element  
 PCEP: Path Computation Element Protocol.  
 SID: Segment Identifier.  
 SR: Segment Routing.  
 TLV: Type, Length, and Value.

## 3. Path Binding TLV

The new optional TLV is called "TE-PATH-BINDING TLV" whose format is shown in the diagram below is defined to carry binding label or SID for a TE path. This TLV is associated with the LSP object specified in ([[I-D.ietf-pce-stateful-pce](#)]). The type of this TLV is to be allocated by IANA.

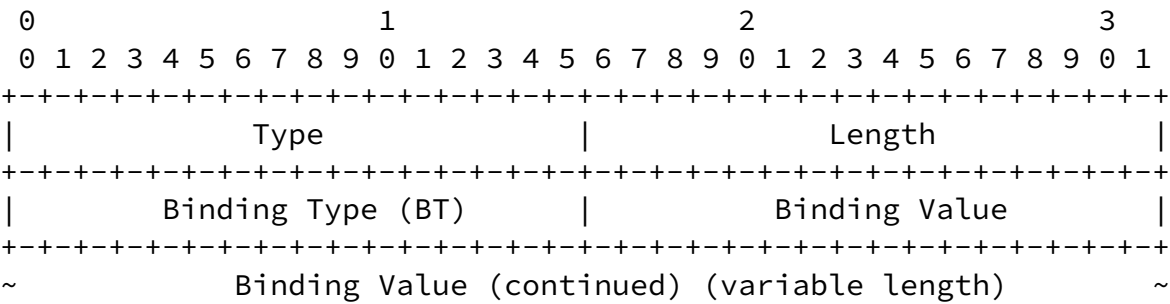



If the value can be successfully allocated, the PCC reports the binding value to the PCE. If the PCC considers the binding value specified by the PCE invalid, it MUST send a PCErr message with Error-Type = TBD ("Binding SID failure") and Error Value = TBD ("Invalid SID"). If the binding value is valid, but the PCC is unable to allocate the binding value, it MUST send a PCErr message with Error-Type = TBD ("Binding label/SID failure") and Error Value = TBD ("Unable to allocate the specified label/SID").

If a PCC receives TE-PATH-BINDING TLV in any message other than PCUpd, it MUST close the corresponding PCEP session with the reason "Reception of a malformed PCEP message" according ([RFC5440]). Similarly, if a PCE receives a TE-PATH-BINDING TLV in any message other than a PCRpt or if the TE-PATH-BINDING TLV is associated with any object other than LSP object, the PCE MUST close the corresponding PCEP session with the reason "Reception of a malformed PCEP message" according ([RFC5440]).

If a PCC wishes to withdraw or modify a previously reported binding value, it MUST send a PCRpt message without any TE-PATH-BINDING TLV or with the TE-PATH-BINDING TLV containing the new binding value respectively.

If a PCE wishes to modify a previously requested binding value, it MUST send a PCUpd message with TE-PATH-BINDING TLV containing the new binding value. Absence of TE-PATH-BINDING TLV in PCUpd message means that the PCE does not specify a binding value in which case the binding value allocation is governed by the PCC's local policy.

If a PCC receives a valid binding value from a PCE which is different than the current binding value, it MUST try to allocate the new value. If the new binding value is successfully allocated, the PCC MUST report the new value to the PCE. Otherwise, it MUST send a

PCErr message with Error-Type = TBD ("Binding label/SID failure") and Error Value = TBD ("Unable to allocate the specified label/SID").

## 5. Security Considerations

No additional security measure is required.

## 6. IANA Considerations

### 6.1. TE-PATH-BINDING TLV

IANA is requested to allocate a new TLV type (recommended value is 31) for TE-PATH-BINDING TLV specified in this document.

This document requests that a registry is created to manage the value of the Binding Type field in the TE-PATH-BINDING TLV.

Value	Description	Reference
0	MPLS Label	This document

### 6.2. PCEP Error Type and Value

IANA is requested to allocate code-points in the PCEP-ERROR Object Error Types and Values registry for the following new error-values:

Error-Type	Meaning
-----	-----

TBD (recommended 22) Binding SID failure:

Error-value = TBD (recommended 1):	Invalid SID
Error-value = TBD (recommended 2):	Unable to allocate binding SID

## 7. Acknowledgements

We like to thank Milos Fabian for his valuable comments.

## 8. Normative References

[I-D.ietf-isis-segment-routing-extensions]  
Previdi, S., Filsfils, C., Bashandy, A., Gredler, H., Litkowski, S., Decraene, B., and J. Tantsura, "IS-IS Extensions for Segment Routing", [draft-ietf-isis-segment-routing-extensions-06](#) (work in progress), December 2015.

Sivabalan, et al.	Expires September 22, 2016	[Page 7]
-------------------	----------------------------	----------

---

Internet-Draft	Binding Label/Segment-ID	March 2016
----------------	--------------------------	------------

[I-D.ietf-ospf-segment-routing-extensions]



Psenak, P., Previdi, S., Filsfils, C., Gredler, H., Shakir, R., Henderickx, W., and J. Tantsura, "OSPF Extensions for Segment Routing", [draft-ietf-ospf-segment-routing-extensions-07](#) (work in progress), March 2016.

[I-D.ietf-pce-pce-initiated-lsp]

Crabbe, E., Minei, I., Sivabalan, S., and R. Varga, "PCEP Extensions for PCE-initiated LSP Setup in a Stateful PCE Model", [draft-ietf-pce-pce-initiated-lsp-05](#) (work in progress), October 2015.

[I-D.ietf-pce-segment-routing]

Sivabalan, S., Medved, J., Filsfils, C., Crabbe, E., Lopez, V., Tantsura, J., Henderickx, W., and J. Hardwick, "PCEP Extensions for Segment Routing", [draft-ietf-pce-segment-routing-06](#) (work in progress), August 2015.

[I-D.ietf-pce-stateful-pce]

Crabbe, E., Minei, I., Medved, J., and R. Varga, "PCEP Extensions for Stateful PCE", [draft-ietf-pce-stateful-pce-14](#) (work in progress), March 2016.

[I-D.keyupate-idr-bgp-prefix-sid]

Patel, K., Previdi, S., Filsfils, C., Sreekantiah, A., Ray, S., and H. Gredler, "Segment Routing Prefix SID extensions for BGP", [draft-keyupate-idr-bgp-prefix-sid-05](#) (work in progress), July 2015.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.

[RFC4206] Kompella, K. and Y. Rekhter, "Label Switched Paths (LSP) Hierarchy with Generalized Multi-Protocol Label Switching (GMPLS) Traffic Engineering (TE)", [RFC 4206](#), DOI 10.17487/RFC4206, October 2005, <<http://www.rfc-editor.org/info/rfc4206>>.

[RFC5440] Vasseur, JP., Ed. and JL. Le Roux, Ed., "Path Computation Element (PCE) Communication Protocol (PCEP)", [RFC 5440](#), DOI 10.17487/RFC5440, March 2009, <<http://www.rfc-editor.org/info/rfc5440>>.

[RFC5462] Andersson, L. and R. Asati, "Multiprotocol Label Switching (MPLS) Label Stack Entry: "EXP" Field Renamed to "Traffic Class" Field", [RFC 5462](https://www.rfc-editor.org/info/rfc5462), DOI 10.17487/RFC5462, February 2009, <<http://www.rfc-editor.org/info/rfc5462>>.

#### Authors' Addresses

Siva Sivabalan  
Cisco Systems, Inc.  
2000 Innovation Drive  
Kanata, Ontario K2K 3E8  
Canada

Email: [msiva@cisco.com](mailto:msiva@cisco.com)

Clarence Filsfils  
Cisco Systems, Inc.  
Pegasus Parc  
De kleetlaan 6a, DIEGEM BRABANT 1831  
BELGIUM

Email: [cfilsfil@cisco.com](mailto:cfilsfil@cisco.com)

Stefano Previdi  
Cisco Systems, Inc.  
Via Del Serafico, 200  
Rome, Rome 00142  
Italy

Email: [sprevidi@cisco.com](mailto:sprevidi@cisco.com)

Jeff Tantsura  
Ericsson  
300 Holger Way  
San Jose, CA 95134  
USA

Email: [jeff.tantsura@ericsson.com](mailto:jeff.tantsura@ericsson.com)

---

Internet-Draft

Binding Label/Segment-ID

March 2016

Jonathan Hardwick  
Metaswitch Networks  
100 Church Street  
Enfield, Middlesex  
UK

Email: Jonathan.Hardwick@metaswitch.com

Mohan Nanduri  
Microsoft Corporation  
One Microsoft Way  
Redmond, WA 98052  
USA

Email: mnanduri@microsoft.com

