

MPLS
Internet-Draft
Intended status: Informational
Expires: 7 July 2022

H. Song, Ed.
Futurewei Technologies
Z. Li
T. Zhou
Huawei
L. Andersson
Bronze Dragon Consulting
3 January 2022

Options for MPLS Extension Header Indicator
draft-song-mpls-eh-indicator-04

Abstract

The intention of this document is to enumerate and describe the candidate schemes that can be used to indicate the presence of the MPLS extension header(s) following the MPLS label stack. After a careful evaluation of these options by comparing their pros and cons, it is expected that one should be chosen as the final standard scheme for MPLS extension header indicator.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)][RFC8174] when, and only when, they appear in all capitals, as shown here.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 7 July 2022.

Internet-Draft

MPLS Extension Header Indicator

January 2022

Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Revised BSD License.

Table of Contents

1.	Introduction	2
2.	Dedicated Extension Header Label	3
2.1.	Special Purpose Label	3
2.2.	Extension Label plus an Extended Special Purpose Label .	4
3.	Generic Associated Channel Extension	4
3.1.	GAL and Associated Channel Header	4
3.2.	GAL and a Different Nibble Value	5
4.	Extend MPLS Entropy Label	6
5.	Configured FEC Labels	7
6.	Summary	7
7.	Considerations of EHI	9
8.	Security Considerations	9
9.	IANA Considerations	9
10.	Contributors	9
11.	Acknowledgments	9
12.	References	9
12.1.	Normative References	9
12.2.	Informative References	10
	Authors' Addresses	10

[1.](#) Introduction

The document [[I-D.song-mpls-extension-header](#)] presents the motivation, specification, and use cases of MPLS Extension Header (EH). An indicator is needed in the MPLS label stack to indicate the presence of the extension header(s). Multiple options are possible for this purpose. As the discussion progresses, more options could

emerge.

In this document, we propound three categories of methods which can be further partitioned into five unique schemes. Four of them use explicit data plane encoding to indicate the EH and the last one

implies the EH through control plane configuration. This document details and compares these schemes, in order to foster further discussions until a final decision is made.

[2.](#) Dedicated Extension Header Label

A straightforward method is to directly encode an Extension Header Label (EHL) in the MPLS label stack. Two derived schemes are as follows.

[2.1.](#) Special Purpose Label

A new special purpose label, EHL, can be used to indicate EHs. As specified in [[RFC7274](#)], so far eight special purpose label values are still left unsigned by IANA (which are 4 to 6 and 8 to 12). This single label scheme is elegant but arguably demands a scarce resource. We cannot rule out the possibility of requiring more than one label value to differentiate EH classes (e.g., Hop-by-Hop, End-to-End, or both). If this happens, it can only aggravate the situation.

Another benefit of this scheme is that an EHL can potentially be located anywhere in an MPLS label stack. It is easier and quicker for a router to figure out the existence of extension header(s) if the EHL is close to or at the top of the label stack. However, if there are legacy devices which can reach the EHL but do not recognize it in a network, then for backward compatibility, the EHL must be located at the bottom of the stack (i.e., only the MPLS tunnel ends and EHL-aware nodes will look up and process it).

The format of an EHL is the same as an MPLS label. The first 20-bit label value will be assigned by IANA. The BoS bit is used to indicate the location of the label. The other fields, CoS and TTL, currently have no use in the context of EHL. However, these two fields can potentially be used to encode other information. If such code points are open for other purpose, it will make the single EHL

idea more compelling. E.g., the EH category and/or other information, if needed, can be encoded in these fields, so that only one special label value is needed.

The following figure shows a potential scheme in which one bit from the CoS field ('H') is used to indicate the presence of HbH EHs in the packet. If 'H' bit is 0, it means no HbH EH follows so a P-router will not need to check the EH. The last 8 bits can be used to find the location of the extension headers (i.e., the first byte after the MPLS label stack). This information can help to avoid the scan of the label stack in case the extension headers need to be accessed.

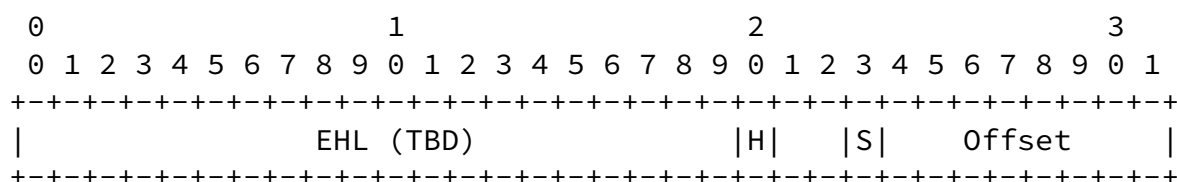


Figure 1: Special EHL with EH Category Encoding

Note that the Cos/TTL fields can be encoded to include more information. For example, in addition to indicate the EH, it can also indicate the presence of some other label-based services (e.g., EL). If we want to explore such possibilities, we have 11 bits in total at our disposal.

2.2. Extension Label plus an Extended Special Purpose Label

[RFC7274] specifies the Extension Label (XL) with the value of 15. An extended special purpose label (ESPL) following XL can be used as EHL. A large number of ESPL values are available for allocation. The XL+EHL scheme eases the concern on the reserved label space at the cost of one more label in the label stack.

Except for the fact that one more label is needed, The XL+EHL scheme shares the same property as the single special purpose EHL scheme.

3. Generic Associated Channel Extension

The similar "header extension" requirement for MPLS has led to some proposals before. A special Generic Associated Channel Label (GAL)

[RFC5586] with the value of 13 has been assigned to support the identification of an Associated Channel Header (ACH). We can extend this existing mechanism to encode the MPLS EH indicator.

3.1. GAL and Associated Channel Header

The ACH is located below the bottom label. It has a 16-bit Channel Type field which provides abundant space to encode the MPLS EH indicator. This scheme has the same header overhead as the XL+EHL scheme. The format is depicted in Figure 2.

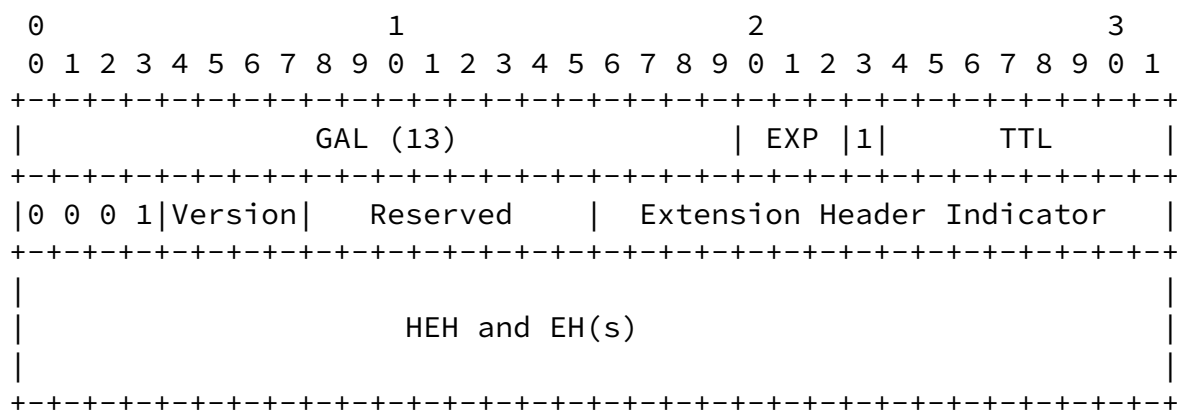


Figure 2: Associated Channel Header as Extension Header Indicator

GAL has several applications already yet its heritage also has several limitations. The GAL must be located at the bottom of a label stack for its chief use cases such as MPLS-TP. So a router needs to search the entire label stack for the BoS bit and check if the corresponding label is GAL. This can impact the performance when the label stack is deep. A more serious concern is that [RFC5586] states that GAL+ACH MUST NOT be used to transport user traffic and an ACH is supposed to be followed by a non-service payload.

None of these is insurmountable but it does require an overhaul of the existing RFC in order to extend the usage of GAL.

3.2. GAL and a Different Nibble Value

To avoid changing the established semantics of ACH, a variation can be used. ACH starts with a nibble value "0001". A different nibble value may be used to redefine the remaining part of the word. The idea has been exploited by [[I-D.guichard-sfc-mpls-metadata](#)] to define a Metadata Channel Header (MCH) with the leading nibble value "0000". Similarly, we can use another nibble value (e.g., "0010") to define a new header, namely the MPLS Extension Header Indicator (EHI).

The format of the GAL and EHI is depicted in Figure 3.

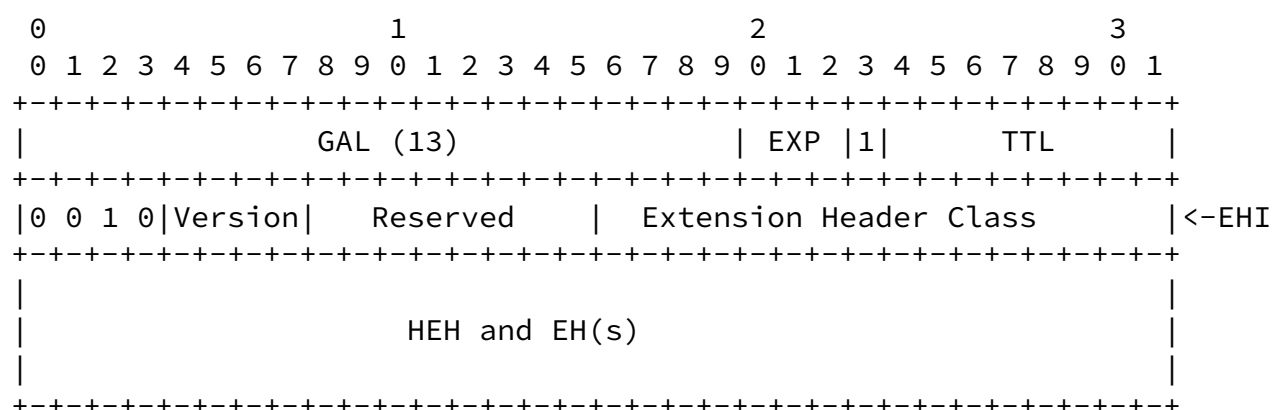


Figure 3: Extension Header Indicator Format

The Extension Header Class field in EHI is used to differentiate the

extension headers. Potentially there are three classes: Hop-by-Hop (HbH), End-to-End (E2E), or both. If finally we decide to not differentiate the extension headers, we have the opportunity to merge the HEH (see [[I-D.song-mpls-extension-header](#)] for details) into EHI, so we can reduce the header overhead by four bytes. The header format is depicted in Figure 4.


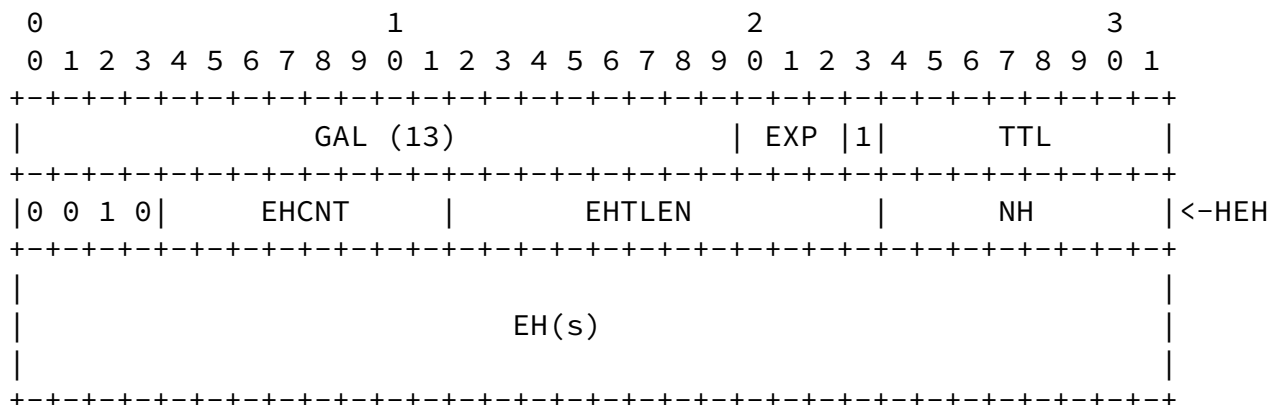


Figure 4: Merge HEH to EHI

4. Extend MPLS Entropy Label

Instead of introducing a new SPL as the EH indicator, we can piggyback the indicator in some existing SPL to avoid claiming extra SPL resource and save a label overhead. The best candidate is the entropy label (EL) [[RFC6790](#)]. If we can make EL default for every MPLS packet, we can encode the EH indicator in the unused ELI/EL label fields such as CoS and TTL.

In Figure 5 we show a possible encoding method, in which the first bit of the CoS field in ELI is used to indicate the presence of EH and the TTL field in ELI can be used to indicate the location of the EH. Note that the CoS field of the EL can also be used to encode other information, if necessary.



No.	Description	Pros and Cons
1	Special purpose EHL	<ul style="list-style-type: none"> + Single label + Location freedom - Need standard extension - Use scarce resource
2	XL(15) + EHL	<ul style="list-style-type: none"> + Location freedom + Established mechanism + Abundant resource - One extra label than Option 1 - Need standard extension
3	GAL + ACH with channel type extension	<ul style="list-style-type: none"> + Reuse existing mechanism + Abundant resource - Label location limitation - One more word than Option 1 - Not for user traffic - Need standard extension/update
4	GAL + another nibble value to indicate EHs (e.g., "0010")	<ul style="list-style-type: none"> + No change to ACH semantics + Potential overhead saving - Label location limitation - Hack scarce resource (nibble) - Need standard extension
5	Extend ELI/EL	<ul style="list-style-type: none"> + No need for new label - Need standard update - Need to make EL mandatory - One extra label than Option 1
6	FEC label as EH indicator	<ul style="list-style-type: none"> + No need for header standard - Complex control plane - Cross-domain interoperability - Label space issue - Not for incremental deployment

Figure 6: Potential Schemes for MPLS Extension Headers

Basically we have three groups of solutions. The scheme 1 and 2 introduce new labels, the scheme 3, 4, and 5 extend the existing solutions, and the scheme 6 relies on the control plane. Through comprehensive considerations on the pros and cons of each scheme, we expect a working group consensus can be reached to pick the final winner.

[7.](#) Considerations of EHI

The existence of Extension Headers will make the ECMP based on inner IP packet header impossible or harder. If legacy routers need to conduct this kind of ECMP, the process either fails or generates unexpected results. EH-aware routers can do this kind of ECMP but they need to skip all the EHs in order to access the inner packet header which may not be efficient (we make provision in HEH to help accelerate this process). In this case, the Entropy Label (EL) is preferred for ECMP. The Entropy Label Indicator (ELI) and EL should be put in front of the EHI to avoid confusing the legacy routers.

[8.](#) Security Considerations

TBD

[9.](#) IANA Considerations

If the EHL approach is adopted to indicate the presence of MPLS extension header(s), this document requests IANA to assign one or more new Special-Purpose MPLS Label Values from the Special-Purpose Multiprotocol Label Switching (MPLS) Label Values Registry of "Extension Header Label (EHL)".

[10.](#) Contributors

The other contributors of this document are listed as follows.

- * James Guichard
- * Stewart Bryant
- * Bruno Decraene

[11.](#) Acknowledgments

TBD.

[12.](#) References

[12.1.](#) Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

Internet-Draft

MPLS Extension Header Indicator

January 2022

- [RFC5586] Bocci, M., Ed., Vigoureux, M., Ed., and S. Bryant, Ed., "MPLS Generic Associated Channel", [RFC 5586](#), DOI 10.17487/RFC5586, June 2009, <<https://www.rfc-editor.org/info/rfc5586>>.
- [RFC6790] Kompella, K., Drake, J., Amante, S., Henderickx, W., and L. Yong, "The Use of Entropy Labels in MPLS Forwarding", [RFC 6790](#), DOI 10.17487/RFC6790, November 2012, <<https://www.rfc-editor.org/info/rfc6790>>.
- [RFC7274] Kompella, K., Andersson, L., and A. Farrel, "Allocating and Retiring Special-Purpose MPLS Labels", [RFC 7274](#), DOI 10.17487/RFC7274, June 2014, <<https://www.rfc-editor.org/info/rfc7274>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

12.2. Informative References

- [I-D.guichard-sfc-mpls-metadata]
Guichard, J., Pignataro, C., Spraggs, S., and S. Bryant, "Carrying Metadata in MPLS Networks", Work in Progress, Internet-Draft, [draft-guichard-sfc-mpls-metadata-00](#), 27 September 2013, <<https://www.ietf.org/archive/id/draft-guichard-sfc-mpls-metadata-00.txt>>.
- [I-D.song-mpls-extension-header]
Song, H., Li, Z., Zhou, T., Andersson, L., and Z. Zhang, "MPLS Extension Header", Work in Progress, Internet-Draft, [draft-song-mpls-extension-header-05](#), 10 July 2021, <<https://www.ietf.org/archive/id/draft-song-mpls-extension-header-05.txt>>.

Authors' Addresses

Haoyu Song (editor)
Futurewei Technologies

2330 Central Expressway
Santa Clara,
United States of America

Email: haoyu.song@futurewei.com

Song, et al.

Expires 7 July 2022

[Page 10]

Internet-Draft

MPLS Extension Header Indicator

January 2022

Zhenbin Li
Huawei
156 Beiqing Road
Beijing, 100095
P.R. China

Email: lizhenbin@huawei.com

Tianran Zhou
Huawei
156 Beiqing Road
Beijing, 100095
P.R. China

Email: zhoutianran@huawei.com

Loa Andersson
Bronze Dragon Consulting
Stockholm
Sweden

Email: loa@pi.nu

