

Network Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: September 5, 2014

C. Xie  
Q. Sun  
China Telecom  
Q. Sun  
Tsinghua University  
C. Zhou  
Huawei Technologies  
T. Tsou  
Huawei Technologies (USA)  
Z. Liu  
Tsinghua University  
March 4, 2014

**Radius Extension for Lightweight 4over6  
draft-sun-softwire-lw4over6-radext-01**

Abstract

lightweight 4over6(lw4over6) [[I-D.ietf-softwire-lw4over6](#)] is an extension to DS-Lite in which the amount of state maintained in lwAFTR has been reduced to per-subscriber-level. The lwB4 needs to be provisioned with the public IPv4 address and port set it is allowed to use. The DHCPv4 over DHCPv6 Transport [[I.D-ietf-dhc-dhcpv4-over-dhcpv6](#)] and Dynamic Host Configuration Protocol (DHCP) Option for Port Set [[I.D-sun-dhc-port-set-option](#)] can be used for lwB4 to provision with the public IPv4 address and port set.

However, in many networks, the configuration information may be stored in Authentication Authorization and Accounting (AAA) servers while user configuration is mainly from Broadband Network Gateway (BNG). This document defines a Remote Authentication Dial In User Service (RADIUS) attribute that carries lightweight 4over6 configuration information from AAA server to BNG.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any

time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 5, 2014.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1.](#) Introduction . . . . . [2](#)
- [2.](#) Terminology . . . . . [3](#)
- [3.](#) Lightweight 4over6 configuration process with RADIUS . . . . . [3](#)
- [4.](#) Attributes . . . . . [6](#)
  - [4.1.](#) lw4o6\_binding Attribute . . . . . [6](#)
- [5.](#) Table of attributes . . . . . [8](#)
- [6.](#) Security Considerations . . . . . [9](#)
- [7.](#) IANA Considerations . . . . . [9](#)
- [8.](#) Acknowledgements . . . . . [9](#)
- [9.](#) References . . . . . [9](#)
  - [9.1.](#) Normative References . . . . . [9](#)
  - [9.2.](#) Informative References . . . . . [10](#)
- Authors' Addresses . . . . . [10](#)

**1. Introduction**

Lightweight 4over6 (lw4over6) [[I-D.ietf-softwire-lw4over6](#)] defines a model for providing IPv4 access over an IPv6 network in which the Network Address Translation (NAT) function is performed by the Customer-Premises Equipment (CPE) instead of being centralized on a Carrier-Grade NAT (CGN). Lightweight 4over6 features keeping per-subscriber binding state in the service provider's network. This per-subscriber binding state is assigned by the provisioning system and should be synchronized between lwAFTRs. In lw4over6, there are multiple mechanisms to provision an lwB4 with the binding state,



including [I.D.ietf-dhc-dhcpv4-over-dhcpv6], [I-D.ietf-softwire-map-dhcp] , or [[I-D.ietf-pcp-port-set](#)], etc.

In many networks, user configuration information may be managed by AAA (Authentication, Authorization, and Accounting) servers. Current AAA servers communicate using the Remote Authentication Dial In User Service (RADIUS) [[RFC2865](#)] protocol. In a fixed line broadband network, the Broadband Network Gateways (BNGs) act as the access gateway of users. For lw4over6 case, the BNGs are assumed to embed a DHCPv4-over-DHCPv6 server function which allows them to locally handle any DHCPv4-over-DHCPv6 requests issued by hosts. The operators may per-configure subscriber's binding state in AAA server which then passes the information to a BNG and in turn populates the mapping of the subscribe.

This document defines a new RADIUS attribute that can be used in lightweight 4over6 to carry subscriber's binding state.

## **2. Terminology**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

Terminology defined in [[I-D.ietf-softwire-lw4over6](#)] is used extensively in this document.

## **3. Lightweight 4over6 configuration process with RADIUS**

The below Figure 1 illustrates how the RADIUS protocol and DHCPv4-over-DHCPv6 cooperate to provide lwB4 with the binding state.







AAA server on-demand, it should inform the lwAFTR with the subscriber's binding state using [I-D.zhou-dime-4over6-provisioning] or COA requests.

Figure 2 illustrates how the RADIUS protocol and DHCPv6 cooperate to provide lwB4 and lwAFTR with tunnel configuration information.

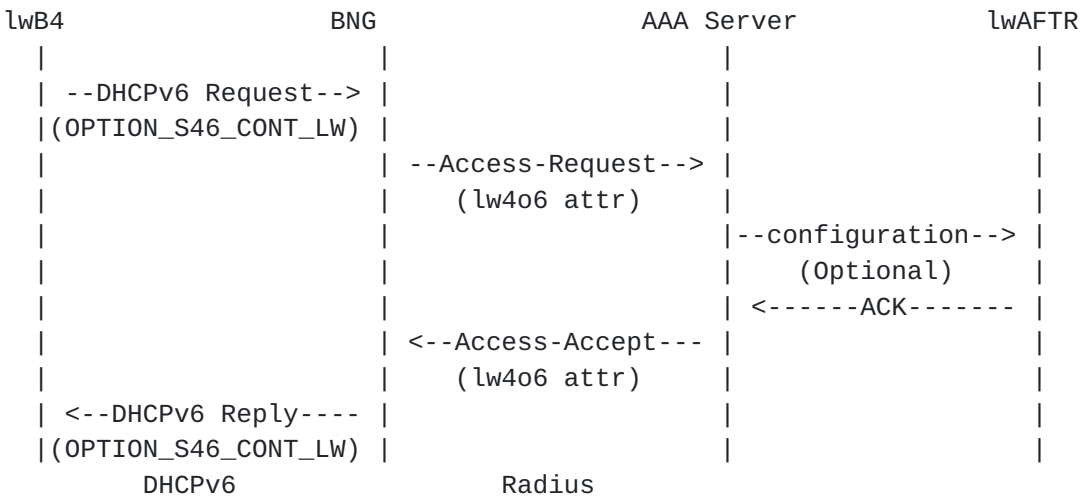


Figure 2: Lightweight 4over6 configuration process with RADIUS case 2

BNGs act as a RADIUS client and as a DHCPv6 server. Before the tunnel establishes, lwB4 MAY initiate a DHCPv6 Solicit message that includes an Option Request option[RFC3315] with OPTION\_S46\_CONT\_LW option defined in [I-D.ietf-software-map-dhcp]. When BNG receives the SOLICIT, it SHOULD initiates radius Access-Request message, in which the User-Name attribute (1) SHOULD be filled by the lwB4 MAC address, to the RADIUS server, the User-password attribute (2) SHOULD be filled by the shared lw4over6 password that has been preconfigured on the DHCPv6 server to get lw4over6 attribute.

If the authentication request is approved by the AAA server, AAA server will determine the IPv6 address, IPv4 address and Port Set for the subscriber. The subscriber's binding state should be synchronized between AAA server and lwAFTR. If the bindings are pre-configured statically in both AAA server and lwAFTR, the AAA server does not need to configure lwAFTR anymore. Otherwise, if the bindings are locally created in AAA server on-demand, it should inform the lwAFTR as mentioned above.

Similarly, BNGs can act as a RADIUS client and as a PCP server in case an lwB4 runs a PCP client (as depicted in Figure 3).










If the BNG includes the lw4o6\_binding attribute, but the AAA server does not recognize it, this attribute MUST be ignored by the AAA server.

If the BNG does not receive the lw4o6\_binding attribute in the Access-Accept message and there is the unified server in BNG is not configured to allocate the port-set by itself, the unified SHOULD not response and the tunnel can not be established.

When the Access-Request message is triggered by a DHCP Rebind message, if the binding attribute received in the Access-Accept message is different from the currently used one for that session, the BNG MUST force the lwB4 to re-establish the tunnel using the new binding information received in the Access-Accept message.

The lw4o6\_binding Attribute is structured as follows:



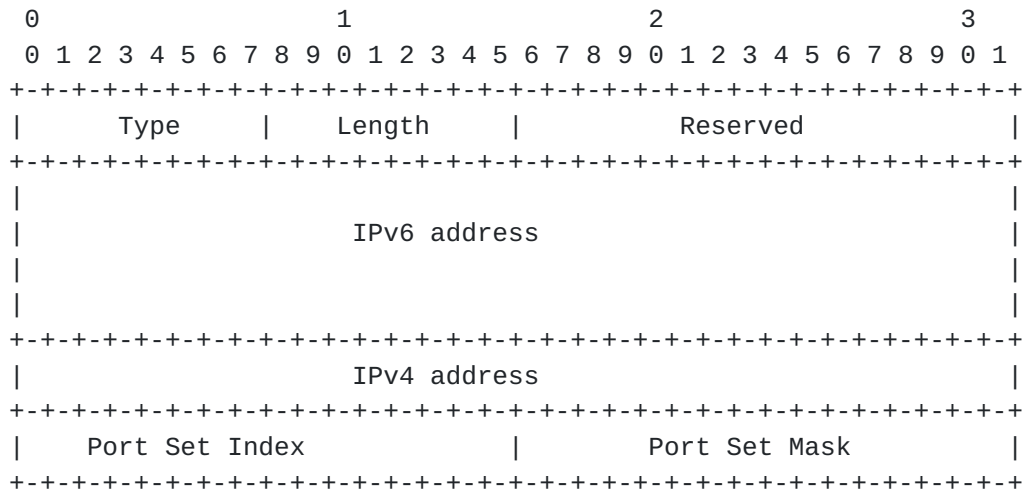

Type

TBD

Length

28

Port Set Index:

Port Set Index identifies a set of ports assigned to a device. The first k bits on the left of the 2-octet field is the Port Set Index value, with the rest of the field right padding zeros.

Port Set Mask:

Port Set Mask indicates the position of the bits used to build the mask. The first k bits on the left is padding ones while the remained (16-k) bits of the 2-octet field on the right is padding zeros.

IPv4 address

The translated IPv4 address for a subscriber.

IPv6 address

The IPv6 address for a subscriber.

Figure 4: Lightweight 4over6 Attribute

5. Table of attributes

The following table provides a guide to which attributes may be found in which kinds of packets, and in what quantity.



Request	Accept	Reject	Challenge	Accounting	#	Attribute
				Request		
0-1	0-1	0	0	0-1	TBD1	lw4o6-binding
0-1	0-1	0	0	0-1	1	User-Name
0-1	0	0	0	0	2	User-Password
0-1	0-1	0	0	0-1	6	Service-Type
0-1	0-1	0-1	0-1	0-1	80	Message-Authenticator

The following table defines the meaning of the above table entries.

- 0     This attribute MUST NOT be present in packet.
- 0+   Zero or more instances of this attribute MAY be present in packet.
- 0-1   Zero or one instance of this attribute MAY be present in packet.
- 1     Exactly one instance of this attribute MUST be present in packet.

Figure 5: Lightweight 4over6 Attribute Table

## 6. Security Considerations

TO BE COMPLETED

## 7. IANA Considerations

This document has no IANA actions.

## 8. Acknowledgements

The authors would like to thank the following individuals who have participated in the drafting, review, and discussion of this memo: TO BE COMPLETED

## 9. References

### 9.1. Normative References

- [I-D.ietf-pcp-port-set] Sun, Q., Boucadair, M., Sivakumar, S., Zhou, C., Tsou, T., and S. Perreault, "Port Control Protocol (PCP) Extension for Port Set Allocation", [draft-ietf-pcp-port-set-00](#) (work in progress), March 2013.





**[I-D.ietf-softwire-lw4over6]**

Cui, Y., Sun, Q., Boucadair, M., Tsou, T., Lee, Y., and I. Farrer, "Lightweight 4over6: An Extension to the DS-Lite Architecture", [draft-ietf-softwire-lw4over6-00](#) (work in progress), April 2013.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[RFC3484] Draves, R., "Default Address Selection for Internet Protocol version 6 (IPv6)", [RFC 3484](#), February 2003.

[RFC6334] Hankins, D. and T. Mrugalski, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6) Option for Dual-Stack Lite", [RFC 6334](#), August 2011.

[RFC6887] Wing, D., Cheshire, S., Boucadair, M., Penno, R., and P. Selkirk, "Port Control Protocol (PCP)", [RFC 6887](#), April 2013.

**[9.2. Informative References](#)**

[RFC6333] Durand, A., Droms, R., Woodyatt, J., and Y. Lee, "Dual-Stack Lite Broadband Deployments Following IPv4 Exhaustion", [RFC 6333](#), August 2011.

**Authors' Addresses**

Chongfeng Xie  
China Telecom  
P.R.China

Phone: 86 10 58552116  
Email: xiechf@ctbri.com.cn

Qiong Sun  
China Telecom  
P.R.China

Phone: 86 10 58552936  
Email: sunqiong@ctbri.com.cn



Qi Sun  
Tsinghua University  
Department of Computer Science, Tsinghua University  
Beijing 100084  
P.R.China

Phone: +86-10-6278-5822  
Email: sunqibupt@gmail.com

Cathy Zhou  
Huawei Technologies  
Bantian, Longgang District  
Shenzhen 518129  
P.R. China

Email: cathy.zhou@huawei.com

Tina Tsou  
Huawei Technologies (USA)  
2330 Central Expressway  
Santa Clara, CA 95050  
USA

Phone: +1 408 330 4424  
Email: Tina.Tsou.Zouting@huawei.com

ZiLong Liu  
Tsinghua University  
Beijing 100084  
P.R.China

Phone: +86-10-6278-5822  
Email: liuzilong8266@126.com

