

ICN Research Group
Internet-Draft
Intended status: Informational

Prakash Suthar
Milan Stolic
Anil Jangam
Cisco Systems
Dirk Trossen
InterDigital Inc.
November 12, 2017

Expires: May 16, 2018

Native Deployment of ICN in LTE, 4G Mobile Networks
draft-suthar-icnrg-icn-lte-4g-04

Abstract

LTE, 4G mobile networks use IP based transport for control plane to establish the data session and user plane for actual data delivery. In existing architecture, IP transport used in user plane is not optimized for data transport, which leads to an inefficient data delivery. IP unicast routing from server to clients is used for delivery of multimedia content to User Equipment (UE), where each user gets a separate stream. From bandwidth and routing perspective this approach is inefficient. Multicast and broadcast technologies have emerged recently for mobile networks, but their deployments are very limited or at an experimental stage due to complex architecture and radio spectrum issues. ICN is a rapidly emerging technology with built-in features for efficient multimedia data delivery, however majority of the work is focused on fixed networks. The main focus of this draft is on native deployment of ICN in cellular mobile networks by using ICN in 3GPP protocol stack. ICN has an inherent capability for multicast, anchorless mobility, security and it is optimized for data delivery using local caching at the edge. The native ICN (it runs directly on cellular layer 2 protocols like PDCP/RLC/MAC/L1) or dual stack (along with IP) deployment will bring all inherent benefits and help in optimizing mobile networks.

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference

material or to cite them other than as "work in progress".

The list of current Internet-Drafts can be accessed at

<http://www.ietf.org/lid-abstracts.html>

The list of Internet-Draft Shadow Directories can be accessed at

<http://www.ietf.org/shadow.html>

Copyright and License Notice

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1	Introduction	4
1.1	Terminology	4
1.2	3GPP Terminology and Concepts	4
2	LTE, 4G Mobile Network	8
2.1	Network Overview	8
2.2	QoS Challenges	9
2.3	Data Transport Using IP	10
2.4	Virtualizing Mobile Networks	11
3	Data Transport Using ICN	11
4	ICN Deployment in 4G and LTE Networks	14
4.1	General ICN Deployment Considerations	14
4.2	ICN Deployment Scenarios	14
4.3	ICN Deployment in LTE Control Plane	17
4.4	ICN Deployment in LTE User Plane	18
4.4.1	Dual stack ICN Deployments in UE	19
4.4.2	Native ICN Deployments in UE	22
4.5	ICN Deployment in eNodeB	23
4.6	ICN Deployment in Packet Core (SGW, PGW) Gateways	24
5	Security Considerations	26
6	Summary	27

7	References	29
7.1	Normative References	29
7.2	Informative References	30
	Authors' Addresses	31

1 Introduction

LTE mobile technology is built as all-IP network. It uses IP routing protocols such as OSPF, ISIS, BGP etc. to establish network routes to route the data traffic to end user's device. Stickiness of IP address to a device is the key to get connected to a mobile network and the same IP address is maintained through the session until the device gets detached or moves to another network.

One of the key protocols used in 4G and LTE networks is GPRS Tunneling protocol (GTP). GTP, DIAMETER and other protocols are built on top of IP. One of the biggest challenges with IP based routing is that it is not optimized for data transport although it is the most efficient communication protocol. By native implementation of Information Centric Networking (ICN) in 3GPP, we can re-architect mobile network and optimize its design for efficient data transport by leveraging the caching feature of ICN. ICN also offers an opportunity to leverage inherent capabilities of multicast, anchorless mobility management, and authentication. This draft provides insight into different options for deploying ICN in mobile networks and how they impact mobile providers and end-users.

1.1 Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

1.2 3GPP Terminology and Concepts

Access Point Name

The Access Point Name (APN) is a Fully Qualified Domain Name (FQDN) and resolves to a set of gateways in an operator's network. APN identifies the packet data network (PDN) that a mobile data user wants to communicate with. In addition to identifying a PDN, an APN may also be used to define the type of service, QoS and other logical entities inside GGSN, PGW.

Control Plane

The control plane carries signaling traffic and is responsible for routing between eNodeB and MME, MME and HSS, MME and SGW, SGW and PGW etc. Control plane signaling is required to authenticate and authorize UE and establish mobility session with mobile gateways (SGW/PGW). Functions of the control plane also include system configuration and management.

Dual Address PDN/PDP Type

The dual address Packet Data Network/Packet Data Protocol (PDN/PDP) Type (IPv4v6) is used in 3GPP context in many cases as a synonym for dual-stack, i.e. a connection type capable of serving both IPv4 and IPv6 simultaneously.

eNodeB

The eNodeB is a base station entity that supports the Long-Term Evolution (LTE) air interface.

Evolved Packet Core

The Evolved Packet Core (EPC) is an evolution of the 3GPP GPRS system characterized by a higher-data-rate, lower-latency, packet-optimized system. The EPC comprises some of the sub components of the EPS core such as Mobility Management Entity (MME), Serving Gateway (SGW), Packet Data Network Gateway (PDN-GW), and Home Subscriber Server (HSS).

Evolved Packet System

The Evolved Packet System (EPS) is an evolution of the 3GPP GPRSsystem characterized by a higher-data-rate, lower-latency, packet-optimized system that supports multiple Radio Access Technologies (RATs). The EPS comprises the EPC together with the Evolved Universal Terrestrial Radio Access (E-UTRA) and the Evolved Universal Terrestrial Radio Access Network (E-UTRAN).

Evolved UTRAN The Evolved UTRAN (E-UTRAN) is a communications network, sometimes referred to as 4G, and consists of eNodeBs (4G base stations). The E-UTRAN allows connectivity between the User Equipment and the core network.

GPRS Tunnelling Protocol

The GPRS Tunnelling Protocol (GTP) [TS.29060] [TS.29274] [TS.29281] is a tunnelling protocol defined by 3GPP. It is a network-based mobility protocol and is similar to Proxy Mobile IPv6 (PMIPv6). However, GTP also provides functionality beyond mobility, such as in-band signaling related to Quality of Service (QoS) and charging, among others.

Gateway GPRS Support Node

The Gateway GPRS Support Node (GGSN) is a gateway function in the

GPRS and 3G network that provides connectivity to the Internet or other PDNs. The host attaches to a GGSN identified by an APN assigned to it by an operator. The GGSN also serves as the topological anchor for addresses/prefixes assigned to the User Equipment.

General Packet Radio Service

The General Packet Radio Service (GPRS) is a packet-oriented mobile data service available to users of the 2G and 3G cellular communication systems -- the GSM -- specified by 3GPP.

Home Subscriber Server

The Home Subscriber Server (HSS) is a database for a given subscriber and was introduced in 3GPP Release-5. It is the entity containing the subscription-related information to support the network entities actually handling calls/sessions.

Mobility Management Entity

The Mobility Management Entity (MME) is a network element that is responsible for control-plane functionalities, including authentication, authorization, bearer management, layer-2 mobility, etc. The MME is essentially the control-plane part of the SGSN in the GPRS. The user-plane traffic bypasses the MME.

Public Land Mobile Network

The Public Land Mobile Network (PLMN) is a network that is operated by a single administration. A PLMN (and therefore also an operator) is identified by the Mobile Country Code (MCC) and the Mobile Network Code (MNC). Each (telecommunications) operator providing mobile services has its own PLMN.

Policy and Charging Control

The Policy and Charging Control (PCC) framework is used for QoS policy and charging control. It has two main functions: flow-based charging, including online credit control and policy control (e.g., gating control, QoS control, and QoS signaling). It is optional to 3GPP EPS but needed if dynamic policy and charging control by means of PCC rules based on user and services are desired.

Packet Data Network

The Packet Data Network (PDN) is a packet-based network that

either belongs to the operator or is an external network such as the Internet or a corporate intranet. The user eventually accesses services in one or more PDNs. The operator's packet core networks are separated from packet data networks either by GGSNs or PDN Gateways (PGWs).

Serving Gateway

The Serving Gateway (SGW) is a gateway function in the EPS, which terminates the interface towards the E-UTRAN. The SGW is the Mobility Anchor point for layer-2 mobility (inter-eNodeB handovers). For each UE connected with the EPS, at any given point in time, there is only one SGW. The SGW is essentially the user-plane part of the GPRS's SGSN.

Packet Data Network Gateway

The Packet Data Network Gateway (PGW) is a gateway function in the Evolved Packet System (EPS), which provides connectivity to the Internet or other PDNs. The host attaches to a PGW identified by an APN assigned to it by an operator. The PGW also serves as the topological anchor for addresses/prefixes assigned to the User Equipment.

Packet Data Protocol Context

A Packet Data Protocol (PDP) context is the equivalent of a virtual connection between the User Equipment (UE) and a PDN using a specific gateway.

Packet Data Protocol Type

A Packet Data Protocol Type (PDP Type) identifies the used/allowed protocols within the PDP context. Examples are IPv4, IPv6, and IPv4v6 (dual-stack).

Serving GPRS Support Node

The Serving GPRS Support Node (SGSN) is a network element that is located between the radio access network (RAN) and the gateway (GGSN). A per-UE point-to-point (p2p) tunnel between the GGSN and SGSN transports the packets between the UE and the gateway.

Terminal Equipment

The Terminal Equipment (TE) is any device/host connected to the Mobile Terminal (MT) offering services to the user. A TE may communicate to an MT, for example, over the Point to Point

Protocol (PPP).

UE, MS, MN, and Mobile

The terms UE (User Equipment), MS (Mobile Station), MN (Mobile Node), and mobile refer to the devices that are hosts with the ability to obtain Internet connectivity via a 3GPP network. A MS is comprised of the Terminal Equipment (TE) and a Mobile Terminal (MT). The terms UE, MS, MN, and mobile are used interchangeably within this document.

User Plane

The user plane refers to data traffic and the required bearers for the data traffic. In practice, IP is the only data traffic protocol used in the user plane.

2. LTE, 4G Mobile Network

2.1 Network Overview

With the introduction of LTE, mobile networks moved to all-IP transport for all elements such as eNodeB, MME, SGW/PGW, HSS, PCRF, routing and switching etc. Although LTE network is data-centric, it has support for legacy Circuit Switch features like voice and SMS through transitional CS fallback and flexible IMS deployment [GRAYSON]. For each mobile device attached to the radio (eNodeB) there is a separate overlay tunnel (GPRS Tunneling Protocol, GTP) between eNodeB and Mobile gateways (i.e. SGW, PGW).

The GTP tunnel is used to carry user traffic between gateways and mobile devices so the data can only be distributed using unicast mechanism. It is also important to understand the overhead of a GTP and IPSec protocols because it has impact on the carried user data traffic. All mobile backhaul traffic is encapsulated using GTP tunnel, which has overhead of 8 bytes on top of IP and UDP [NGMN]. Additionally, if IPSec is used for security (which is often required if the Service provider is using a shared backhaul), it adds overhead based upon IPSec tunneling model (tunnel or transport), and encryption and authentication header algorithm used. If we factor Advanced Encryption Standard (AES) encryption with packet size the overhead can vary significantly [IPSEC2].

When any UE is powered up, it attaches to a mobile network based on its configuration and subscription. After successful attach procedure, UE registers with the mobile core network and IPv4 and/or IPv6 address is assigned. A default bearer is created for each UE and it is assigned to default Access Point Name (APN).

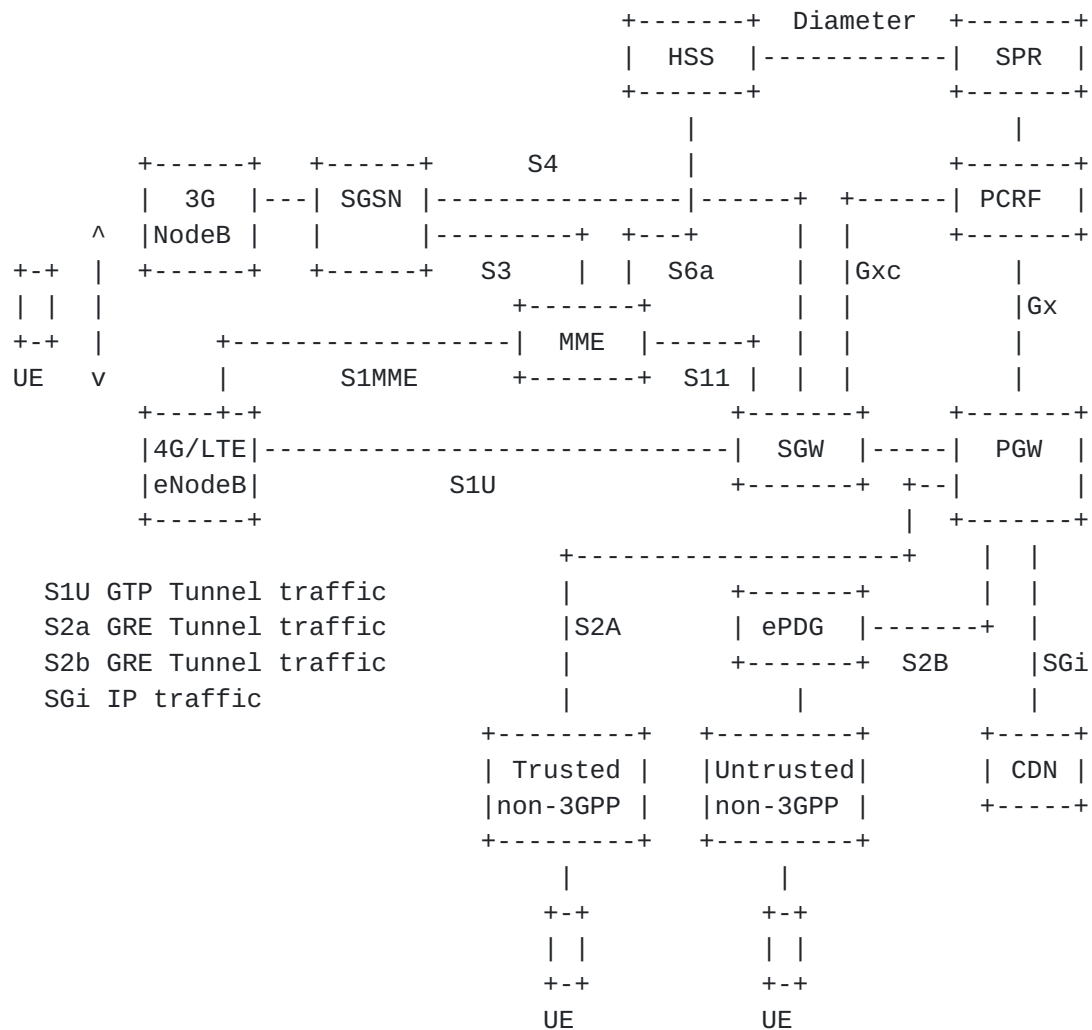


Figure-1: LTE, 4G Mobile Network Overview

The data delivered to mobile devices is unicast inside GTP tunnel. If we consider combined impact of GTP, IPsec and unicast traffic, the data delivery is not efficient. IETF has developed various header compression algorithms to reduce the overhead associated with IP packets. Some of techniques are robust header compression (ROHC) and enhanced compression of the real-time transport protocol (ECRTP) so that impact of overhead created by GTP, IPsec etc. is reduced to some extent [BROWER]. For commercial mobile networks, 3GPP has adopted different mechanisms for header compression to achieve efficiency in data delivery [TS25.323], and can be used in ICN as well.

2.2 QoS Challenges

During attach procedure, default bearer is created for each UE and it is assigned to the default Access Point Name (APN). The QoS values uplink and downlink bandwidth assigned during initial attach are

minimal. Additional dedicated bearer(s) with enhanced QoS parameters is established depending on the specific application needs.

While all traffic within a certain bearer gets the same treatment, QoS parameters supporting these requirements can be very granular in different bearers. These values vary for the control, management and user traffic, and depending on the application key parameters, such as latency, jitter (important for voice and other real-time applications), packet loss and queuing mechanism (strict priority, low-latency, fair etc.) can be very different.

Implementation of QoS for mobile networks is done at two stages: at content prioritization/marketing and transport marking, and congestion management. From the transport perspective, QoS is defined at layer 2 as class of service (CoS) and at layer 3 either as DiffServ code point (DSCP) or type of service (ToS). The mapping of CoS to DSCP takes place at layer 2/3 switching and routing elements. 3GPP has specified QoS Class Identifier (QCI) which represents different types of content and equivalent mapping to DSCP at transport layer [[TS23.203](#)] [[TS23.401](#)]; however, this again requires manual configuration at different elements and if there is misconfiguration at any place in the path it will not work properly.

In summary QoS configuration for mobile network for user plane (for user traffic) and transport in IP based mobile network is complex and it requires synchronization of parameters among different platforms. Normally QoS in IP is implemented using DiffServ, which uses hop-by-hop QoS configuration at each router. Any inconsistency in IP QoS configuration at routers in the forwarding path can result in poor subscriber experience (e.g. packet classified as high-priority can go to lower priority queue). By deploying ICN, we intend to enhance the subscriber experience using policy based configuration, which can be associated with the named contents [[ICNQoS](#)] at ICN forwarder. Further investigation is needed to understand how QoS in ICN can be implemented to meet the IP QoS requirements [[RFC4594](#)].

[2.3](#) Data Transport Using IP

The data delivered to mobile devices is unicast inside GTP tunnel from a eNodeB to a PDN gateway (PGW), as described in 3GPP specifications [[TS23.401](#)]. While the technology exists to address the issue of possible multicast delivery, there are many difficulties related to multicast protocol implementation on the RAN side of the network. Transport networks in the backhaul and core have addressed the multicast delivery long time ago and have implemented it in most cases in their multi-purpose integrated transport, but the RAN part of the network is still lagging behind due to complexities related to mobility of the clients, handovers, and the fact that the potential

gain to the Service Providers may not justify the investment. With that said, the data delivery in the mobility remains greatly unicast.

To ease the burden on the bandwidth of the SGi interface, caching is introduced in a similar manner as with many Enterprises. In the mobile networks, whenever possible, a cached data is delivered. Caching servers are placed at a centralized location, typically in the Service Provider's Data Center, or in some cases lightly distributed in the Packet Core locations with the PGW nodes close to the Internet and IP services access (SGi interface). This is a very inefficient concept because traffic has to traverse the entire backhaul path for the data to be delivered to the end-user. Other issues, such as out-of-order delivery contribute to this complexity and inefficiency but could be addressed at the IP transport level.

The data delivered to mobile devices is unicast inside a GTP tunnel. If we consider combined impact of GTP, IPSec and unicast traffic, the data delivery is not efficient. By deploying ICN, we intend to either terminate GTP tunnel at the edge by leveraging control and user plane separation or replace it with the native ICN protocols.


2.4 Virtualizing Mobile Networks

The Mobile packet core deployed in a major service provider network is either based on dedicated hardware or large capacity x86 platforms in some cases. With adoption of Mobile Virtual Network Operators (MVNO), public safety network, and enterprise mobility network, we need elastic mobile core architecture. By deploying mobile packet core on a commercially off the shelf (COTS) platform using virtualized infrastructure (NFVI) framework and end-to-end orchestration, we can simplify new deployments and provide optimized total cost of ownership (TCO).

While virtualization is growing and many mobile providers use hybrid architecture consisting of dedicated and virtualized infrastructures, the control and data delivery planes are still the same. There is also work underway to separate control plane and user plane so that the network can scale better. Virtualized mobile networks and network slicing with control and user plane separation provide mechanism to evolve GTP-based architecture to open-flow SDN-based signaling for LTE and proposed 5G. Some of early architecture work for 5G mobile technologies provides mechanism for control and user plane separation and simplifies mobility call flow by introduction of open-flow based signaling. This has been considered by 3GPP [[EPCCUPS](#)] and is also described in [[SDN5G](#)].

3. Data Transport Using ICN

For mobile devices, the edge connectivity to the network is between radio and a router or mobile edge computing (MEC) [[MECSPEC](#)] element. MEC has the capability of processing client requests and segregating control and user traffic at the edge of radio rather than sending all requests to the mobile gateway.

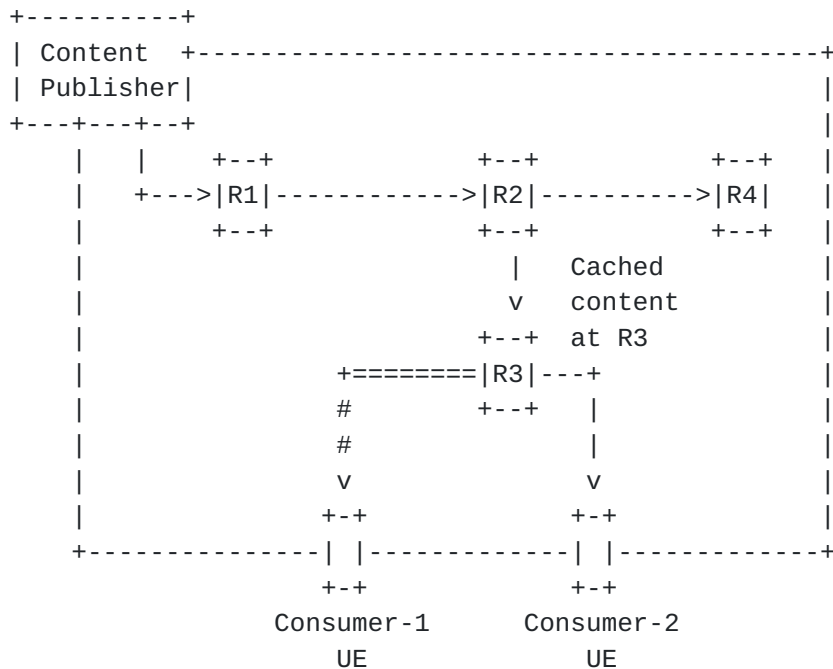

====> Content flow from cache
 ---> Content flow from publisher

Fig. 2. ICN Architecture

MEC transforms radio into an intelligent service edge that is capable of delivering services directly from the edge of the network, while providing the best possible performance to the client. MEC can be an ideal candidate for ICN forwarder in addition to its usual function of managing mobile termination. In addition to MEC, other transport elements, such as routers, can work as ICN forwarders.

Data transport using ICN is different compared to IP-based transport. It evolves the Internet infrastructure by introducing uniquely named data as a core Internet principle. Communication in ICN takes place between content provider (producer) and end user (consumer) as described in figure 2.

Every node in a physical path between a client and a content provider is called ICN forwarder or router, and it has the ability to route the request intelligently and also cache the content so that it can be delivered locally for subsequent request from any other client.

For mobile network, transport between a client and a content provider consists of radio network + mobile backhaul and IP core transport + Mobile Gateways + Internet + content data network (CDN).

In order to understand suitability of ICN for mobile networks, we will discuss the ICN framework describing protocols architecture and different types of messages, and then consider how we can use this in a mobile network for delivering content more efficiently. ICN uses two types of packets called "interest packet" and "data packet" as described in figure 3.

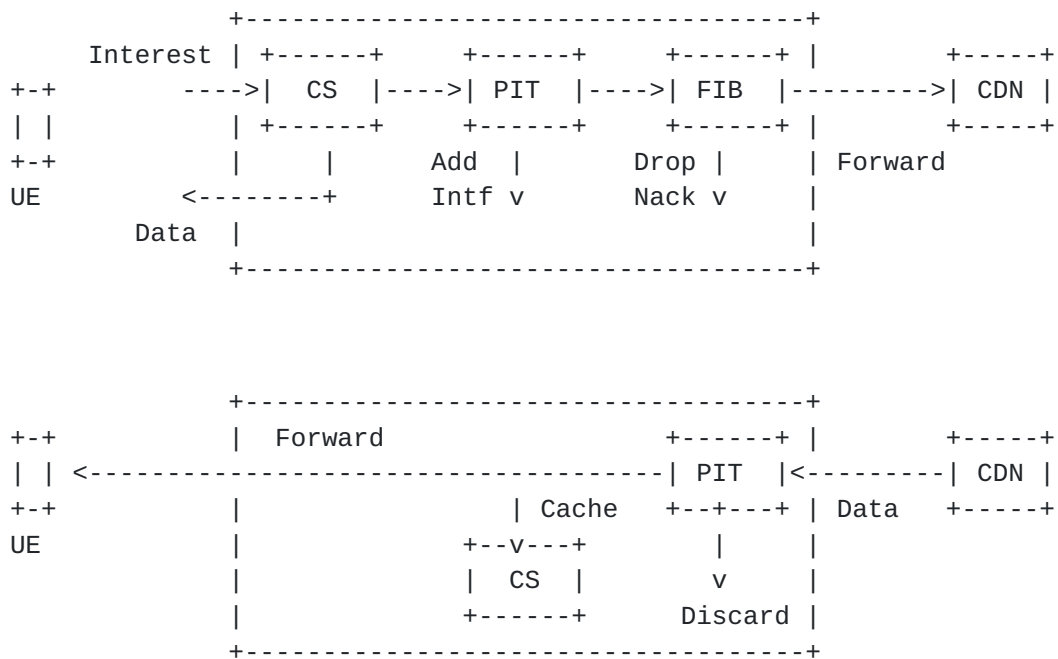


Fig. 3. ICN Interest, Data Packet and Forwarder

For LTE network, when a mobile device wants to get certain content, it will send an Interest message to the closest eNodeB. Interest packet follows the TLV format [CCNxTLV] and contains mandatory fields such as name of the content and nonce. Name and nonce together uniquely identify an Interest packet. Nonce is also used to detect looping Interest messages. Interest packet also contains optional fields such as selector and guider fields. Selectors provides a specific filtering action during matching and selection of the name prefixes. Guiders provides specific set of rules on how the Interest packet can be processed at the forwarder.

First ICN router will receive Interest packet and perform lookup if request for such content has come earlier from any other client. If yes, it is served from the local cache, otherwise request is forwarded to the next-hop ICN router. Each ICN router maintains three

data structures, namely Pending Interest Table (PIT), Forwarding Information Base (FIB), and Content Store (CS). The Interest packet travels hop-by-hop towards content provider. Once the Interest reaches the content provider it will return a Data packet containing information such as content name, signature, signed key and data.

Data packet travels in reverse direction following the same path taken by the interest packet so routing symmetry is maintained. Details about algorithms used in PIT, FIB, CS and security trust models are described in various resources [[CCN](#)], here we explained the concept and its applicability to the LTE network.

4. ICN Deployment in 4G and LTE Networks

4.1 General ICN Deployment Considerations

In LTE/4G mobile networks, both user and control plane traffic have to be transported from the edge to the mobile packet core via IP transport. The evolution of existing mobile packet core using CUPS [[TS23.714](#)] enables flexible network deployment and operation, by distributed deployment and the independent scaling between control plane and user plane functions - while not affecting the functionality of the existing nodes subject to this split.

In the CUPS architecture, there is an opportunity to shorten the path for user plane traffic by deploying offload nodes closer to the edge. This optimization allows for the introduction of ICN and amplifies its advantages. This section analyzes the potential impact of ICN on control and user plane traffic for centralized and disaggregate CUPS based mobile network architecture.

4.2 ICN Deployment Scenarios

Deployment of ICN provides an opportunity to further optimize the existing data transport in LTE/4G mobile networks. The various deployment options that ICN and IP provide are somewhat analogous to the deployment scenarios when IPv6 was introduced to inter operate with IPv4, except with ICN the whole IP stack is being replaced. We have reviewed [[RFC6459](#)] and analyzed the impact of ICN on control plane signaling and user plane data delivery. In general ICN can be deployed natively replacing IP transport (IPv4 and IPv6) or as an overlay protocol. Figure 4 describes a modified protocol stack to support ICN deployment scenarios.

As shown in figure 4, for applications running either in UE or in content provider system to use the new transport option, we propose a new transport convergence layer (TCL). This transport convergence layer helps determine what type of transport (e.g. ICN or IP), as

well as type of radio interface (e.g. LTE or WiFi or both), is used to send and receive the traffic based on preference e.g. content location, content type, content publisher, congestion, cost, quality of service etc. It helps to configure and decide the type of connection as well as the overlay mode (ICNoIP or IPoICN) between application and the protocol stack (IP or ICN) to be used.

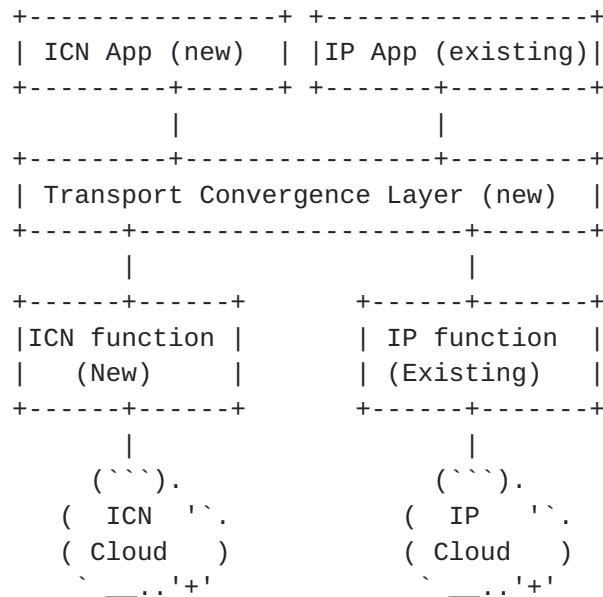


Fig. 4. IP/ICN Convergence and Deployment Scenarios

TCL can use a number of mechanisms for the selection of transport. It can use a per application configuration through a management interface, possibly even a user-facing setting realized through a user interface, similar to those used today that select cellular over WiFi being used for selected applications. In another option, it might use a software API, which an adapted IP application could use to specify e.g. an ICN transport for obtaining its benefits.

Another potential application of TCL is in implementation of network slicing, where it can have a slice management capability locally or it can interface to an external slice manager through an API [[GALIS](#)]. This solution can enable network slicing for IP and ICN transport selection from the UE itself. The TCL could apply slice settings to direct certain traffic (or applications) over one slice and others over another slice, determined by some form of 'slicing policy'. Slicing policy can be obtained externally from slice manager or configured locally on UE.

From the perspective of the applications either on UE or content provider, four different options are possible for the deployment of

ICN natively and/or with IP.

1. IP over IP

In this scenario UE uses applications tightly integrated with the existing IP transport infrastructure. In this option, the TCL has no additional function since the packets are directly forwarded using IP protocol stack, which in turn sends the packets over the IP transport.

2. ICN over ICN

Similar to case 1 above, ICN applications tightly integrate with the ICN transport infrastructure. The TCL has no additional responsibility since the packets are directly forwarded using ICN protocol stack, which in turn sends the packets over the ICN transport.

3. ICN over IP (ICNoIP)

In ICN over IP scenario, the underlying IP transport infrastructure is not impacted (i.e. ICN is implemented, as an IP overlay, between user equipment (UE) and content provider). IP routing is used from Radio Access Network (eNodeB) to mobile backhaul, IP core and Mobile Gateway (SGW/PGW). UE attaches to Mobile Gateway (SGW/PGW) using IP address. Also, the data transport between Mobile Gateway (SGW/PGW) and content publisher uses IP. Content provider is capable of serving content either using IP or ICN, based on UE request.

An alternative approach to implement ICN over IP is provided in Hybrid ICN [[HICN](#)], which implements ICN over IP by mapping of ICN names to the IPv4/IPv6 addresses.

Detailed deployment of use cases is described in [section 4.4](#). Application conveys the preference to the TCL, which in turn sends the ICN data packets using the IP transport.

4. IP over ICN (IPoICN)

H2020 project [H2020] provides an architectural framework for deployment of IP as an overlay over ICN protocol [IPICN]. Implementing IP services over ICN provides an opportunity leveraging benefit of ICN in the transport infrastructure and there is no impact on end devices (UE and access network) as they continue to use IP. IPoICN however, will require an inter-working function (IWF/Border Gateway) to translate various transport primitives such as transport of tunnel mode. IWF

function will provide a mechanism for protocol translation between IPoICN and native IP deployment for mobile network. After reviewing [IPICN], we understand and interpret that ICN is implemented in the transport natively; however, IP is implemented in UE, eNodeB, and Mobile gateway (SGW/PGW), which is also called as network attach point (NAP).

4.3 ICN Deployment in LTE Control Plane

In this section we analyze signaling messages which are required for different procedures, such as attach, handover, tracking area update etc. The goal of analysis is to see if there is any benefit to replace IP-based protocols with ICN for LTE signaling in the current architecture. It is important to understand the concept of point of attachment (POA). When UE connects to a network it has at least three POAs:

1. eNodeB managing location or physical POA
2. Authentication and Authorization (MME, HSS) managing identity or authentication POA
3. Mobile Gateways (SGW, PGW) managing logical or session management POA.

In current architecture IP transport is used for all the messages associated with Control Plane for mobility and session management. IP is embedded very deeply into these messages and TLV carrying additional attributes as a layer 3 transport. Physical POA in eNodeB handles both mobility and session management for any UE attached to 4G, LTE network. The number of mobility management messages between different nodes in an LTE network per signaling procedure are given below in figure 5.

Normally two types of UE devices attach to LTE network: SIM based (need 3GPP mobility protocol for authentication) or non-SIM based (which connect to WiFi network), and authentication is required for both of these device types. For non-SIM based devices, AAA is used for authentication. We do not propose to change UE authentication procedures for user data transport using ICN, or any other mobility management messaging. A separate study would be required to analyze impact of ICN on mobility management messages structures and flows. We are merely analyzing the viability of implementing ICN as a transport for Control plane messages.

It is important to note that even if MME and HSS do not support ICN transport, they still need to support UE capable of dual stack or native ICN. When UE initiates attach request using the identity as

ICN, MME must be able to parse that message and create a session. MME forwards UE authentication to HSS so HSS must be able to authenticate an ICN capable UE and authorize create session [[TS23.401](#)].

LTE Signaling Procedures	MME	HSS	SGW	PGW	PCRF
Attach	10	2	3	2	1
Additional default bearer	4	0	3	2	1
Dedicated bearer	2	0	2	2	1
Idle-to-connect	3	0	1	0	0
Connect-to-Idle	3	0	1	0	0
X2 handover	2	0	1	0	0
S1 handover	8	0	3	0	0
Tracking area update	2	0	0	0	0
Total	34	2	14	6	3

Fig. 5. Signaling Messages in LTE Gateways

Anchorless mobility [[ALM](#)] has made some important comments on how mobility management is done in ICN. Author comments about handling mobility without having a dependency on the core network function e.g. MME. However, location update to the core network would still be required to support some of the legal compliance requirements such as lawful intercept and emergency services.

The main advantage of ICN is in caching and reusing the content, which does not apply to the transactional signaling exchange. After analyzing LTE signaling call flows [[TS23.401](#)] and messages inter-dependencies [Fig 4], our recommendation is that it is not beneficial to deploy ICN for control plane and mobility management functions.

4.4 ICN Deployment in LTE User Plane

We will consider figure 1 to discuss different mechanisms to deploy ICN in mobile networks. In [section 4.2](#) we discussed generic deployment scenarios of ICN. In this section, we shall see the specific use cases of native ICN deployment in LTE user plane. We consider the following options:

1. Dual stack ICN deployment in UE
2. Native ICN Deployments in UE
3. ICN Deployment in eNodeB
4. ICN Deployment in mobile gateways (SGW/PGW)

4.4.1 Dual stack ICN Deployments in UE

The control and user plane communications in LTE, 4G mobile networks are specified in 3GPP documents [TS23.323] [TS23.203] [TS23.401]. It is important to understand that UE can be either consumer (receiving content) or publisher (pushing content for other clients). The protocol stack inside mobile device (UE) is complex as it has to support multiple radio connectivity access to eNodeB(s).

Figure 6 provides high level description of a protocol stack, where IP is defined at two layers: (1) at user plane communication, (2) Transport layer. User plane communication takes place between Packet Data Convergence Protocol (PDCP) and Application layer, whereas transport layer is at GTP protocol stack.

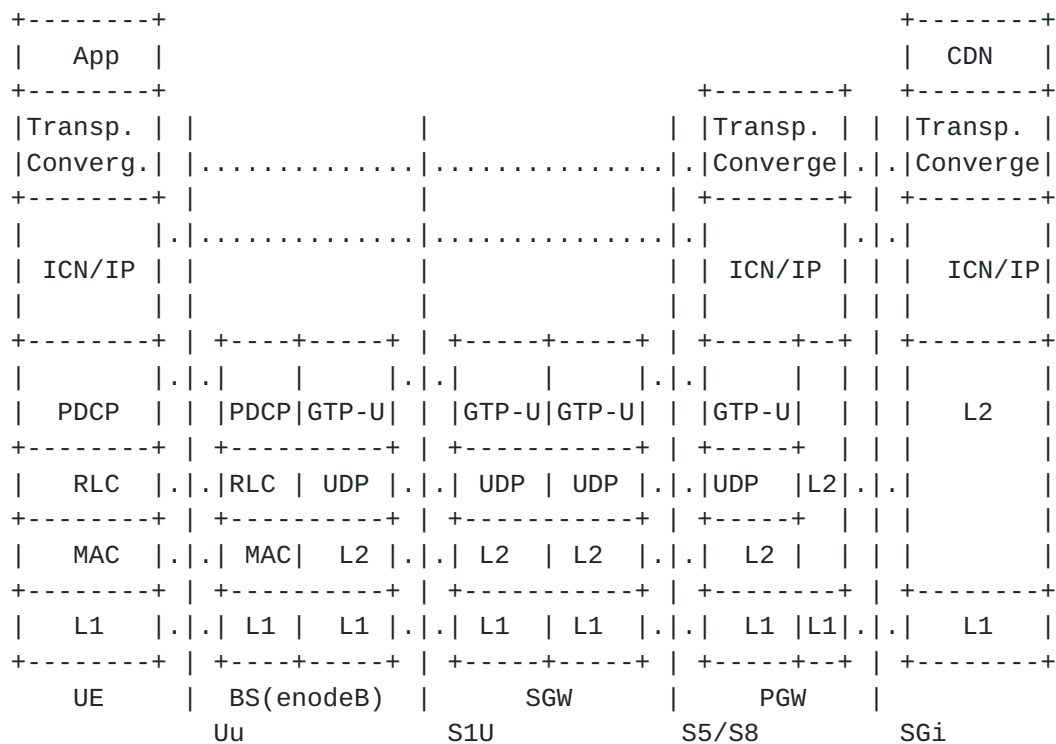


Fig. 6. Dual stack ICN Deployment in UE

The protocol interactions and impact of supporting tunneling of ICN packet into IP or to support ICN natively are described in figure 6 and figure 7 respectively.

The protocols and software stack used inside LTE capable UE support both 3G and LTE software interworking and handover. Latest 3GPP Rel.13 onward specification describes the use of IP and non-IP protocols to establish logical/session connectivity. We intend to leverage the non-IP protocol based mechanism to deploy ICN protocol

stack in UE as well as in eNodeB and mobile gateways (SGW, PGW).

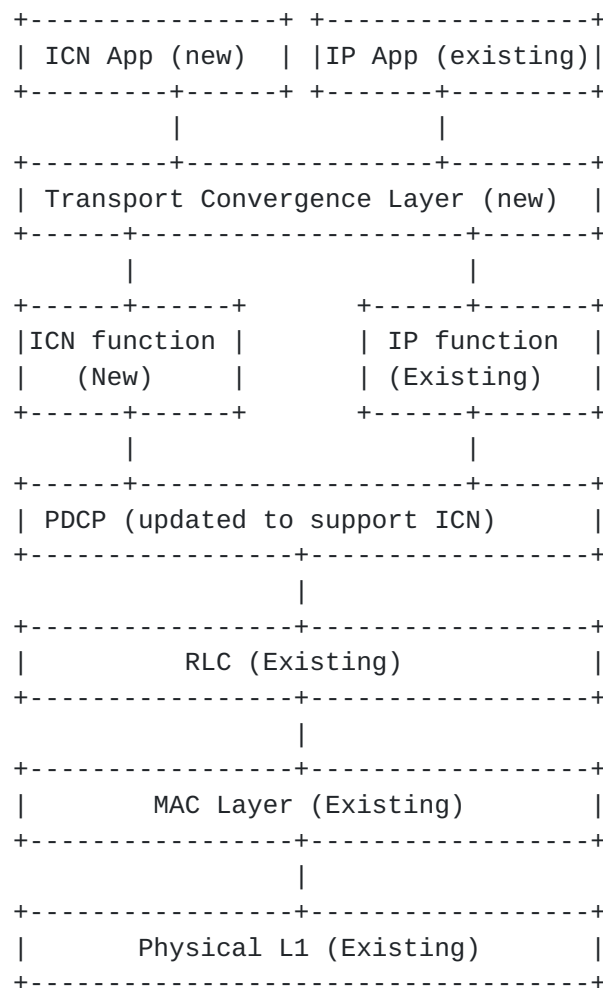


Fig. 7. Dual stack ICN protocol interactions

1. Existing application layer can be modified to provide options for new ICN based application and existing IP based applications. UE can continue to support existing IP based applications or host new applications developed either to support native ICN as transport, ICNoIP or IPoICN based transport. Application layer has the option of selecting either ICN or IP transport layer as well as radio interface to send and receive data traffic.

Our proposal is to provide a common Application Programming Interface (API) to the application developers such that there is no impact on the application development when they choose either ICN or IP transport for exchanging the traffic with the network. As mentioned in [section 4.2](#), the transport convergence layer (TCL) function handles the interaction of application

with the multiple transport options.

2. The transport convergence layer helps determine what type of transport (e.g. ICN or IP) as well as type of radio interface (e.g. LTE or WiFi or both), is used to send and receive the traffic. Application layer can make the decision to select a specific transport based on preference e.g. content location, content type, content publisher, congestion, cost, quality of service etc. There can be an Application Programming Interface (API) to exchange parameters required for transport selection. The southbound interactions of Transport Convergence Layer (TCL) will be either to IP or ICN at the network layer.
3. ICN function (forwarder) is introduced in parallel to the existing IP layer. ICN forwarder contains functional capabilities to forward ICN packets, e.g. Interest packet to eNodeB or response "data packet" from eNodeB to the application.
4. For dual stack scenario, when UE is not supporting ICN at transport layer, we use IP underlay to transport ICN packets. ICN function will use IP interface to send Interest and Data packets for fetching or sending data using ICN protocol function. This interface will use ICN overlay over IP using any overlay tunneling mechanism.
5. To support ICN at network layer in UE, PDCP layer has to be aware of ICN capabilities and parameters. PDCP is located in the Radio Protocol Stack in the LTE Air interface, between IP (Network layer) and Radio Link Control Layer (RLC). PDCP performs following functions [[TS36.323](#)]:
 - a) Data transport by listening to upper layer, formatting and pushing down to Radio Link Layer (RLC)
 - b) Header compression and decompression using ROHC (Robust Header Compression)
 - c) Security protections such as ciphering, deciphering and integrity protection
 - d) Radio layer messages associated with sequencing, packet drop detection and re-transmission etc.
6. No changes are required for lower layer such as RLC, MAC and Physical (L1) because they are not IP aware.

One key point to understand in this scenario is that ICN is deployed

as an overlay on top of IP.

4.4.2 Native ICN Deployments in UE

We propose to implement ICN natively in UE by modifying PDCP layer in 3GPP protocols. Figure 8 provides a high-level protocol stack description where ICN is used at two different layers:

1. at user plane communication
2. at transport layer

User plane communication takes place between PDCP and application layer, whereas transport layer is a substitute of GTP protocol. Removal of GTP protocol stack is significant change in mobile architecture because GTP is used not just for routing but for mobility management functions such as billing, mediation, policy enforcement etc.

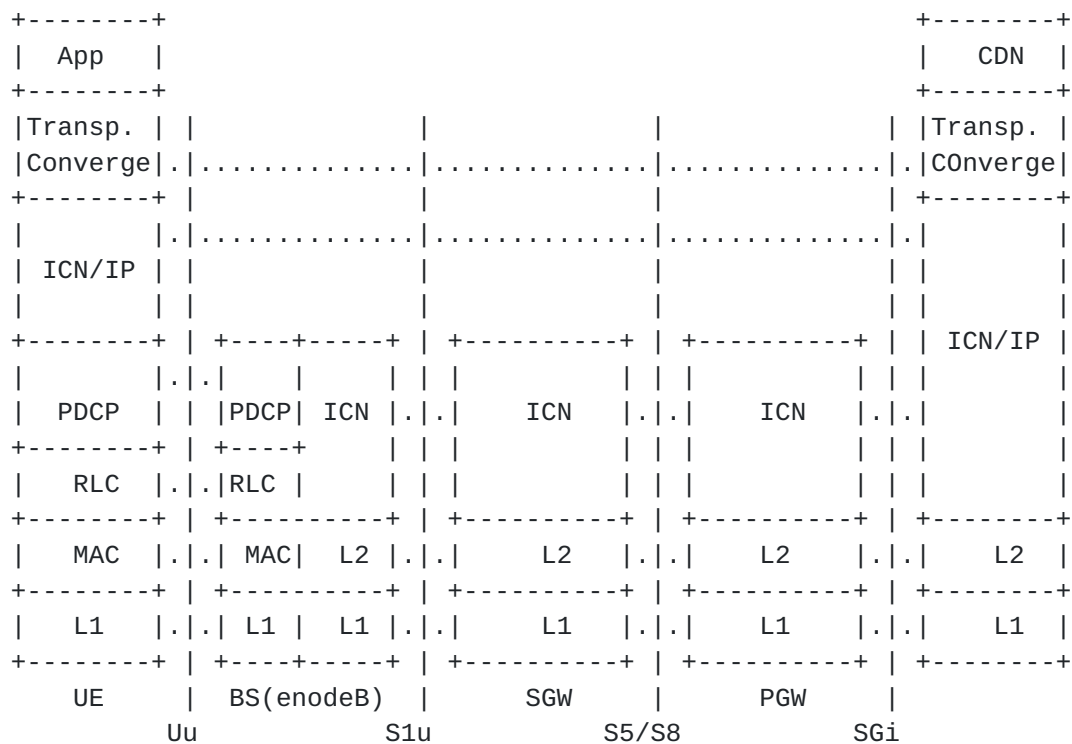


Fig. 8. Native ICN Deployment in UE

If we implement ICN natively in UE, communication between UE and eNodeB will change and also we will not need to tunnel user plane traffic from eNodeB to mobile packet core (SGW, PGW) using GTP tunnel.

For native ICN deployment, Application is configured to use ICN forwarder so there is no need for Transport Convergence. Also to support ICN at network layer in UE, we need to modify existing PDCP layer. PDCP layer has to be aware of ICN capabilities and parameters.

Native implementation will also provide opportunities to develop new use cases leveraging ICN capabilities such as seamless mobility, UE to UE content delivery using radio network without interactions with mobile gateways, etc.

4.5 ICN Deployment in eNodeB

eNodeB is physical point of attachment for UE, where radio protocols are converted into IP transport protocol as depicted in figure 7 and figure 8 for dual stack/overlay and native ICN respectively. When UE performs attach procedures, it is assigned an identity either as IP, dual stack (IP and ICN), or ICN. UE can initiate data traffic using any of three different options:

1. Native IP (IPv4 or IPv6)
2. Native ICN
3. Dual stack IP (IPv4/IPv6) or ICN

UE encapsulates user data transport request into PDCP layer and sends the information on air interface to eNodeB. eNodeB receives the information and using PDCP [TS 36.323], de-encapsulates air-interface messages and converts them to forward to core mobile gateways (SGW, PGW). In order to support ICN natively in eNodeB, it is proposed to provide transport convergence layer (TCL) capabilities in eNodeB (similar as provided in UE), which provides following functions:

1. It decides the forwarding strategy for user data request coming from UE. The strategy can make decision based on preference indicated by the application such as congestion, cost, quality of service, etc.
2. eNodeB to provide open Application Programming Interface (API) to external management systems, to provide capability to eNodeB to program the forwarding strategies.
3. eNodeB shall be upgraded to support three different types of transport: IP, ICN, and dual stack IP+ICN towards mobile gateways, as depicted in figure 9. It is also recommended to deploy IP and/or ICN forwarding capabilities into eNodeB for efficient transfer of data between eNodeB and mobile gateways. There can be four choices for forwarding data request towards

mobile gateways:

- a) Assuming eNodeB is IP-enabled and UE requests IP transfer, eNodeB forwards data over IP.
- b) Assuming eNodeB is ICN-enabled and UE requests ICN transfer, eNodeB forwards data over ICN.
- c) Assuming eNodeB is IP-enabled and UE requests ICN, eNodeB overlays ICN on IP and forwards the user plane traffic over IP.
- d) Assuming eNodeB is ICN-enabled and UE requests IP, eNodeB overlays IP on ICN and forwards the user plane traffic over ICN [[IPoICN](#)].

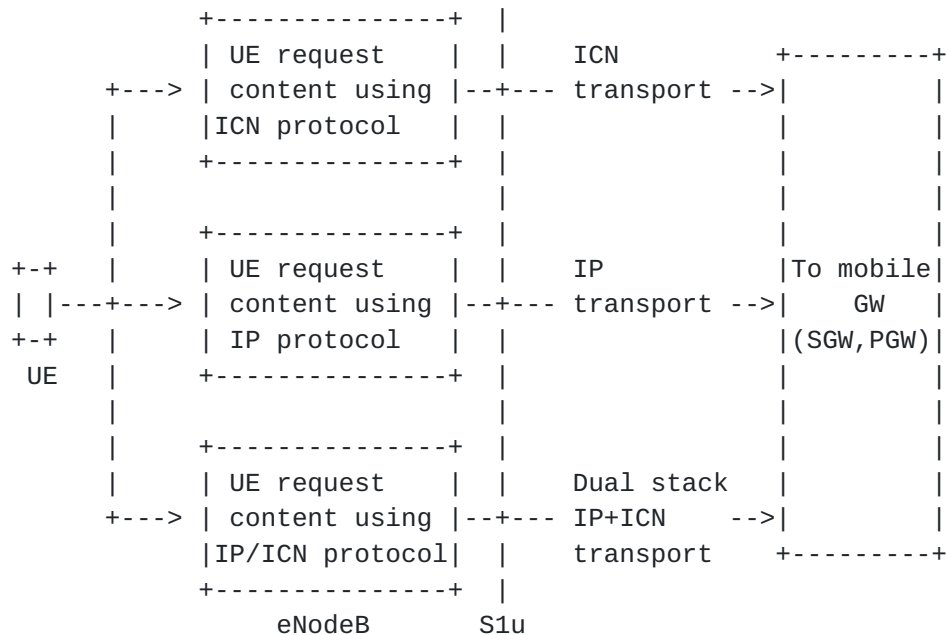


Fig. 9. Native ICN Deployment in eNodeB

4.6 ICN Deployment in Packet Core (SGW, PGW) Gateways

Mobile gateways a.k.a. Evolved Packet Core (EPC) include SGW, PGW, which perform session management for UE from the initial attach to disconnection. When UE is powered on, it performs NAS signaling and after successful authentication it attaches to PGW. PGW is an anchoring point for UE and responsible for service creations, authorization, maintenance etc. Entire functionality is managed using IP address(es) for UE.

In order to implement ICN in EPC, the following functions are needed.

1. Insert ICN function at session management layer as additional functionality with IP stack. Session management layer is used for performing attach procedures and assigning logical identity to user. After successful authentication by HSS, MME sends create session request (CSR) to SGW and SGW to PGW.
2. When MME sends Create Session Request message (step 12 in [\[TS23.401\]](#)) to SGW or PGW, it contains Protocol Configuration Option Information Element (PCO IE) containing UE capabilities. We can use PCO IE to carry ICN related capabilities information from UE to PGW. This information is received from UE during the initial attach request in MME. Details of available TLV, which can be used for ICN are given in subsequent sections. UE can support either native IP, or ICN+IP, or native ICN. IP is referred to as both IPv4 and IPv6 protocols.
3. For ICN+IP capable UE, PGW assigns the UE both IP address and ICN identity. UE selects either of the identities during the initial attach procedures and registers with network for session management. For ICN-capable UE it will provide only ICN attachment. For native IP-capable UE there is no change.
4. In order to support ICN-capable attach procedures and use ICN for user plane traffic, PGW needs to have full ICN protocol stack functionalities. Typical ICN capabilities include functions such as content store (CS), Pending Interest Table (PIT), Forwarding Information Base (FIB) capabilities etc. If UE requests ICN in PCO IE, then PGW registers UE with ICN names. For ICN forwarding, PGW caches content locally using CS functionality.
5. Protocol configuration options information elements described in [\[TS24.008\]](#) (see Figure 10.5.136 on page 598) and [\[TS24.008\]](#) (see Table 10.5.154 on page 599) provide details for different fields.
 - Octet 3 (configuration protocols defines PDN types) which contains details about IPv4, IPv6, both or ICN.
 - Any combination of Octet 4 to Z can be used to provide additional information related to ICN capability. It is most important that PCO IE parameters are matched between UE and mobile gateways (SGW, PGW) so that they can be interpreted properly and UE can attach successfully.
6. Deployment of ICN functionalities in SGW and PGW should be matched with UE and eNodeB because they will exchange ICN protocols and parameters.

7. Mobile gateways SGW, PGW will also need ICN forwarding and caching capability.
8. The transport between PGW and CDN provider can be either IP or ICN. When UE is attached to PGW with ICN identity and communicates with an ICN-enabled CDN provider, it will use ICN primitives to fetch the data. On other hand, for an UE attached with an ICN identity, if PGW has to communicate with an IP-enabled CDN provider, it will have to use an ICN-IP interworking gateway to perform conversion between ICN and IP primitives for data retrieval. Further study is required to understand how this ICN to IP (and vice versa) interworking gateway would function.

5. Security Considerations

To ensure only authenticated UEs are connected to the network, LTE mobile network implements various security mechanisms. From perspective of ICN deployment in user plane, it needs to take care of the following security aspects:

1. UE authentication and authorization
2. Radio or air interface security
3. Denial of service attacks on mobile gateway, services
4. Content positioning either in transport or servers
5. Content cache pollution attacks
6. Secure naming, routing, and forwarding
7. Application security

Security over the LTE air interface is provided through cryptographic technique. When UE is powered up, it performs key exchange between UE's USIM and HSS/Authentication Center using NAS messages including ciphering and integrity protections between UE and MME. Details of secure UE authentication, key exchange, ciphering and integrity protections messages are given in 3GPP call flow [[TS23.401](#)].

LTE is an all-IP network and uses IP transport in its mobile backhaul (e.g. between eNodeB and core network). In case of provider owned backhaul, it may not implement security mechanisms; however, they are necessary in case it uses shared or a leased network. The native IP transport continues to leverage security mechanism such as Internet key exchange (IKE) and the IP security protocol (IPsec). More details

of mobile backhaul security are provided in 3GPP network security [[TS33.310](#)] and [[TS33.320](#)]. When mobile backhaul is upgraded to support dual stack (IP+ICN) or native ICN, it is required to implement security techniques which are deployed in mobile backhaul. When ICN forwarding is enabled on mobile transport routers, we need to deploy security practices based on [RFC7476](#) and [RFC7927](#).

Some of the key functions supported by LTE mobile gateway (SGW, PGW) are content based billing, deep packet inspection (DPI), and lawful intercept (LI). For ICN-based user plane traffic, it is required to integrate ICN security for session between UE and gateway; however, in ICN network, since only consumers who are in possession of decryption keys can access the content, some of the services provided by mobile gateways mentioned above may not work. Further research in this area is needed.

6. Summary

In this draft, we have discussed complexities of LTE network and key dependencies for deploying ICN in user plane data transport. Different deployment options described cover aspects such as interoperability and multi-technology, which is a reality for any service provider. We are currently evaluating the ICN deployment options, described in [section 4](#), using LTE gateway software and ICN simulator. One can deploy ICN for data transport in user plane either as an overlay, dual stack (IP + ICN) or natively (by integrating ICN with CDN, eNodeB, SGW, PGW and transport network etc.). It is important to understand that for above discussed deployment scenarios, additional study is required for lawful interception, billing/mediation, network slicing, and provisioning APIs.

Based on our study of control plane signaling it is not beneficial to deploy ICN with existing protocols unless further changes are introduced in the control protocol stack itself. As mentioned in [[TS23.501](#)], 5G network architecture proposes simplification of control plane messages and can be a candidate for use of ICN.

As a starting step towards ICN user plane deployment, it is recommended to incorporate protocol changes in UE, eNodeB, SGW/PGW for data transport. ICN has inherent capabilities for mobility and content caching, which can improve the efficiency of data transport for unicast and multicast delivery.

Mobile Edge Computing (MEC) [[CHENG](#)] provides capabilities to deploy functionalities such as Content Delivery Network (CDN) caching and mobile user plane functions (UPF) [[TS23.501](#)]. Recent research for delivering real-time video content using ICN has also been proven to be efficient [[NDNRTC](#)] and can be used towards realizing the benefits

of ICN deployment in eNodeB, MEC, mobile gateways (SGW, PGW) and CDN. The key aspect for ICN is in its seamless integration in LTE and 5G networks with tangible benefits so that we can optimize content delivery using simple and scalable architecture. Authors will continue to explore how ICN forwarding in MEC could be used in efficient data delivery from mobile edge.

7 References

7.1 Normative References

- [GRAYSON] Grayson M, Shatzkamer K, Wainner S.; Cisco Press book "IP Design for Mobile Networks" by. page 108-112.
- [IPSEC1] Cisco IPsec overhead calculator tool
<<https://cway.cisco.com/tools/ipsec-overhead-calc/ipsec-overhead-calc.html>>.
- [IPSEC2] IPsec Bandwidth Overhead Using AES
<<http://packetpushers.net/ipsec-bandwidth-overhead-using-aes/>>.
- [BROWER] Brower, E.; Jeffress, L.; Pezeshki, J.; Jasani, R.; Ertekin, E. "Integrating Header Compression with IPsec", Military Communications Conference, 2006. MILCOM 2006. IEEE, On page(s): 1 - 6.
- [TS25.323] 3GPP TS25.323 Rel. 14 (2017-03) Packet Data Convergence Protocol (PDCP) specification.
- [TS23.501] 3GPP TS23.501 Rel. 15 (2017-06) System Architecture for the 5G System.
- [TS23.203] 3GPP TS23.203 Rel. 14 (2017-03) Policy and charging control and QoS architecture
- [TS23.401] 3GPP TS23.401 Rel. 14 (2017-03) E-UTRAN Access procedures architecture
- [TS33.310] 3GPP TS33.310 Rel. 14 (2016-12) LTE Network Domain Security (NDS); Authentication Framework (AF)
- [TS33.320] 3GPP TS33.320 Rel. 14 (2016-12) Security of Home Node B (HNB) / Home evolved Node B (HeNB)
- [TS24.008] 3GPP TS24.008 Rel. 14 (2017-06) Mobile radio interface Layer 3 specification.
- [TS23.501] 3GPP TS23.501 Rel. 14 (2017-06) System Architecture for the 5G System
- [TS23.214] 3GPP TS23.214 Rel. 14 (2017-06) Architecture enhancements for control and user plane separation of EPC nodes
- [TS36.323] 3GPP TS36.323 Rel. 14 (2017-06) Evolved Universal

Terrestrial Radio Access (E-UTRA); Packet Data Convergence Protocol (PDCP) specification

[TS23.714] 3GPP TS23.714 Rel. 14 (2016-06) Technical Specification Group Services and System Aspects: Study on control and user plane separation of EPC nodes

[RFC7476] Information-Centric Networking: Baseline Scenarios

[RFC7927] Information-Centric Networking (ICN) Research Challenges

[RFC6459] IPv6 in 3GPP Evolved Packet System (EPS)

7.2 Informative References

[RFC2119] Key words for use in RFCs to Indicate Requirement Levels
<<https://www.ietf.org/rfc/rfc2119.txt>>

[MECSPEC] European Telecommunication Standards Institute (ETSI) MEC specification ETSI-GS-MEC-IEG-001 V1.1.1 (2015-11).

[NDNTLV] NDN Interest Packet Format Specification 0.2-2.
<<https://named-data.net/doc/ndn-tlv/interest.html>>

[CCNxTLV] CCNx Messages in TLV Format
<<https://datatracker.ietf.org/doc/draft-irtf-icnrg-ccnxmessages/>>

[NDNPUB] Named Data Networking <<http://named-data.net/publications/>>.

[CCN] Content Centric Networking <<http://www.ccnx.org> and <http://blogs.parc.com/ccnx/documentation-guide/>>.

[NDN] Lixia Z., Lan W. et al. SIGCOMM Named Data Networking

[ALM] J. Aug'le, G. Carofiglio et al. "Anchor-less producer mobility in icn," in Proceedings of the 2Nd ACM Conference on Information-Centric Networking, ACM-ICN '15, pp. 189-190, ACM, 2015.

[VNIIDX] Cisco Visual Networking Index (VNI) dated 16 Feb 2016,
<<http://www.cisco.com/c/en/us/solutions/service-provider/visual-networking-index-vni/index.html>>.

[NDNRTC] Peter Gusev,Zhehao Wang, Jeff Burke, Lixia Zhang et. All,

IEICE Trans Communication, RealtimeStreaming Data Delivery over Named Data Networking, Vol E99-B, No.5 May 2016.

- [CHENG] Chengchao L., F. Richard Yu, Information-centric network function virtualization over 5G mobile wireless networks, IEEE network (Volume:29, Issue:3), page 68-74, 01 June 2015.
- [NGMN] Backhaul Provisioning for LTE-Advanced & Small Cells <https://www.ngmn.org/uploads/media/150929_NGMN_P-SmallCells_Backhaul_for_LTE-Advanced_and_Small_Cells.pdf>
- [IPoICN] IP Over ICN - The Better IP? <<http://ieeexplore.ieee.org/stamp/stamp.jsp?arnumber=7194109>>
- [HICN] Cisco Hybrid ICN <<http://blogs.cisco.com/sp/cisco-announces-important-steps-toward-adoption-of-information-centric-networking>>
- [GALIS] Autonomic Slice Networking-Requirements and Reference Model <<https://www.ietf.org/id/draft-galis-anima-autonomic-slice-networking-02.txt>>
- [EPCCUPS] Control and User Plane Separation of EPC nodes (CUPS). <<http://www.3gpp.org/news-events/3gpp-news/1882-cups>>
- [SDN5G] Software-defined networking for low-latency 5G core network. <<http://ieeexplore.ieee.org/document/7496561/>>
- [ICNQoS] Quality of Service in an Information-Centric Network. <<http://ieeexplore.ieee.org/stamp/stamp.jsp?arnumber=7037079>>
- [RFC4594] Configuration Guidelines for DiffServ Service Classes

Authors' Addresses

Prakash Suthar
9501 Technology Blvd.
Rosemont, Illinois 60018

EMail: psuthar@cisco.com

Milan Stolic
9501 Technology Blvd.

Rosemont, Illinois 60018

EMail: mistolic@cisco.com

Anil Jangam
3625 Cisco Way
San Jose, CA 95134
USA

Email: anjangam@cisco.com

Dirk Trossen
InterDigital Inc.
64 Great Eastern Street, 1st Floor
London EC2A 3QR
United Kingdom

Email: Dirk.Trossen@InterDigital.com

