

IP Tunnel MIB
<[draft-thaler-inet-tunnel-mib-00.txt](#)>

Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

Copyright Notice

Copyright (C) The Internet Society (2003). All Rights Reserved.

Abstract

This memo defines a Management Information Base (MIB) for use with network management protocols in the Internet community. In particular, it describes managed objects used for managing tunnels of any type over IPv4 and IPv6 networks. Extension MIBs may be designed for managing protocol-specific objects. Likewise, extension MIBs may be designed for managing security-specific objects. This MIB does not support tunnels over non-IP networks. Management of such tunnels may be supported by other MIBs.

1. Introduction

Over the past several years, there have been a number of "tunneling" protocols specified by the IETF (see [\[RFC1241\]](#) for an early discussion of the model and examples). This document describes a Management Information Base (MIB) used for managing tunnels of any type over IPv4 networks, including GRE [\[RFC1701, RFC1702\]](#), IP-in-IP [\[RFC2003\]](#), Minimal Encapsulation [\[RFC2004\]](#), L2TP [\[RFC2661\]](#), PPTP [\[RFC2637\]](#), L2F [\[RFC2341\]](#), UDP (e.g., [\[RFC1234\]](#)), ATMP [\[RFC2107\]](#), and IPv6-in-IPv4 [\[RFC2893\]](#) tunnels.

Extension MIBs may be designed for managing protocol-specific objects. Likewise, extension MIBs may be designed for managing security-specific objects (e.g., IPSEC [\[RFC2401\]](#)), and traffic conditioner [\[RFC2474\]](#) objects. Finally, this MIB does not support tunnels over non- IPv4 networks (including IPv6 networks). Management of such tunnels may be supported by other MIBs.

2. The Internet-Standard Management Framework

For a detailed overview of the documents that describe the current Internet-Standard Management Framework, please refer to [section 7 of RFC 3410](#) [\[RFC3410\]](#).

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. MIB objects are generally accessed through the Simple Network Management Protocol (SNMP). Objects in the MIB are defined using the mechanisms defined in the Structure of Management Information (SMI). This memo specifies a MIB module that is compliant to the SMIV2, which is described in STD 58, [RFC 2578](#) [\[RFC2578\]](#), STD 58, [RFC 2579](#) [\[RFC2579\]](#) and STD 58, [RFC 2580](#) [\[RFC2580\]](#).

Expires March 2004

[Page 2]

3. Overview

This MIB module contains two current tables and one deprecated table. The current tables are:

- o the Tunnel Interface Table, containing information on the tunnels known to a router; and
- o the Tunnel Inet Config Table, which can be used for dynamic creation of tunnels, and also provides a mapping from endpoint addresses to the current interface index value.


The version of this MIB that appeared in [RFC 2667](#) contained the Tunnel Config Table, which mapped IPv4 endpoint addresses to interface indexes. It is now deprecated in favor of the Tunnel Inet Config Table.

3.1. Relationship to the Interfaces MIB

This section clarifies the relationship of this MIB to the Interfaces MIB [[RFC2863](#)]. Several areas of correlation are addressed in the following subsections. The implementor is referred to the Interfaces MIB document in order to understand the general intent of these areas.

3.1.1. Layering Model

Each logical interface (physical or virtual) has an ifEntry in the Interfaces MIB [[RFC2863](#)]. Tunnels are handled by creating a logical interface (ifEntry) for each tunnel. These are then correlated, using the ifStack table of the Interfaces MIB, to those interfaces on which the local IPv4 addresses of the tunnels are configured. The basic model, therefore, looks something like this (for example):

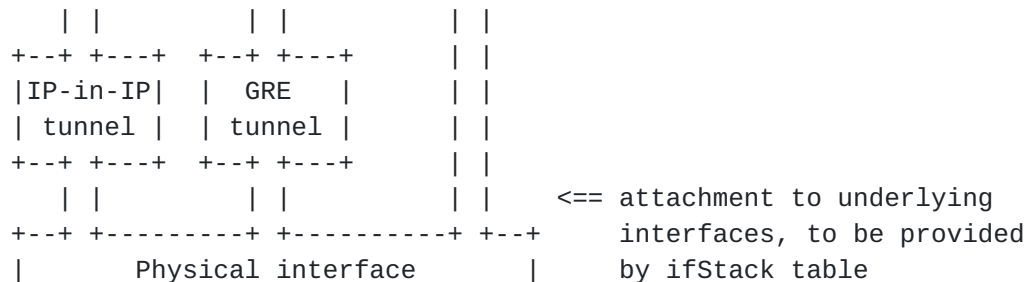

Expires March 2004

[Page 3]

+-----+

3.1.2. ifRcvAddressTable

The ifRcvAddressTable usage can be defined in the MIBs defining the encapsulation below the network layer, and holds the local IP addresses on which decapsulation will occur. For example, if IP-in-IP encapsulation is being used, the ifRcvAddressTable can be defined by IP-in-IP. If it is not specified, the default is that one entry will exist for the tunnel interface, where ifRcvAddressAddress contains the local IP address used for encapsulation/decapsulation (i.e., tunnelIfLocalInetAddress in the Tunnel Interface Table).

3.1.3. ifEntry

IfEntries are defined in the MIBs defining the encapsulation below the network layer. For example, if IP-in-IP encapsulation [20] is being used, the ifEntry is defined by IP-in-IP.

The ifType of a tunnel should be set to "tunnel" (131). An entry in the IP Tunnel MIB will exist for every ifEntry with this ifType. An implementation of the IP Tunnel MIB may allow ifEntries to be created via the tunnelConfigTable. Creating a tunnel will also add an entry in the ifTable and in the tunnelIfTable, and deleting a tunnel will likewise delete the entry in the ifTable and the tunnelIfTable.

The use of two different tables in this MIB was an important design decision. Traditionally, ifIndex values are chosen by agents, and are permitted to change across restarts. Allowing row creation directly in the Tunnel Interface Table, indexed by ifIndex, would complicate row creation and/or cause interoperability problems (if each agent had special restrictions on ifIndex). Instead, a separate table is used which is indexed only by objects over which the manager has control. Namely, these are the addresses of the tunnel endpoints and the encapsulation protocol. Finally, an additional manager-chosen ID is used in the index to support protocols such as L2F which allow multiple tunnels between the same endpoints.

Expires March 2004

[Page 4]

3.1.4. ifEntry

IfEntries are defined in the MIBs defining the encapsulation below the network layer. For example, if IP-in-IP encapsulation [20] is being used, the ifEntry is defined by IP-in-IP.

The ifType of a tunnel should be set to "tunnel" (131). An entry in the IP Tunnel MIB will exist for every ifEntry with this ifType. An implementation of the IP Tunnel MIB may allow ifEntries to be created via the tunnelConfigTable. Creating a tunnel will also add an entry in the ifTable and in the tunnelIfTable, and deleting a tunnel will likewise delete the entry in the ifTable and the tunnelIfTable.

The use of two different tables in this MIB was an important design decision. Traditionally, ifIndex values are chosen by agents, and are permitted to change across restarts. Allowing row creation directly in the Tunnel Interface Table, indexed by ifIndex, would complicate row creation and/or cause interoperability problems (if each agent had special restrictions on ifIndex). Instead, a separate table is used which is indexed only by objects over which the manager has control. Namely, these are the addresses of the tunnel endpoints and the encapsulation protocol. Finally, an additional manager- chosen ID is used in the index to support protocols such as L2F which allow multiple tunnels between the same endpoints.

4. Definitions

TUNNEL-MIB DEFINITIONS ::= BEGIN

IMPORTS

MODULE-IDENTITY, OBJECT-TYPE, transmission,
Integer32, IpAddress FROM SNMPv2-SMI
RowStatus, StorageType FROM SNMPv2-TC
MODULE-COMPLIANCE, OBJECT-GROUP FROM SNMPv2-CONF
InetAddressType, InetAddress FROM INET-ADDRESS-MIB
IPv6FlowLabelOrAny FROM IPV6-FLOW-LABEL-MIB
ifIndex, InterfaceIndexOrZero FROM IF-MIB
IANA_tunnelType FROM IANA-TUNNELTYPE-MIB;

tunnelMIB MODULE-IDENTITY

LAST-UPDATED "200310071200Z" -- October 7, 2003
ORGANIZATION "IETF Interfaces MIB Working Group"

Expires March 2004

[Page 5]

CONTACT-INFO

" Dave Thaler
Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399
EMail: dthaler@microsoft.com"

DESCRIPTION

"The MIB module for management of IP Tunnels,
independent of the specific encapsulation scheme in
use.

Copyright (C) The Internet Society (date). This
version of this MIB module is part of RFC yyyy; see
the RFC itself for full legal notices."

-- RFC Ed.: replace yyyy with actual RFC number & remove this note

REVISION "199908241200Z" -- August 24, 1999

DESCRIPTION

"Initial version, published as [RFC 2667](#)."

REVISION "200310071200Z" -- October 7, 2003

DESCRIPTION

"Added support for IPv6. Published as RFC yyyy."

-- RFC Ed.: replace yyyy with actual RFC number & remove this note

::= { transmission 131 }

tunnelMIBObjects OBJECT IDENTIFIER ::= { tunnelMIB 1 }

tunnel OBJECT IDENTIFIER ::= { tunnelMIBObjects 1 }

-- the IP Tunnel MIB-Group

--

-- a collection of objects providing information about

-- IP Tunnels

tunnelIfTable OBJECT-TYPE

SYNTAX SEQUENCE OF TunnelIfEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The (conceptual) table containing information on
configured tunnels."

::= { tunnel 1 }

tunnelIfEntry OBJECT-TYPE

SYNTAX TunnelIfEntry

MAX-ACCESS not-accessible

Expires March 2004

[Page 6]

STATUS current
DESCRIPTION
"An entry (conceptual row) containing the information
on a particular configured tunnel."
INDEX { ifIndex }
::= { tunnelIfTable 1 }

TunnelIfEntry ::= SEQUENCE {
tunnelIfLocalAddress IpAddress, -- deprecated
tunnelIfRemoteAddress IpAddress, -- deprecated
tunnelIfEncapsMethod IANA_tunnelType,
tunnelIfHopLimit Integer32,
tunnelIfSecurity INTEGER,
tunnelIfTOS Integer32,
tunnelIfFlowLabel IPv6FlowLabelOrAny,
tunnelIfAddressType InetAddressType,
tunnelIfLocalInetAddress InetAddress,
tunnelIfRemoteInetAddress InetAddress
}

tunnelIfLocalAddress OBJECT-TYPE

SYNTAX IpAddress
MAX-ACCESS read-only
STATUS deprecated
DESCRIPTION
"The address of the local endpoint of the tunnel
(i.e., the source address used in the outer IP
header), or 0.0.0.0 if unknown or if the tunnel is
over IPv6. This object is deprecated in favor of
tunnelIfLocalInetAddress."
::= { tunnelIfEntry 1 }

tunnelIfRemoteAddress OBJECT-TYPE

SYNTAX IpAddress
MAX-ACCESS read-only
STATUS deprecated
DESCRIPTION
"The address of the remote endpoint of the tunnel
(i.e., the destination address used in the outer IP
header), or 0.0.0.0 if unknown, or an IPv6 address, or
the tunnel is not a point-to-point link (e.g., if it
is a 6to4 tunnel). This object is deprecated in favor
of tunnelIfRemoteInetAddress."
::= { tunnelIfEntry 2 }

Expires March 2004

[Page 7]

tunnelIfEncapsMethod OBJECT-TYPE

SYNTAX IANAtunnelType

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The encapsulation method used by the tunnel."

::= { tunnelIfEntry 3 }

tunnelIfHopLimit OBJECT-TYPE

SYNTAX Integer32 (0..255)

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The IPv4 TTL or IPv6 Hop Limit to use in the outer IP header. A value of 0 indicates that the value is copied from the payload's header."

::= { tunnelIfEntry 4 }

tunnelIfSecurity OBJECT-TYPE

```
SYNTAX  INTEGER {
            none(1),    -- no security
            ipsec(2),   -- IPSEC security
            other(3)
        }
```

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The method used by the tunnel to secure the outer IP header. The value ipsec indicates that IPsec is used between the tunnel endpoints for authentication or encryption or both. More specific security-related information may be available in a MIB for the security protocol in use."

::= { tunnelIfEntry 5 }

tunnelIfTOS OBJECT-TYPE

SYNTAX Integer32 (-2..63)

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The method used to set the high 6 bits of the IPv4 TOS or IPv6 Traffic Class in the outer IP header. A value of -1 indicates that the bits are copied from the payload's header. A value of -2 indicates that a traffic conditioner is invoked and more information

Expires March 2004

[Page 8]

may be available in a traffic conditioner MIB. A value between 0 and 63 inclusive indicates that the bit field is set to the indicated value."

::= { tunnelIfEntry 6 }

tunnelIfFlowLabel OBJECT-TYPE

SYNTAX IPv6FlowLabelOrAny

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The method used to set the IPv6 Flow Label value. This object need not be present in rows where tunnelIfAddressType indicates the tunnel is over IPv6. A value of -1 indicates that a traffic conditioner is invoked and more information may be available in a traffic conditioner MIB. Any other value indicates that the Flow Label field is set to the indicated value."

::= { tunnelIfEntry 7 }

tunnelIfAddressType OBJECT-TYPE

SYNTAX InetAddressType

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The type of address in the corresponding tunnelIfLocalInetAddress and tunnelIfRemoteInetAddress objects."

::= { tunnelIfEntry 8 }

tunnelIfLocalInetAddress OBJECT-TYPE

SYNTAX InetAddress

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The address of the local endpoint of the tunnel (i.e., the source address used in the outer IP header). If the address is unknown, the value is 0.0.0.0 for IPv4 or :: for IPv6."

::= { tunnelIfEntry 9 }

tunnelIfRemoteInetAddress OBJECT-TYPE

SYNTAX InetAddress

MAX-ACCESS read-write

STATUS current

Expires March 2004

[Page 9]

DESCRIPTION

"The address of the remote endpoint of the tunnel (i.e., the destination address used in the outer IP header). If the address is unknown or the tunnel is not a point-to-point link (e.g., if it is a 6to4 tunnel), the value is 0.0.0.0 for tunnels over IPv4 or :: for tunnels over IPv6."

::= { tunnelIfEntry 10 }

tunnelConfigTable OBJECT-TYPE

SYNTAX SEQUENCE OF TunnelConfigEntry

MAX-ACCESS not-accessible

STATUS deprecated

DESCRIPTION

"The (conceptual) table containing information on configured tunnels. This table can be used to map a set of tunnel endpoints to the associated ifIndex value. It can also be used for row creation. Note that every row in the tunnelIfTable with a fixed IPv4 destination address should have a corresponding row in the tunnelConfigTable, regardless of whether it was created via SNMP. This table is deprecated in favor of tunnelInetConfigTable."

::= { tunnel 2 }

tunnelConfigEntry OBJECT-TYPE

SYNTAX TunnelConfigEntry

MAX-ACCESS not-accessible

STATUS deprecated

DESCRIPTION

"An entry (conceptual row) containing the information on a particular configured tunnel."

INDEX { tunnelConfigLocalAddress,
tunnelConfigRemoteAddress,
tunnelConfigEncapsMethod,
tunnelConfigID }

::= { tunnelConfigTable 1 }

TunnelConfigEntry ::= SEQUENCE {

tunnelConfigLocalAddress	IpAddress,
tunnelConfigRemoteAddress	IpAddress,
tunnelConfigEncapsMethod	IANA_tunnelType,
tunnelConfigID	Integer32,
tunnelConfigIfIndex	InterfaceIndexOrZero,
tunnelConfigStatus	RowStatus

Expires March 2004

[Page 10]

```
}
```

```
tunnelConfigLocalAddress OBJECT-TYPE
```

```
    SYNTAX      IPAddress
```

```
    MAX-ACCESS  not-accessible
```

```
    STATUS      deprecated
```

```
    DESCRIPTION
```

```
        "The address of the local endpoint of the tunnel, or  
        0.0.0.0 if the device is free to choose any of its  
        addresses at tunnel establishment time."
```

```
    ::= { tunnelConfigEntry 1 }
```

```
tunnelConfigRemoteAddress OBJECT-TYPE
```

```
    SYNTAX      IPAddress
```

```
    MAX-ACCESS  not-accessible
```

```
    STATUS      deprecated
```

```
    DESCRIPTION
```

```
        "The address of the remote endpoint of the tunnel."
```

```
    ::= { tunnelConfigEntry 2 }
```

```
tunnelConfigEncapsMethod OBJECT-TYPE
```

```
    SYNTAX      IANA_tunnelType
```

```
    MAX-ACCESS  not-accessible
```

```
    STATUS      deprecated
```

```
    DESCRIPTION
```

```
        "The encapsulation method used by the tunnel."
```

```
    ::= { tunnelConfigEntry 3 }
```

```
tunnelConfigID OBJECT-TYPE
```

```
    SYNTAX      Integer32 (1..2147483647)
```

```
    MAX-ACCESS  not-accessible
```

```
    STATUS      deprecated
```

```
    DESCRIPTION
```

```
        "An identifier used to distinguish between multiple  
        tunnels of the same encapsulation method, with the  
        same endpoints.  If the encapsulation protocol only  
        allows one tunnel per set of endpoint addresses (such  
        as for GRE or IP-in-IP), the value of this object is  
        1.  For encapsulation methods (such as L2F) which  
        allow multiple parallel tunnels, the manager is  
        responsible for choosing any ID which does not  
        conflict with an existing row, such as choosing a  
        random number."
```

```
    ::= { tunnelConfigEntry 4 }
```

Expires March 2004

[Page 11]

tunnelConfigIfIndex OBJECT-TYPE

SYNTAX InterfaceIndexOrZero

MAX-ACCESS read-only

STATUS deprecated

DESCRIPTION

"If the value of tunnelConfigStatus for this row is active, then this object contains the value of ifIndex corresponding to the tunnel interface. A value of 0 is not legal in the active state, and means that the interface index has not yet been assigned."

::= { tunnelConfigEntry 5 }

tunnelConfigStatus OBJECT-TYPE

SYNTAX RowStatus

MAX-ACCESS read-create

STATUS deprecated

DESCRIPTION

"The status of this row, by which new entries may be created, or old entries deleted from this table. The agent need not support setting this object to createAndWait or notInService since there are no other writable objects in this table, and writable objects in rows of corresponding tables such as the tunnelIfTable may be modified while this row is active.

To create a row in this table for an encapsulation method which does not support multiple parallel tunnels with the same endpoints, the management station should simply use a tunnelConfigID of 1, and set tunnelConfigStatus to createAndGo. For encapsulation methods such as L2F which allow multiple parallel tunnels, the management station may select a pseudo-random number to use as the tunnelConfigID and set tunnelConfigStatus to createAndGo. In the event that this ID is already in use and an inconsistentValue is returned in response to the set operation, the management station should simply select a new pseudo-random number and retry the operation.

Creating a row in this table will cause an interface index to be assigned by the agent in an implementation-dependent manner, and corresponding rows will be instantiated in the ifTable and the tunnelIfTable. The status of this row will become

Expires March 2004

[Page 12]

active as soon as the agent assigns the interface index, regardless of whether the interface is operationally up.

Deleting a row in this table will likewise delete the corresponding row in the ifTable and in the tunnelIfTable."

::= { tunnelConfigEntry 6 }

tunnelInetConfigTable OBJECT-TYPE

SYNTAX SEQUENCE OF TunnelInetConfigEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The (conceptual) table containing information on configured tunnels. This table can be used to map a set of tunnel endpoints to the associated ifIndex value. It can also be used for row creation. Note that every row in the tunnelIfTable with a fixed destination address should have a corresponding row in the tunnelInetConfigTable, regardless of whether it was created via SNMP."

::= { tunnel 3 }

tunnelInetConfigEntry OBJECT-TYPE

SYNTAX TunnelInetConfigEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry (conceptual row) containing the information on a particular configured tunnel. Note that there is a 128 subid maximum for object OIDs. In practice this is not expected to be a problem since IPv4 and IPv6 addresses will not cause the limit to be reached. If other types are supported by an agent, care must be taken to ensure that the sum of the lengths do not cause the limit to be exceeded."

INDEX { tunnelInetConfigAddressType,
tunnelInetConfigLocalAddress,
tunnelInetConfigRemoteAddress,
tunnelInetConfigEncapsMethod,
tunnelInetConfigID }

::= { tunnelInetConfigTable 1 }

TunnelInetConfigEntry ::= SEQUENCE {

Expires March 2004

[Page 13]

```
tunnelInetConfigAddressType      InetAddressType,
tunnelInetConfigLocalAddress     InetAddress,
tunnelInetConfigRemoteAddress    InetAddress,
tunnelInetConfigEncapsMethod     IANA_tunnelType,
tunnelInetConfigID               Integer32,
tunnelInetConfigIfIndex          InterfaceIndexOrZero,
tunnelInetConfigStatus           RowStatus,
tunnelInetConfigStorageType      StorageType
}
```

tunnelInetConfigAddressType OBJECT-TYPE

```
SYNTAX      InetAddressType
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "The address type over which the tunnel encapsulates
    packets."
 ::= { tunnelInetConfigEntry 1 }
```

tunnelInetConfigLocalAddress OBJECT-TYPE

```
SYNTAX      InetAddress
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "The address of the local endpoint of the tunnel, or
    0.0.0.0 if the device is free to choose any of its
    addresses at tunnel establishment time."
 ::= { tunnelInetConfigEntry 2 }
```

tunnelInetConfigRemoteAddress OBJECT-TYPE

```
SYNTAX      InetAddress
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "The address of the remote endpoint of the tunnel."
 ::= { tunnelInetConfigEntry 3 }
```

tunnelInetConfigEncapsMethod OBJECT-TYPE

```
SYNTAX      IANA_tunnelType
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "The encapsulation method used by the tunnel."
 ::= { tunnelInetConfigEntry 4 }
```

Expires March 2004

[Page 14]

tunnelInetConfigID OBJECT-TYPE

SYNTAX Integer32 (1..2147483647)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An identifier used to distinguish between multiple tunnels of the same encapsulation method, with the same endpoints. If the encapsulation protocol only allows one tunnel per set of endpoint addresses (such as for GRE or IP-in-IP), the value of this object is 1. For encapsulation methods (such as L2F) which allow multiple parallel tunnels, the manager is responsible for choosing any ID which does not conflict with an existing row, such as choosing a random number."

::= { tunnelInetConfigEntry 5 }

tunnelInetConfigIfIndex OBJECT-TYPE

SYNTAX InterfaceIndexOrZero

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"If the value of tunnelInetConfigStatus for this row is active, then this object contains the value of ifIndex corresponding to the tunnel interface. A value of 0 is not legal in the active state, and means that the interface index has not yet been assigned."

::= { tunnelInetConfigEntry 6 }

tunnelInetConfigStatus OBJECT-TYPE

SYNTAX RowStatus

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The status of this row, by which new entries may be created, or old entries deleted from this table. The agent need not support setting this object to createAndWait or notInService since there are no other writable objects in this table, and writable objects in rows of corresponding tables such as the tunnelIfTable may be modified while this row is active.

To create a row in this table for an encapsulation method which does not support multiple parallel

Expires March 2004

[Page 15]

tunnels with the same endpoints, the management station should simply use a tunnelInetConfigID of 1, and set tunnelInetConfigStatus to createAndGo. For encapsulation methods such as L2F which allow multiple parallel tunnels, the management station may select a pseudo-random number to use as the tunnelInetConfigID and set tunnelInetConfigStatus to createAndGo. In the event that this ID is already in use and an inconsistentValue is returned in response to the set operation, the management station should simply select a new pseudo-random number and retry the operation.

Creating a row in this table will cause an interface index to be assigned by the agent in an implementation-dependent manner, and corresponding rows will be instantiated in the ifTable and the tunnelIfTable. The status of this row will become active as soon as the agent assigns the interface index, regardless of whether the interface is operationally up.

Deleting a row in this table will likewise delete the corresponding row in the ifTable and in the tunnelIfTable."

```
::= { tunnelInetConfigEntry 7 }
```

tunnelInetConfigStorageType OBJECT-TYPE

SYNTAX StorageType

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The storage type of this row. If the row is permanent(4), no objects in the row need be writable."

```
::= { tunnelInetConfigEntry 8 }
```

-- conformance information

tunnelMIBConformance

OBJECT IDENTIFIER ::= { tunnelMIB 2 }

tunnelMIBCompliances

OBJECT IDENTIFIER ::= { tunnelMIBConformance 1 }

tunnelMIBGroups OBJECT IDENTIFIER ::= { tunnelMIBConformance 2 }

-- compliance statements

Expires March 2004

[Page 16]

tunnelMIBCompliance MODULE-COMPLIANCE

STATUS deprecated

DESCRIPTION

"The (deprecated) IPv4-only compliance statement for the IP Tunnel MIB."

MODULE -- this module

MANDATORY-GROUPS { tunnelMIBGroup }

OBJECT tunnelIfHopLimit

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT tunnelIfTOS

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT tunnelConfigStatus

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

::= { tunnelMIBCompliances 1 }

tunnelMIBInetReadWriteCompliance MODULE-COMPLIANCE

STATUS deprecated

DESCRIPTION

"The full compliance statement for the IP Tunnel MIB."

MODULE -- this module

MANDATORY-GROUPS { tunnelMIBInetGroup }

OBJECT tunnelIfAddressType

SYNTAX InetAddressType { ipv4(1), ipv6(2),
ipv4z(3), ipv6z(4) }

DESCRIPTION

"An implementation is only required to support IPv4 and/or IPv6 addresses. An implementation only needs to support the addresses it actually supports on the device."

OBJECT tunnelInetConfigStatus

SYNTAX RowStatus { active(1) }

WRITE-SYNTAX RowStatus { createAndGo(4), destroy(6) }

DESCRIPTION

"Support for createAndWait and notInService is not

Expires March 2004

[Page 17]

```
        required."
 ::= { tunnelMIBCompliances 2 }
```

tunnelMIBInetReadOnlyCompliance MODULE-COMPLIANCE

STATUS deprecated

DESCRIPTION

"The read-only compliance statement for the IP Tunnel
MIB."

MODULE -- this module

MANDATORY-GROUPS { tunnelMIBInetGroup }

OBJECT tunnelIfHopLimit

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT tunnelIfTOS

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT tunnelIfFlowLabel

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT tunnelIfAddressType

MIN-ACCESS read-only

SYNTAX InetAddressType { ipv4(1), ipv6(2),
ipv4z(3), ipv6z(4) }

DESCRIPTION

"Write access is not required."

An implementation is only required to support IPv4
and/or IPv6 addresses. An implementation only needs to
support the addresses it actually supports on the
device."

OBJECT tunnelIfLocalInetAddress

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT tunnelIfRemoteInetAddress

MIN-ACCESS read-only

Expires March 2004

[Page 18]

DESCRIPTION

"Write access is not required."

OBJECT tunnelInetConfigStatus

MIN-ACCESS read-only

SYNTAX RowStatus { active(1) }

DESCRIPTION

"Write access is not required, and active is the only status that needs to be supported."

OBJECT tunnelInetConfigStorageType

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

::= { tunnelMIBCompliances 3 }

-- units of conformance

tunnelMIBGroup OBJECT-GROUP

OBJECTS { tunnelIfLocalAddress, tunnelIfRemoteAddress,
tunnelIfEncapsMethod, tunnelIfHopLimit, tunnelIfTOS,
tunnelIfSecurity, tunnelConfigIfIndex, tunnelConfigStatus }

STATUS deprecated

DESCRIPTION

"A collection of objects to support basic management
of IPv4 Tunnels."

::= { tunnelMIBGroups 1 }

tunnelMIBInetGroup OBJECT-GROUP

OBJECTS { tunnelIfAddressType, tunnelIfLocalInetAddress,
tunnelIfRemoteInetAddress, tunnelIfEncapsMethod,
tunnelIfHopLimit, tunnelIfTOS, tunnelIfFlowLabel,
tunnelIfSecurity, tunnelInetConfigIfIndex,
tunnelInetConfigStatus, tunnelInetConfigStorageType }

STATUS current

DESCRIPTION

"A collection of objects to support basic management
of IPv4 and IPv6 Tunnels."

::= { tunnelMIBGroups 2 }

END

Expires March 2004

[Page 19]

5. IANA Considerations

The IANAtunnelType textual convention is imported from the IANA-TUNNELTYPE-MIB. The purpose of defining this textual convention in a separate MIB module is to allow additional values to be defined without having to issue a new version of this document. The Internet Assigned Numbers Authority (IANA) is responsible for the assignment of all Internet numbers, including various SNMP-related numbers; it will administer the values associated with these textual conventions.

New types of tunnels over IPv4 or IPv6 should not be assigned IANAifType values. Instead, they should be assigned IANAtunnelType values and hence reuse the interface type tunnel(131). Hence, the assignment requirements for IANAtunnelType values should be identical to the latest requirements for assigning IANAifType values. Note this restriction does not apply to "tunnels" which are not over IPv4 or IPv6.

Previously tunnel types which were not point-to-point tunnels were problematic in that they could not be properly expressed in the tunnel MIB, and hence were assigned IANAifType values. This document now corrects this problem, and as a result, IANA should deprecate the sixToFour(215) IANAifType value in favor of the sixToFour(11) IANAtunnelType value.

The current version of the textual convention can be accessed from the IANA home page at: "<http://www.iana.org/>".

6. Security Considerations

There are a number of management objects defined in this MIB module with a MAX-ACCESS clause of read-write and/or read-create. Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

Unauthorized write access to any of the writable objects could cause unauthorized creation and/or manipulation of tunnels, resulting in a denial of service, or redirection of packets to an arbitrary destination.

Expires March 2004

[Page 20]

Some of the readable objects in this MIB module (i.e., objects with a MAX-ACCESS other than not-accessible) may be considered sensitive or vulnerable in some network environments. It is thus important to control even GET and/or NOTIFY access to these objects and possibly to even encrypt the values of these objects when sending them over the network via SNMP.

Unauthorized read access to tunnelIfLocalInetAddress, tunnelIfRemoteInetAddress, tunnelIfLocalAddress, tunnelIfRemoteAddress, or any object in the tunnelConfigTable or tunnelInetConfigTable would reveal information about the tunnel topology.

SNMP versions prior to SNMPv3 did not include adequate security. Even if the network itself is secure (for example by using IPSec), even then, there is no control as to who on the secure network is allowed to access and GET/SET (read/change/create/delete) the objects in this MIB module.

It is RECOMMENDED that implementers consider the security features as provided by the SNMPv3 framework (see [\[RFC3410\], section 8](#)), including full support for the SNMPv3 cryptographic mechanisms (for authentication and privacy).

Further, deployment of SNMP versions prior to SNMPv3 is NOT RECOMMENDED. Instead, it is RECOMMENDED to deploy SNMPv3 and to enable cryptographic security. It is then a customer/operator responsibility to ensure that the SNMP entity giving access to an instance of this MIB module is properly configured to give access to the objects only to those principals (users) that have legitimate rights to indeed GET or SET (change/create/delete) them.

7. Acknowledgements

This MIB module was updated based on feedback from the IETF's Interfaces MIB (IF-MIB) and Point-to-Point Protocol Extensions (PPPEXT) Working Groups.

8. Authors' Addresses

Dave Thaler
Microsoft Corporation

Expires March 2004

[Page 21]

One Microsoft Way
Redmond, WA 98052-6399

Phone: +1 425 703 8835
EMail: dthaler@microsoft.com

9. Normative References

- [RFC2578] McCloghrie, K., Perkins, D., Schoenwaelder, J., Case, J., Rose, M. and S. Waldbusser, "Structure of Management Information Version 2 (SMIv2)", STD 58, [RFC 2578](#), April 1999.
- [RFC2579] McCloghrie, K., Perkins, D., Schoenwaelder, J., Case, J., Rose, M. and S. Waldbusser, "Textual Conventions for SMIv2", STD 58, [RFC 2579](#), April 1999.
- [RFC2580] McCloghrie, K., Perkins, D., Schoenwaelder, J., Case, J., Rose, M. and S. Waldbusser, "Conformance Statements for SMIv2", STD 58, [RFC 2580](#), April 1999.
- [RFC2863] McCloghrie, K. and F. Kastenholz. "The Interfaces Group MIB", [RFC 2863](#), June 2000.
- [RFC3595] B. Wijnen, "Textual Conventions for IPv6 Flow Label", [RFC 3595](#), September 2003.

10. Informative References

- [RFC1234] D. Provan, "Tunneling IPX Traffic through IP Networks", [RFC 1234](#), June 1991.
- [RFC1241] Woodburn, R. and D. Mills, "A Scheme for an Internet Encapsulation Protocol: Version 1", [RFC 1241](#), July 1991.
- [RFC1701] Hanks, S., Li, T., Farinacci, D. and P. Traina, "Generic Routing Encapsulation (GRE)", [RFC 1701](#), October 1994.
- [RFC1702] Hanks, S., Li, T., Farinacci, D. and P. Traina, "Generic Routing Encapsulation over IPv4 networks", [RFC 1702](#), October 1994.

Expires March 2004

[Page 22]

- [RFC2003] Perkins, C., "IP Encapsulation within IP", [RFC 2003](#), October 1996.
- [RFC2004] Perkins, C., "Minimal Encapsulation within IP", [RFC 2004](#), October 1996.
- [RFC2107] Hamzeh, K., "Ascend Tunnel Management Protocol - ATMP", [RFC 2107](#), February 1997.
- [RFC2341] Valencia, A., Littlewood, M. and T. Kolar. "Cisco Layer Two Forwarding (Protocol) "L2F"", [RFC 2341](#), May 1998.
- [RFC2401] R. Atkinson, "Security architecture for the internet protocol", [RFC 2401](#), November 1998.
- [RFC2474] Nichols, K., Blake, S., Baker, F. and D. Black. "Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers", [RFC 2474](#), December 1998.
- [RFC2637] Hamzeh, K., Pall, G., Verthein, W. Taarud, J., Little, W. and G. Zorn, "Point-to-Point Tunneling Protocol", [RFC 2637](#), July 1999.
- [RFC2661] Townsley, W., Valencia, A., Rubens, A., Pall, G., Zorn, G. and B. Palter, "Layer Two Tunneling Protocol "L2TP"", [RFC 2661](#), August 1999.
- [RFC2893] Gilligan, R. and E. Nordmark. "Transition Mechanisms for IPv6 Hosts and Routers", [RFC 2893](#), August 2000.
- [RFC3410] Case, J., Mundy, R., Partain, D. and B. Stewart, "Introduction and Applicability Statements for Internet-Standard Management Framework", [RFC 3410](#), December 2002.

[11. Appendix A: IANA Tunnel Type MIB](#)

This appendix defines the initial content of the IANA-TUNNELTYPE-MIB. Alternatively, IANA may choose to include this textual convention in the IANAifType-MIB. This would have the added benefit of making the tunnel types immediately visible to those looking for specific interface types which are instead represented

Expires March 2004

[Page 23]

as tunnel types, and hence avoid confusion and duplication.

NOTE TO RFC-EDITOR: This section should be removed from this document prior to its publication, at which time this MIB will be administered by IANA.

IANA-TUNNELTYPE-MIB DEFINITIONS ::= BEGIN

IMPORTS

MODULE-IDENTITY, mib-2 FROM SNMPv2-SMI
TEXTUAL-CONVENTION FROM SNMPv2-TC;

ianaTunnelTypeMIB MODULE-IDENTITY

LAST-UPDATED "200310071200Z" -- October 7, 2003

ORGANIZATION "IANA"

CONTACT-INFO

" Internet Assigned Numbers Authority
Internet Corporation for Assigned Names and Numbers
4676 Admiralty Way, Suite 330
Marina del Rey, CA 90292-6601

Phone: +1 310 823 9358

EMail: iana@iana.org"

DESCRIPTION

"This MIB module defines the IANAtunnelType textual convention for use in MIBs which need to identify types of IP tunnels.

To assign new tunnel type values, IANA should apply the same requirements as it applies to IANAifType values. Requests for IANAifType values to be assigned for new IP tunnel types should instead result in assignments of new tunnel type values."

REVISION "200310071200Z" -- October 7, 2003

DESCRIPTION

"Initial version."

::= { mib-2 xxx } -- TO BE ASSIGNED BY IANA

IANAtunnelType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The encapsulation method used by a tunnel. The value direct indicates that a packet is encapsulated directly within a normal IP header, with no intermediate header, and unicast to the remote tunnel

Expires March 2004

[Page 24]

endpoint (e.g., an [RFC 2003](#) IP-in-IP tunnel, or an [RFC 1933](#) IPv6-in-IPv4 tunnel). The value minimal indicates that a Minimal Forwarding Header ([RFC 2004](#)) is inserted between the outer header and the payload packet. The value UDP indicates that the payload packet is encapsulated within a normal UDP packet (e.g., [RFC 1234](#)).

The values sixToFour, sixOverFour, and isatap indicates that an IPv6 packet is encapsulated directly within an IPv4 header, with no intermediate header, and unicast to the destination determined by the 6to4, 6over4, or ISATAP protocol.

The remaining protocol-specific values indicate that a header of the protocol of that name is inserted between the outer header and the payload header."

```
SYNTAX      INTEGER {
                other(1),          -- none of the following
                direct(2),        -- no intermediate header
                gre(3),            -- GRE encapsulation
                minimal(4),        -- Minimal encapsulation
                l2tp(5),           -- L2TP encapsulation
                pptp(6),           -- PPTP encapsulation
                l2f(7),            -- L2F encapsulation
                udp(8),            -- UDP encapsulation
                atmp(9),           -- ATMP encapsulation
                msdp(10),          -- MSDP encapsulation
                sixToFour(11),     -- 6to4 encapsulation
                sixOverFour(12),   -- 6over4 encapsulation
                isatap(13),        -- ISATAP encapsulation
                teredo(14)         -- Teredo encapsulation
            }
```

END

[12.](#) Full Copyright Statement

Copyright (C) The Internet Society (2003). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without

Expires March 2004

[Page 25]

restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

13. Intellectual Property

The IETF takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights.

Information on the IETF's procedures with respect to rights in standards-track and standards-related documentation can be found in [BCP-11](#). Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementors or users of this specification can be obtained from the IETF Secretariat.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights which may cover technology that may be required to practice this standard. Please address the information to the IETF Executive Director."

Expires March 2004

[Page 26]