

6lo
Internet-Draft
Updates: [6282](#) (if approved)
Intended status: Standards Track
Expires: February 27, 2015

P. Thubert, Ed.
Cisco
August 28, 2014

A compression mechanism for the RPL option
draft-thubert-6lo-rpl-nhc-00

Abstract

This document proposes a compression mechanism for the RPL option. This operation saves up to 48 bits in each frame compared to [RFC 6553](#).

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on February 27, 2015.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
2.	On Wasted Resources	3

3.	Terminology	4
4.	Updating RFC 6282	4

Internet-Draft A compression mechanism for the RPL option August 2014

5.	New RPL Next Header Compression	5
6.	Security Considerations	6
7.	IANA Considerations	7
8.	Acknowledgements	7
9.	References	7
9.1.	Normative References	7
9.2.	Informative References	8
	Author's Address	8

[1.](#) Introduction

The emergence of radio technology enabled a large variety of new types of devices to be interconnected, at a very low marginal cost compared to wire, at any range from Near Field to interplanetary distances, and in circumstances where wiring would be less than practical, for instance rotating devices.

In particular, IEEE802.14.5 [[IEEE802154](#)] that is chartered to specify PHY and MAC layers for radio Lowpower Lossy Networks (LLNs), defined the TimeSlotted Channel Hopping [[I-D.ietf-6tisch-tsch](#)] (TSCH) mode of operation as part of the IEEE802.15.4e MAC specification in order to address Time Sensitive applications.

The 6TiSCH architecture [[I-D.ietf-6tisch-architecture](#)] specifies the operation IPv6 over TSCH wireless networks attached and synchronized by backbone routers.

With 6TiSCH, the route Computation may be achieved in a centralized fashion by a Path Computation Element (PCE), in a distributed fashion using the Routing Protocol for Low Power and Lossy Networks [[RFC6550](#)] (RPL), or in a mixed mode.

6TiSCH was created to simplify the adoption of IETF technology by other Standard Defining Organizations (SDOs), in particular in the Industrial Automation space, which already relies on variations of IEEE802.15.4e TSCH for Wireless Sensor Networking.

ISA100.11a [[ISA100.11a](#)] (now IEC62734) is an example of such industrial WSN standard, using IEEE802.15.4e over the classical IEEE802.14.5 PHY. In that case, after security is applied, roughly 80 octets are available per frame for IP and Payload. In order to 1) avoid fragmentation and 2) conserve energy, the SDO will scrutinize

any bit in the frame and reject any waste.

The challenge to obtain the adoption of IPv6 in the original standard was really to save any possible bit in the frames, including the UDP checksum which was an interesting discussion on its own. This work was actually one of the roots for the 6LoWPAN Header Compression [[RFC6282](#)] work, which goes down to the individual bits to save space in the frames for actual data, and allowed ISA100.11a to adopt IPv6.


In order to get an SDO such as ISA100 to adopt RPL and 6TiSCH, it is mandatory to maintain the same degree to requirement and maximize the compression of all possible protocol information, and in particular the overhead that RPL imposes on all packets.

[2.](#) On Wasted Resources

The design of Lowpower Lossy Networks is generally focussed on saving energy, which is the most constrained resource of all. The other constraints, such as the memory capacity and the duty cycling of the LLN devices, derive from that primary concern. Energy is typically available from batteries that are expected to last for years, or scavenged from the environment in very limited quantities. Any protocol that is intended for use in LLNs must be designed with the primary concern of saving energy as a strict requirement.

The Routing Protocol for Low Power and Lossy Networks (RPL) [[RFC6550](#)] specification defines a generic Distance Vector protocol that is indeed designed for very low energy consumption and adapted to a variety of LLNs. RPL forms Destination Oriented Directed Acyclic Graphs (DODAGs) which root often acts as the Border Router to connect the RPL domain to the Internet. The root is responsible to select the RPL Instance that is used to forward a packet coming from the Internet into the RPL domain and set the related RPL information in the packets.

A classical RPL implementation will use the RPL Option for Carrying RPL Information in Data-Plane Datagrams [[RFC6553](#)] to tag a packet with the Instance ID and other information that RPL requires for its operation within the RPL domain. In particular, the Rank, which is the scalar metric computed by an specialized Objective Function such as [[RFC6552](#)], is modified at each hop and allows to validate that the packet progresses in the expected direction each upwards or downwards in along the DODAG.

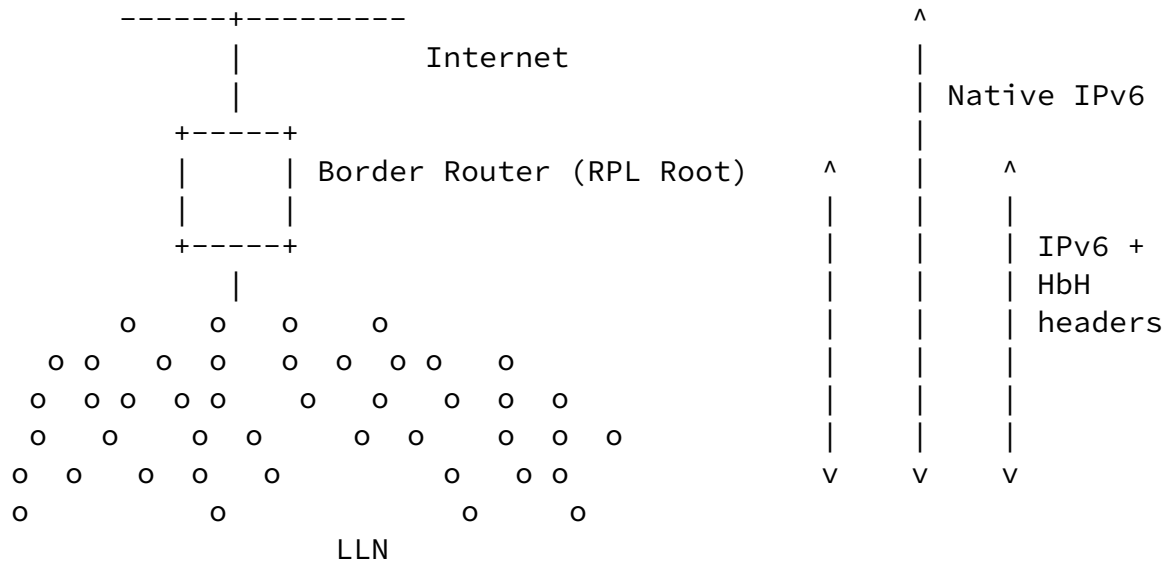

With [\[RFC6553\]](#), the RPL option is encoded as 6 Octets; it must be placed in a Hop-by-Hop header that represents 2 additional octets for a total of 8. In order to limit its range to the inside the RPL domain, the Hop-by-Hop header must be added to (or removed from) packets that cross the border of the RPL domain. For reasons such as the capability to send ICMP errors back to the source, this operation involves an extra IP-in-IP encapsulation inside the RPL domain for all the packets which path is not contained within the RPL domain.

The 8-octets overhead is detrimental to the LLN operation, in particular with regards to bandwidth and battery constraints. These octets may cause a containing frame to grow above maximum frame size, leading to Layer 2 or 6LoWPAN [\[RFC4944\]](#) fragmentation, which in turn cause even more energy spending and issues discussed in the LLN Fragment Forwarding and Recovery [I-D.thubert-6lo-forwarding-fragments].

Considering that, in the classical IEEE802.14.5 PHY that is used by 6TiSCH, roughly 80 octets are available per frame after security is

applied, and any additional transmitted bit weights in the energy consumption and drains the batteries.

For timing reasons, [RFC6282] failed to provide an adapted compression for the RPL option so the cost in current implementations can not be alleviated in any fashion. This document provides thus the much-needed efficient compression of the RPL option as a logical extension to [RFC6282].

3. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

The Terminology used in this document is consistent with and incorporates that described in 'Terminology in Low power And Lossy Networks' [RFC7102] and [RFC6550].

4. Updating RFC 6282

This specification proposes a new 6LoWPAN Next Header Compression (NHC) for the RPL option [RFC6553], called RPL_NHC, to be placed in an [RFC6282]-compressed packet.

It updates [RFC6282] in that the necessary property of encoding headers using LOWPAN_NHC becomes that the immediately preceding header must be encoded using either LOWPAN_IPHC, RPL_NHC or LOWPAN_NHC.

Additionally, the necessary property of encoding headers using RPL_NHC is that the immediately preceding header must be encoded using either LOWPAN_IPHC or LOWPAN_NHC.

5. New RPL Next Header Compression

[RFC6550] [section 11.2](#) specifies the RPL information as a set of fields that are to be placed into the packets for the purpose of Instance Identification, as well as Loop Avoidance and Detection. Those fields include an 'O', an 'R' and an 'F' bits, a 8-bit RPLInstanceID, which is in fact an encoded structure, and a 16-bit SenderRank.

The SenderRank is the result of the DAGRank operation on the rank of the sender, here the DAGRank operation is defined in [section 3.5.1](#) as:

$$\text{DAGRank}(\text{rank}) = \text{floor}(\text{rank}/\text{MinHopRankIncrease})$$

If MinHopRankIncrease is set to a multiple of 256, it appears that the least significant 8 bits of the SenderRank will be all zeroes and can be elided, in which case the SenderRank can be compressed into one octet.

[RFC6553] defines an encoding for the RPL information as a RPL option located in a Hop-by-hop header. The RPL_NHC provides a compressed form for that the RPL information and is constructed as follows:

```
  0 1 2 3 4 5 6 7
+---+---+---+---+---+---+---+---+
| 1 | 0 | I | K | O | R | F |NH |
+---+---+---+---+---+---+---+---
```

The RPL_NHC is immediately followed by the RPLInstanceID, unless it is elided, and then the SenderRank, which is either compressed into one octet or fully inlined as the whole 2 octets. Bits in the RPL_NHC indicate whether the RPLInstanceID is elided and/or the SenderRank is compressed:

O, R, and F bits The O, R, and F bits are defined in [\[RFC6550\] section 11.2](#).

NH: 1-bit. The Next Header (NH) bit is defined in [\[RFC6282\] section 4.2](#), and it is set to indicate that the next header is encoded using LOWPAN_NHC

I: 1-bit. If it is set, the Instance ID is elided and the RPLInstanceID is the Global RPLInstanceID 0. If it is not set, the octet immediately following the RPL_NHC contains the RPLInstanceID as specified in [\[RFC6550\] section 5.1](#).

K: 1-bit. If it is set, the SenderRank is be compressed into one octet, and the lowest significant octet is elided. If it is not set, the SenderRank, is fully inlined as 2 octets.

In the following case, the RPLInstanceID is the Global RPLInstanceID 0, and the MinHopRankIncrease is a multiple of 256 so the least significant octet is all zeroes and can be elided:

```

      0                               1                               2
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|1|0|1|1|0|R|F|N|  SenderRank  |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

In the following case, the RPLInstanceID is the Global RPLInstanceID 0, but both octets of the SenderRank are significant so it can not be compressed:

```

      0                               1                               2
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|1|0|1|0|0|R|F|N|      SenderRank      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

In the following case, the RPLInstanceID is not the Global RPLInstanceID 0, and the MinHopRankIncrease is a multiple of 256:

```

      0                               1                               2
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|1|0|0|1|0|R|F|N| RPLInstanceID |  SenderRank  |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

In the following case, the RPLInstanceID is not the Global RPLInstanceID 0, and both octets of the SenderRank are significant:

```

      0                               1                               2                               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|1|0|0|0|0|R|F|N| RPLInstanceID |      SenderRank      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Depending on the RPLInstanceID and the MinHopRankIncrease, the proposed format Squeezes the RPL information in 16 to 32 bits, which compares to 64 bits when using a Hop-by-hop option with the RPL option as specified in [\[RFC6553\]](#).

6. Security Considerations

Thubert

Expires February 27, 2015

[Page 6]

Internet-Draft A compression mechanism for the RPL option August 2014

Using a compressed format as opposed to the full inline RPL option is logically equivalent and does not create an opening for a new threat when compared to [[RFC6553](#)].

7. IANA Considerations

This document updates IANA registry for the LOWPAN_NHC defined in [[RFC6282](#)] and assigns the previously unassigned:

10IOKRFN: RPL Information [this]

Capital letters in bit positions represent class-specific bit assignments. N indicates whether or not additional LOWPAN_NHC encodings follow, as defined in [Section 4.2](#). IOKRF represents variables specific to RPL Information compression defined in [Section 5](#).

8. Acknowledgements

The author wishes to thank Laurent Toutain and Carsten Bormann for suggesting this work .

9. References

9.1. Normative References

[IEEE802154]

IEEE standard for Information Technology, "IEEE std. 802.15.4, Part. 15.4: Wireless Medium Access Control (MAC) and Physical Layer (PHY) Specifications for Low-Rate Wireless Personal Area Networks", June 2011.

[ISA100.11a]

ISA, "ISA100, Wireless Systems for Automation", May 2008, < <http://www.isa.org/Community/SP100WirelessSystemsforAutomation>>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

- [RFC2460] Deering, S.E. and R.M. Hinden, "Internet Protocol, Version 6 (IPv6) Specification", [RFC 2460](#), December 1998.
- [RFC6282] Hui, J. and P. Thubert, "Compression Format for IPv6 Datagrams over IEEE 802.15.4-Based Networks", [RFC 6282](#), September 2011.
- [RFC6550] Winter, T., Thubert, P., Brandt, A., Hui, J., Kelsey, R., Levis, P., Pister, K., Struik, R., Vasseur, JP. and R. Alexander, "RPL: IPv6 Routing Protocol for Low-Power and Lossy Networks", [RFC 6550](#), March 2012.

- [RFC6552] Thubert, P., "Objective Function Zero for the Routing Protocol for Low-Power and Lossy Networks (RPL)", [RFC 6552](#), March 2012.
- [RFC6553] Hui, J. and JP. Vasseur, "The Routing Protocol for Low-Power and Lossy Networks (RPL) Option for Carrying RPL Information in Data-Plane Datagrams", [RFC 6553](#), March 2012.

[9.2](#). Informative References

- [I-D.ietf-6tisch-architecture]
Thubert, P., Watteyne, T. and R. Assimiti, "An Architecture for IPv6 over the TSCH mode of IEEE 802.15.4e", Internet-Draft [draft-ietf-6tisch-architecture-01](#), February 2014.
- [I-D.ietf-6tisch-tsch]
Watteyne, T., Palattella, M. and L. Grieco, "Using IEEE802.15.4e TSCH in an LLN context: Overview, Problem Statement and Goals", Internet-Draft [draft-ietf-6tisch-tsch-00](#), November 2013.
- [I-D.thubert-6lo-forwarding-fragments]
Thubert, P. and J. Hui, "LLN Fragment Forwarding and Recovery", Internet-Draft [draft-thubert-6lo-forwarding-fragments-01](#), February 2014.
- [RFC4944] Montenegro, G., Kushalnagar, N., Hui, J. and D. Culler, "Transmission of IPv6 Packets over IEEE 802.15.4

Networks", [RFC 4944](#), September 2007.

[RFC7102] Vasseur, JP., "Terms Used in Routing for Low-Power and Lossy Networks", [RFC 7102](#), January 2014.

Author's Address

Pascal Thubert, editor
Cisco Systems
Village d'Entreprises Green Side
400, Avenue de Roumanille
Batiment T3
Biot - Sophia Antipolis, 06410
FRANCE

Phone: +33 4 97 23 26 34
Email: pthubert@cisco.com